

ULN2803A Datasheet

www.digi-electronics.com



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	ULN2803A-DG
Manufacturer	UMW
Manufacturer Product Number	ULN2803A
Description	SOP-18 DARLINGTON TRANSISTOR ARR
Detailed Description	Bipolar (BJT) Transistor Array 8 NPN Darlington 500 mA Surface Mount 18-SOP

This model ULN2803A is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:	Manufacturer:
ULN2803A	UMW
Series:	Product Status:
-	Active
Transistor Type:	Current - Collector (Ic) (Max):
8 NPN Darlington	500mA
Voltage - Collector Emitter Breakdown (Max):	Vce Saturation (Max) @ Ib, Ic:
-	1.6V @ 500µA, 350mA
Current - Collector Cutoff (Max):	DC Current Gain (hFE) (Min) @ Ic, Vce:
20µA	-
Power - Max:	Frequency - Transition:
-	-
Operating Temperature:	Mounting Type:
-40°C ~ 150°C (TJ)	Surface Mount
Package / Case:	Supplier Device Package:
18-SOIC (0.295", 7.50mm Width)	18-SOP
Base Product Number:	
ULN2803	

Environmental & Export classification

RoHS Status:	Moisture Sensitivity Level (MSL):
ROHS3 Compliant	1 (Unlimited)
REACH Status:	ECCN:
REACH Unaffected	EAR99
HTSUS:	
8541.21.0095	

DESCRIPTION

The ULN2803 is high-voltage, high-current darlington driver IC composed of 8 NPN darlington pairs. All units share the emitter in common, and each unit adopts open-collector output. A 2.7KΩ resistor is connected to each darlington pair in serial, which is compatible with TTL and 5V CMOS for data processing without logic buffer.

Sink current of ULN2803 is up to 500mA, when it is off state, the withstand voltage is 50V and the output can runs with high load current, which provides solutions for various interface.

FEATURES


- ♦ Wide operating voltage range
- ♦ 8-ch high-gain darlington array
- ♦ High output voltage (up to 50V)
- ♦ High output current (up to 500mA)
- ♦ Able to connect to TTL, CMOS, PMOS directly
- ♦ Clamp diodes for switching inductive loads

APPLICATIONS

- ♦ Relay driver
- ♦ DC lamp driver
- ♦ Step motor driver
- ♦ Magnet valve
- ♦ DC brushless motor driver


ORDERING INFORMATION

Part No.	Package	Marking	Hazardous Substance Control	Packing Type
UMW ULN2803AN	DIP-18-300-2.54	ULN2803AN	Halogen free	Tube
UMW ULN2803A	SOP-18-375-1.27	ULN2803A	Halogen free	Tape&Reel

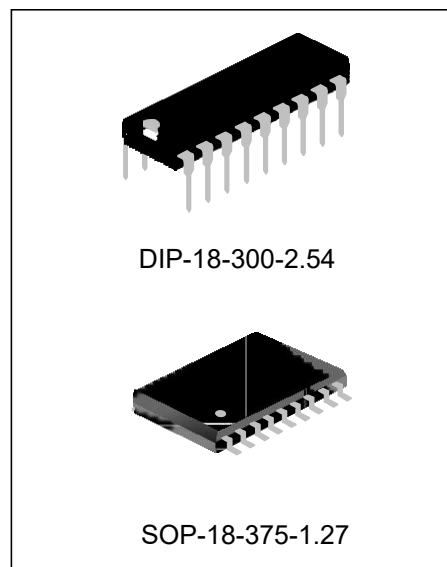

DARLINGTON ARRAY DRIVER IC

BOLBK DIAGRAM

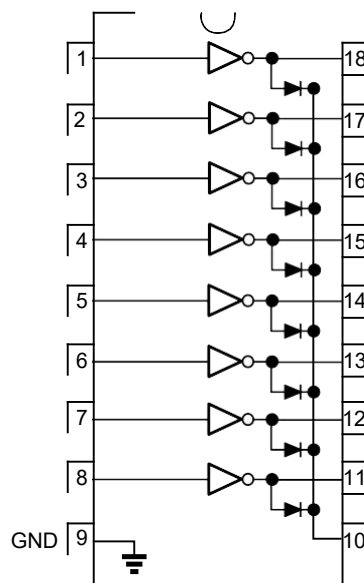

Pin		I/O	Description
Pin name	Pin		
<1:8>	1-8	Input	Channel 1~8 darlington input
<11:18>	18-11	Output	Channel 1~8 darlington output
(GND)	9	GND	Ground
COM	10	Input/ Output	Positive of clamp diode (used with inductive load)

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Ratings	Units
Input Voltage	V_{IN}	-0.5~30	V
Output Voltage	V_{OUT}	-0.5~50	V
Clamp Diode Reverse Voltage	V_R	55	V
Output Current	I_{OUT}	500	mA
Clamp Diode Forward Current	I_F	500	mA
Storage Temperature	T_{STG}	-55~150	°C
Operating Temperature	T_{OPR}	-40~85	°C
Operating Junction Temperature	T_J	-40~150	°C

DARLINGTON ARRAY DRIVER IC

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

Parameter	Symbol	Test conditions	Min.	Typ.	Max.	Units
Output Leakage Current	I_{CEX}	$T_A=25^\circ\text{C}, V_{CE}=50\text{V}$ (Figure 1)	--	--	20	μA
		$T_A=85^\circ\text{C}, V_{CE}=50\text{V}$ (Figure 1)	--	--	100	
CE Saturation Voltage	$V_{CE(sat)}$	$I_{OUT}=350\text{mA}, I_{IN}=500\text{ }\mu\text{A}$ (Figure 3)	--	1.3	1.6	V
		$I_{OUT}=250\text{mA}, I_{IN}=350\text{ }\mu\text{A}$ (Figure 3)	--	1.1	1.3	
		$I_{OUT}=100\text{mA}, I_{IN}=250\text{ }\mu\text{A}$ (Figure 3)	--	0.9	1.1	
Input Current (Output On)	$I_{I(ON)}$	$V_I=3.85\text{V}$ (Figure 4)	--	0.93	1.35	mA
Input Current (Output Off)	$I_{I(OFF)}$					μA
		$T_A=+25^\circ\text{C}, I_C=500\text{ }\mu\text{A}$ (Figure 5)	50	100	--	
		$T_A=+85^\circ\text{C}, I_C=500\text{ }\mu\text{A}$ (Figure 5)	25	50	--	
Input Voltage (Output On)	$V_{I(ON)}$	$V_{CE}=2.0\text{V}, I_C=200\text{mA}$ (Figure 6)	--	--	2.4	V
		$V_{CE}=2.0\text{V}, I_C=250\text{mA}$ (Figure 6)	--	--	2.7	
		$V_{CE}=2.0\text{V}, I_C=300\text{mA}$ (Figure 6)	--	--	3.0	
Input Capacitance	C_i		--	15	30	pF
Turn-on Delay	t_{MH}	$0.5V_I$ to $0.5V_O$	--	--	1.0	μs
Turn-off Delay	t_{ML}	$0.5V_I$ to $0.5V_O$	--	--	1.0	
Clamp Diode Reverse Current	I_R		--	--	--	μA
		$T_A=+25^\circ\text{C}, V_R=50\text{V}$ (Figure 7)	--	--	10	
		$T_A=+85^\circ\text{C}, V_R=50\text{V}$ (Figure 7)	--	--	50	
Clamp Diode Forward Voltage	V_F	$I_F=350\text{mA}$ (Figure 8)	--	1.7	2.0	V

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.





Absolute maximum ratings are stress ratings only and functional device operation is not implied. Electrical Characteristics are for normal operating range;

2. All the conditions are suitable for darlington pairs unless otherwise noted;


3. In general, with 70°C , $V_{CE}(\text{Sat})=1.6\text{V}$, pulse width=20ms, the continuous operating current of each channel is 350mA.

DARLINGTON ARRAY DRIVER IC









TYPICAL CHARACTERISTIC CURVES

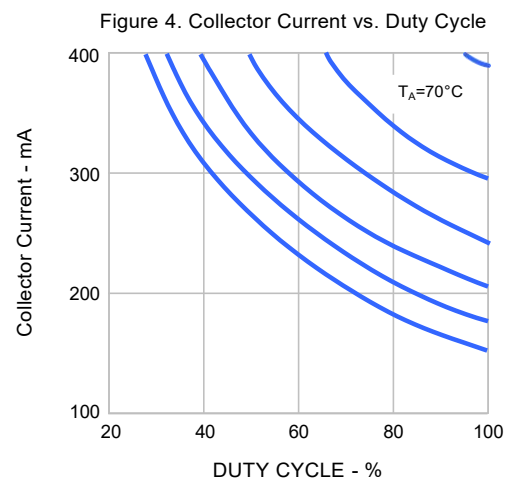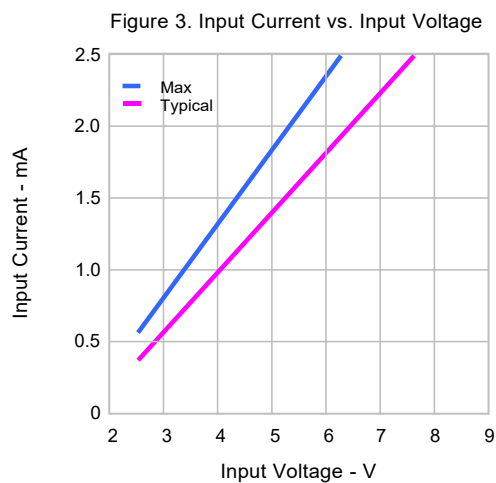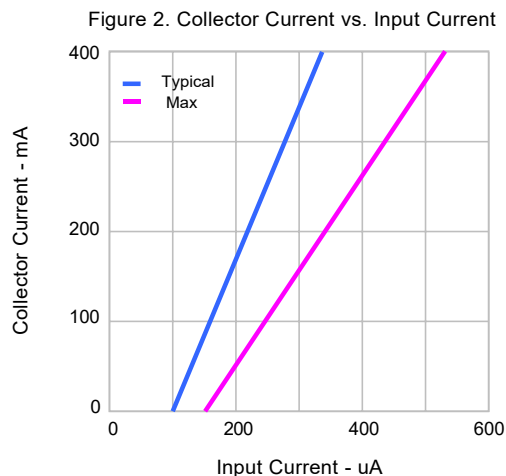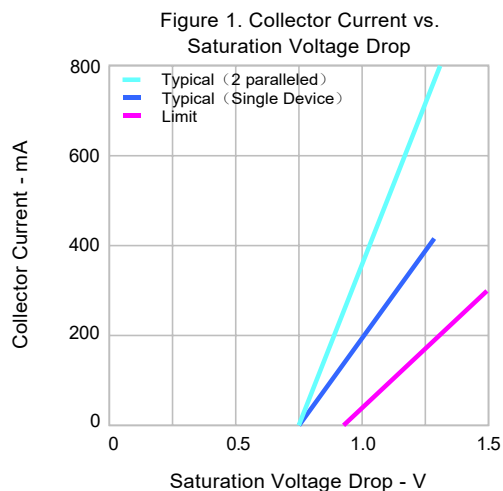

INTERNAL EQUIVALENT CIRCUIT

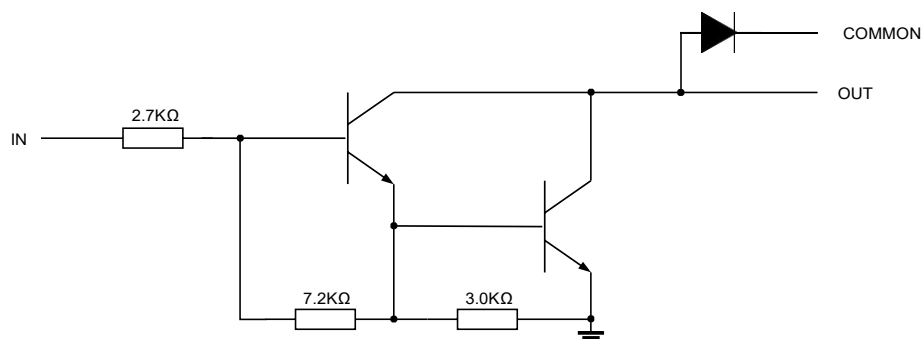

TEST CIRCUITS

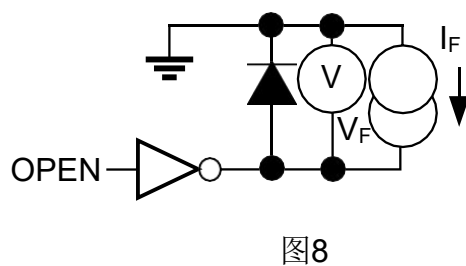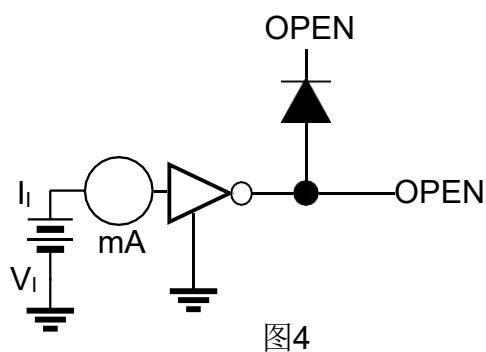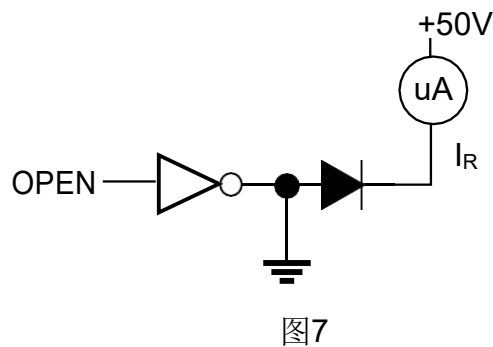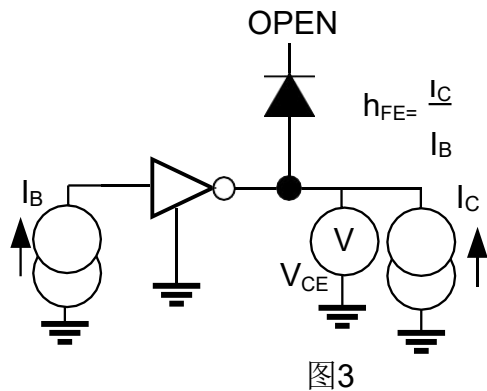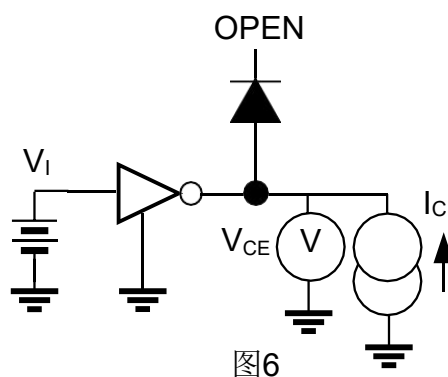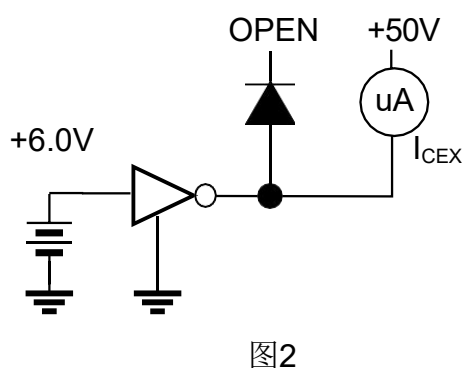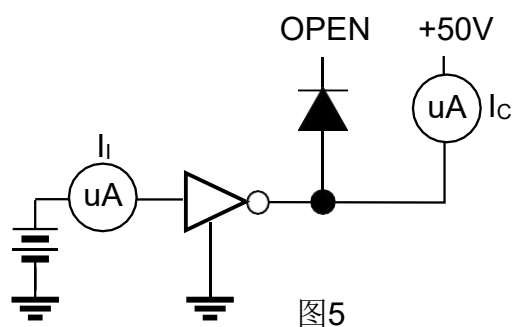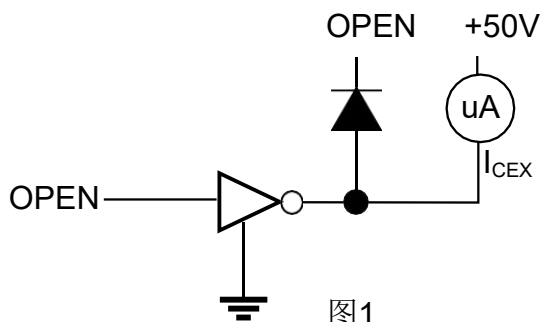


PACKAGE OUTLINE

DARLINGTON ARRAY DRIVER IC


DIP-18-300-2.54

UNIT: mm

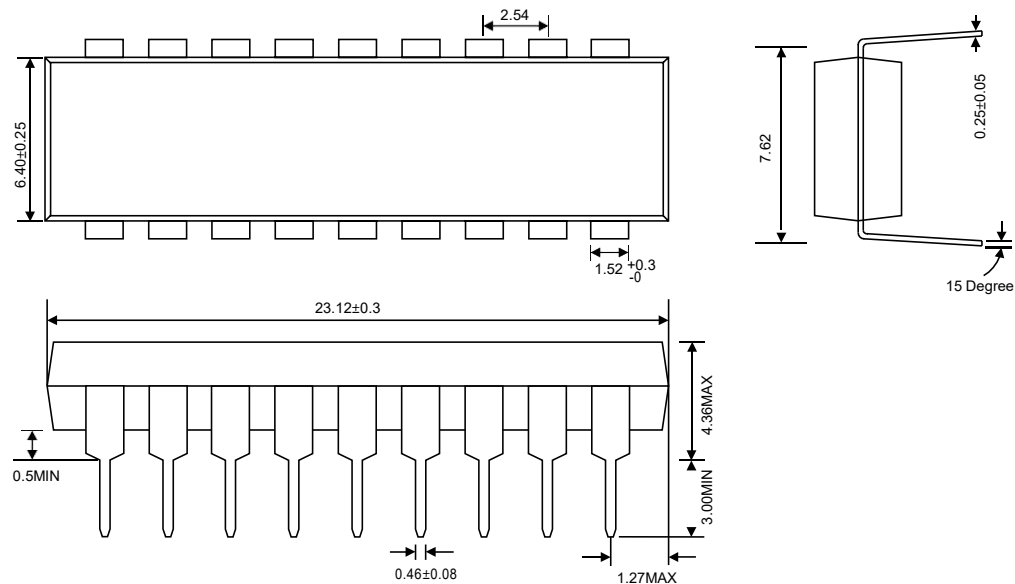

SOP-18-375-1.27

UNIT: mm

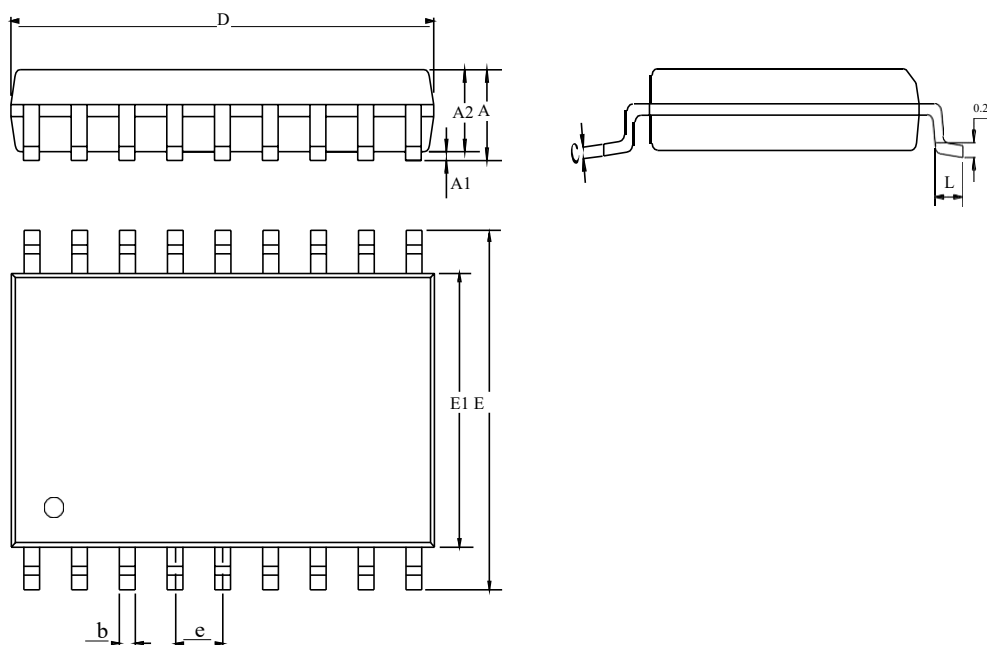

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	—	—	2.65
A1	0.10	—	0.30
A2	2.20	2.30	2.40
b	0.35	—	0.43
c	0.25	—	0.29
D	11.35	11.45	11.55
E	10.10	10.30	10.50
E1	7.40	7.50	7.60
e	1.27BSC		
L	0.70	—	1.00

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.