查询LT1634供应商 捷多邦，专业PCB打样工厂，24小时加急出货

LT1634

Micropower Precision Shunt Voltage Reference

FEATURES

- **Initial Voltage Accuracy: 0.05%**
- **Low Operating Current: 10µA**
- **Low Drift: 25ppm/°C Max**
- Less Than 1Ω Dynamic Impedance
- Available in 1.25V, 2.5V, 4.096V and 5V in SO-8 and TO-92 Packages
- 1.25V and 2.5V Available in MSOP Package
- Both Commercial and Industrial Temperature Range Parts Are Available

APPLICATIONS

- Portable Meters
- Precision Regulators
- A/D and D/A Converters
- Calibrators

DESCRIPTION


The LT®1634 is a micropower, precision, shunt voltage reference. The bandgap reference uses trimmed precision thin film resistors to achieve 0.05% initial voltage accuracy. Improved curvature correction technique guarantees 25ppm/°C maximum temperature drift. Advances in design, processing and packaging techniques guarantee 10µA operation and low temperature cycling hysteresis. The LT1634 does not require an output compensation capacitor, but is stable with capacitive loads. Low dynamic impedance makes the LT1634 reference easy to use from unregulated supplies.

The LT1634 reference can be used as a high performance upgrade to the LM185/LM385, LT1004 and LT1034 where lower power and guaranteed temperature drift is required.


LT, LTC and LT are registered trademarks of Linear Technology Corporation.

TYPICAL APPLICATION

Super Accurate ±4.096V Output References

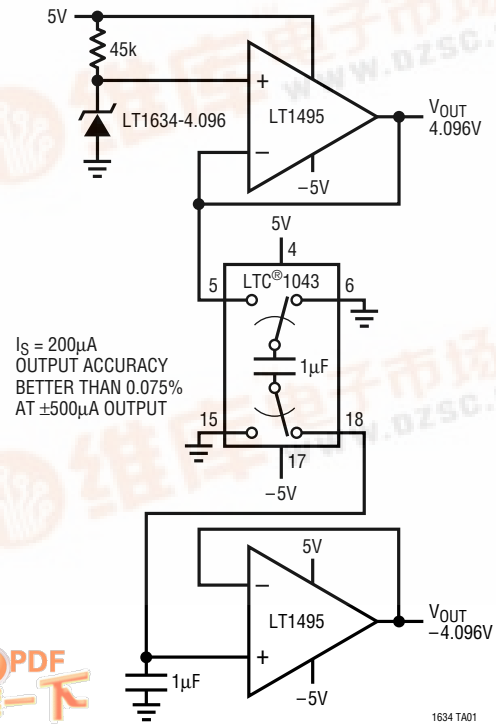

Temperature Drift

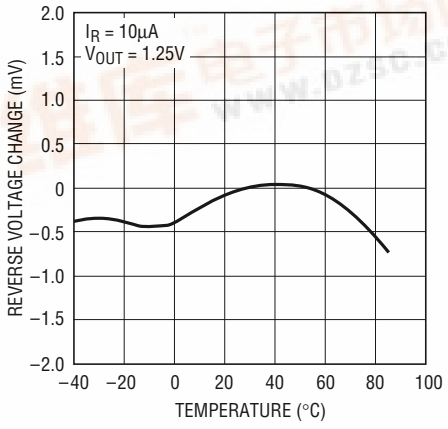

找PDF 维库一下 pdf.dzsc.com

ABSOLUTE MAXIMUM RATINGS

Operating Current
- 1.25V 100mA
- 2.5V 50mA
- 4.096V, 5V 30mA


Forward Current 20mA

Operating Temperature Range
- Commercial ..... 0°C to 70°C
- Industrial ..... –40°C to 85°C

Storage Temperature Range (Note 1) ... –65°C to 150°C


Lead Temperature (Soldering, 10 sec) ..... 300°C

PACKAGE/ORDER INFORMATION



MS8 PACKAGE
8-LEAD PLASTIC MSOP

T_{JMAX} = 125°C, θ_{JA} = 250°C/W




S8 PACKAGE
8-LEAD PLASTIC SO

T_{JMAX} = 125°C, θ_{JA} = 190°C/W

ORDER PART NUMBER	MS8 PART MARKING
LT1634BCMS8-1.25	LTCV
LT1634BCMS8-2.5	LTDF

ORDER PART NUMBER	S8 PART MARKING
LT1634BCS8-1.25	634B1
LT1634BCS8-2.5	634B2
LT1634BCS8-4.096	634B4
LT1634BCS8-5	634B5
LT1634BIS8-1.25	634BI1
LT1634BIS8-2.5	634BI2
LT1634BIS8-4.096	634BI4
LT1634BIS8-5	634BI5



Z PACKAGE
3-LEAD PLASTIC TO-92

T_{JMAX} = 125°C, θ_{JA} = 190°C/W

ORDER PART NUMBER
LT1634CCZ-1.25
LT1634CCZ-2.5
LT1634CCZ-4.096
LT1634CCZ-5

*Connected internally. Do not connect external circuitry to these pins.
**Connect to ground in user application.
Consult factory for Military grade parts.

AVAILABLE OPTIONS

TEMPERATURE	ACCURACY (%)	TEMPERATURE COEFFICIENT (ppm/°C)	PACKAGE TYPE		
			MS8	S8	Z
0°C to 70°C	0.05	25	LT1634BCMS8-1.25 LT1634BCMS8-2.5	LT1634BCS8-1.25 LT1634BCS8-2.5 LT1634BCS8-4.096 LT1634BCS8-5	
–40°C to 85°C	0.05	25		LT1634BIS8-1.25 LT1634BIS8-2.5 LT1634BIS8-4.096 LT1634BIS8-5	
0°C to 70°C	0.20	25			LT1634CCZ-1.25 LT1634CCZ-2.5 LT1634CCZ-4.096 LT1634CCZ-5

1.25V ELECTRICAL CHARACTERISTICS (Note 2)

PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
Reverse Breakdown Voltage	LT1634BCMS8/LT1634BCS8/LT1634BIS8 (I_R = 10µA)		1.24937 –0.05	1.250	1.25062 0.05	V %
	LT1634CCZ (I_R = 10µA)		1.24750 –0.20	1.250	1.25250 0.20	V %
	LT1634BCS8/LT1634BCMS8 (I_R = 10µA)	●	1.24718 –0.225	1.250	1.25281 0.225	V %
	LT1634BIS8 (I_R = 10µA)	●	1.24547 –0.362	1.250	1.25453 0.362	V %
	LT1634CCZ (I_R = 10µA)	●	1.24531 –0.375	1.250	1.25469 0.375	V %
Reverse Breakdown Change with Current (Note 3)	10µA ≤ I_R ≤ 2mA	 ●		0.25 0.30	1 2	mV mV
	2mA ≤ I_R ≤ 20mA	 ●		2 2	8 10	mV mV
Minimum Operating Current		●			7	µA
Temperature Coefficient	I_R = 10µA	●		10	25	ppm/°C
Reverse Dynamic Impedance (Note 4)	10µA ≤ I_R ≤ 2mA	 ●		0.125 0.150	0.5 1.0	Ω Ω
Low Frequency Noise (Note 5)	I_R = 10µA, 0.1Hz ≤ f ≤ 10Hz			10		μV_{P-P}
Hysteresis (Note 6)	ΔT = –40°C to 85°C ΔT = 0°C to 70°C			160 40		ppm ppm

2.5V ELECTRICAL CHARACTERISTICS (Note 2)

PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
Reverse Breakdown Voltage	LT1634BCMS8/LT1634BCS8/LT1634BIS8 (I_R = 10µA)		2.49875 –0.05	2.500	2.50125 0.05	V %
	LT1634CCZ (I_R = 10µA)		2.49500 –0.20	2.500	2.50500 0.20	V %
	LT1634BCMS8/LT1634BCS8 (I_R = 10µA)	●	2.49437 –0.225	2.500	2.50562 0.225	V %
	LT1634BIS8 (I_R = 10µA)	●	2.49094 –0.362	2.500	2.50906 0.362	V %
	LT1634CCZ (I_R = 10µA)	●	2.49062 –0.375	2.500	2.50937 0.375	V %
Reverse Breakdown Change with Current (Note 3)	10µA ≤ I_R ≤ 2mA	 ●		0.30 0.40	1.5 3.0	mV mV
	2mA ≤ I_R ≤ 20mA	 ●		2 2	8 10	mV mV
Minimum Operating Current		●			8	µA
Temperature Coefficient	I_R = 10µA	●		10	25	ppm/°C
Reverse Dynamic Impedance (Note 4)	10µA ≤ I_R ≤ 2mA	 ●		0.15 0.20	0.75 1.50	Ω Ω
Low Frequency Noise (Note 5)	I_R = 10µA, 0.1Hz ≤ f ≤ 10Hz			15		μV_{P-P}
Hysteresis (Note 6)	ΔT = –40°C to 85°C ΔT = 0°C to 70°C			160 40		ppm ppm

4.096V ELECTRICAL CHARACTERISTICS (Note 2)

PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
Reverse Breakdown Voltage	LT1634BCS8/LT1634BIS8 (I_R = 20µA)		4.09395 –0.05	4.096	4.09805 0.05	V %
	LT1634CCZ (I_R = 20µA)		4.08780 –0.20	4.096	4.10419 0.20	V %
	LT1634BCS8 (I_R = 20µA)	●	4.08678 –0.225	4.096	4.10522 0.225	V %
	LT1634BIS8 (I_R = 20µA)	●	4.08115 –0.362	4.096	4.11085 0.362	V %
	LT1634CCZ (I_R = 20µA)	●	4.08064 –0.375	4.096	4.11137 0.375	V %
Reverse Breakdown Change with Current (Note 3)	20µA ≤ I_R ≤ 2mA	 ●		0.3 0.4	1.5 3.0	mV mV
	2mA ≤ I_R ≤ 20mA	 ●		2 2	8 10	mV mV
Minimum Operating Current		●			15	µA
Temperature Coefficient	I_R = 20µA	●		10	25	ppm/°C
Reverse Dynamic Impedance (Note 4)	20µA ≤ I_R ≤ 2mA	 ●		0.15 0.20	0.75 1.50	Ω Ω
Low Frequency Noise (Note 5)	I_R = 20µA, 0.1Hz ≤ f ≤ 10Hz			30		μV_{P-P}
Hysteresis (Note 6)	ΔT = –40°C to 85°C ΔT = 0°C to 70°C			160 40		ppm ppm

5V ELECTRICAL CHARACTERISTICS (Note 2)

PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
Reverse Breakdown Voltage	LT1634BCS8/LT1634BIS8 (I_R = 20µA)		4.99750 –0.05	5.000	5.00250 0.05	V %
	LT1634CCZ (I_R = 20µA)		4.99000 –0.20	5.000	5.01000 0.20	V %
	LT1634BCS8 (I_R = 20µA)	●	4.98875 –0.225	5.000	5.01125 0.225	V %
	LT1634BIS8 (I_R = 20µA)	●	498188 –0.362	5.000	5.01813 0.362	V %
	LT1634CCZ (I_R = 20µA)	●	4.98126 –0.375	5.000	5.01876 0.375	V %
Reverse Breakdown Change with Current (Note 3)	20µA ≤ I_R ≤ 2mA	 ●		0.3 0.4	1.5 3.0	mV mV
	2mA ≤ I_R ≤ 20mA	 ●		2 2	8 10	mV mV
Minimum Operating Current		●			15	µA
Temperature Coefficient	I_R = 20µA	●		10	25	ppm/°C
Reverse Dynamic Impedance (Note 4)	20µA ≤ I_R ≤ 2mA	 ●		0.15 0.20	0.75 1.50	Ω Ω
Low Frequency Noise (Note 5)	I_R = 20µA, 0.1Hz ≤ f ≤ 10Hz			35		μV_{P-P}
Hysteresis (Note 6)	ΔT = –40°C to 85°C ΔT = 0°C to 70°C			160 40		ppm ppm

The ● denotes specifications which apply over the full operating temperature range.

Note 1: If the part is stored outside of the specific operating temperature range, the output may shift due to hysteresis.

Note 2: ESD (Electrostatic Discharge) sensitive device. Use proper ESD handling precautions.

Note 3: Output requires 0.1µF for operating current greater than 1mA.


Note 4: This parameter is guaranteed by "reverse breakdown change with current" test.

Note 5: Peak-to-peak noise is measured with a single highpass filter at 0.1Hz and 2-pole lowpass filter at 10Hz.

Note 6: Hysteresis in output voltage is created by package stress that differs depending on whether the IC was previously at a higher or lower temperature. Output voltage is always measured at 25°C but the IC is cycled to 85°C or –40°C before successive measurements. Hysteresis is roughly proportional to the square of the temperature change. Hysteresis is not normally a problem for operational temperature excursions where the instrument might be stored at high or low temperature.


1.25V TYPICAL PERFORMANCE CHARACTERISTICS

Reverse Characteristics

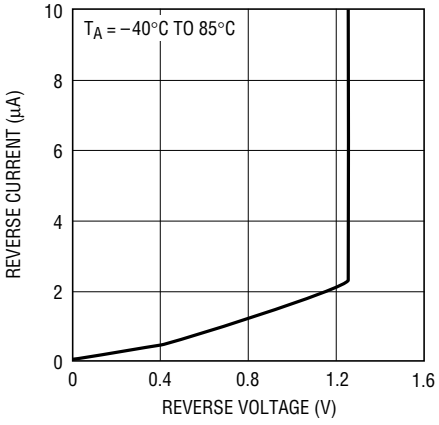


1634-1.25 G01

Temperature Drift

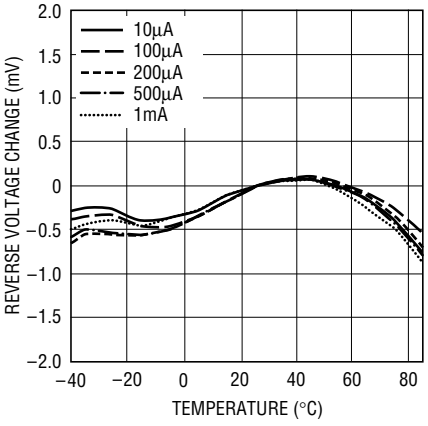


1634-1.25 TA02

Reverse Voltage Change vs Current

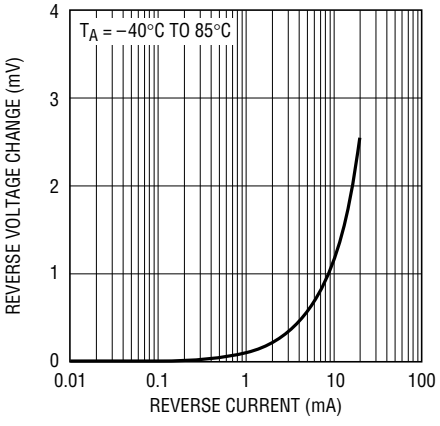


1634-1.25 G03

Reverse Dynamic Impedance

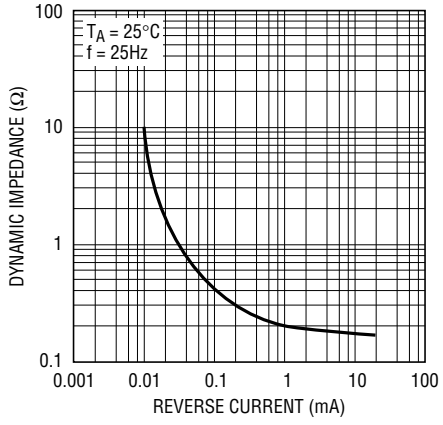


1634-1.25 G04

Dynamic Impedance vs Frequency

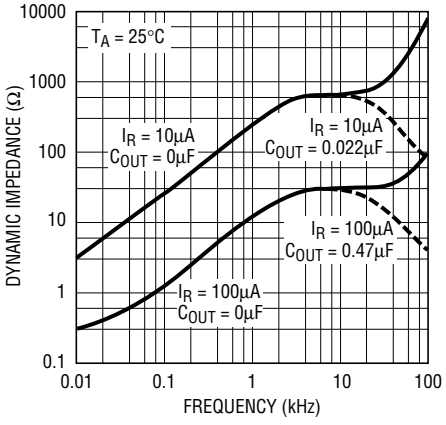


1634-1.25 G05

Forward Characteristics

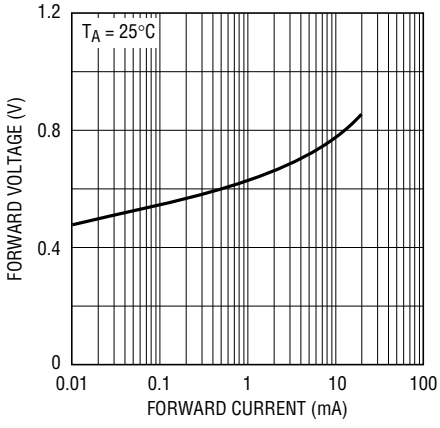


1634-1.25 G06

0.1Hz to 10Hz Noise

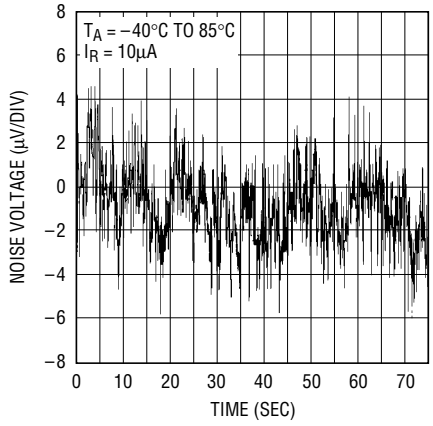

1634-1.25 G07

Response Time

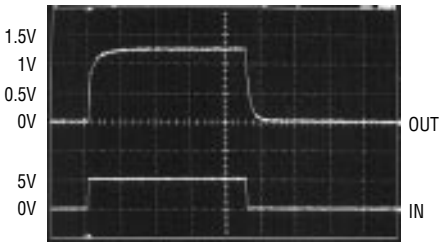


I_R = 10µA
C_{OUT} = 0

200µs/DIV

1634-1.25 G08

Response Time

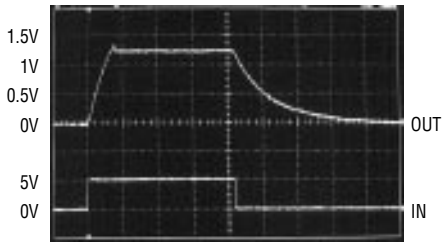


I_R = 10µA
C_{OUT} = 0.1µF

20ms/DIV

1634-1.25 G09


2.5V TYPICAL PERFORMANCE CHARACTERISTICS

Reverse Characteristics

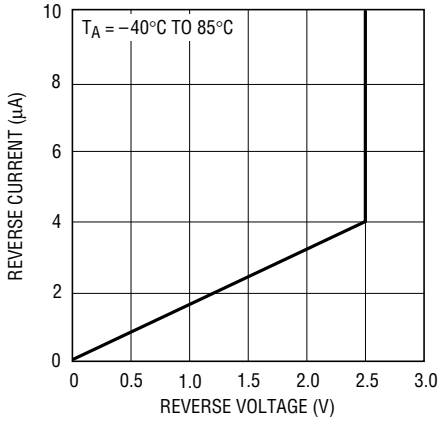


1634-2.5 G01

Temperature Drift

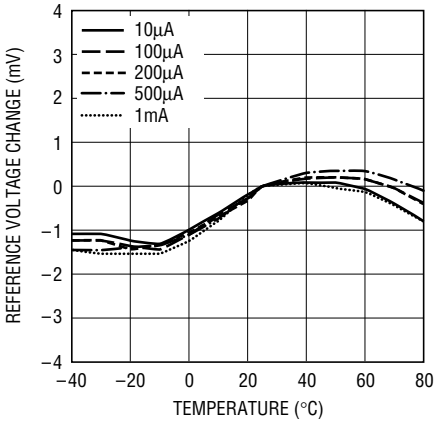


1634-2.5 G02

Reverse Voltage Change vs Current

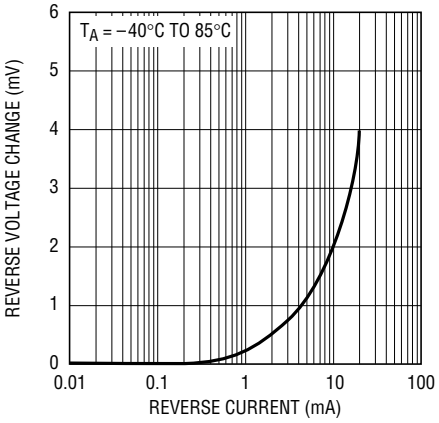


1634-2.5 G03

Reverse Dynamic Impedance

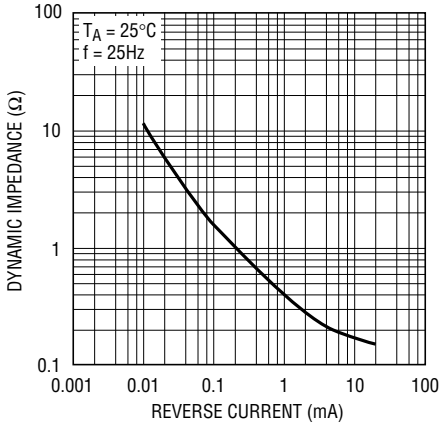


1635-2.5 G04

Dynamic Impedance vs Frequency

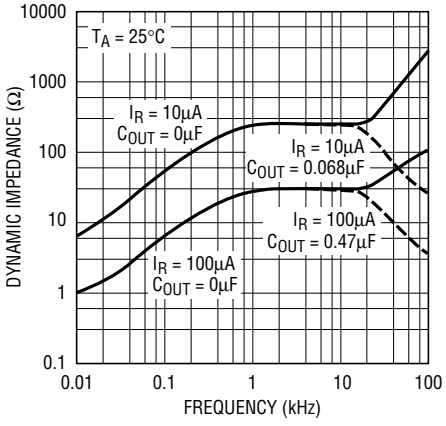


1634-2.5 G05

Forward Characteristics

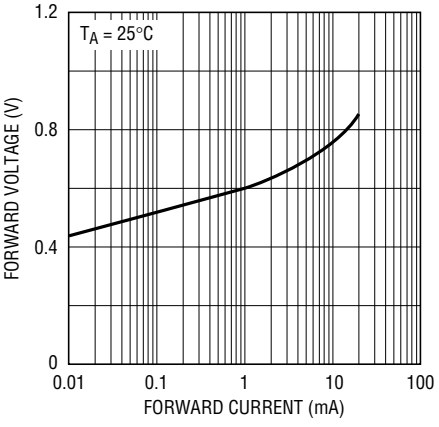


1634-2.5 G06

0.1Hz to 10Hz Noise

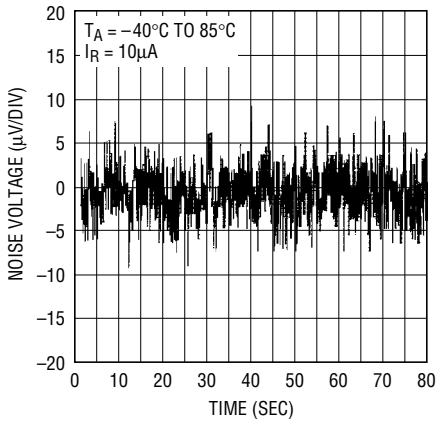

1634-2.5 G07

Response Time

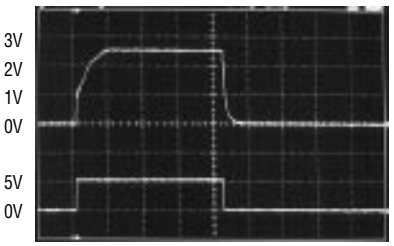


I_R = 10µA
C_{OUT} = 0

200µs/DIV

1634-2.5 G08

Response Time

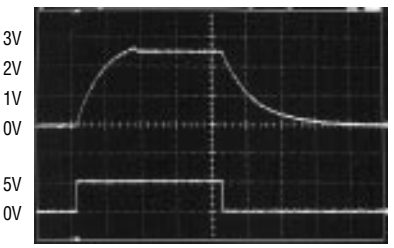


I_R = 10µA
C_{OUT} = 0.1µF

20ms/DIV

1634-2.5 G09


4.096V TYPICAL PERFORMANCE CHARACTERISTICS

Reverse Characteristics

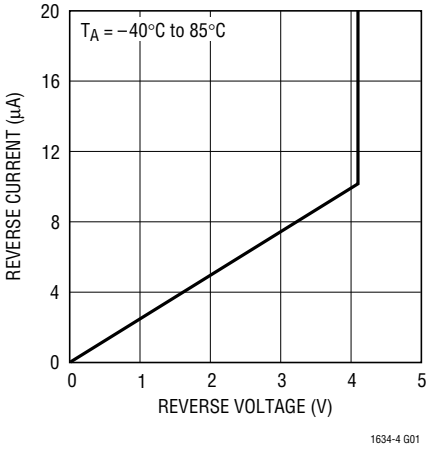


1634-4 G01

Temperature Drift

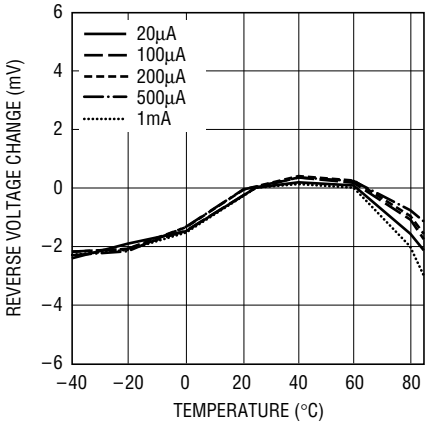


1634-4 G02

Reverse Voltage Change vs Current

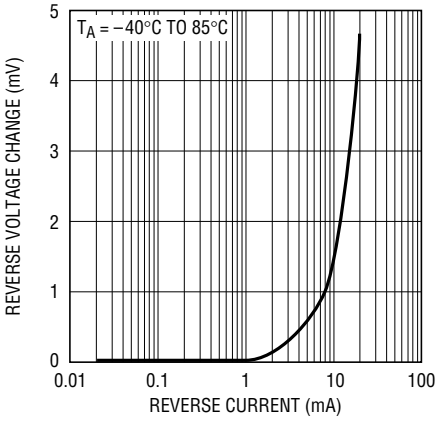


1634-4 G03

Reverse Dynamic Impedance

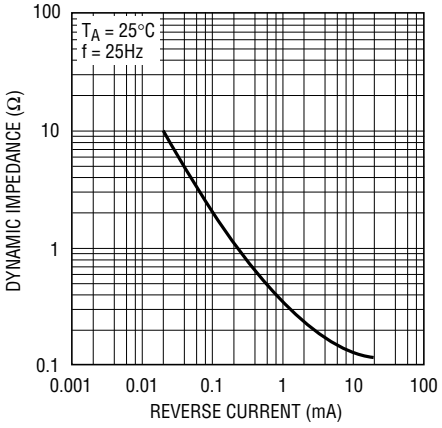


1635-4 G04

Dynamic Impedance vs Frequency

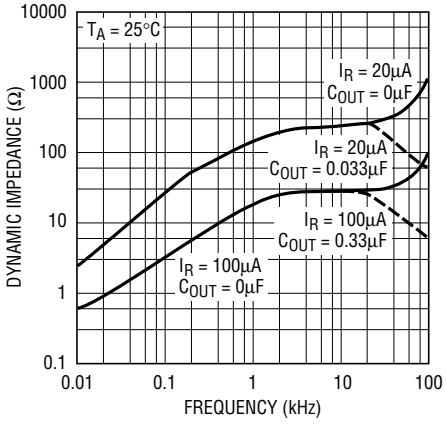


1634-4 G05

Forward Characteristics

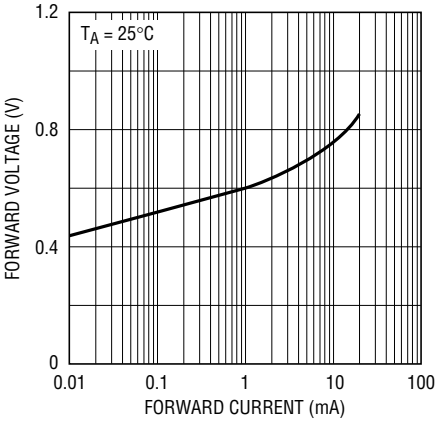


1634-2.5 G06

0.1Hz to 10Hz Noise

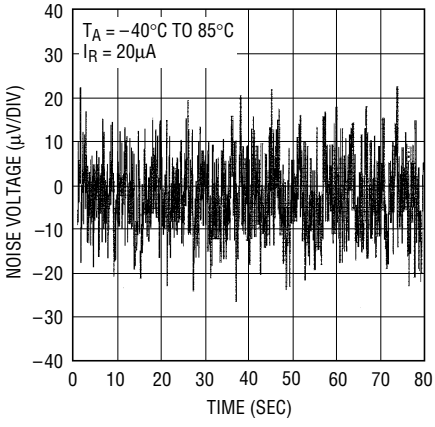

1634-4 G06

Response Time

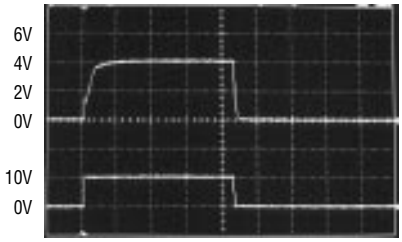


I_R = 20µA
C_{OUT} = 0

500µs/DIV

1634-4 G07

Response Time

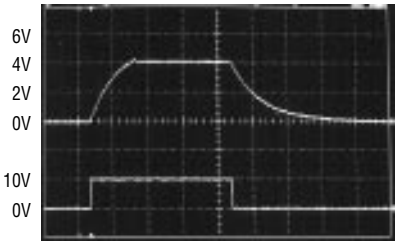


I_R = 20µA
C_{OUT} = 0.1µF

20ms/DIV

1634-2.5 G08


5V TYPICAL PERFORMANCE CHARACTERISTICS

Reverse Characteristics

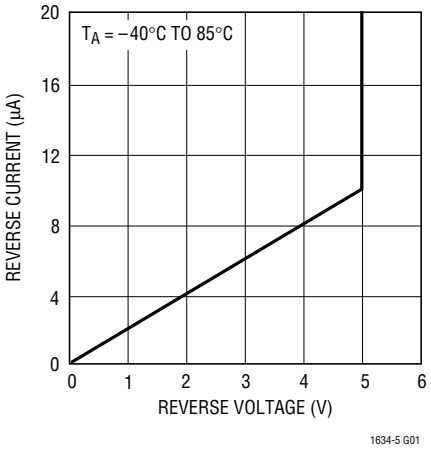


1634-5 G01

Temperature Drift

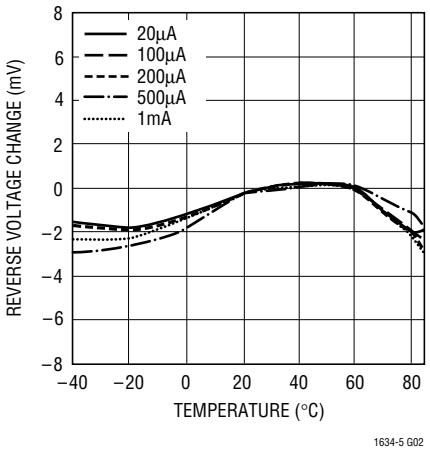


1634-5 G02

Reverse Voltage Change vs Current

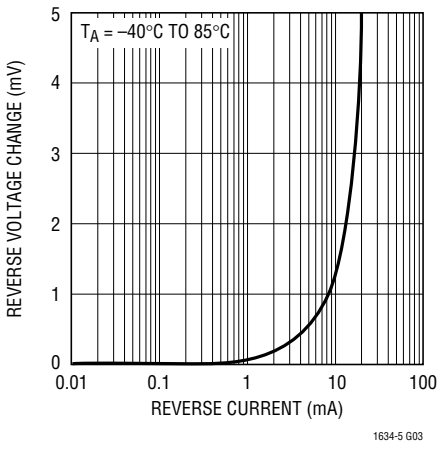


1634-5 G03

Reverse Dynamic Impedance

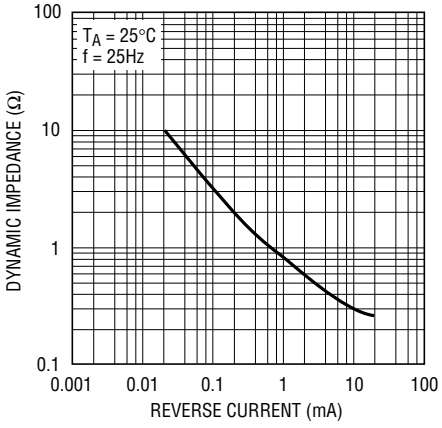


1635-5 G04

Dynamic Impedance vs Frequency

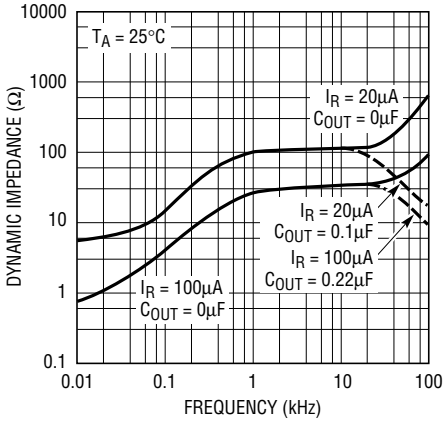


1634-5 G05

Forward Characteristics

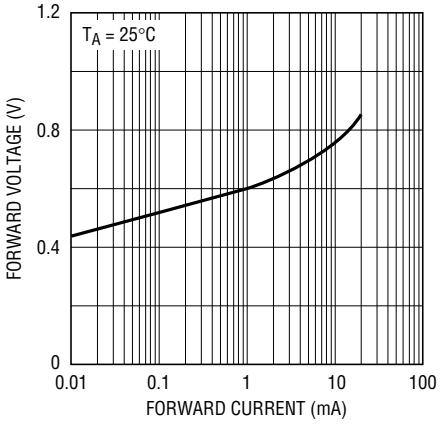


1634-2.5 G06

0.1Hz to 10Hz Noise

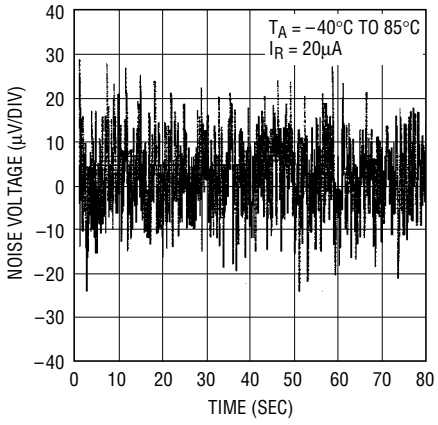

1634-5 G06

Response Time

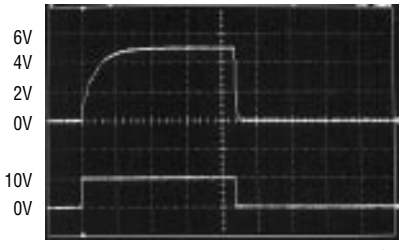


I_R = 20µA
C_{OUT} = 0

500µs/DIV

1634-5 G07

Response Time

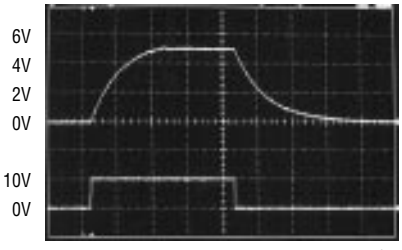

I_R = 20µA
C_{OUT} = 0.1µF

20ms/DIV

1634-5 G08

APPLICATIONS INFORMATION

The reverse characteristics of the LT1634 behave like a resistor in parallel with a Zener diode. This simple, well behaved characteristic is important to the proper operation of circuits like Figure 1. The adjustable output voltage reference depends upon positive feedback from the LT1495's output to start-up and regulate the bias current for the LT1634.


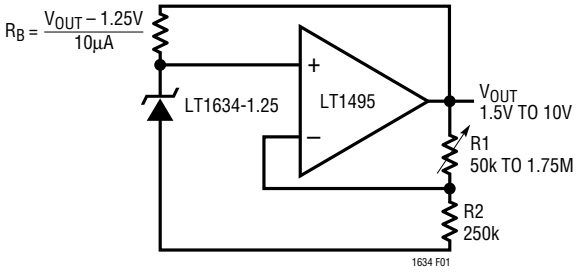



Figure 1. Adjustable Output Voltage Reference

TYPICAL APPLICATIONS

Reference for Micropower A/D Converter

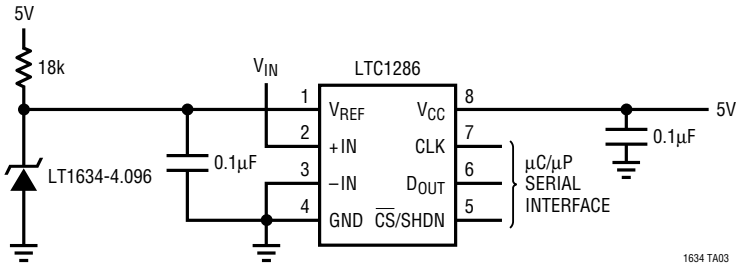


The LT1634-5 Generates the LTC1448 Dual 12-Bit DAC's Reference and Supply Voltage

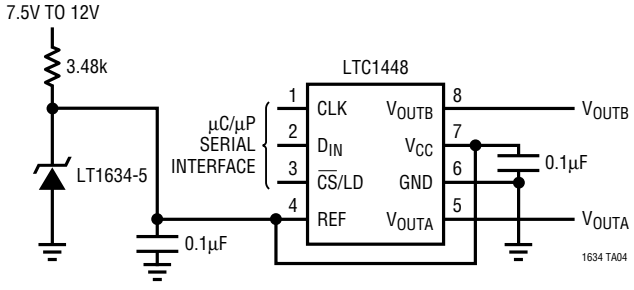

PACKAGE DESCRIPTION

Dimensions in inches (millimeters) unless otherwise noted.


MS8 Package
8-Lead Plastic MSOP
(LTC DWG # 05-08-1660)

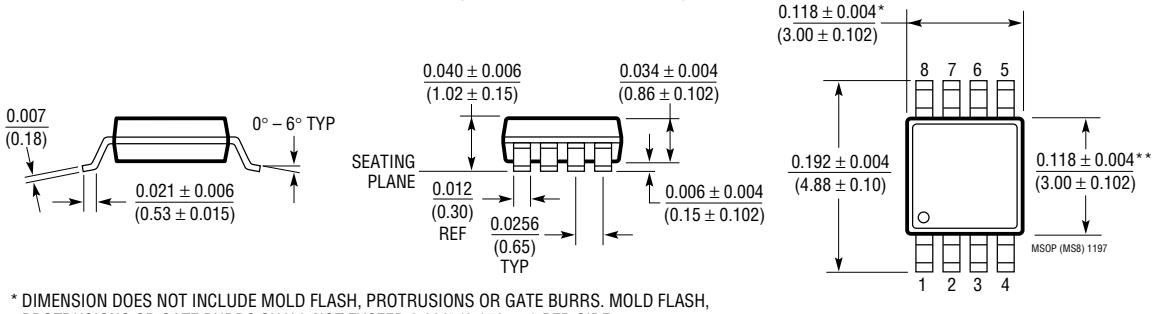

* DIMENSION DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.006" (0.152mm) PER SIDE

** DIMENSION DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS. INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.006" (0.152mm) PER SIDE


S8 Package
8-Lead Plastic Small Outline (Narrow 0.150)
(LTC DWG # 05-08-1610)

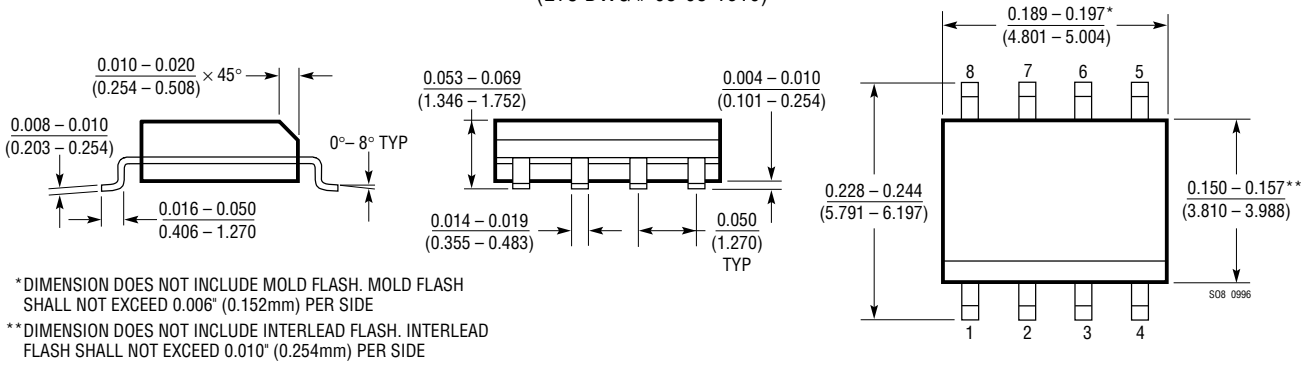

*DIMENSION DOES NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.006" (0.152mm) PER SIDE


**DIMENSION DOES NOT INCLUDE INTERLEAD FLASH. INTERLEAD FLASH SHALL NOT EXCEED 0.010" (0.254mm) PER SIDE

Z Package
3-Lead Plastic TO-92 (Similar to TO-226)
(LTC DWG # 05-08-1410)

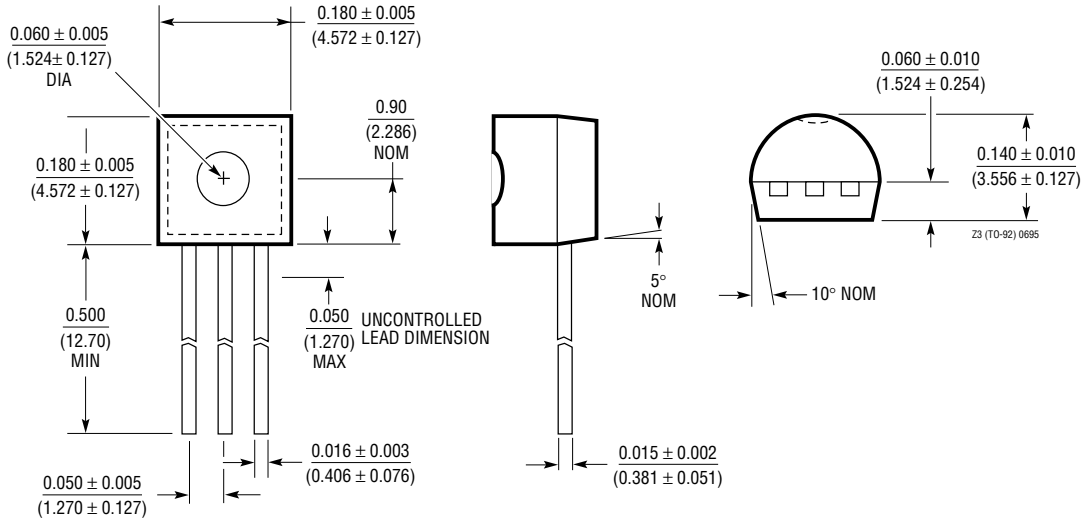


TYPICAL APPLICATIONS

Single Cell Li-Ion Battery Supervisory Circuit

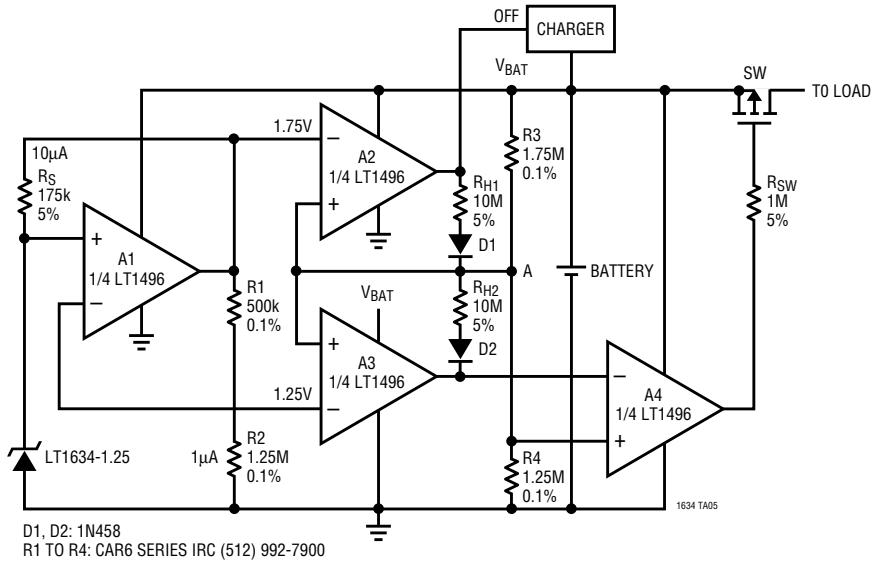

Micropower Voltage and Current Reference

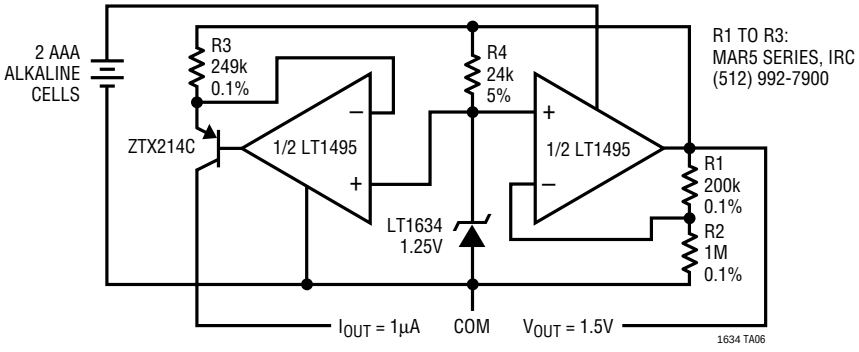

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LTC1440	Micropower Comparator with Reference	3.7µA Max Supply Current, 1% 1.182V Reference, MSOP, PDIP and SO-8 Packages
LT1460	Micropower Series Reference	0.075% Max, 10ppm/°C Max Drift, 2.5V, 5V and 10V Versions, MSOP, PDIP, SO-8, SOT-23 and TO-92 Packages
LT1495	1.5µA Precision Rail-to-Rail Dual Op Amp	1.5µA Max Supply Current, 100pA Max I_{OS}
LTC1540	Nanopower Comparator with Reference	600nA Max Supply Current, 2% 1.182V Reference, MSOP and SO-8 Packages