FIGARO

PRODUCT INFORMATION

TGS 2442 - for the detection of Carbon Monoxide


Features:

* Low power consumption
* High sensitivity/selectivity to carbon monoxide (CO)
* Miniature size
* Low sensitivity to alcohol vapor
* Long life and low cost
* Low humidity dependency

Applications:

* CO detectors
* Air quality controllers
* Indoor parking lot ventilation

TGS 2442 utilizes a multilayer sensor structure. A glass layer for thermal insulation is printed between a ruthenium oxide (RuO_2) heater and an alumina substrate. A pair of Au electrodes for the heater are formed on a thermal insulator. The gas sensing layer, which is formed of tin dioxide (SnO_2), is printed on an electrical insulation layer which covers the heater. A pair of Au electrodes for measuring sensor resistance are formed on the electrical insulator. Activated charcoal is filled between the internal cover and the outer cover for the purpose of reducing the influence of noise gases.

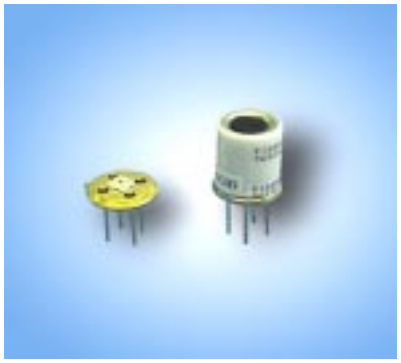

TGS 2442 displays good selectivity to carbon monoxide, making it ideal for CO monitors. In the presence of CO, the sensor's conductivity increases depending on the gas concentration in the air. A simple pulsed electrical circuit operating on a one second circuit voltage cycle can convert the change in conductivity to an output signal which corresponds to gas concentration.

The figure below represents typical sensitivity characteristics, all data having been gathered at standard test conditions (see reverse side of this sheet). The Y-axis is indicated as *sensor resistance ratio* (Rs/Ro) which is defined as follows:

Rs = Sensor resistance of displayed gases at various concentrations


Ro = Sensor resistance in 100ppm CO

The figure below represents typical temperature and humidity dependency characteristics. Again, the Y-axis is indicated as *sensor resistance ratio* (Rs/Ro), defined as follows:


Rs = Sensor resistance at 30ppm, 100ppm and 300ppm of CO at various temperatures and 50%R.H.

Ro = Sensor resistance at 300ppm of CO at 25°C and 50% R.H.

Sensitivity Characteristics:

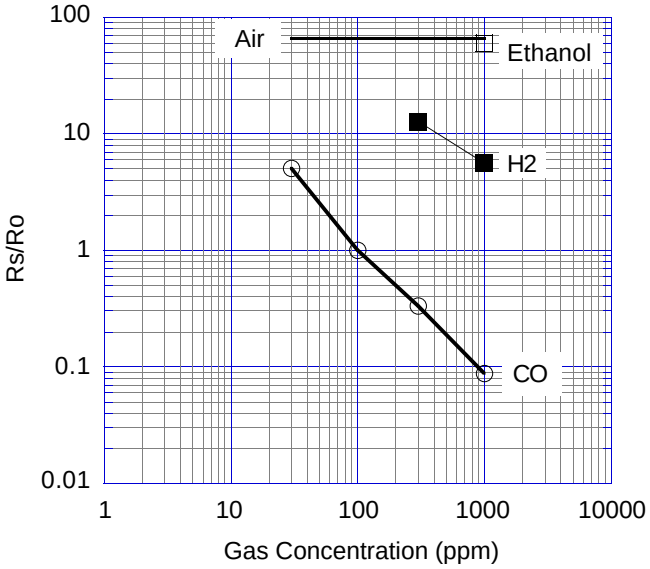

Temperature/Humidity Dependency:

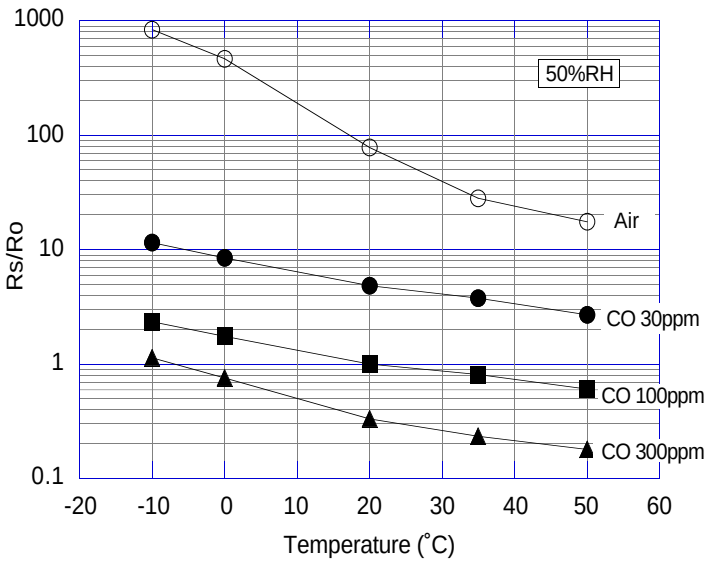


IMPORTANT NOTE: OPERATING CONDITIONS IN WHICH FIGARO SENSORS ARE USED WILL VARY WITH EACH CUSTOMER'S SPECIFIC APPLICATIONS. FIGARO STRONGLY RECOMMENDS CONSULTING OUR TECHNICAL STAFF BEFORE DEPLOYING FIGARO SENSORS IN YOUR APPLICATION AND, IN PARTICULAR, WHEN CUSTOMER'S TARGET GASES ARE NOT LISTED HEREIN. FIGARO CANNOT ASSUME ANY RESPONSIBILITY FOR ANY USE OF ITS SENSORS IN A PRODUCT OR APPLICATION FOR WHICH SENSOR HAS NOT BEEN SPECIFICALLY TESTED BY FIGARO.


Basic Measuring Circuit:

Circuit voltage (V_C) is applied across the sensing element which has a resistance (Rs) between the sensor's two electrodes (pins No. 2 and No. 3) and a load resistor (R_L) connected in series. The sensing element is heated by the heater which is connected to pins No. 1 and No. 4.

Heating cycle--The sensor requires application of a 1 second heating cycle which is used in connection with a circuit voltage cycle of 1 second. Each V_H cycle is comprised by 4.8V being applied to the heater for the first 14ms, followed by 0V pulse for the remaining 986ms. The Vc cycle consists of 0V applied for 995ms, followed by 5.0V for 5ms. For achieving optimal sensing characteristics, the sensor's signal should be measured after the midpoint of the 5ms Vc pulse of 5.0V (*for reference, see timing chart below*).

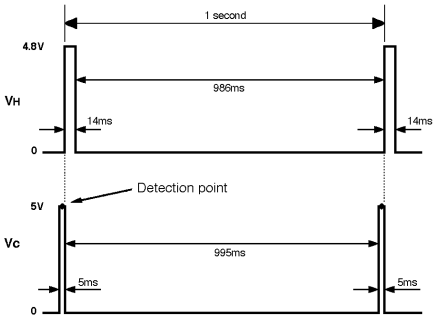


NOTE: Application of a Vc pulse condition is required to prevent possible migration of heater materials into the sensing element material. Under extreme conditions of high humidity and temperature, a constant Vc condition could result in such migration and cause long term drift of Rs to higher values. A 5ms Vc pulse results in significantly less driving force for migration than a constant Vc condition, rendering the possibility of migration negligibly small.

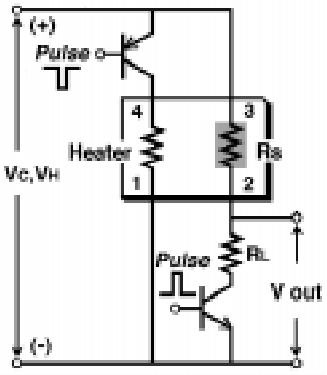

Structure and Dimensions:

unit: mm

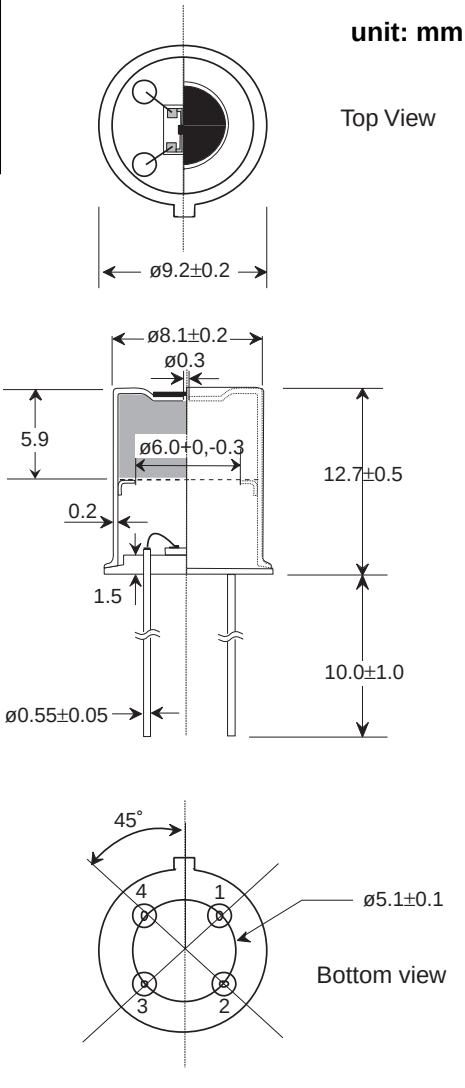

Preliminary Specifications:

Model number			TGS 2442
Sensing element type			M1
Standard package			TO-5 metal can
Target gases			Carbon monoxide
Typical detection range			30 ~ 1000 ppm
Standard circuit conditions	Heater voltage cycle	V_H	V_{HH}=4.8V±0.2V DC, 14ms V_{HL}=0V, 986ms
	Circuit voltage cycle	V_C	V_C=0V for 995ms, V_C=5.0V±0.2V DC for 5ms
	Load resistance	R_L	variable (≥10kΩ)
Electrical characteristics under standard test conditions	Heater resistance	R_H	17 ± 2.5Ω at room temp.
	Heater current	I_H	approx. 203mA(in case of V_{HH})
	Heater power consumption	P_H	approx. 14mW (ave.)
	Sensor resistance	Rs	6.81 kΩ ~ 68.1 kΩ in 100ppm of carbon monoxide
	Sensitivity (change ratio of Rs)	β	0.23 ~ 0.49
Standard test conditions	Test gas conditions		Carbon monoxide in air at 20±2˚C, 65±5%RH
	Circuit conditions		Same as Std. Circuit Condition (above)
	Conditioning period before test		> 2 days (under review)

Sensor resistance (Rs) is calculated with a measured value of Vout as follows:

$$Rs = \frac{Vcx\ RL}{Vout} - RL$$

The value of sensitivity (β) is calculated with two measured values of Rs as follows:

$$\beta = \frac{Rs\ (CO,300ppm)}{Rs\ (CO,100ppm)}$$

To facilitate usage of this sensor, TGS2442 is shipped in presorted groupings which have a more narrowly defined range of β:

Code:

A: 0.23 ~ 0.34	D: 0.32 ~ 0.43
B: 0.26 ~ 0.37	E: 0.35 ~ 0.46
C: 0.29 ~ 0.40	F: 0.38 ~ 0.49

The above six classification will be further subdivided into the following rankings of Rs values in 100ppm of CO:

Code:

1: 6.81 ~ 21.5kΩ	3: 14.7 ~ 46.6kΩ
2: 10.0 ~ 31.6kΩ	4: 21.5 ~ 68.1kΩ

For information on warranty, please refer to Standard Terms and Conditions of Sale of Figaro USA Inc.

REV: 6/00

FIGARO USA INC.
3703 West Lake Ave. Suite 203
Glenview, IL 60025 USA
Tel: 847-832-1701
Fax: 847-832-1705
email: figarousa@figarosensor.com