

1.2 - 8V, 3A PFET High Side Load Switch with Level Shift & Adjustable Slew Rate Control

Check for Samples: [TPS27081A](#)

FEATURES

- Low ON Resistance, High current PFET
 - $R_{DS(ON)} = 32m\Omega$ (Typ) at $V_{GS} = -4.5V$
 - $R_{DS(ON)} = 44m\Omega$ (Typ) at $V_{GS} = -3.0V$
 - $R_{DS(ON)} = 85m\Omega$ (Typ) at $V_{GS} = -1.8V$
 - $R_{DS(ON)} = 85m\Omega$ (Typ) at $V_{GS} = -1.5V$
 - $R_{DS(ON)} = 155m\Omega$ (Typ) at $V_{GS} = -1.2V$
- Adjustable Turn-ON and Turn-OFF slew rate control through discrete components R1, R2, and C1
- Supports a wide range of 1.2V up to 8V supply inputs
- Integrated NMOS for Inrush current Control
- NMOS Enable Supports a Wide Range of 1.2V up to 8V Control logic Interface
- Full Protection Against ESD (All Pins)
 - HBM 2kV, CDM 500V
- Ultra Low Leakage Current in Stand-by (Typ 100nA)
- $-40^{\circ}C$ to $85^{\circ}C$ Temperature Rating
- Available in Tiny 6-pin Packages
 - 2.9mm x 1.6mm Thin (0.9mm max) SOT-23 (DDC)
 - 2mm x 2mm SON-6 (DRV) Preview Only

APPLICATIONS

- High Side Load Switch
- Inrush-current control
- Power Sequencing and Control
- Stand-by Power Isolation
- Portable Power Switch

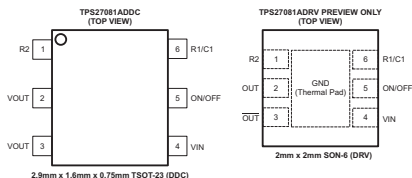


Figure 1. TPS27081A Packages

DESCRIPTION

The TPS27081A IC is a high side load switch that integrates a Power PFET and a Control NMOS in a tiny package.

The TPS27081A is fully protected against ESD strikes on all pins. The TPS27081A features industry-standard ESD protection on all pins thus providing better ESD compatibility with other on-board components.

The TPS27081A level shifts ON/OFF logic signal to VIN levels and thus supports as low as 1.2V CPU or MCU logic to control higher voltage power supplies (VIN) without requiring an external level shifter.

Switching a large value output capacitor CL through a fast ON/OFF logic signal may result in an excessive inrush current. To control the load inrush current connect a resistor R2, as shown in Figure 2 To further limit the inrush current add an external capacitor C1. To configure the TPS27081A to achieve a specific slew rate refer to the Application section.

A single external component, R1, is required in applications that do not require inrush current control. In such applications connect the TPS27081A pin R2 to system ground.




Figure 2. Simplified Block & Application Diagram

Component Table (Typical Application)

COMPONENT	DESCRIPTION
R1	Level Shift Pull-up Resistor
R2	Optional ⁽¹⁾
C1	Optional ⁽¹⁾

(1) Required for load inrush current (slew rate) control



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

ORDERING INFORMATION⁽¹⁾

T _A	PART NUMBER	PACKAGE		TOP-SIDE MARKING
–40°C to 85°C	TPS27081ADDCR	6-Pin TSOT	Reel of TBD	TBD
	TPS27081ADRV	6-Pin SON	Contact factory for availability ⁽²⁾	Contact factory for availability ⁽¹⁾

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at www.ti.com.
- (2) Contact factory for details and availability for PREVIEW devices, minimum order quantity may apply.

ABSOLUTE MAXIMUM RATINGS⁽¹⁾⁽²⁾

Specified at T_J = –40°C to 125°C unless otherwise noted.

			VALUE		UNIT
			MIN	MAX	
V _{IN}	VIN/R1 Pin Maximum Voltage (VDS, VGS,VGD of Q1)		−0.3	8	V
V _{EN}	Enable voltage (VGS of Q2)		−0.3	8	V
I _{Q1-ON}	Max Continuous Drain Current of Q1		3		A
	Max Pulsed Drain Current of Q1 ⁽³⁾		9.5		
I _{F-peak}	Free-wheeling Diode Peak Forward Current		140		mA
P _D	Max power dissipation at T _A = 25°C, T _J = 150°C ⁽³⁾	6 Pin - TSOT, T _{JA} = 180°C/W	1190		mW
All pins	ESD Rating – HBM		2000		V
	ESD Rating – MM		200		
	ESD Rating – CDM		500		
T _A	Operating free-air ambient temperature range		−40	85	°C
T _{J-max} ⁽⁴⁾	Operating virtual junction temperature		150		°C
T _{stg}	Storage temperature range		−65	150	°C

- (1) Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) Refer to TI's design support web page at www.ti.com/thermal for improving device thermal performance
- (3) Pulse Width <300us, Duty Cycle <2%
- (4) Operating at the absolute T_{J-max} of 150°C can affect reliability – for higher reliability it is recommended to ensure T_J <125°C

DISSIPATION RATINGS⁽¹⁾⁽²⁾

BOARD	PACKAGE	θ _{JC}	θ _{JA} ⁽³⁾	T _A < 25°C	T _A = 70°C	T _A = 85°C	T _A = 105°C	DERATING FACTOR ABOVE T _A = 25°C
High-K	6-Pin TSOT (DDC)	TBD°C/W	105°C/W	1190 mW/°C	760 mW	619 mW	428 mW	9.55 mW/°C

- (1) Maximum dissipation values for retaining a safe maximum device junction temperature of 125°C
- (2) Refer to TI's design support web page at www.ti.com/thermal for improving device thermal performance.
- (3) Operating at the absolute T_{J-max} of 150°C can affect reliability

RECOMMENDED OPERATING CONDITIONS

		MIN	TYP	MAX	UNIT
V _{DS}	Pins VIN1/R1 and VOUT/C1 voltage difference	–0.3		7	V
V _{IL}	EN Pin Low-level input voltage			0.4	V
V _{IH}	EN Pin High-level input voltage	1.2			V
T _J	Operating junction temperature	–40		125	°C

ELECTRICAL CHARACTERISTICS


Specified over the recommended junction temperature range $T_J = -40^{\circ}\text{C}$ to 125°C unless otherwise noted. Typical values are at $T_J = 25^{\circ}\text{C}$.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
BV _{IN}	VIN breakdown voltage	V _{EN} = 0 V, ID = 250 μA	8			V
IF _{Leak}	Forward leakage current	VIN= 8 V, EN= 0 V		100		nA
ON CHARACTERISTICS ⁽¹⁾						
VTH _{Q1}	Q1 Threshold voltage (VGS)	ID(Q1) = 250 μA	-0.7	-0.85		V
VTH _{Q2}	Q2 Threshold voltage (VGS)	ID(Q2) = 250 μA	0.6	0.76		V
R _{DSQ1(ON)})	Q1 Channel ON resistance	VGS = -4.5 V, ID = 3.0 A		32	55	mΩ
		VGS = -3.0 V, ID = 2.5 A		44	77	
		VGS = -2.5 V, ID = 2.5 A		50	85	
		VGS = -1.8 V, ID = 2.0 A		82	147	
		VGS = -1.5 V, ID = 1.0 A		93	166	
		VGS = -1.2 V, ID = 0.5 A		155	260	
R _{DSQ2(ON)})	Q2 Channel ON resistance	VGS = 4.5 V, ID = 0.4 A		1.8	3	Ω
		VGS = 3.0 V, ID = 0.3 A		2.3	6.2	
		VGS = 2.5 V, ID = 0.2 A		2.6	6.1	
		VGS = 1.8 V, ID = -0.1 A		3.8	10	
		VGS = -1.5 V, ID = 0.05 A		4.4	8.5	
		VGS = 1.2 V, ID = 0.03 A		6.25	13.5	
Q1 DRAIN-SOURCE DIODE PARAMETERS ⁽¹⁾⁽²⁾						
IF _{SD}	Source-drain diode peak forward current	VF _{SD(Q1)} = 0.8 V	0.8	1.0		A
V _{SD}	Source-drain diode forward voltage	VEN = 0 V, IF _{SD(Q1)} = -0.6A			1	V

(1) Pulse width $<300\text{ }\mu\text{s}$, Duty Cycle $<2.0\%$

(2) Not rated for continuous current operation

DEVICE INFORMATION

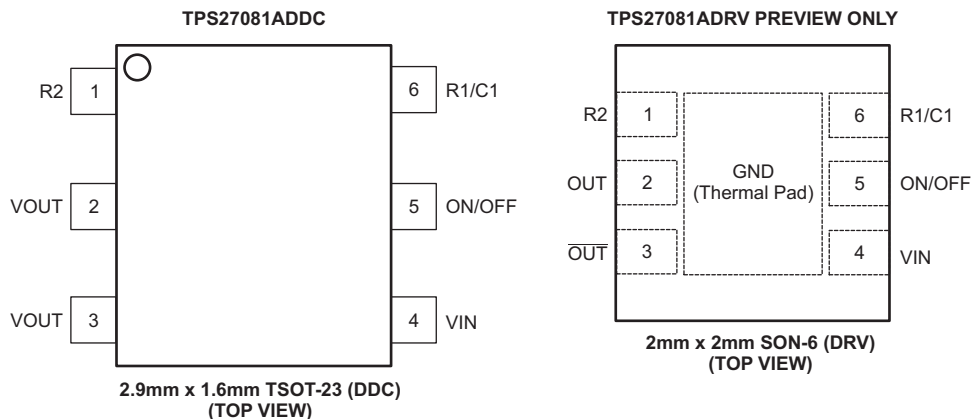

TPS27081A PIN DESCRIPTION

PIN		DESCRIPTION
NAME	NUMBER	
R2	1	Source Terminal of NMOS (Q2) - Connect to system GND directly or through a slew control resistor
VOUT	2, 3	Drain Terminal of Power PFET (Q1) - Connect a slew control capacitor between pins VOUT/C1 and R1/C1
VIN	4	Source Terminal of Power PFET (Q1) - connect a slew control/pull-up resistor between the pins VIN/R1 and R1/C1
ON/OFF	5	Active high enable pin – when driven with a high impedance driver connect an external pull down resistor to GND
R1/C1	6	Gate Terminal of Power PFET (Q1)

PRODUCT PREVIEW

APPLICATION INFORMATION

The TPS27081A IC is a high side load switch that integrates a Power PFET and a Control NMOS in a tiny package. The TPS27081A internal components are rated for up to 8V supply and support up to 3A of load current. The TPS27081A can be used in a variety of applications. Figure 3 below shows a general application of TPS27081A to control the load inrush current.

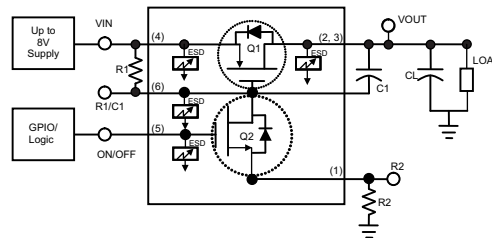


Figure 3. Typical Application Diagram

Configuring Q1 ON Resistance

The V_{GS-Q1} Gate-Source voltage across the PMOS transistor Q1 sets its ON resistance $R_{DS-Q1(ON)}$. Directly connecting the pin R2 to ground maximizes the ON state V_{GS-Q1} and thus minimizes the VIN to VOUT voltage dropout. When a resistor R2 is installed to control the Turn-ON slew rate then V_{GS-Q1} is given by:

$$V_{GS-Q1} = VIN \times \frac{R2}{R1 + R2} \quad (1)$$

e.g. $R1 = 10 \times R2$, $VIN = 5V$ sets $V_{GS-Q1} = 4.5V$

Note: It is recommended to keep $R1 > 20 \times R2$; while limiting maximum value of resistor R1 to approximately 2MΩ

Configuring Turn-ON Slew Rate

Switching a large capacitive load CL instantaneously results in a load inrush current given by the following equation:

$$I_{inrush} = C_{load} \times \frac{dv}{dt} = C_{load} \times \frac{V_{OUT_{final}} - V_{OUT_{initial}}}{V_{out} \text{ Slew Rate}} \quad (2)$$

An uncontrolled fast rising ON/OFF logic input may result in a high slew rate at the output resulting in a very high dv/dt thus leading to a higher inrush current. To control the inrush current connect a resistor R2 and a capacitor C1 as shown in the Figure 3. Use the following equation to configure the TPS27081A slew rate to a specific value. Refer to Table 1 for component values to configure TPS27081A to achieve standard slew rates.

$$t_{rise} = \frac{3.9 \times R2 \times C1}{VIN^{2/3}} \text{ sec} \quad (3)$$

Where t_{rise} is the time delta starting from the ON/OFF signal's rising edge to charge up the load capacitor CL from 10% to 90% of VIN voltage.

Note: The t_{rise} equation is accurate to within +/-20% across full VIN range supported by TPS27081A. Ensure that $R1 > 10 \times R2$.

Table 1. Component Values for VOUT Rise Time

Rise Time (sec)	VIN (V)	R2 (Ω)	C1 (μF)	CL (μF) ⁽¹⁾
250n	5.0	0 (short)	0 (open)	0 (open)
100μ	5.0	6.65k	0.01	10.0μ
200μ	1.2	5.23k	0.01	10.0μ
470μ	5.0	3.30k	0.12	10.0μ

(1) Component values for VOUT rise time

Table 1. Component Values for VOUT Rise Time (continued)

Rise Time (sec)	VIN (V)	R2 (Ω)	C1 (μF)	CL (μF) ⁽¹⁾
1.00m	5.0	61.9k	0.01	10.0μ
12.0m	5.0	61.9k	0.12	470μ
21.0m	1.5	61.9k	0.12	470μ
600m	3.0	333k	1.00	10.0μ

Low Voltage ON/OFF Interface

The $V_{GS_{Q2}}$ is set by the ON/OFF logic level. To turn ON, the transistor Q2 requires a $V_{GS} > 1.0V$ (Typical). For reliable operation apply ON/OFF logic that has the following V_{IH} and V_{IL} limits:

$$V_{IH_{ON}} > 1.0V + I_{Q2} \times R2 \text{ V}$$

$$V_{IH_{OFF}} 0.4 \text{ V}$$

Minimizing $I_{Q2} \times R2$ drop helps achieve a direct interface with a low voltage ON/OFF logic. To minimize $I_{Q2} \times R2$ voltage drop select a high $R1/R2$ ratio. E.g. When $V_{IN} = 1.8V$, selecting $R1/R2 = 40$ will require $V_{IH} > 1.0 + 45mV$ and thus allowing a 1.2V GPIO interface.

In applications where ON/OFF signal is not available connect ON/OFF pin to VIN. The TPS27081A will turn ON/OFF in sync with the input supply connected to VIN.

Note: Connect a pull down resistor between ON/OFF pin to GND when ON/OFF is driven by a high-impedance (tri-state) driver.

On-Chip Power Dissipation

Use the below equation to calculate TPS27081A on-chip power dissipation P_D :

$$PD = I_{D_{Q1}}^2 \times RDS_{Q1(ON)} + I_{D_{Q2}}^2 \times RDS_{Q2(ON)}$$

Where, $I_{D_{Q1}}$ and $I_{D_{Q2}}$ are the DC current flowing through the transistors Q1 and Q2 respectively. Refer to the [ELECTRICAL CHARACTERISTICS](#) table and/or [Figure x](#) to estimate $RDS_{Q1(ON)}$ and $RDS_{Q2(ON)}$ for various values of $V_{GS_{Q1}}$ and $V_{GS_{Q2}}$ respectively.

Note: MOS switches can get extremely hot when operated in saturation region. As a general guideline, to avoid transistors Q1 and Q2 going into saturation region set $V_{GS} > V_T + V_{DS}$. E.g. $V_{GS} > 1.5V$ and $V_{DS} < 200mV$ ensures switching region.

Thermal Reliability

For higher reliability it is recommended to limit TPS27081A IC's die junction temperature to less than 125°C. The IC junction temperature is directly proportional to the on-chip power dissipation. Use the following equation to calculate maximum on-chip power dissipation to achieve the maximum die junction temperature target:

$$PD_{(MAX)} = \frac{(T_{J(MAX)} - T_A)}{\theta_{JA}}$$

Where:

$T_{J(MAX)}$ is the target maximum junction temperature.

T_A is the operating ambient temperature.

$R_{\theta JA}$ is the package junction to ambient thermal resistance.


(4)

Improving Package Thermal Performance

The package θ_{JA} value under standard conditions on a High-K board is listed in the [DISSIPATION RATINGS](#). θ_{JA} value depends on the PC board layout. An external heat sink and/or a cooling mechanism, like a cold air fan, can help reduce θ_{JA} and thus improve device thermal capabilities. Refer to TI's design support web page at www.ti.com/thermal for a general guidance on improving device thermal performance.

APPLICATION EXAMPLES

TFT LCD Module Inrush Current Control

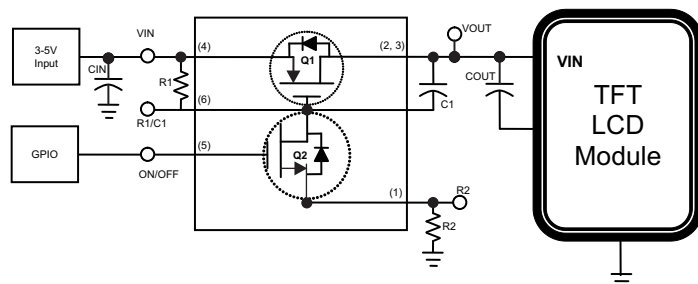

VOUT rise time = 470μs

VIN = 5.0V

Components:

R1 = xkΩ


R2 = 3.3kΩ

C1 = 120nF

Figure 4. Inrush Current Control Using TPS27081A

LCD panels require inrush current control to prevent permanent system damages during turn-ON and turn-OFF events.

Standby Power Isolation

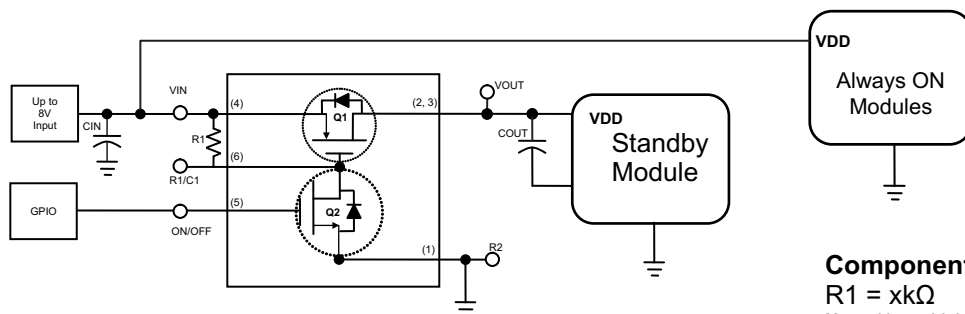

Component:


R1 = xkΩ

Note: Use a higher value of R1 to minimize IQ

Figure 5. Standby Power Generation Using TPS27081A

Many applications have some always ON modules to support various core functions. However, some modules are selectively powered ON or OFF to save power and multiplexing of various on board resources. Such modules that are selectively turned ON or OFF require standby power generation. In such applications TPS27081 requires only a single pull-up resistor. In this configuration the VOUT voltage rise time is approximately 250ns when VIN = 5V.

Boost Regulator with True Shutdown

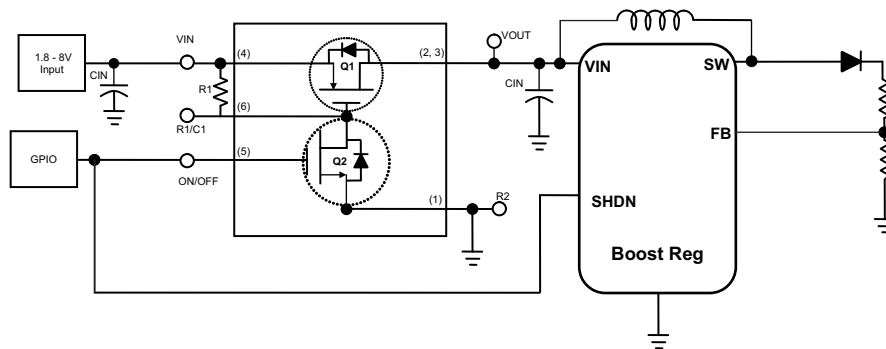

Components:

$R1 = xk\Omega$ (for, $I_{Q_{R1}} = 3\mu A$ @ $VIN = 3V$)

Note: Higher value of resistor R1 minimizes I_Q

Figure 6. True Shutdown Using TPS27081A

The most common boost regulator topology provides a current leakage path through inductor and diode into the feedback resistor even when the regulator is shut down. Adding a TPS27081A in the input side power path prevents this leakage current and thus providing a true shutdown.

Single Module Multiple Power Supply Sequencing

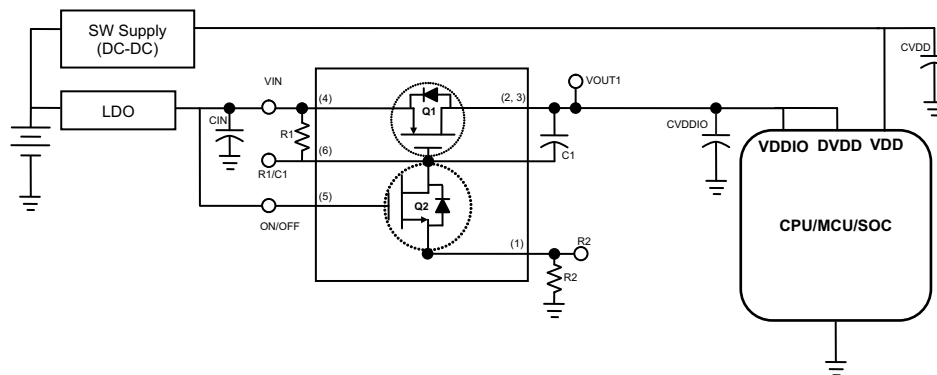


Figure 7. Power Sequencing Using TPS27081A, Example 1

Most modern SOC and CPUs require multiple voltage inputs for its Analog, Digital cores and IO interfaces. These ICs require that these supplies be applied simultaneously or in a certain sequence. TPS27081A when configured, as shown in Figure 7, with the VOUT1 rise time adjusted appropriately through resistor R2 and capacitor C1, will delay the early arriving LDO output to match up with late arriving DC-DC output and thus achieving power sequencing.

Multiple Modules Interdependent Power Supply Sequencing

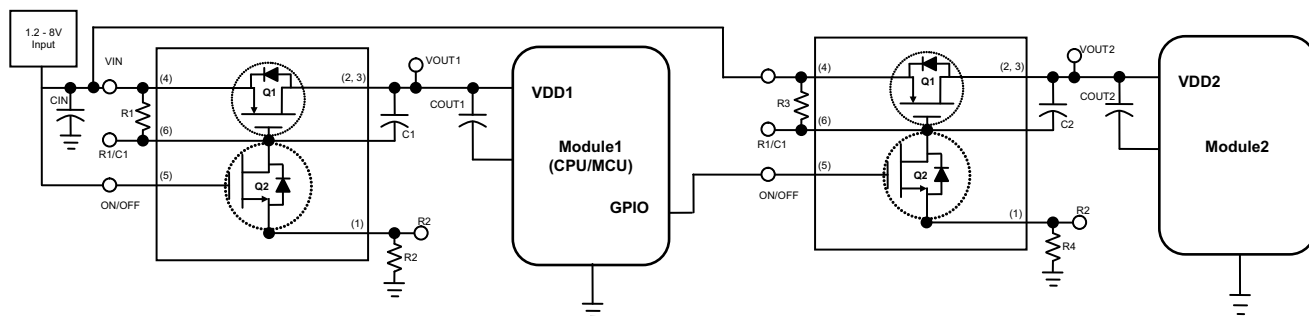


Figure 8. Power Sequencing Using TPS27081A, Example 2

For system integrity reasons a certain power sequencing may be required among various modules. As shown in Figure 8, Module 2 will power up only after Module 1 is powered up and the Module 1 GPIO output is enabled to turn ON Module 2. TPS27081A when used as shown in Figure 8 will not sequence the Module 2 power, but also it will help prevent inrush current into the power path of Module 1 and 2.

Multiple Modules Interdependent Supply Sequencing without a GPIO Input

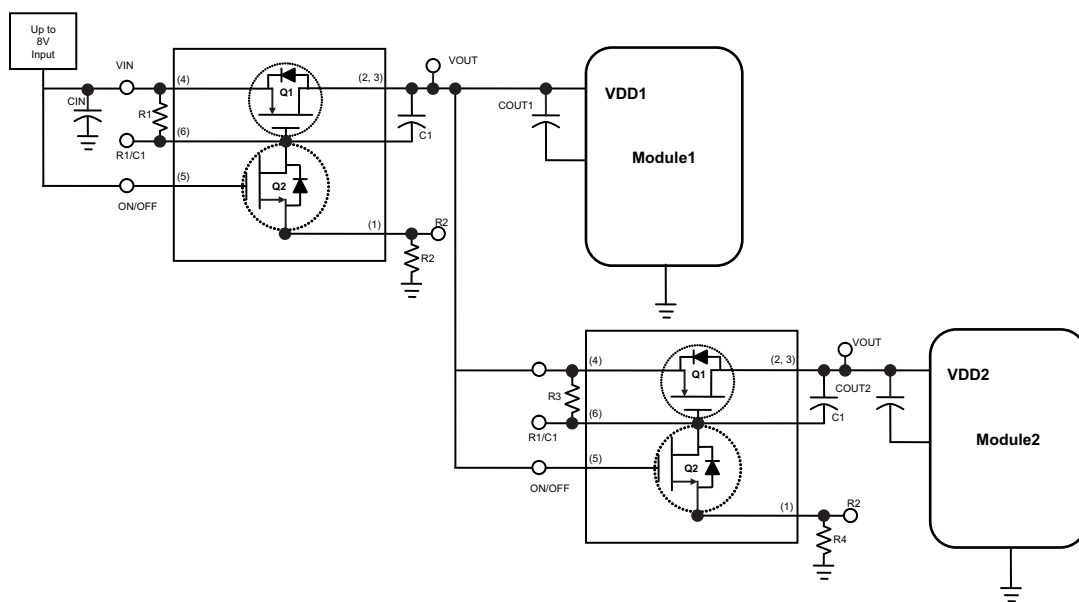
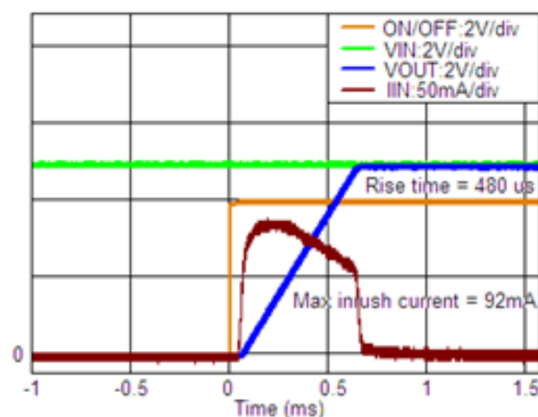
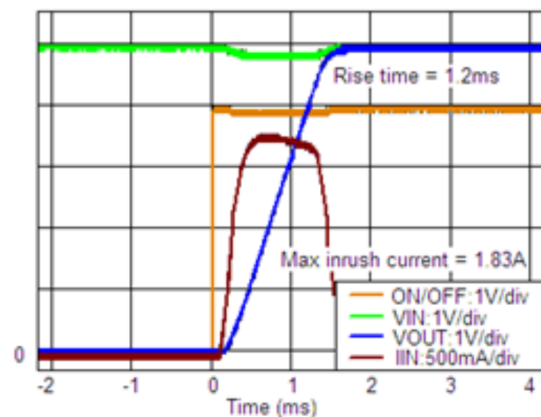
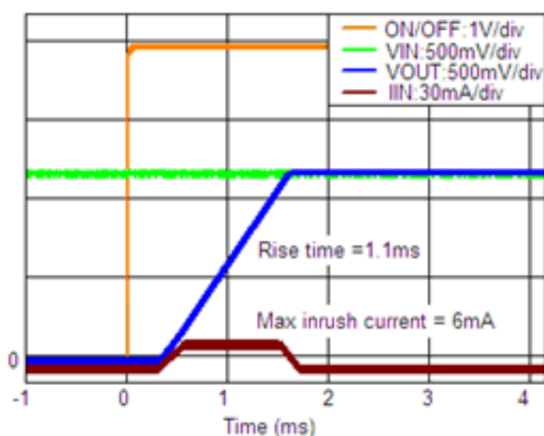
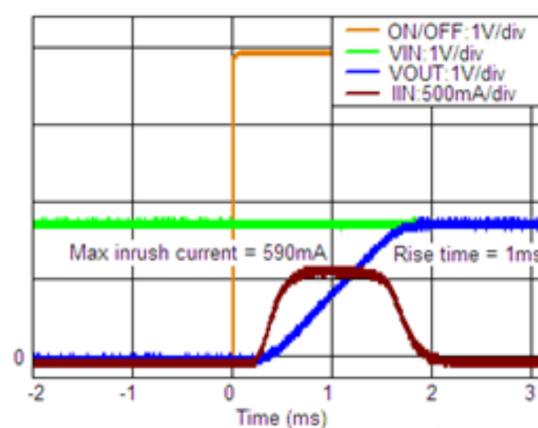


Figure 9. Power Sequencing using TPS27081A, Example 3

When a GPIO signal is not available connecting the ON/OFF pin of TPS27081 connected to Module 2 will power up Module 2 after Module 1, when resistor R4 and capacitor C2 are chosen appropriately. The two TPS27081A in this configuration will also control load inrush current.

TYPICAL CHARACTERISTICS

 $T_A = +25^\circ\text{C}$ Figure 10. $V_{IN} = 5V$, $R_2 = 3.3k\Omega$, $C_1 = 120nF$, $C_L = 10\mu F$ Figure 11. $V_{IN} = 5V$, $R_2 = 6.65k\Omega$, $C_1 = 120nF$, $C_L = 470\mu F$ Figure 12. $V_{IN} = 1.2V$, $R_2 = 5.23k\Omega$, $C_1 = 120nF$, $C_L = 10\mu F$ Figure 13. $V_{IN} = 1.8V$, $R_2 = 5.23k\Omega$, $C_1 = 120nF$, $C_L = 470\mu F$

TYPICAL CHARACTERISTICS (continued)

$T_A = +25^\circ\text{C}$

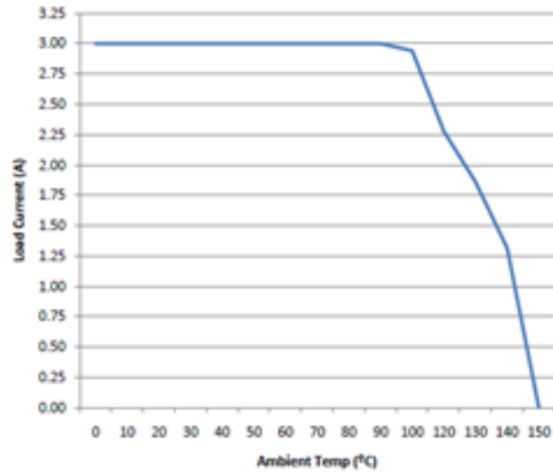


Figure 14. Q1 SOA @ VGS_Q1 = 4.5V

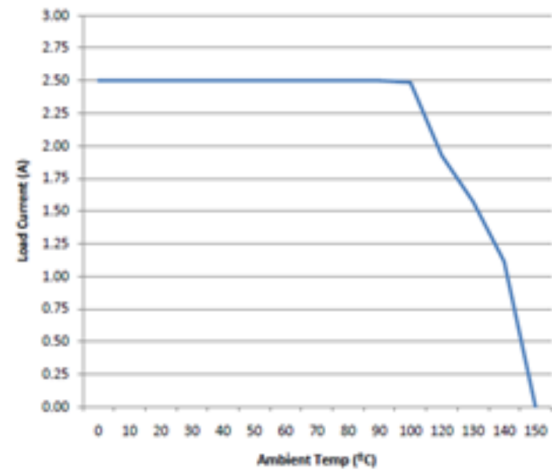


Figure 15. Q1 SOA @ VGS_Q1 = 3.0V

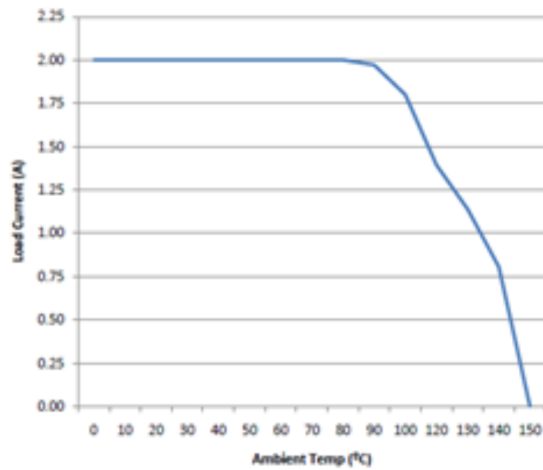


Figure 16. Q1 SOA @ VGS_Q1 = 1.8V

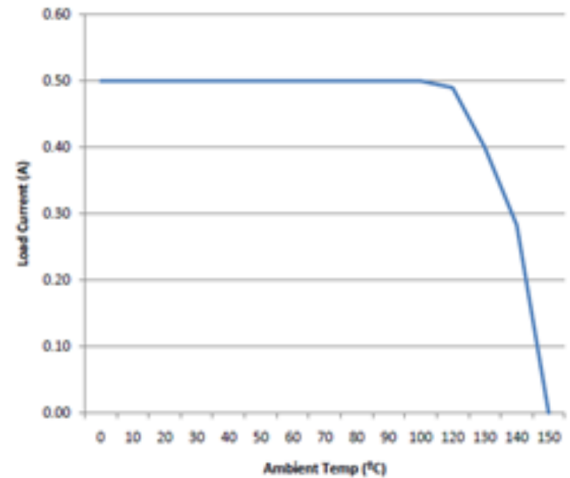


Figure 17. Q1 SOA @ VGS_Q1 = 1.2V

PRODUCT PREVIEW

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/ Ball Finish	MSL Peak Temp ⁽³⁾	Samples (Requires Login)
TPS27081ADDCR	PREVIEW	SOT	DDC	6	3000	TBD	Call TI	Call TI	

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)


⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

DDC (R-PDSO-G6)

PLASTIC SMALL-OUTLINE

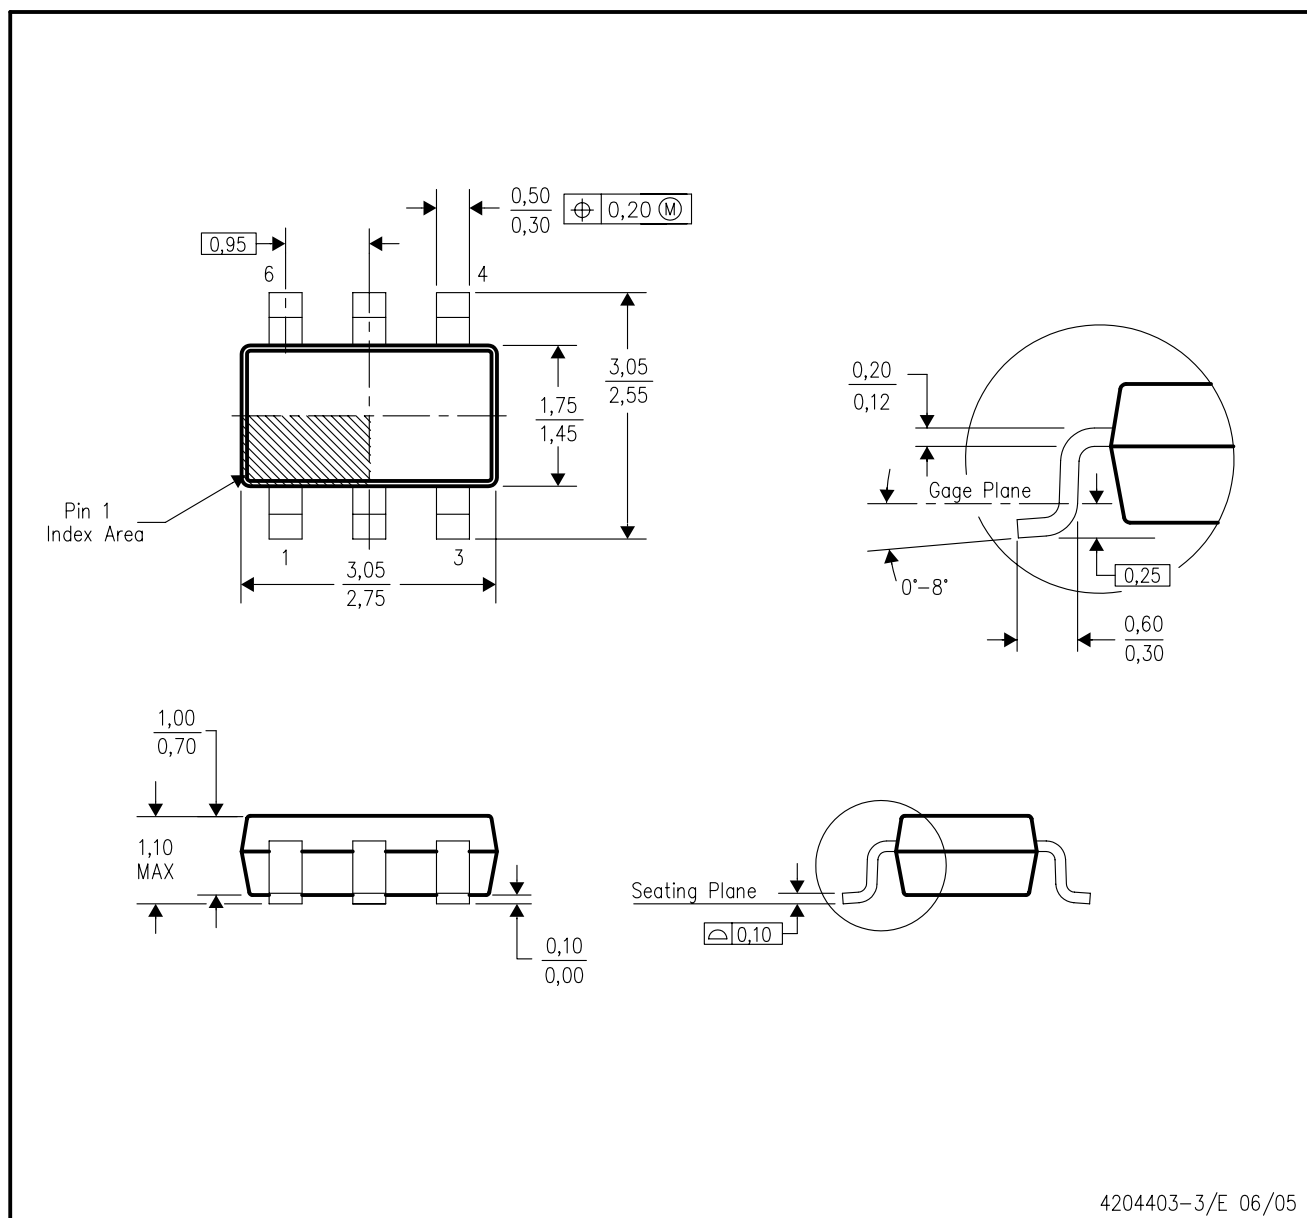

- NOTES:
- All linear dimensions are in millimeters.
 - This drawing is subject to change without notice.
 - Body dimensions do not include mold flash or protrusion.
 - Falls within JEDEC MO-193 variation AA (6 pin).

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2012, Texas Instruments Incorporated