

Thank you for your interest in **onsemi** products.  
Your technical document begins on the following pages.



## Your Feedback is Important to Us!

Please take a moment to participate in our short survey.  
At **onsemi**, we are dedicated to delivering technical content that best meets your needs.

## Help Us Improve – Take the Survey

This survey is intended to collect your feedback, capture any issues you may encounter, and to provide improvements you would like to suggest.

**We look forward to your feedback.**

To learn more about **onsemi**, please visit our website at  
[www.onsemi.com](http://www.onsemi.com)

**onsemi** and **onsemi** and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi** product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner. Other names and brands may be claimed as the property of others.

# Low Dropout Regulator - CMOS 150 mA

## NCP103

The NCP103 is 150 mA LDO that provides the engineer with a very stable, accurate voltage with low noise suitable for space constrained, noise sensitive applications. In order to optimize performance for battery operated portable applications, the NCP103 employs the dynamic quiescent current adjustment for very low  $I_Q$  consumption at no-load.

### Features

- Operating Input Voltage Range: 1.7 V to 5.5 V
- Available in Fixed Voltage Options: 0.9 V to 3.5 V  
Contact Factory for Other Voltage Options
- Very Low Quiescent Current of Typ. 50  $\mu$ A
- Standby Current Consumption: Typ. 0.1  $\mu$ A
- Low Dropout: 75 mV Typical at 150 mA
- $\pm 1\%$  Accuracy at Room Temperature
- High Power Supply Ripple Rejection: 75 dB at 1 kHz
- Thermal Shutdown and Current Limit Protections
- Stable with a 1  $\mu$ F Ceramic Output Capacitor
- Available in uDFN 1.0 x 1.0 mm Package
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

### Typical Applications

- PDAs, Mobile phones, GPS, Smartphones
- Wireless Handsets, Wireless LAN, Bluetooth®, Zigbee®
- Portable Medical Equipment
- Other Battery Powered Applications


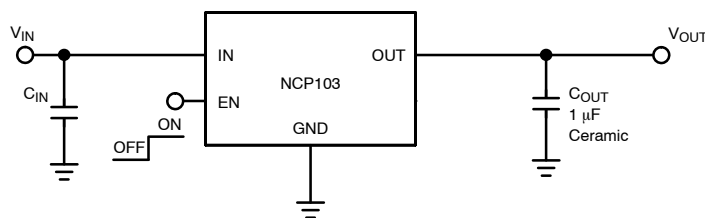


Figure 1. Typical Application Schematic




UDFN4  
MX SUFFIX  
CASE 517CU

### MARKING DIAGRAM



XX = Specific Device Code  
M = Date Code

### PIN CONNECTION




(Bottom View)

### ORDERING INFORMATION

See detailed ordering, marking and shipping information on page 13 of this data sheet.

NOTE: Some of the devices on this data sheet have been **DISCONTINUED**. Please refer to the table on page 13.

# NCP103

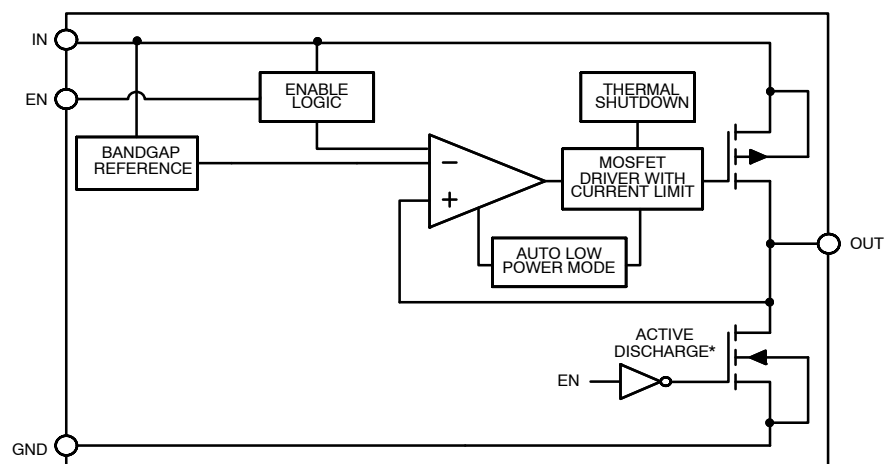

\*Active output discharge function is present only in NCP103AMXyyyTCG devices.  
yyy denotes the particular  $V_{OUT}$  option.

**Figure 2. Simplified Schematic Block Diagram**

## PIN FUNCTION DESCRIPTION

| Pin No. | Pin Name | Description                                                                                                                                          |
|---------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | OUT      | Regulated output voltage pin. A small ceramic capacitor with minimum value of 1 $\mu\text{F}$ is needed from this pin to ground to assure stability. |
| 2       | GND      | Power supply ground.                                                                                                                                 |
| 3       | EN       | Driving EN over 0.9 V turns on the regulator. Driving EN below 0.4 V puts the regulator into shutdown mode.                                          |
| 4       | IN       | Input pin. A small capacitor is needed from this pin to ground to assure stability.                                                                  |
| –       | EPAD     | Exposed pad should be connected directly to the GND pin. Soldered to a large ground copper plane allows for effective heat removal.                  |

## ABSOLUTE MAXIMUM RATINGS

| Rating                                    | Symbol       | Value                             | Unit               |
|-------------------------------------------|--------------|-----------------------------------|--------------------|
| Input Voltage (Note 1)                    | $V_{IN}$     | –0.3 V to 6 V                     | V                  |
| Output Voltage                            | $V_{OUT}$    | –0.3 V to $V_{IN} + 0.3$ V or 6 V | V                  |
| Enable Input                              | $V_{EN}$     | –0.3 V to $V_{IN} + 0.3$ V or 6 V | V                  |
| Output Short Circuit Duration             | $t_{SC}$     | $\infty$                          | s                  |
| Maximum Junction Temperature              | $T_{J(MAX)}$ | 150                               | $^{\circ}\text{C}$ |
| Storage Temperature                       | $T_{STG}$    | –55 to 150                        | $^{\circ}\text{C}$ |
| ESD Capability, Human Body Model (Note 2) | $ESD_{HBM}$  | 2000                              | V                  |
| ESD Capability, Machine Model (Note 2)    | $ESD_{MM}$   | 200                               | V                  |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Refer to ELECTRICAL CHARACTERISTICS and APPLICATION INFORMATION for Safe Operating Area.

2. This device series incorporates ESD protection and is tested by the following methods:

ESD Human Body Model tested per EIA/JESD22–A114,

ESD Machine Model tested per EIA/JESD22–A115,

Latchup Current Maximum Rating tested per JEDEC standard: JESD78.

## THERMAL CHARACTERISTICS (Note 3)

| Rating                                                                       | Symbol          | Value | Unit                        |
|------------------------------------------------------------------------------|-----------------|-------|-----------------------------|
| Thermal Characteristics, uDFN4 1x1 mm<br>Thermal Resistance, Junction-to-Air | $R_{\theta JA}$ | 170   | $^{\circ}\text{C}/\text{W}$ |

3. Single component mounted on 1 oz, FR 4 PCB with 645  $\text{mm}^2$  Cu area.

# NCP103

**ELECTRICAL CHARACTERISTICS**  $-40^{\circ}\text{C} \leq T_J \leq 85^{\circ}\text{C}$ ;  $V_{IN} = V_{OUT(NOM)} + 1\text{ V}$  for  $V_{OUT}$  options greater than 1.5 V. Otherwise  $V_{IN} = 2.5\text{ V}$ , whichever is greater;  $I_{OUT} = 1\text{ mA}$ ,  $C_{IN} = C_{OUT} = 1\text{ }\mu\text{F}$ , unless otherwise noted.  $V_{EN} = 0.9\text{ V}$ . Typical values are at  $T_J = +25^{\circ}\text{C}$ . Min./Max. are for  $T_J = -40^{\circ}\text{C}$  and  $T_J = +85^{\circ}\text{C}$  respectively.

| Parameter                                                   | Test Conditions                                                                                                 |                             | Symbol                       | Min | Typ         | Max | Unit                |
|-------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|-----------------------------|------------------------------|-----|-------------|-----|---------------------|
| Operating Input Voltage                                     |                                                                                                                 |                             | $V_{IN}$                     | 1.7 |             | 5.5 | V                   |
| Output Voltage Accuracy                                     | $-40^{\circ}\text{C} \leq T_J \leq 85^{\circ}\text{C}$                                                          | $V_{OUT} \leq 2.0\text{ V}$ | $V_{OUT}$                    | -40 |             | +40 | mV                  |
|                                                             |                                                                                                                 | $V_{OUT} > 2.0\text{ V}$    |                              | -2  |             | +2  | %                   |
| Line Regulation                                             | $V_{OUT} + 0.5\text{ V} \leq V_{IN} \leq 5.5\text{ V}$ ( $V_{IN} \geq 1.7\text{ V}$ )                           |                             | $\text{Reg}_{LINE}$          |     | 0.01        | 0.1 | %/V                 |
| Load Regulation                                             | $I_{OUT} = 1\text{ mA}$ to 150 mA                                                                               |                             | $\text{Reg}_{LOAD}$          |     | 10          | 30  | mV                  |
| Load Transient                                              | $I_{OUT} = 1\text{ mA}$ to 150 mA or 150 mA to 1 mA<br>in 1 $\mu\text{s}$ , $C_{OUT} = 1\text{ }\mu\text{F}$    |                             | $\text{Tran}_{LOAD}$         |     | -30/<br>+20 |     | mV                  |
| Dropout Voltage (Note 4)                                    | $I_{OUT} = 150\text{ mA}$                                                                                       | $V_{OUT} = 1.5\text{ V}$    | $V_{DO}$                     |     | 180         | 235 | mV                  |
|                                                             |                                                                                                                 | $V_{OUT} = 1.85\text{ V}$   |                              |     | 120         | 165 |                     |
|                                                             |                                                                                                                 | $V_{OUT} = 2.8\text{ V}$    |                              |     | 75          | 125 |                     |
|                                                             |                                                                                                                 | $V_{OUT} = 3.0\text{ V}$    |                              |     | 72          | 120 |                     |
|                                                             |                                                                                                                 | $V_{OUT} = 3.1\text{ V}$    |                              |     | 70          | 120 |                     |
|                                                             |                                                                                                                 | $V_{OUT} = 3.3\text{ V}$    |                              |     | 65          | 110 |                     |
| Output Current Limit                                        | $V_{OUT} = 90\% V_{OUT(nom)}$                                                                                   |                             | $I_{CL}$                     | 150 | 550         |     | mA                  |
| Ground Current                                              | $I_{OUT} = 0\text{ mA}$                                                                                         |                             | $I_Q$                        |     | 50          | 95  | $\mu\text{A}$       |
| Shutdown Current                                            | $V_{EN} \leq 0.4\text{ V}$ , $V_{IN} = 5.5\text{ V}$                                                            |                             | $I_{DIS}$                    |     | 0.01        | 1   | $\mu\text{A}$       |
| EN Pin Threshold Voltage<br>High Threshold<br>Low Threshold | $V_{EN}$ Voltage increasing<br>$V_{EN}$ Voltage decreasing                                                      |                             | $V_{EN\_HI}$<br>$V_{EN\_LO}$ | 0.9 |             | 0.4 | V                   |
| EN Pin Input Current                                        | $V_{EN} = 5.5\text{ V}$                                                                                         |                             | $I_{EN}$                     |     | 0.3         | 1.0 | $\mu\text{A}$       |
| Power Supply Rejection Ratio                                | $V_{IN} = 3.6\text{ V}$ , $V_{OUT} = 3.1\text{ V}$<br>$I_{OUT} = 150\text{ mA}$                                 | $f = 1\text{ kHz}$          | PSRR                         |     | 75          |     | dB                  |
| Output Noise Voltage                                        | $V_{IN} = 2.5\text{ V}$ , $V_{OUT} = 1.8\text{ V}$ , $I_{OUT} = 150\text{ mA}$<br>$f = 10\text{ Hz}$ to 100 kHz |                             | $V_N$                        |     | 60          |     | $\mu\text{V}_{rms}$ |
| Thermal Shutdown Temperature                                | Temperature increasing from $T_J = +25^{\circ}\text{C}$                                                         |                             | $T_{SD}$                     |     | 160         |     | $^{\circ}\text{C}$  |
| Thermal Shutdown Hysteresis                                 | Temperature falling from $T_{SD}$                                                                               |                             | $T_{SDH}$                    |     | 20          |     | $^{\circ}\text{C}$  |
| Active Output Discharge Resistance                          | $V_{EN} < 0.4\text{ V}$ , Version A only                                                                        |                             | $R_{DIS}$                    |     | 100         |     | $\Omega$            |

4. Characterized when  $V_{OUT}$  falls 100 mV below the regulated voltage at  $V_{IN} = V_{OUT(NOM)} + 1\text{ V}$ .

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

TYPICAL CHARACTERISTICS

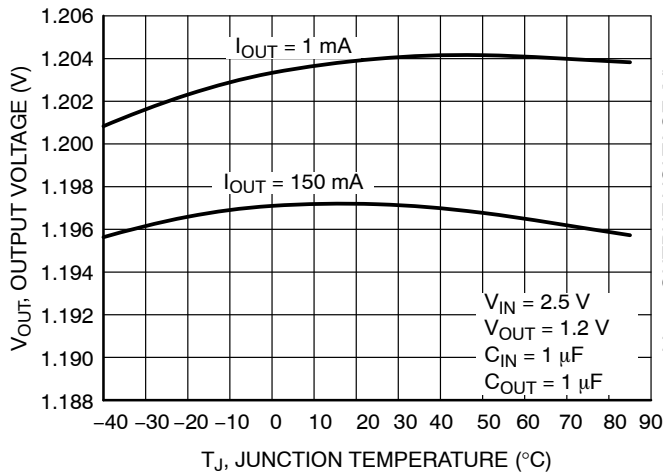


Figure 3. Output Voltage vs. Temperature  
 $V_{OUT} = 1.2\text{ V}$

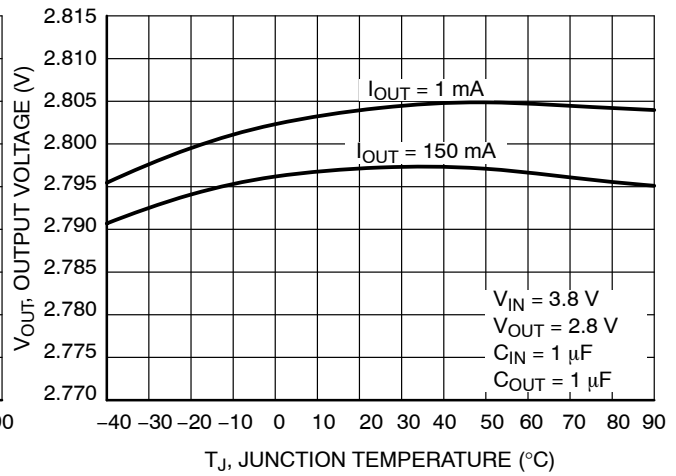


Figure 4. Output Voltage vs. Temperature  
 $V_{OUT} = 2.8\text{ V}$

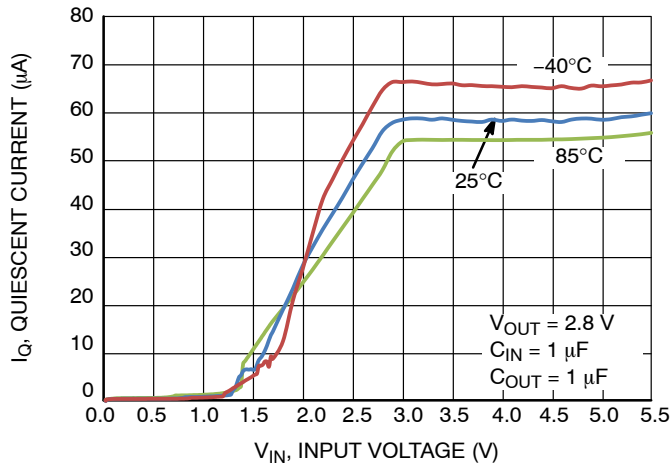


Figure 5. Quiescent Current vs. Input Voltage

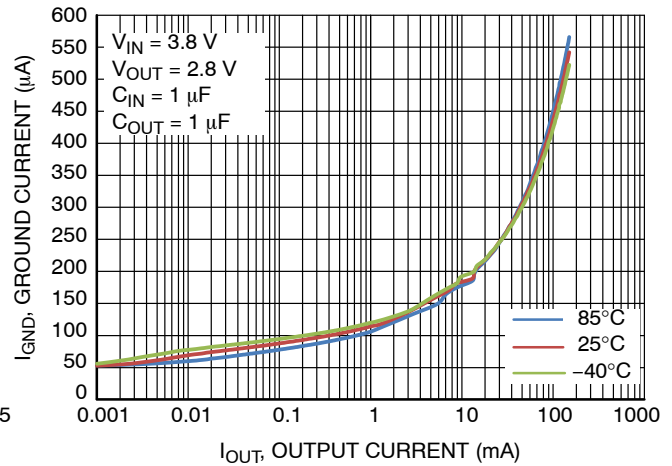


Figure 6. Ground Current vs. Output Current

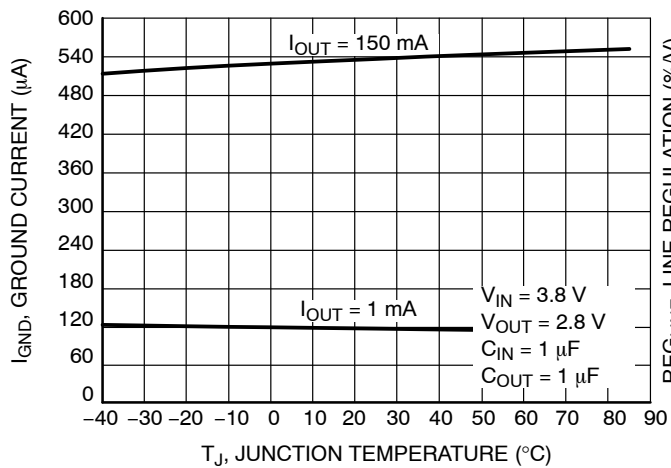


Figure 7. Ground Current vs. Temperature

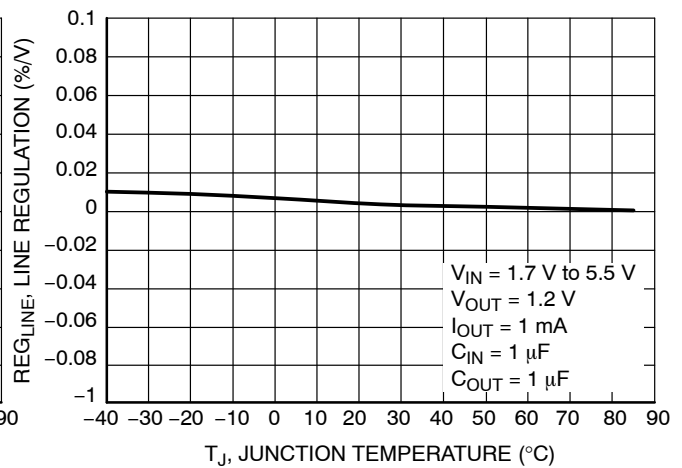


Figure 8. Line Regulation vs. Output Current  
 $V_{OUT} = 1.2\text{ V}$

TYPICAL CHARACTERISTICS

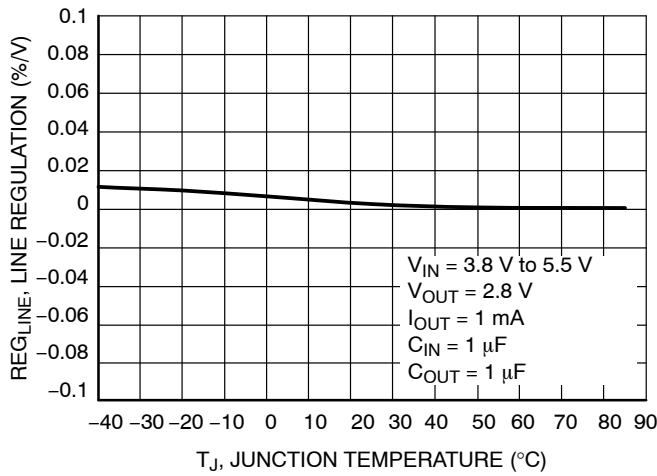


Figure 9. Line Regulation vs. Temperature  
 $V_{OUT} = 2.8\text{ V}$

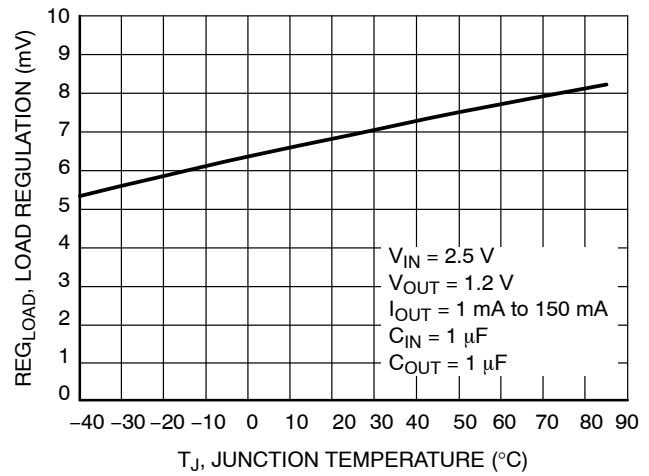


Figure 10. Load Regulation vs. Temperature  
 $V_{OUT} = 1.2\text{ V}$

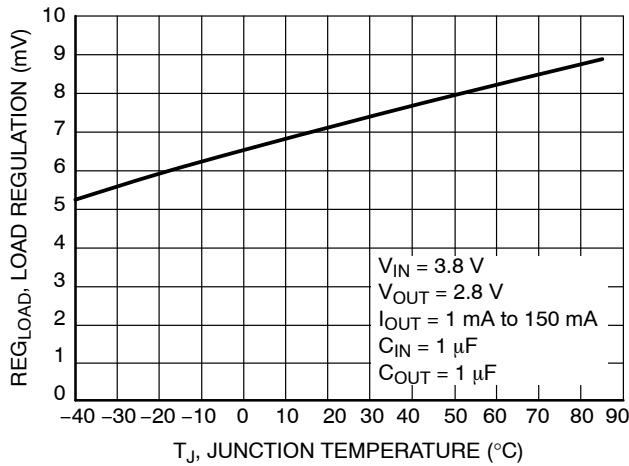


Figure 11. Load Regulation vs. Temperature  
 $V_{OUT} = 2.8\text{ V}$

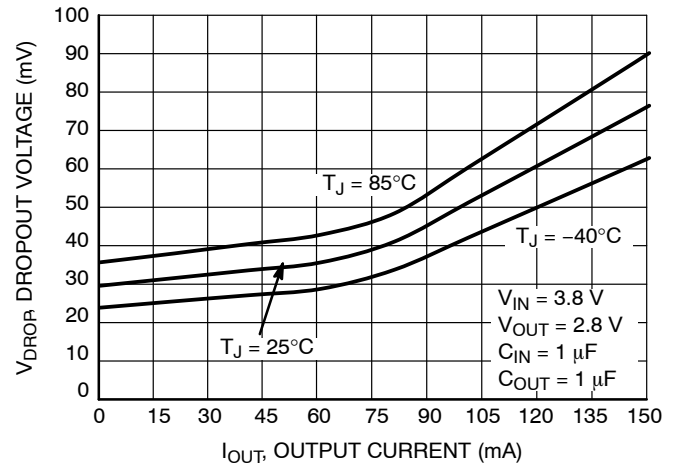


Figure 12. Dropout Voltage vs. Output Current  
 $V_{OUT} = 2.8\text{ V}$

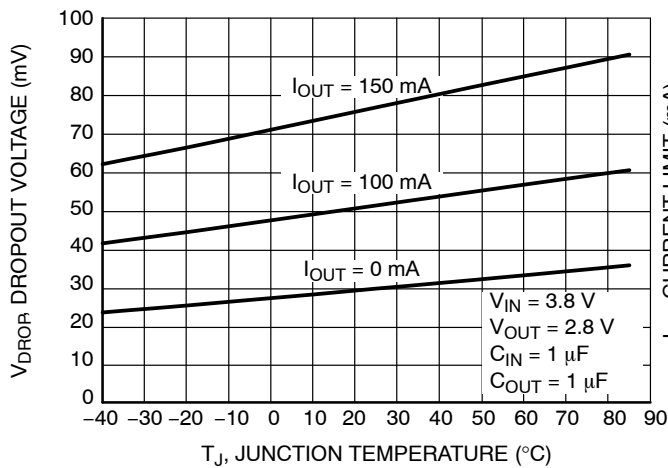


Figure 13. Dropout Voltage vs. Temperature

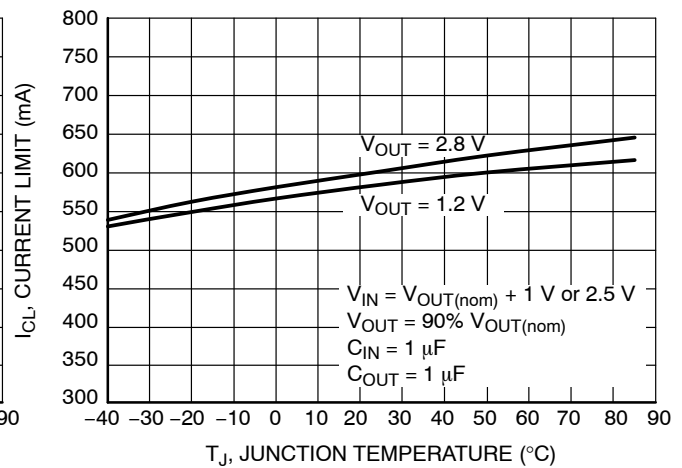


Figure 14. Current Limit vs. Temperature

TYPICAL CHARACTERISTICS

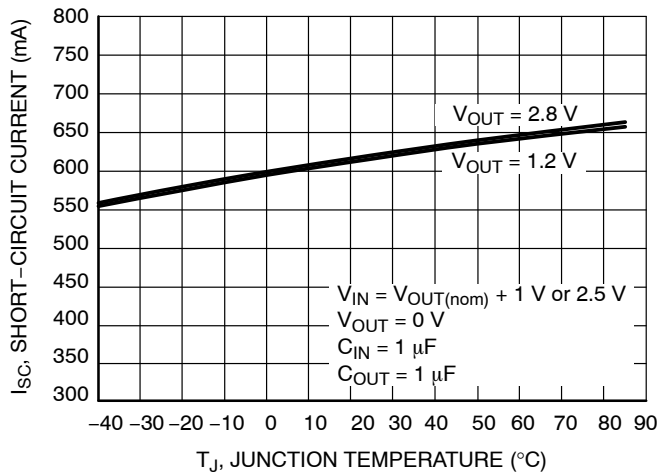


Figure 15. Short-Circuit Current vs. Temperature

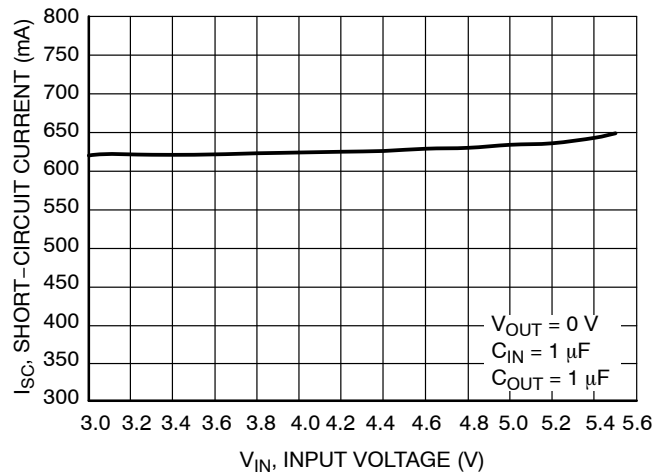


Figure 16. Short-Circuit Current vs. Input Voltage

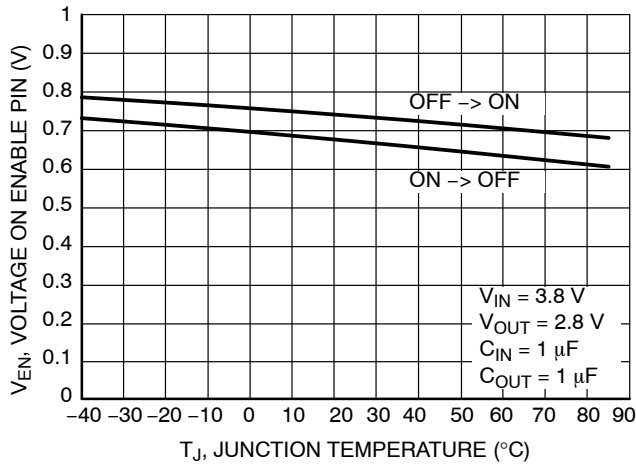


Figure 17. Enable Voltage Threshold vs. Temperature

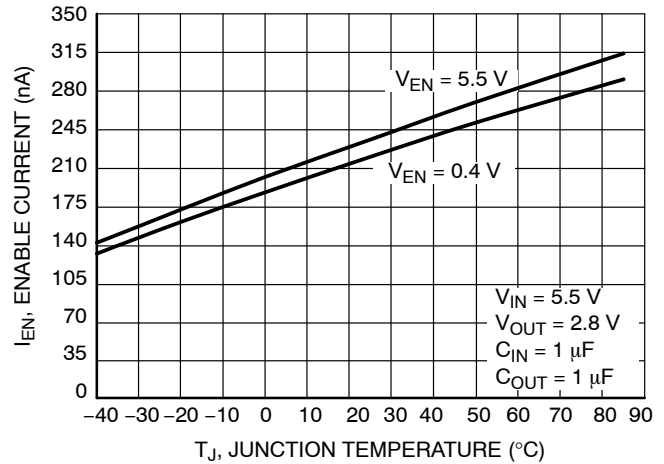


Figure 18. Current to Enable Pin vs. Temperature

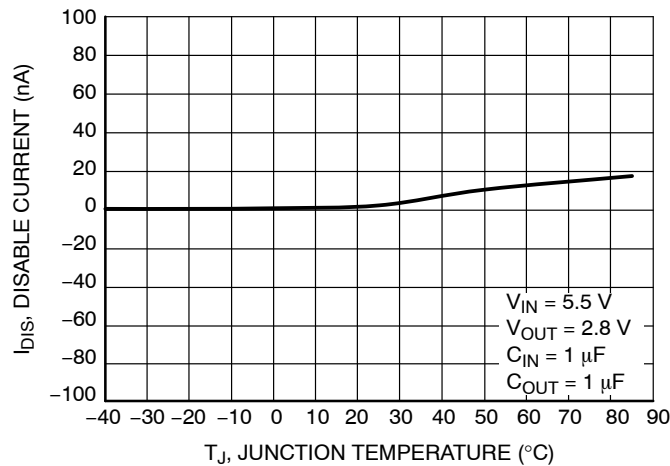


Figure 19. Disable Current vs. Temperature

TYPICAL CHARACTERISTICS

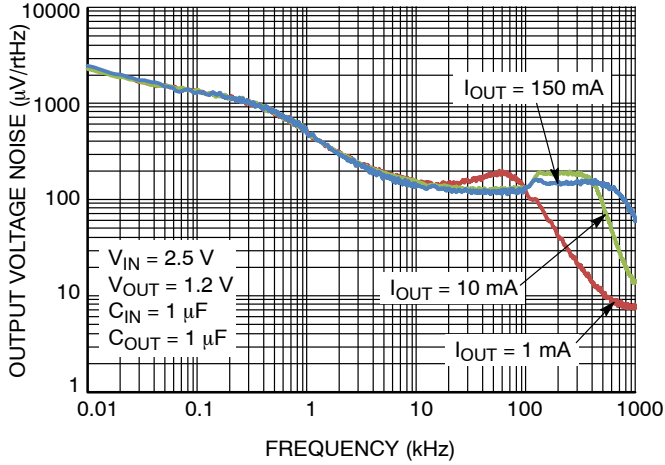


Figure 20. Output Voltage Noise Spectral Density for  $V_{OUT} = 1.2\text{ V}$ ,  $C_{OUT} = 1\text{ }\mu\text{F}$

| $I_{OUT}$ | RMS Output Noise ( $\mu\text{V}$ ) |                  |
|-----------|------------------------------------|------------------|
|           | 10 Hz – 100 kHz                    | 100 Hz – 100 kHz |
| 1 mA      | 60.93                              | 59.11            |
| 10 mA     | 52.73                              | 50.63            |
| 150 mA    | 51.20                              | 48.96            |

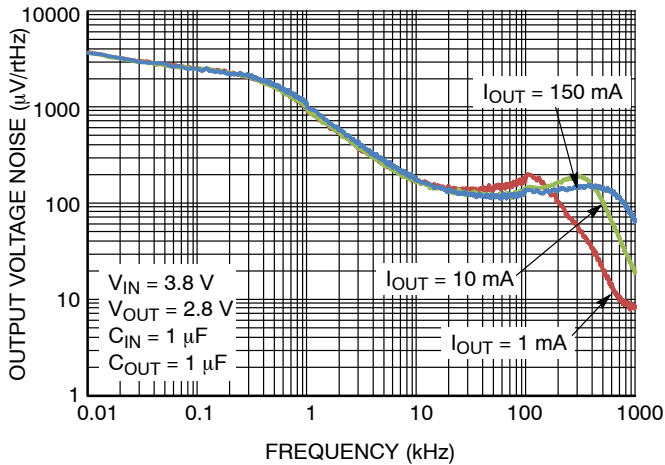


Figure 21. Output Voltage Noise Spectral Density for  $V_{OUT} = 2.8\text{ V}$ ,  $C_{OUT} = 1\text{ }\mu\text{F}$

| $I_{OUT}$ | RMS Output Noise ( $\mu\text{V}$ ) |                  |
|-----------|------------------------------------|------------------|
|           | 10 Hz – 100 kHz                    | 100 Hz – 100 kHz |
| 1 mA      | 79.23                              | 74.66            |
| 10 mA     | 75.03                              | 70.37            |
| 150 mA    | 77.28                              | 72.66            |

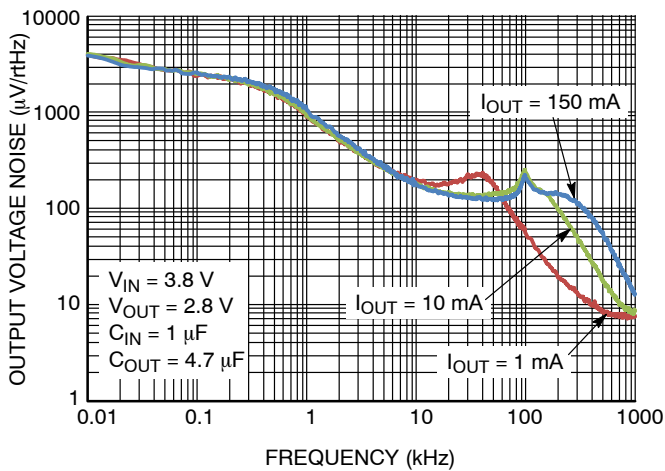


Figure 22. Output Voltage Noise Spectral Density for  $V_{OUT} = 2.8\text{ V}$ ,  $C_{OUT} = 4.7\text{ }\mu\text{F}$

| $I_{OUT}$ | RMS Output Noise ( $\mu\text{V}$ ) |                  |
|-----------|------------------------------------|------------------|
|           | 10 Hz – 100 kHz                    | 100 Hz – 100 kHz |
| 1 mA      | 80.17                              | 75.29            |
| 10 mA     | 81.28                              | 76.46            |
| 150 mA    | 81.31                              | 76.77            |



TYPICAL CHARACTERISTICS

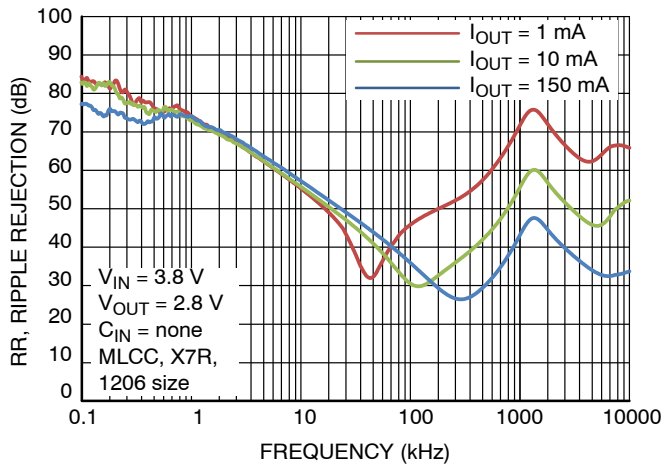


Figure 23. Power Supply Rejection Ratio,  
 $V_{OUT} = 1.2\text{ V}$ ,  $C_{OUT} = 1\text{ }\mu\text{F}$

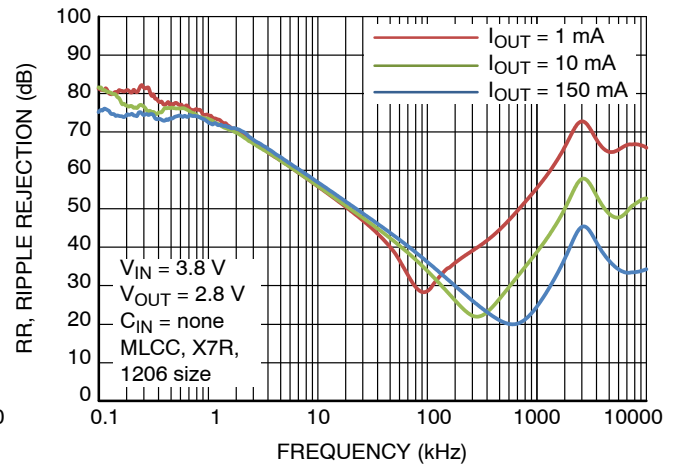


Figure 24. Power Supply Rejection Ratio,  
 $V_{OUT} = 2.8\text{ V}$ ,  $C_{OUT} = 4.7\text{ }\mu\text{F}$



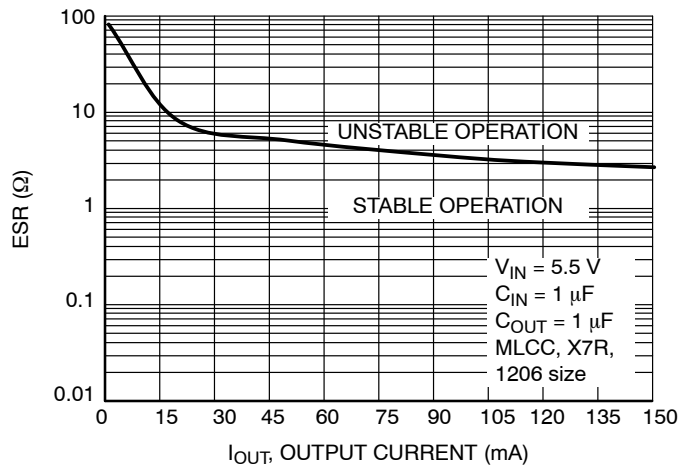


Figure 25. Output Capacitor ESR vs. Output Current


## TYPICAL CHARACTERISTICS

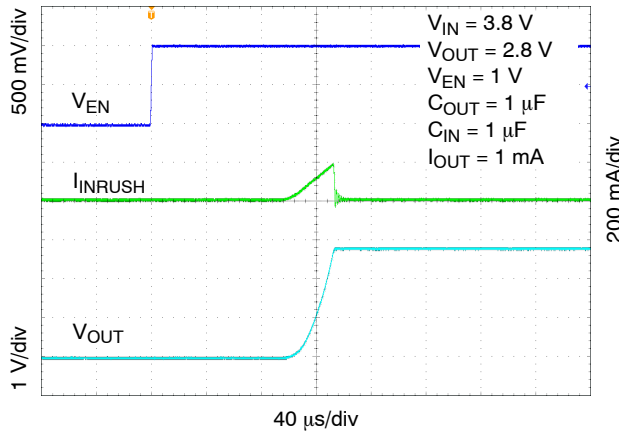


**Figure 26. Enable Turn-on Response,  
 $C_{OUT} = 1 \mu F$ ,  $I_{OUT} = 1 \text{ mA}$**

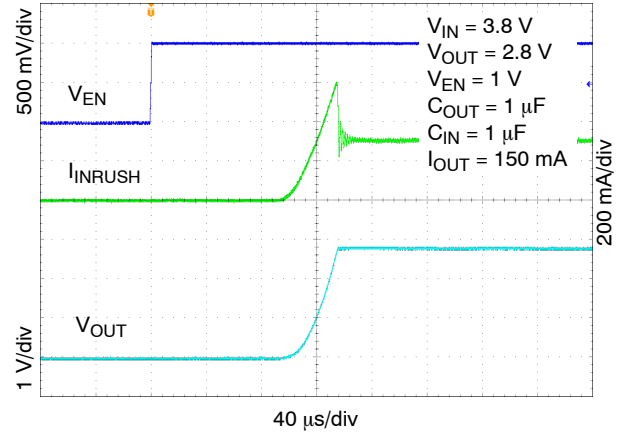


**Figure 27. Enable Turn-on Response,  
 $C_{OUT} = 1 \mu F$ ,  $I_{OUT} = 150 \text{ mA}$**

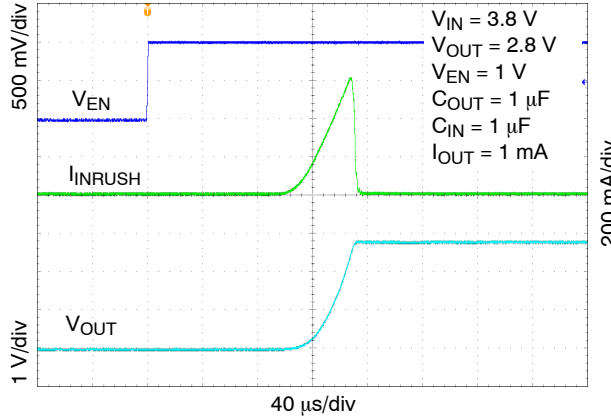


**Figure 28. Enable Turn-on Response,  
 $C_{OUT} = 4.7 \mu F$ ,  $I_{OUT} = 1 \text{ mA}$**

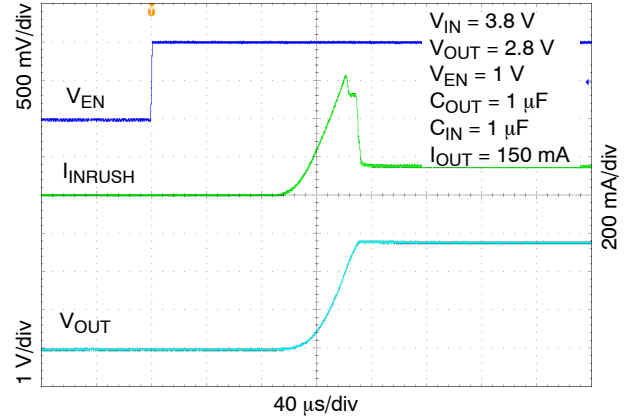

**Figure 29. Enable Turn-on Response,  
 $C_{OUT} = 4.7 \mu F$ ,  $I_{OUT} = 150 \text{ mA}$**

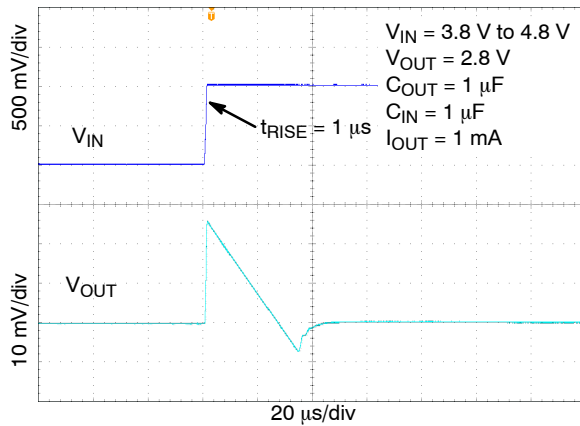


**Figure 30. Line Transient Response – Rising  
Edge,  $V_{OUT} = 2.8 \text{ V}$ ,  $I_{OUT} = 1 \text{ mA}$**

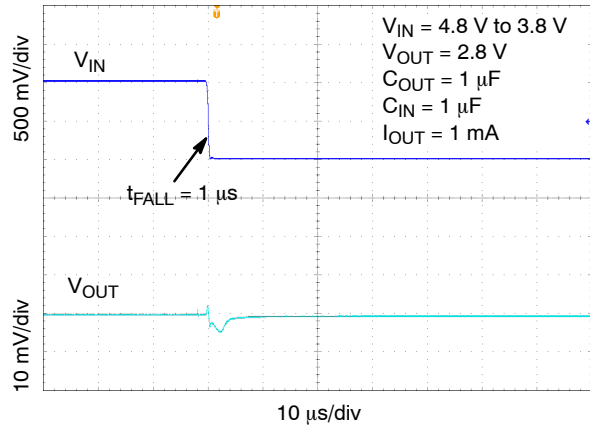


**Figure 31. Line Transient Response – Falling  
Edge,  $V_{OUT} = 2.8 \text{ V}$ ,  $I_{OUT} = 1 \text{ mA}$**


## TYPICAL CHARACTERISTICS

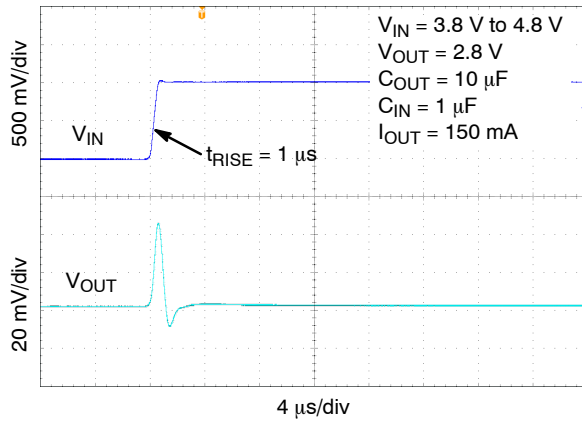


**Figure 32. Line Transient Response – Rising Edge,  $V_{OUT} = 2.8 \text{ V}$ ,  $I_{OUT} = 150 \text{ mA}$**

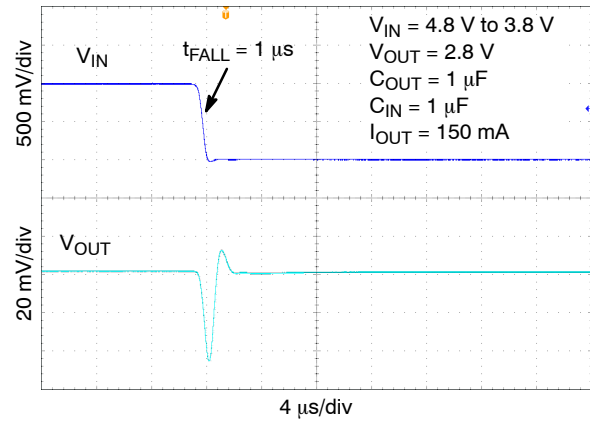


**Figure 33. Line Transient Response – Falling Edge,  $V_{OUT} = 2.8 \text{ V}$ ,  $I_{OUT} = 150 \text{ mA}$**

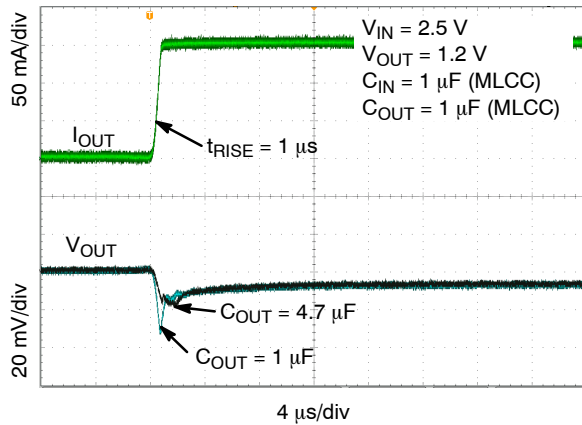


**Figure 34. Load Transient Response – Rising Edge,  $V_{OUT} = 1.2 \text{ V}$ ,  $I_{OUT} = 1 \text{ mA to } 150 \text{ mA}$ ,  $C_{OUT} = 1 \mu\text{F}$ ,  $4.7 \mu\text{F}$**

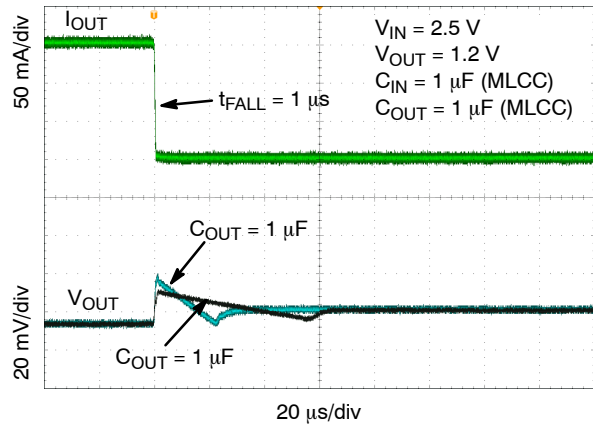

**Figure 35. Load Transient Response – Falling Edge,  $V_{OUT} = 1.2 \text{ V}$ ,  $I_{OUT} = 1 \text{ mA to } 150 \text{ mA}$ ,  $C_{OUT} = 1 \mu\text{F}$ ,  $4.7 \mu\text{F}$**

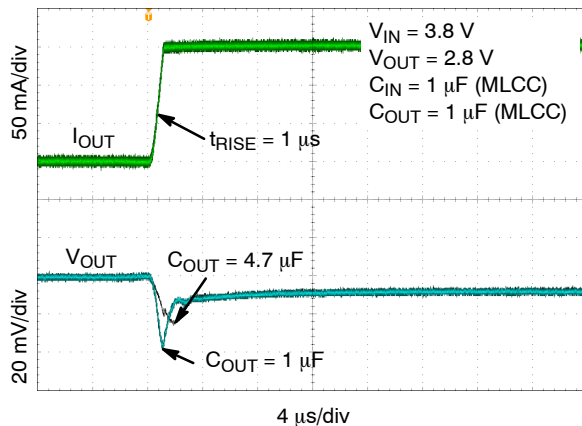


**Figure 36. Load Transient Response – Rising Edge,  $V_{OUT} = 2.8 \text{ V}$ ,  $I_{OUT} = 1 \text{ mA to } 150 \text{ mA}$ ,  $C_{OUT} = 1 \mu\text{F}$ ,  $4.7 \mu\text{F}$**

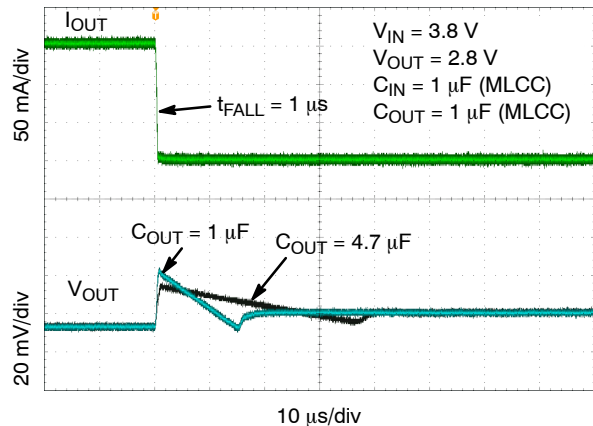


**Figure 37. Load Transient Response – Falling Edge,  $V_{OUT} = 2.8 \text{ V}$ ,  $I_{OUT} = 1 \text{ mA to } 150 \text{ mA}$ ,  $C_{OUT} = 1 \mu\text{F}$ ,  $4.7 \mu\text{F}$**


## TYPICAL CHARACTERISTICS

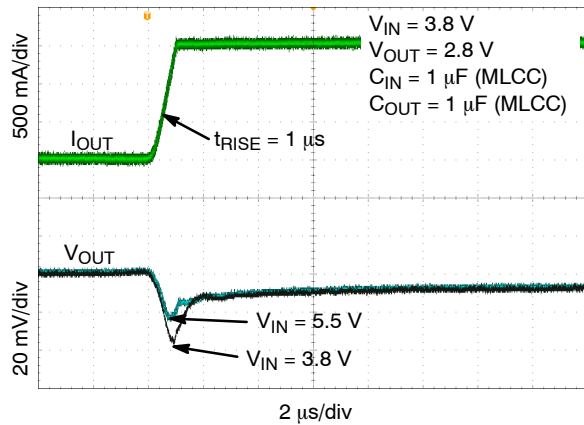


**Figure 38. Load Transient Response – Rising Edge,  $V_{OUT} = 2.8\text{ V}$ ,  $I_{OUT} = 1\text{ mA}$  to  $150\text{ mA}$ ,  $V_{IN} = 3.8\text{ V}$ ,  $5.5\text{ V}$**

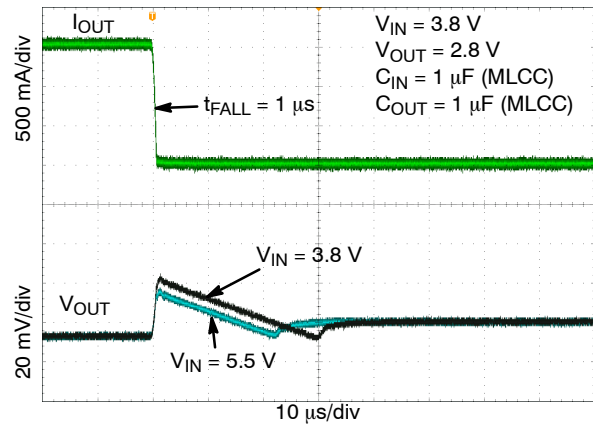

**Figure 39. Load Transient Response – Falling Edge,  $V_{OUT} = 2.8\text{ V}$ ,  $I_{OUT} = 1\text{ mA}$  to  $150\text{ mA}$ ,  $V_{IN} = 3.8\text{ V}$ ,  $5.5\text{ V}$**

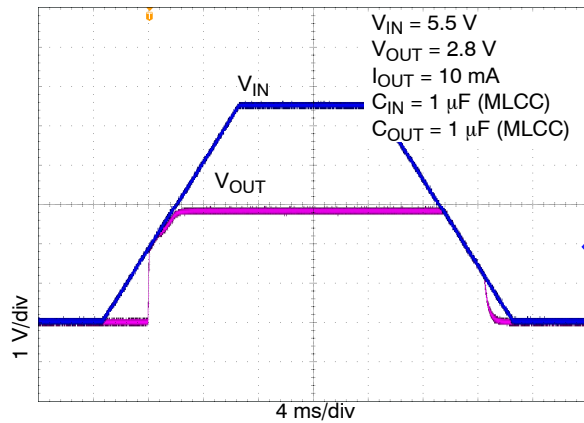

**Figure 40. Turn-on/off – Slow Rising  $V_{IN}$**

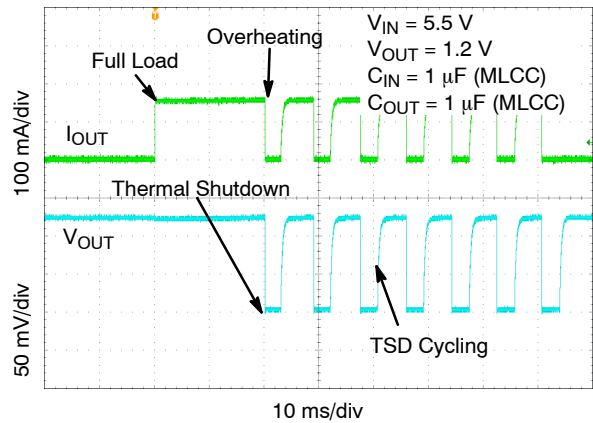

**Figure 41. Short-Circuit and Thermal Shutdown**

## APPLICATIONS INFORMATION

**General**

The NCP103 is a high performance 150 mA Low Dropout Linear Regulator. This device delivers very high PSRR (over 75 dB at 1 kHz) and excellent dynamic performance as load/line transients. In connection with very low quiescent current this device is very suitable for various battery powered applications such as tablets, cellular phones, wireless and many others. The device is fully protected in case of output overload, output short circuit condition and overheating, assuring a very robust design.

**Input Capacitor Selection ( $C_{IN}$ )**

It is recommended to connect at least a 1  $\mu$ F Ceramic X5R or X7R capacitor as close as possible to the IN pin of the device. This capacitor will provide a low impedance path for unwanted AC signals or noise modulated onto constant input voltage. There is no requirement for the min. /max. ESR of the input capacitor but it is recommended to use ceramic capacitors for their low ESR and ESL. A good input capacitor will limit the influence of input trace inductance and source resistance during sudden load current changes. Larger input capacitor may be necessary if fast and large load transients are encountered in the application.

**Output Decoupling ( $C_{OUT}$ )**

The NCP103 requires an output capacitor connected as close as possible to the output pin of the regulator. The recommended capacitor value is 1  $\mu$ F and X7R or X5R dielectric due to its low capacitance variations over the specified temperature range. The NCP103 is designed to remain stable with minimum effective capacitance of 0.22  $\mu$ F to account for changes with temperature, DC bias and package size. Especially for small package size capacitors such as 0402 the effective capacitance drops rapidly with the applied DC bias.

There is no requirement for the minimum value of Equivalent Series Resistance (ESR) for the  $C_{OUT}$  but the maximum value of ESR should be less than 3  $\Omega$ . Larger output capacitors and lower ESR could improve the load transient response or high frequency PSRR. It is not recommended to use tantalum capacitors on the output due to their large ESR. The equivalent series resistance of tantalum capacitors is also strongly dependent on the temperature, increasing at low temperature.

**Enable Operation**

The NCP103 uses the EN pin to enable/disable its device and to deactivate/activate the active discharge function.

If the EN pin voltage is <0.4 V the device is guaranteed to be disabled. The pass transistor is turned-off so that there is virtually no current flow between the IN and OUT. The active discharge transistor is active so that the output voltage  $V_{OUT}$  is pulled to GND through a 100  $\Omega$  resistor. In the

disable state the device consumes as low as typ. 10 nA from the  $V_{IN}$ .

If the EN pin voltage >0.9 V the device is guaranteed to be enabled. The NCP103 regulates the output voltage and the active discharge transistor is turned-off.

The EN pin has internal pull-down current source with typ. value of 300 nA which assures that the device is turned-off when the EN pin is not connected. In the case where the EN function isn't required the EN should be tied directly to IN.

**Output Current Limit**

Output Current is internally limited within the IC to a typical 550 mA. The NCP103 will source this amount of current measured with a voltage drops on the 90% of the nominal  $V_{OUT}$ . If the Output Voltage is directly shorted to ground ( $V_{OUT} = 0$  V), the short circuit protection will limit the output current to 580 mA (typ). The current limit and short circuit protection will work properly over whole temperature range and also input voltage range. There is no limitation for the short circuit duration.

**Thermal Shutdown**

When the die temperature exceeds the Thermal Shutdown threshold ( $T_{SD} = 160^\circ\text{C}$  typical), Thermal Shutdown event is detected and the device is disabled. The IC will remain in this state until the die temperature decreases below the Thermal Shutdown Reset threshold ( $T_{SDU} = 140^\circ\text{C}$  typical). Once the IC temperature falls below the  $140^\circ\text{C}$  the LDO is enabled again. The thermal shutdown feature provides the protection from a catastrophic device failure due to accidental overheating. This protection is not intended to be used as a substitute for proper heat sinking.

**Power Dissipation**

As power dissipated in the NCP103 increases, it might become necessary to provide some thermal relief. The maximum power dissipation supported by the device is dependent upon board design and layout. Mounting pad configuration on the PCB, the board material, and the ambient temperature affect the rate of junction temperature rise for the part.

The maximum power dissipation the NCP103 can handle is given by:

$$P_{D(MAX)} = \frac{[125^\circ\text{C} - T_A]}{\theta_{JA}} \quad (\text{eq. 1})$$

The power dissipated by the NCP103 for given application conditions can be calculated from the following equations:

$$P_D \approx V_{IN}(I_{GND@I_{OUT}}) + I_{OUT}(V_{IN} - V_{OUT}) \quad (\text{eq. 2})$$

## NCP103

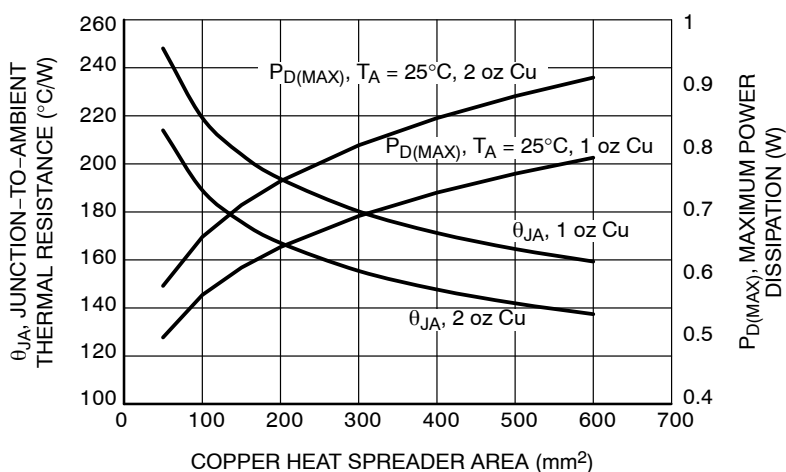


Figure 42.  $\theta_{JA}$  vs. Copper Area (uDFN4)

### Reverse Current

The PMOS pass transistor has an inherent body diode which will be forward biased in the case that  $V_{OUT} > V_{IN}$ . Due to this fact in cases, where the extended reverse current condition can be anticipated the device may require additional external protection.

### Power Supply Rejection Ratio

The NCP103 features very good Power Supply Rejection ratio. If desired the PSRR at higher frequencies in the range 100 kHz – 10 MHz can be tuned by the selection of  $C_{OUT}$  capacitor and proper PCB layout.

### Turn-On Time

The turn-on time is defined as the time period from EN assertion to the point in which  $V_{OUT}$  will reach 98% of its

nominal value. This time is dependent on various application conditions such as  $V_{OUT(NOM)}$ ,  $C_{OUT}$  and  $T_A$ . For example typical value for  $V_{OUT} = 1.2$  V,  $C_{OUT} = 1$   $\mu$ F,  $I_{OUT} = 1$  mA and  $T_A = 25^\circ\text{C}$  is 90  $\mu$ s.

### PCB Layout Recommendations

To obtain good transient performance and good regulation characteristics place  $C_{IN}$  and  $C_{OUT}$  capacitors close to the device pins and make the PCB traces wide. In order to minimize the solution size, use 0402 capacitors. Larger copper area connected to the pins will also improve the device thermal resistance. The actual power dissipation can be calculated from the equation above (Equation 2). Expose pad should be tied the shortest path to the GND pin.

## ORDERING INFORMATION

| Device          | Voltage Option | Marking | Marking Rotation | Option                                   | Package         | Shipping <sup>†</sup> |
|-----------------|----------------|---------|------------------|------------------------------------------|-----------------|-----------------------|
| NCP103BMX185TCG | 1.85 V         | CJ      | 0°               | Without active output discharge function | uDFN4 (Pb-Free) | 3000 / Tape & Reel    |
| NCP103BMX330TCG | 3.3 V          | Q       | 90°              |                                          |                 |                       |

### DISCONTINUED (Note 5)

|                 |        |    |      |                                          |                 |                    |
|-----------------|--------|----|------|------------------------------------------|-----------------|--------------------|
| NCP103AMX180TCG | 1.8 V  | K  | 180° | With active output discharge function    | uDFN4 (Pb-Free) | 3000 / Tape & Reel |
| NCP103AMX310TCG | 3.1 V  | P  | 0°   |                                          |                 |                    |
| NCP103BMX185TBG | 1.85 V | CJ | 0°   | Without active output discharge function |                 |                    |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, [BRD8011/D](#).



5. **DISCONTINUED:** These devices are not recommended for new design. Please contact your onsemi representative for information. The most current information on these devices may be available on [www.onsemi.com](http://www.onsemi.com).



SCALE 4:1

UDFN4 1.0x1.0, 0.65P  
CASE 517CU  
ISSUE A

DATE 18 DEC 2014

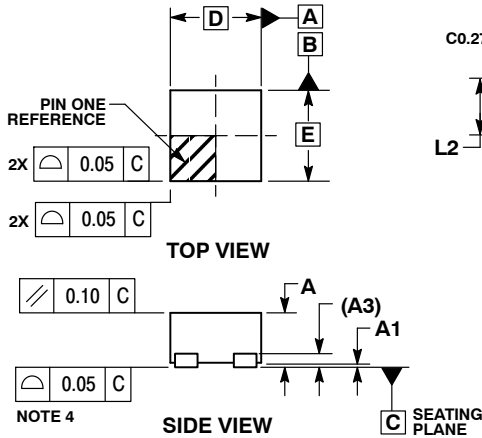


NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.03 AND 0.07 FROM THE TERMINAL TIPS.
4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.


| MILLIMETERS |      |      |
|-------------|------|------|
| DIM         | MIN  | MAX  |
| A           | ---  | 0.60 |
| A1          | 0.00 | 0.05 |
| A3          | 0.15 | REF  |
| b           | 0.20 | 0.30 |
| D           | 1.00 | BSC  |
| D2          | 0.38 | 0.58 |
| E           | 1.00 | BSC  |
| e           | 0.65 | BSC  |
| L           | 0.20 | 0.30 |
| L2          | 0.27 | 0.37 |

GENERIC  
MARKING DIAGRAM\*




XX = Specific Device Code  
M = Date Code

\*This information is generic. Please refer to device data sheet for actual part marking.  
Pb-Free indicator, "G" or microdot "▪", may or may not be present.

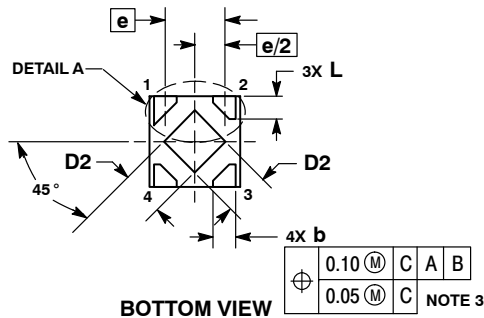

RECOMMENDED  
MOUNTING FOOTPRINT\*

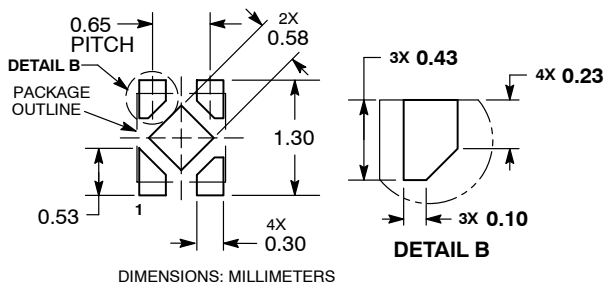

\*For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

|                         |                              |                                                                                                                                                                                     |
|-------------------------|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98AON76666F</b>           | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>UDFN4, 1.0X1.0, 0.65P</b> | <b>PAGE 1 OF 1</b>                                                                                                                                                                  |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)