



Figure 1. Physical Photo of ALSHV24V6600V10MAW

FEATURES

- High precision
- Full modulation range on output voltage
- Linear regulation
- Input to Output Isolation
- Overload and Short Circuit Protection
- Metal Enclosure for Zero EMIS
- Easy Control and Installation

APPLICATIONS

This power module, ALSHV24V6600V10MAW is designed for achieving DC-DC conversion from low voltage to high voltage. High voltage power supply is widely used in industrial measurement and control, energy spectrum analysis, and medical equipment such as: Lightning surge tester, X-ray machine, vacuum/plasma processing, semiconductor fabrication equipment, analytical instrumentation, medical diagnostic and therapeutic systems, test equipment, and research and academic applications, etc.

DESCRIPTION

Draw a clear distinction between input lead and output lead: input 24V (red lead), ground electrodes (black lead), regulation wire (white lead), reference voltage 5V (yellow lead), shutdown (blue lead), Positive output high voltage (thick red lead), and Negative output high voltage (black lead).

While regulating the potentiometer, connect the intermediate tap of the potentiometer with white lead, and connect the other two ends to ground (black lead) and reference voltage (yellow lead) respectively. Switch on the power, and regulate the potentiometer to have the required output voltage.

ALSHV24V6600V10MAW converts an input DC voltage of 24V, to an output voltage of 6600V with high efficiency. The whole converter is shielded by a heavy duty metal enclosure, which blocks EMIs from coming out of the module and going into the module. This feature is particularly important for noise intensive environment.

SHUTDOWN MODE OPERATION

A logic low $<0.8V$ or a $0V$ on the SDN pin will turn the device off. When SDN is in logic high $>1.2V$ or left



unconnected, the product is working well.

SAFETY PRECAUTIONS

The internal protection circuit is provided in the high voltage power supply, but the high voltage short circuit shall be

avoided.

Make sure the circuit is insulated perfectly, especially between the high voltage output and the surroundings so as to avoid electronic shock.

SPECIFICATIONS

Table 1. Characteristics. $T_A = 25^\circ\text{C}$, unless otherwise noted

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit/Note
Input Voltage	VPS		23	24	25	V
Quiescent Input Current	I_{INQ}	$I_{OUT} = 0\text{mA}$	400	450	500	mA
Full Load Input Current	I_{INFLD}	$I_{OUT} = 10\text{mA}$	3.5	3.6	3.7	A
Input Voltage Regulation Ratio	$\Delta V_{OUT}/\Delta V_{PS}$	VPS = 23V ~ 25V		0.1		%
Output Voltage	V_{OUT}	$I_{OUT} = 0 \sim 10\text{mA}$	0		6600	V
Maximum Output Current	I_{OUTMAX}	VPS = 23V ~ 25V			10	mA
Stability of Reference Voltage	V_{REF}	$-20 \sim 50^\circ\text{C}$	4.95	5	5.05	V
Load				660		k Ω
Regulation Mode			0 ~ 5V or 10k potentiometer			
Isolation Voltage	V_{IS}			8000		VDC
Control Input vs. Output Linearity	$\Delta V_{REF}/\Delta V_{OUT}$			<0.2		%
Load Regulation Rate		$I_{OUT} = 0 \sim 10\text{mA}$		≤ 0.05		%
Instantaneous Short Circuit Current	I_{SC}			<150		mA
Shutdown Supply Current	I_{SHDN}				15	mA
Shutdown Logic Input Current	I_{LOGIC}				3	μA
Shutdown Logic Low	V_{INL}				0.8	V
Shutdown Logic High	V_{INH}		1.2			V
Full Load Efficiency	η			≥ 75		%
Temperature Coefficient	TCV_O	$-20 \sim 50^\circ\text{C}$		<0.1		%/ $^\circ\text{C}$
Time Drift	Short Time Drift			<0.3		%/min
	Long Time Drift			<0.5		%/h
Output Voltage Temperature Stability		$-20 \sim 50^\circ\text{C}$		$<\pm 0.5$		%
Operating Temperature Range	T_{opr}		-20		55	$^\circ\text{C}$
Storage Temperature Range	T_{stg}		-55		85	$^\circ\text{C}$
External Dimensions			140×100×55			mm
Weight				1000		g
				2.21		lbs
				35.27		Oz



TESTING DATA

I. DC Testing

High voltage power supply testing data (Test condition: the load is 660 K Ω)

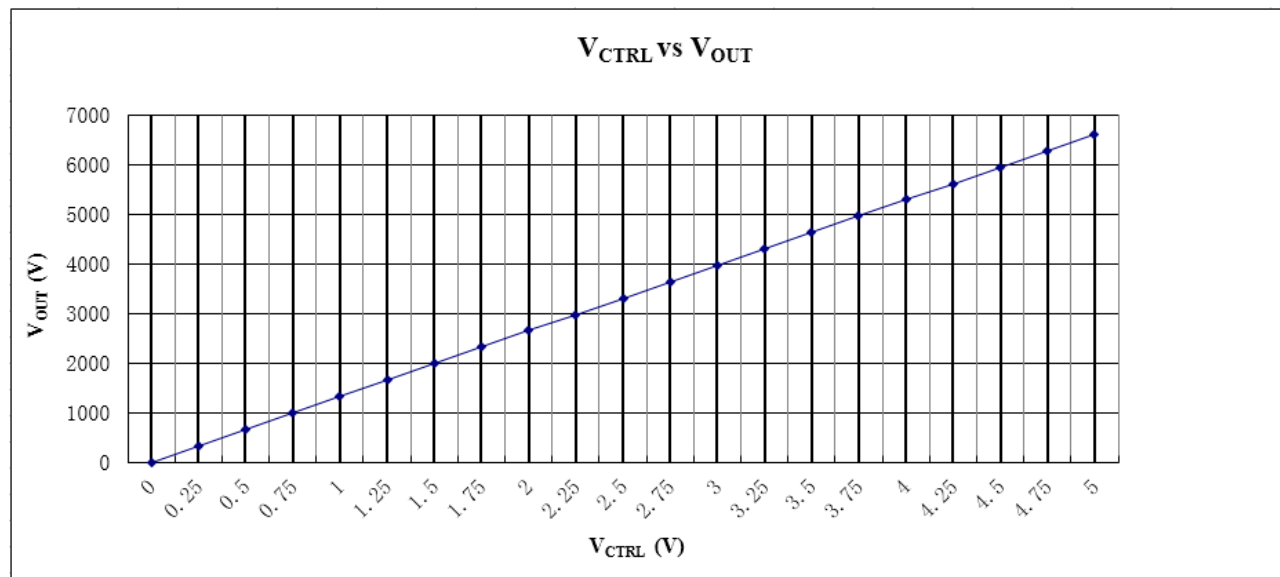



Figure 2. V_{CTRL} vs. V_{OUT}

II. AC Testing

Waveform curve and rise & fall time are tested by using the control voltage supplied by signal generator.

Under the testing condition of modulation frequency 0.1Hz, control voltage 0.25 ~ 5V, and 660K Ω load, the output voltage is 330 ~ 6600V.


Note: as shown in the figures below, the output voltage is represented by yellow line and the control voltage by red line.

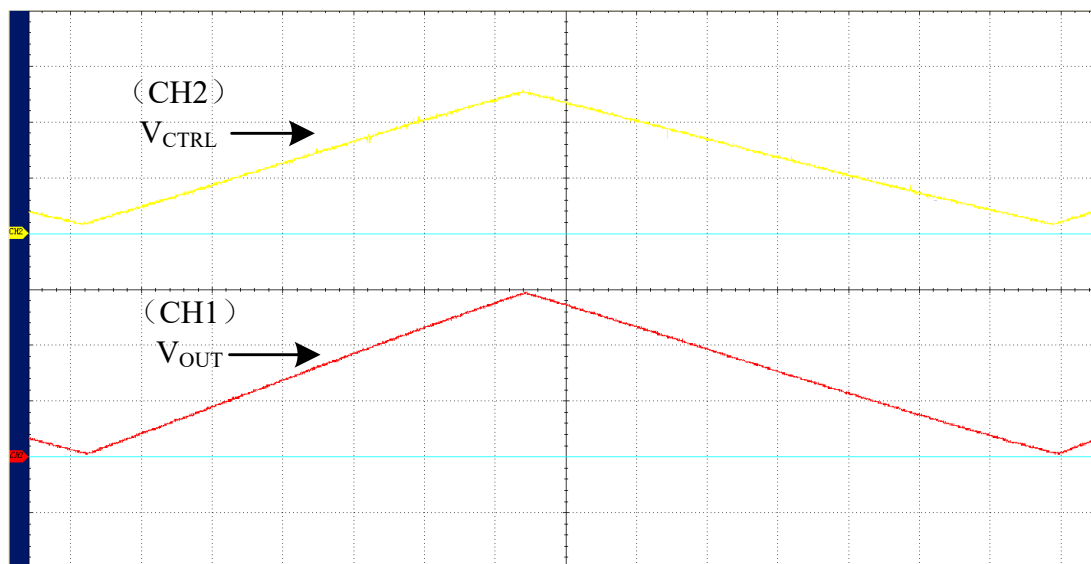

CH1: 2200V/Div CH2: 2V/Div M: 500ms/Div

V_{CTRL}: 0.25V ~ 5V V_{OUT}: 330V ~ 6600V


Figure 3. Triangle Wave

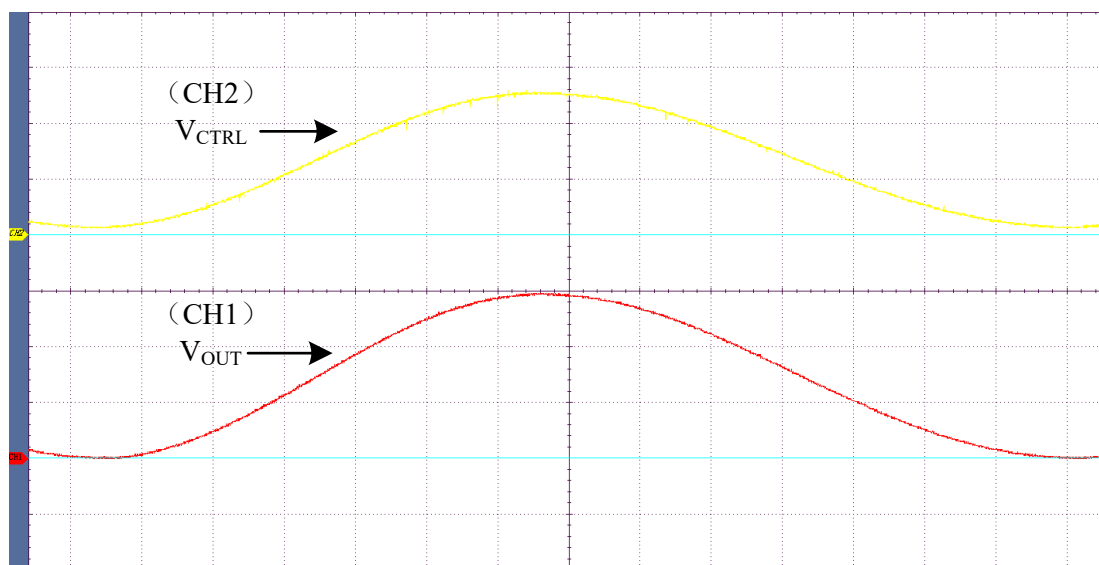

CH1: 2200V/Div CH2: 2V/Div M: 500ms/Div

V_{CTRL} : 0.25V ~ 5V V_{OUT} : 330V ~ 6600V

Figure 4. Sine Wave

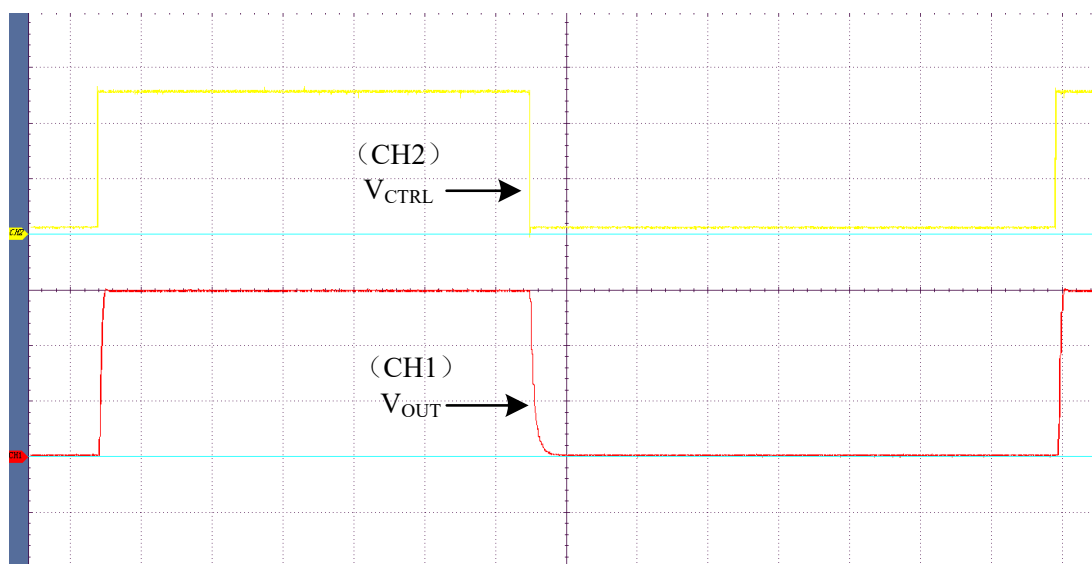

CH1: 2200V/Div CH2: 2V/Div M: 500ms/Div

V_{CTRL} : 0.25V ~ 5V V_{OUT} : 330V ~ 6600V

Figure 5. Square Wave

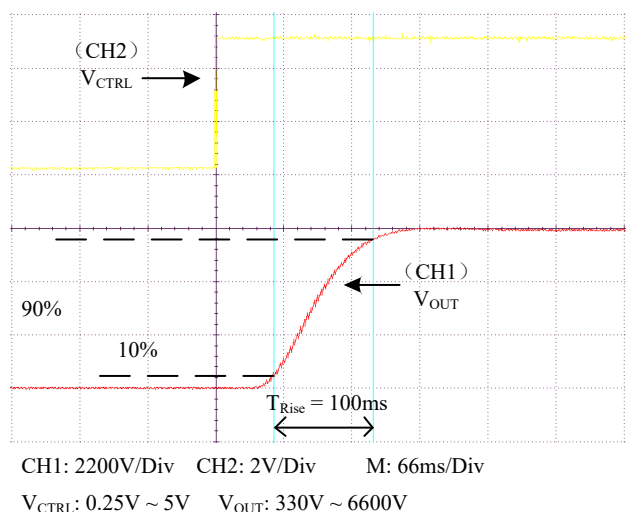


Figure 6. Rise Time

As shown in Figure 6, when a square wave of 0.25V ~ 5V, F=0.10Hz is applied to Control, measure the waveform. The rise time is about 100ms.

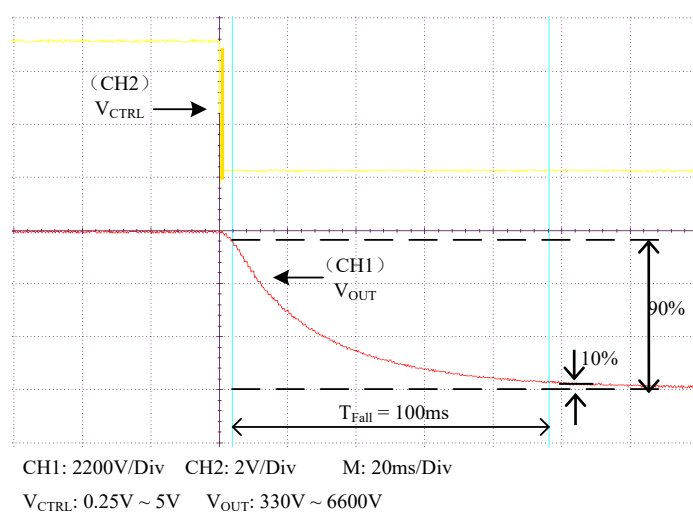


Figure 7. Fall Time

As shown in Figure 7, when a square wave of 0.25V ~ 5V, F=0.10Hz is applied to Control, measure the waveform. The fall time is about 100ms.

THE CONNECTION DIAGRAM OF MODULE'S PERIPHERAL CIRCUIT

The leads colors in the figures below are identical with those in the physical ALSHV24V6600V10MAW.

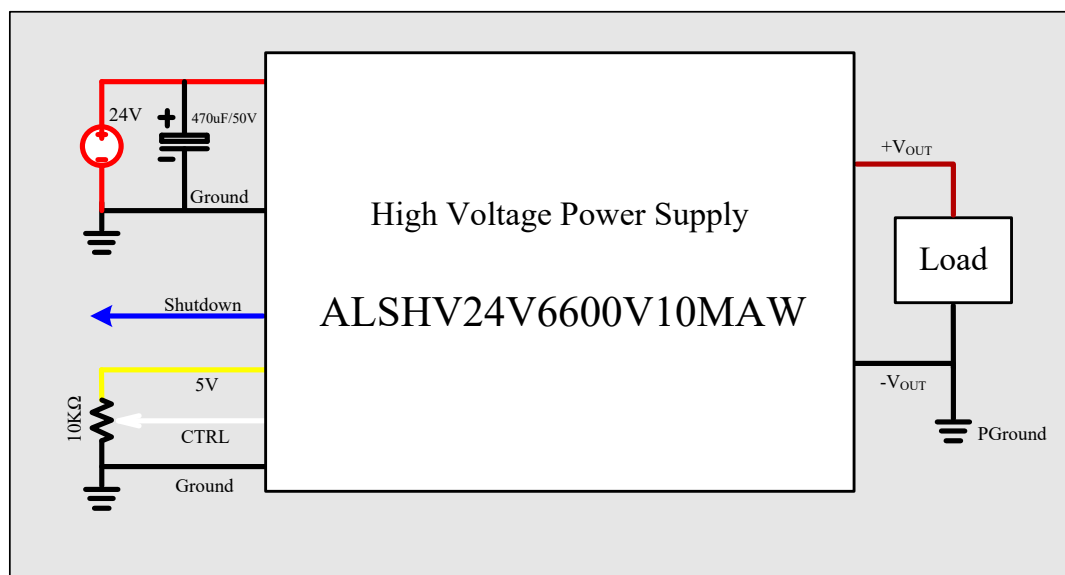


Figure 8. Positive Output

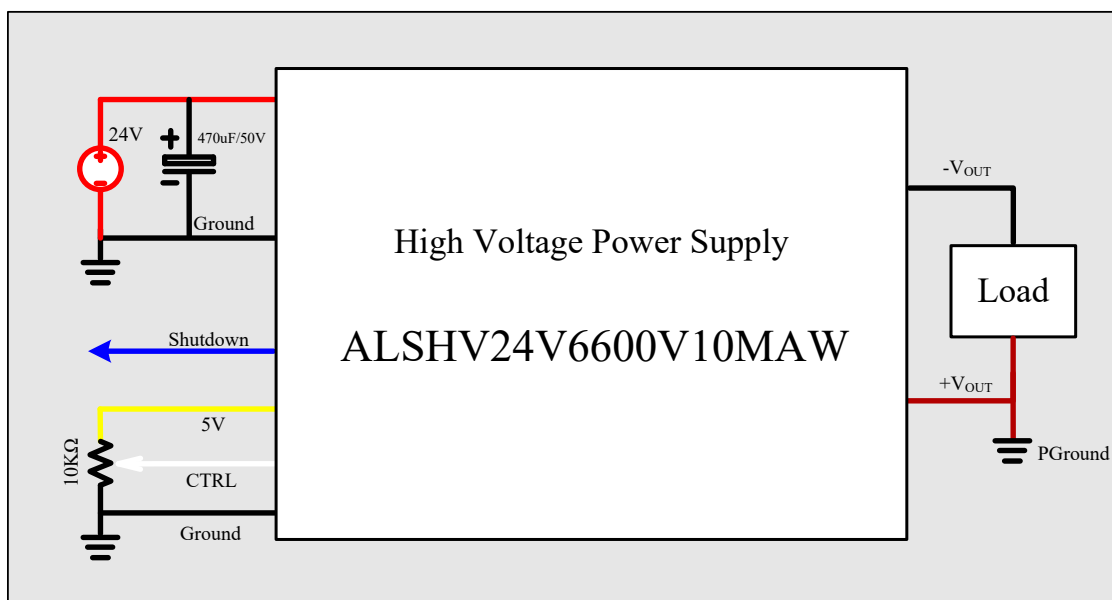


Figure 9. Negative Output

Naming instructions

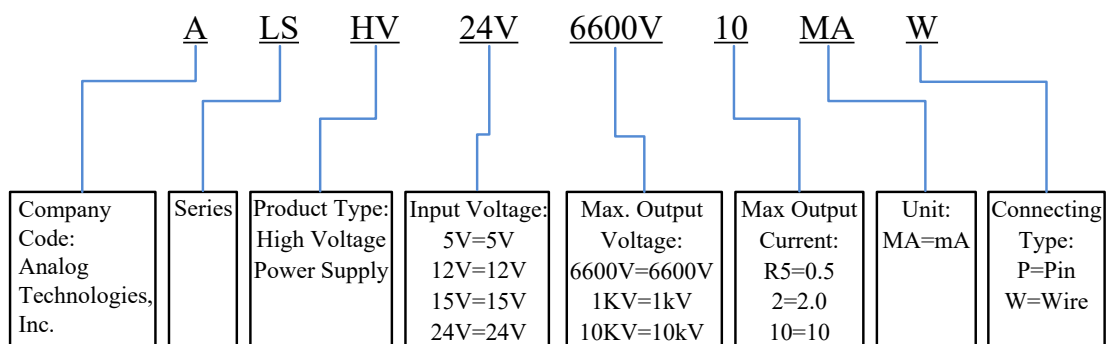


Figure 10. Physical Photo of ALSHV24V6600V10MAW



DIMENSIONS

I. Dimension of the leads.

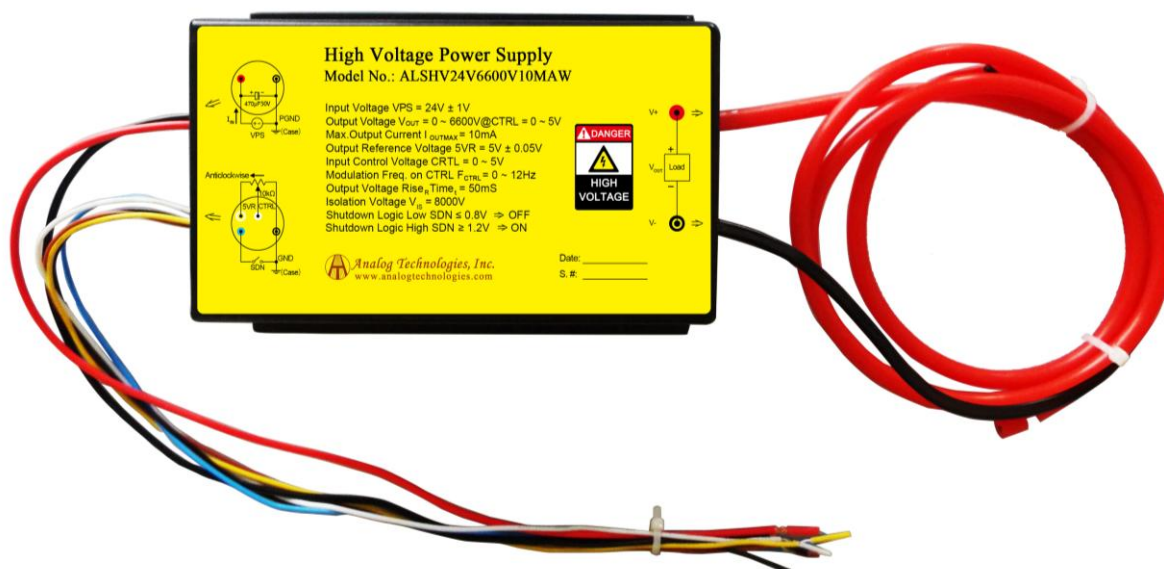


Figure 11. Leads of ALSHV24V6600V10MAW

Leads	Diameter (mm)	Length (mm)
Thick brown lead	4.5	120
Yellow, red, blue, black and white leads	1.5	23

II. Dimension of ALSHV24V6600V10MAW.

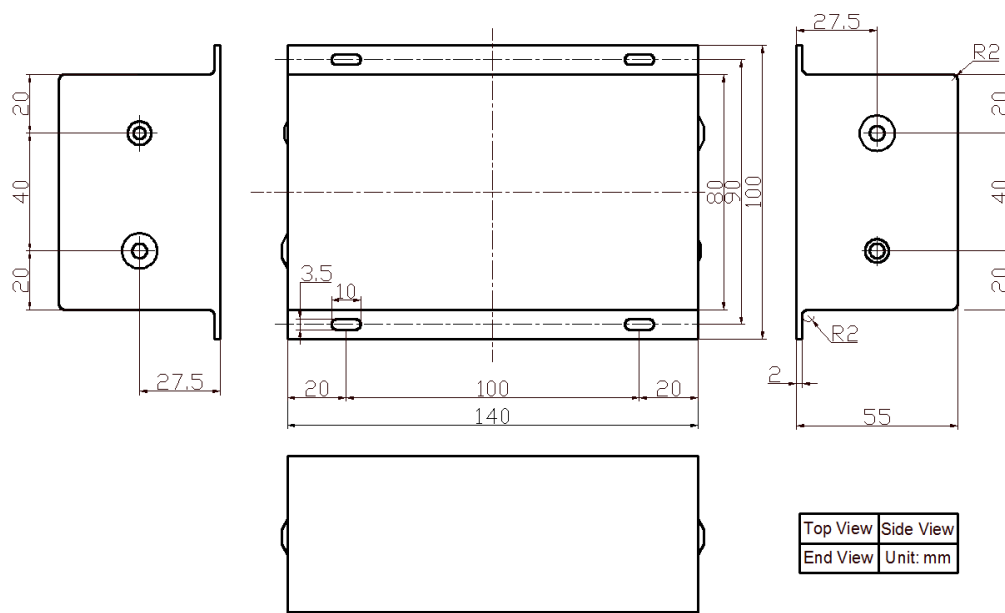


Figure 12. Dimensions for ALSHV24V6600V10MAW



PRICES

Part Number	Buy Now
ALSHV24V6600V10MAW	 * 

NOTICE

1. ATI warrants performance of its products for one year to the specifications applicable at the time of sale, except for those being damaged by excessive abuse. Products found not meeting the specifications within one year from the date of sale can be exchanged free of charge.
2. ATI reserves the right to make changes to its products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete.
3. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability. Testing and other quality control techniques are utilized to the extent ATI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.
4. Customers are responsible for their applications using ATI components. In order to minimize risks associated with the customers' applications, adequate design and operating safeguards must be provided by the customers to minimize inherent or procedural hazards. ATI assumes no liability for applications assistance or customer product design.
5. ATI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of ATI covering or relating to any combination, machine, or process in which such products or services might be or are used. ATI's publication of information regarding any third party's products or services does not constitute ATI's approval, warranty or endorsement thereof.
6. IP (Intellectual Property) Ownership: ATI retains the ownership of full rights for special technologies and/or techniques embedded in its products, the designs for mechanics, optics, plus all modifications, improvements, and inventions made by ATI for its products and/or projects.