

# NCP4632

## 3A, Low Voltage, Low Dropout Linear Voltage Regulator with Reverse Current Protection

The NCP4632 is a CMOS Linear voltage regulator with high output current capability (up to 3 A). This device can provide output voltages as low as 0.8 V while maintaining a low dropout voltage of 510 mV typ. at full load. The NCP4632 is designed to draw only 350  $\mu$ A of supply current and less than 1  $\mu$ A in standby mode to minimize current consumption for battery operated applications. The device has a high accuracy output voltage of  $\pm 1\%$  along with soft-start and reverse current protection circuits to protect the device and the application. The NCP4632 is available in a Pb-Free DPAK-5 package in both fixed and adjustable output voltage options. The output voltage for the fixed options can be modified in 0.1 V steps from 0.8 V to 4.2 V. Please contact your sales office for any additional fixed voltage outputs to those already listed.

### Features

- Operating Input Voltage Range: 1.6 V to 5.25 V
- Output Voltage Range: 0.8 to 4.5 V (0.1 V steps for fixed options)
- Supply current: Typical Operation Mode – 350.0  $\mu$ A  
Standby Mode – 1.0  $\mu$ A
- Dropout Voltage:  
150 mV Typ. at  $I_{OUT} = 1$  A,  $V_{OUT} = 2.5$  V  
510 mV Typ. at  $I_{OUT} = 3$  A,  $V_{OUT} = 2.5$  V
- $\pm 1\%$  Output Voltage Accuracy
- Line Regulation 0.15%/V Typ.
- Current Fold Back Protection Typ. 220 mA
- Stable with Ceramic Capacitors
- Available in DPAK-5 Package (TO252-5)
- These are Pb-Free Devices

### Typical Applications

- Battery Powered Equipments
- Portable Communication Equipments
- Cameras, VCRs and Camcorders
- Home appliances


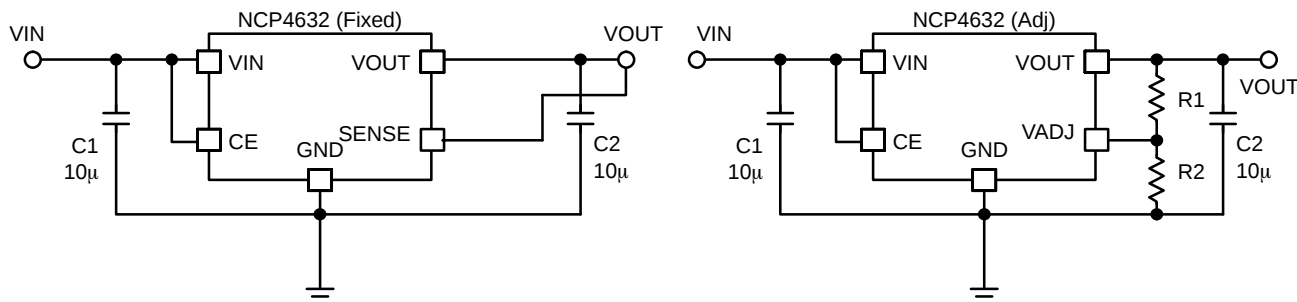


Figure 1. Typical Application Schematics




ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)



DPAK-5  
CASE 369AE

### MARKING DIAGRAM



xx = Specific Device Code  
YY = B – Without Active Discharge  
= D – With Active Discharge  
zz = Lot Number

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 13 of this data sheet.

## NCP4632

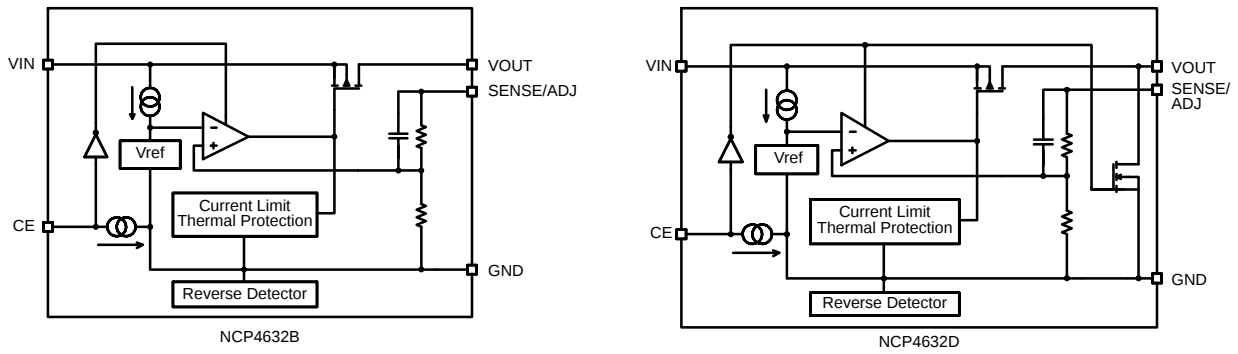


Figure 2. Simplified Schematic Block Diagram

### PIN FUNCTION DESCRIPTION

| Pin No.<br>TO252-5-P2 | Pin Name     | Description                                                  |
|-----------------------|--------------|--------------------------------------------------------------|
| 4                     | VOUT         | Output Voltage Pin                                           |
| 2                     | VIN          | Input Voltage Pin                                            |
| 3                     | GND (Note 1) | Ground Pin                                                   |
| 1                     | CE           | Chip Enable Pin, Active "H", Connect to VIN pin if not used. |
| 5                     | SENSE / ADJ  | Sense Pin on Fixed Options, ADJ for Adjustable               |

1. TAB is internally connected to pin 3 GND.

### ABSOLUTE MAXIMUM RATINGS

| Rating                                    | Symbol       | Value                    | Unit        |
|-------------------------------------------|--------------|--------------------------|-------------|
| Input Voltage                             | $V_{IN}$     | 6.0                      | V           |
| Output Voltage                            | $V_{OUT}$    | $-0.3$ to $V_{IN} + 0.3$ | V           |
| Chip Enable Input                         | $V_{CE}$     | $-0.3$ to $6.0$          | V           |
| Sense Input                               | $V_{sense}$  | $-0.3$ to $6.0$          | V           |
| Output Current                            | $I_{OUT}$    | 3000                     | mA          |
| Power Dissipation (Note 2)                | $P_{D(MAX)}$ | 3800                     | mW          |
| Storage Temperature Range                 | $T_{STG}$    | $-55$ to $125$           | $^{\circ}C$ |
| Maximum Junction Temperature              | $T_{J(MAX)}$ | 125                      | $^{\circ}C$ |
| ESD Capability, Human Body Model (Note 3) | $ESD_{HBM}$  | 2000                     | V           |
| ESD Capability, Machine Model (Note 3)    | $ESD_{MM}$   | 200                      | V           |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

2. JEDEC standard 76.2mm x 114.3 mm, FR4 Four-layers board

3. This device series incorporates ESD protection and is tested by the following methods:

ESD Human Body Model tested per AEC-Q100-002 (EIA/JESD22-A114)

ESD Machine Model tested per AEC-Q100-003 (EIA/JESD22-A115)

Latchup Current Maximum Rating tested per JEDEC standard: JESD78.

### THERMAL CHARACTERISTICS

| Rating                                                                 | Symbol          | Value | Unit          |
|------------------------------------------------------------------------|-----------------|-------|---------------|
| Thermal Characteristics, DPAK-5<br>Thermal Resistance, Junction-to-Air | $R_{\theta JA}$ | 53    | $^{\circ}C/W$ |

# NCP4632

**ELECTRICAL CHARACTERISTICS**  $-40^{\circ}\text{C} \leq T_J \leq 85^{\circ}\text{C}$ ;  $V_{IN} = V_{OUT(NOM)} + 1\text{ V}$ ;  $I_{OUT} = 1\text{ mA}$ ;  $C_{IN} = C_{OUT} = 10\text{ }\mu\text{F}$ ; unless otherwise noted. Typical values are at  $T_J = +25^{\circ}\text{C}$ .

| Parameter                                       | Test Conditions                                                                                                                                                  |                                             | Symbol     | Min           | Typ   | Max           | Unit                |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|------------|---------------|-------|---------------|---------------------|
| Operating Input Voltage (Note 4)                |                                                                                                                                                                  |                                             | $V_{IN}$   | 1.6           |       | 5.25          | V                   |
| Output Voltage                                  | $T_J = +25^{\circ}\text{C}$ ,<br>$I_{OUT} = 5\text{ mA}$                                                                                                         | $V_{OUT} > 1.5\text{ V}$                    | $V_{OUT}$  | $\times 0.99$ |       | $\times 1.01$ | V                   |
|                                                 |                                                                                                                                                                  | $V_{OUT} \leq 1.5\text{ V}$                 |            | -15           |       | 15            | mV                  |
|                                                 | $-40^{\circ}\text{C} \leq T_J \leq 85^{\circ}\text{C}$ ,<br>$I_{OUT} = 5\text{ mA}$                                                                              | $V_{OUT} > 2\text{ V}$                      |            | $\times 0.97$ |       | $\times 1.02$ | V                   |
|                                                 |                                                                                                                                                                  | $V_{OUT} \leq 2\text{ V}$                   |            | -45           |       | 30            | mV                  |
| Output Voltage (Adjustable Option)              | $T_J = +25^{\circ}\text{C}$ ,<br>$I_{OUT} = 5\text{ mA}$<br>$V_{OUT} = \text{ADJ}$                                                                               |                                             | $V_{ADJ}$  | 0.792         | 0.8   | 0.808         | V                   |
| Output Current                                  | $T_J = -40\text{ to }85^{\circ}\text{C}$                                                                                                                         |                                             | $I_{OUT}$  | 3             |       |               | A                   |
| Line Regulation                                 | $V_{IN} = V_{OUT} + 0.5\text{ V to }5\text{ V}$ , $I_{OUT} = 1\text{ mA}$<br>$V_{IN} \geq 1.6\text{ V}$ for NCP4632XDT08T5G, $I_{OUT} = 1\text{ mA}$             |                                             | LineReg    | 0.15          |       |               | %/V                 |
| Load Regulation                                 |                                                                                                                                                                  | $1\text{ mA} \leq I_{OUT} < 300\text{ mA}$  | LoadReg    | -15           | 2     | 20            | mV                  |
|                                                 |                                                                                                                                                                  | $1\text{ mA} \leq I_{OUT} < 3000\text{ mA}$ |            | -70           | 3     | 50            |                     |
| Dropout Voltage                                 | $T_J = +25^{\circ}\text{C}$ ,<br>$I_{OUT} = 1000\text{ mA}$<br>$V_{OUT} = 3.3\text{ V}$                                                                          |                                             | $V_{DO}$   |               | 100   |               | mV                  |
| Dropout Voltage                                 | $I_{OUT} = 3000\text{ mA}$                                                                                                                                       | $0.8\text{ V} \leq V_{OUT} < 0.9\text{ V}$  | $V_{DO}$   |               | 0.910 | 1.110         | V                   |
|                                                 |                                                                                                                                                                  | $0.9\text{ V} \leq V_{OUT} < 1.0\text{ V}$  |            |               | 0.865 | 1.000         |                     |
|                                                 |                                                                                                                                                                  | $1.0\text{ V} \leq V_{OUT} < 1.1\text{ V}$  |            |               | 0.810 | 0.950         |                     |
|                                                 |                                                                                                                                                                  | $1.1\text{ V} \leq V_{OUT} < 1.2\text{ V}$  |            |               | 0.755 | 0.895         |                     |
|                                                 |                                                                                                                                                                  | $1.2\text{ V} \leq V_{OUT} < 1.5\text{ V}$  |            |               | 0.720 | 0.840         |                     |
|                                                 |                                                                                                                                                                  | $1.5\text{ V} \leq V_{OUT} < 2.5\text{ V}$  |            |               | 0.630 | 0.760         |                     |
|                                                 |                                                                                                                                                                  | $2.5\text{ V} \leq V_{OUT} < 3.3\text{ V}$  |            |               | 0.510 | 0.600         |                     |
|                                                 |                                                                                                                                                                  | $3.3\text{ V} \leq V_{OUT} < 4.2\text{ V}$  |            |               | 0.480 | 0.560         |                     |
| Short Current Limit                             | $V_{OUT} = 0\text{ V}$                                                                                                                                           |                                             | $I_{SC}$   |               | 220   |               | mA                  |
| Quiescent Current                               | $I_{OUT} = 0\text{ mA}$ ,<br>$V_{IN} = 5.25\text{ V}$                                                                                                            | $V_{OUT} \leq 1.5\text{ V}$                 | $I_Q$      |               | 390   | 450           | $\mu\text{A}$       |
|                                                 |                                                                                                                                                                  | $V_{OUT} > 1.5\text{ V}$                    |            |               | 350   | 430           |                     |
| Supply Current                                  | $I_{OUT} = 3000\text{ mA}$                                                                                                                                       |                                             | $I_{GND}$  |               |       | 450           | $\mu\text{A}$       |
| Standby Current                                 | $V_{CE} = 0\text{ V}$ , $T_J = 25^{\circ}\text{C}$                                                                                                               |                                             | $I_{STB}$  |               | 1     |               | $\mu\text{A}$       |
| CE Pin Threshold Voltage                        | CE Input Voltage "H"                                                                                                                                             |                                             | $V_{CEH}$  | 1.0           |       |               | V                   |
|                                                 | CE Input Voltage "L"                                                                                                                                             |                                             | $V_{CEL}$  |               |       | 0.4           |                     |
| CE Pull Down Current                            |                                                                                                                                                                  |                                             | $I_{CEPD}$ |               | 0.3   | 0.6           | $\mu\text{A}$       |
| Power Supply Rejection Ratio                    | $V_{IN} = V_{OUT} + 1\text{ V or }2.2\text{ V whichever is higher}$ ,<br>$\Delta V_{IN} = 0.2\text{ V}_{pk-pk}$ , $I_{OUT} = 300\text{ mA}$ , $f = 1\text{ kHz}$ |                                             | PSRR       |               | 55    |               | dB                  |
| Output Noise Voltage                            | $V_{OUT} = 1.5\text{ V}$ , $I_{OUT} = 300\text{ mA}$ , $f = 10\text{ Hz to }100\text{ kHz}$                                                                      |                                             | $V_N$      |               | 60    |               | $\mu\text{V}_{rms}$ |
| Auto Discharge Low Output Nch Tr. On Resistance | $V_{IN} = 4\text{ V}$ , $V_{CE} = 0\text{ V}$                                                                                                                    |                                             | $R_{LOW}$  |               | 30    |               | $\Omega$            |
| Reverse Current Limit                           | $V_{OUT} > 0.5\text{ V}$ , $0\text{ V} \leq V_{IN} < 5.25\text{ V}$                                                                                              |                                             | $I_{REV}$  |               | 10    |               | $\mu\text{A}$       |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. The maximum Input Voltage of the ELECTRICAL CHARACTERISTICS is 5.25 V. In case of exceeding this specification, the IC must be operated on condition that the Input Voltage is up to 5.5 V and the total operating time is within 500 hrs.

TYPICAL CHARACTERISTICS

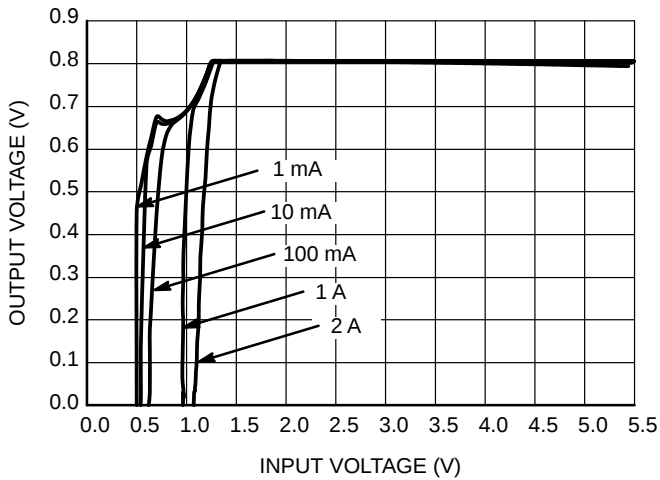


Figure 3. Output Voltage vs. Input Voltage at NCP4632xDT08

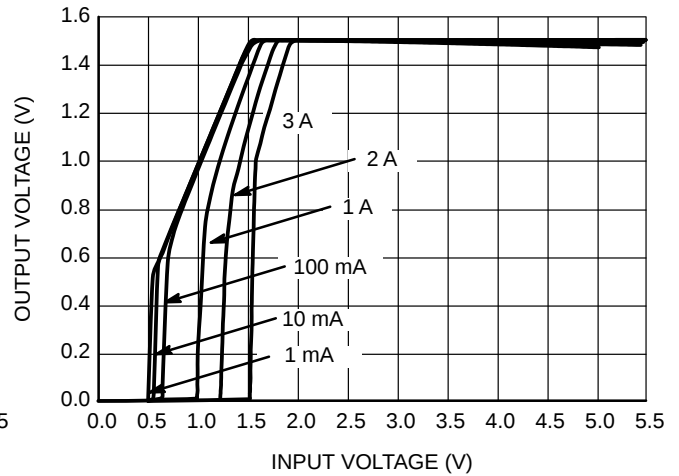


Figure 4. Output Voltage vs. Input Voltage at NCP4632xDT15

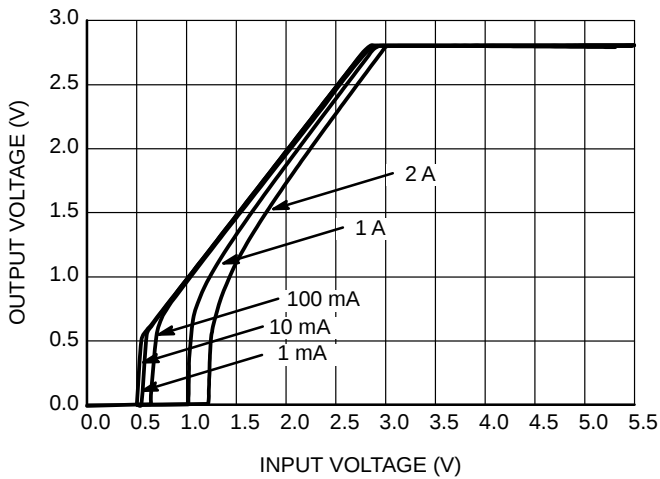


Figure 5. Output Voltage vs. Input Voltage at NCP4632xDT28

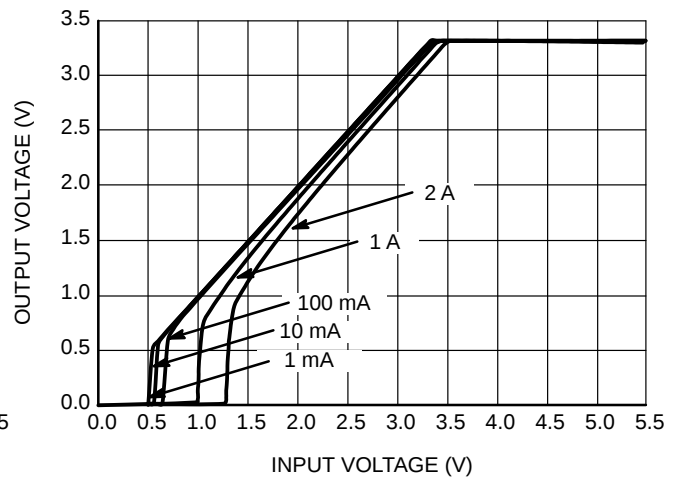


Figure 6. Output Voltage vs. Input Voltage at NCP4632xDT33

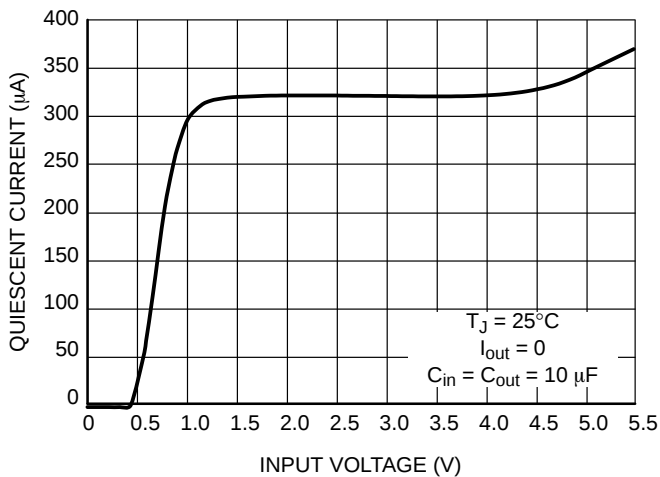


Figure 7. Quiescent Current vs. Input Voltage at NCP4632xDT08

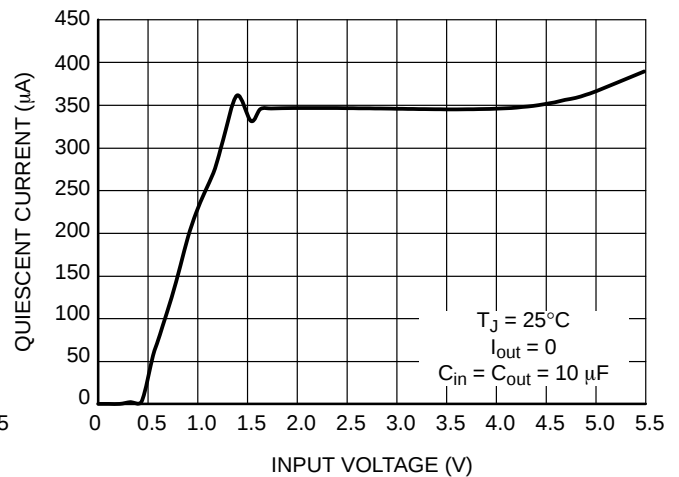


Figure 8. Quiescent Current vs. Input Voltage at NCP4632xDT15

TYPICAL CHARACTERISTICS

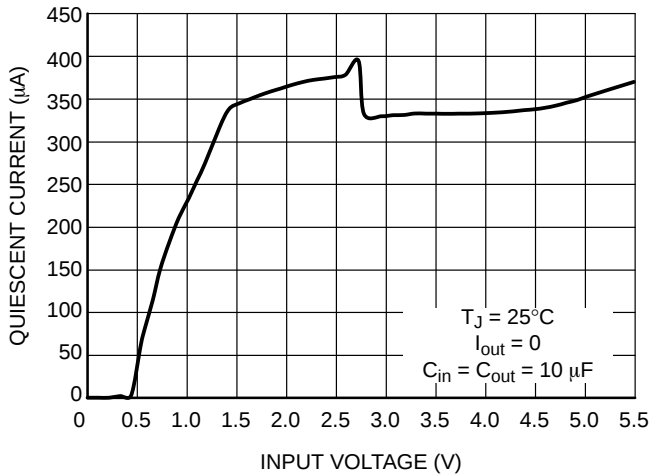


Figure 9. Quiescent Current vs. Input Voltage at NCP4632xDT28

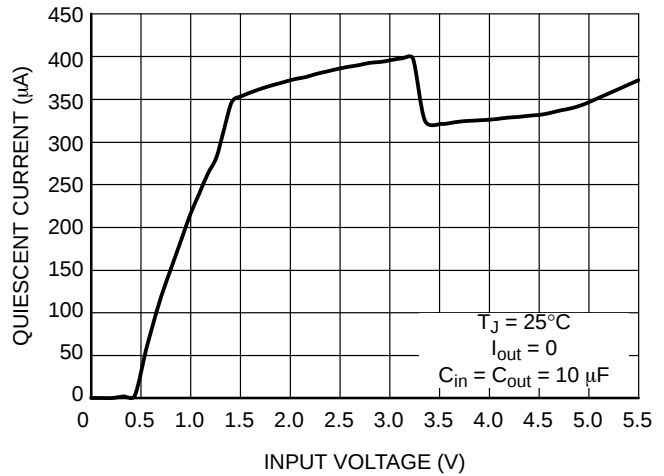


Figure 10. Quiescent Current vs. Input Voltage at NCP4632xDT33

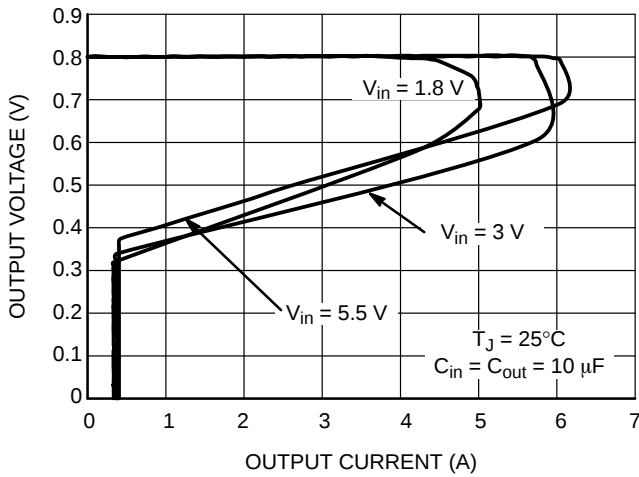


Figure 11. Output Voltage vs. Output Current at NCP4632xDT08

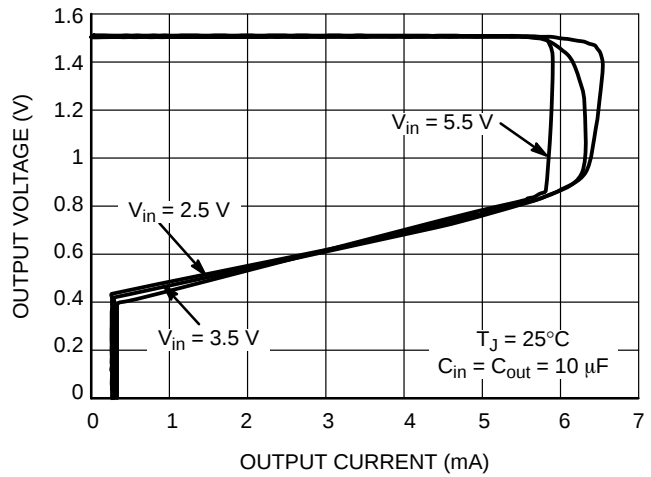


Figure 12. Output Voltage vs. Output Current at NCP4632xDT15

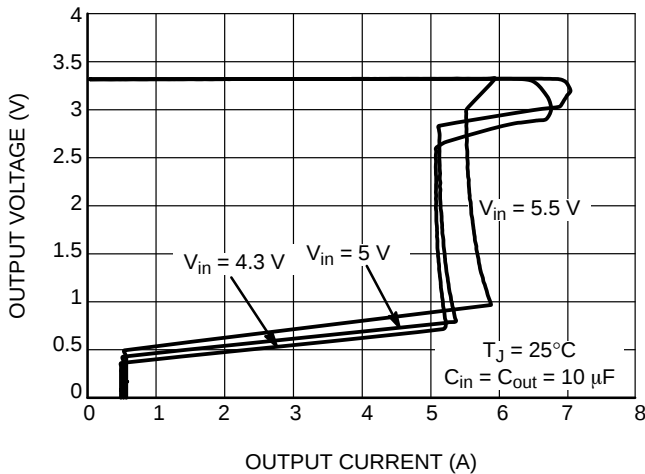


Figure 13. Output Voltage vs. Output Current at NCP4632xDT33

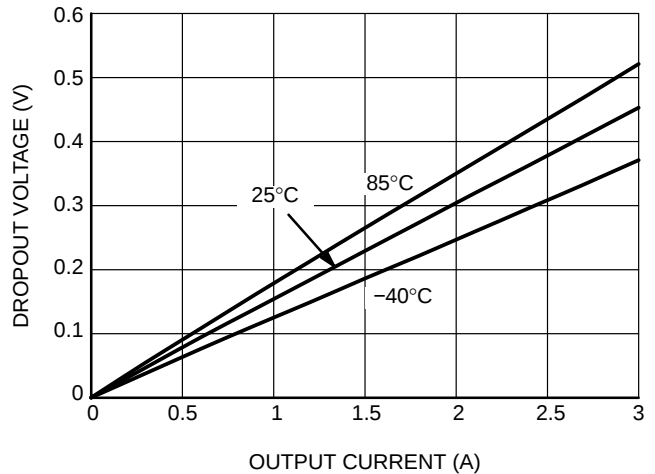


Figure 14. Dropout Voltage vs. Output Current at NCP4632xDT15

TYPICAL CHARACTERISTICS

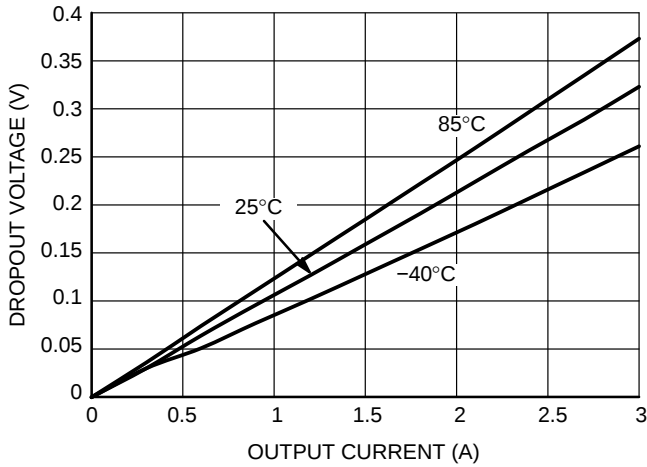


Figure 15. Dropout Voltage vs. Output Current at NCP4632xDT28

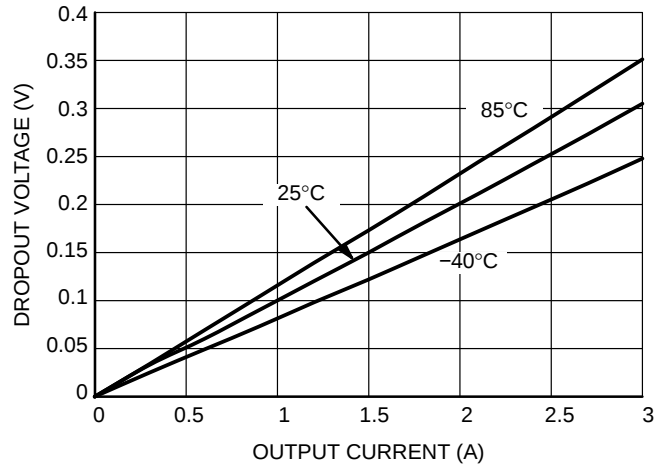


Figure 16. Dropout Voltage vs. Output Current at NCP4632xDT33

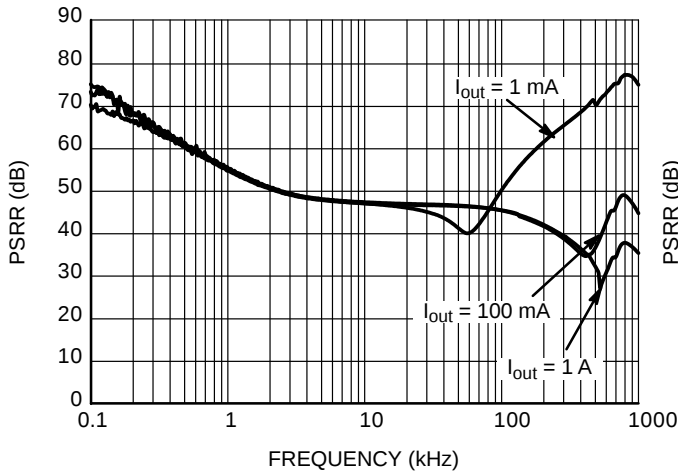


Figure 17. PSRR vs. Frequency at NCP4632xDT08

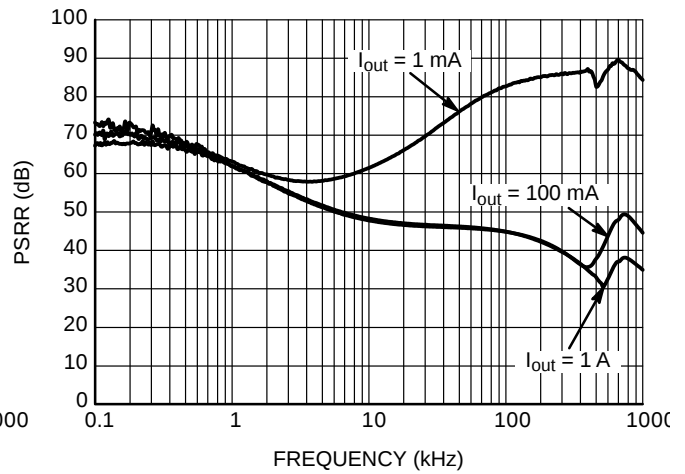


Figure 18. PSRR vs. Frequency at NCP4632xDT15

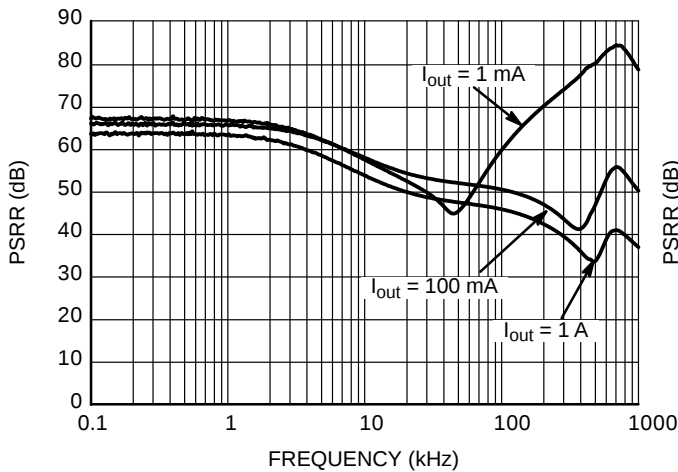


Figure 19. PSRR vs. Frequency at NCP4632xDT28

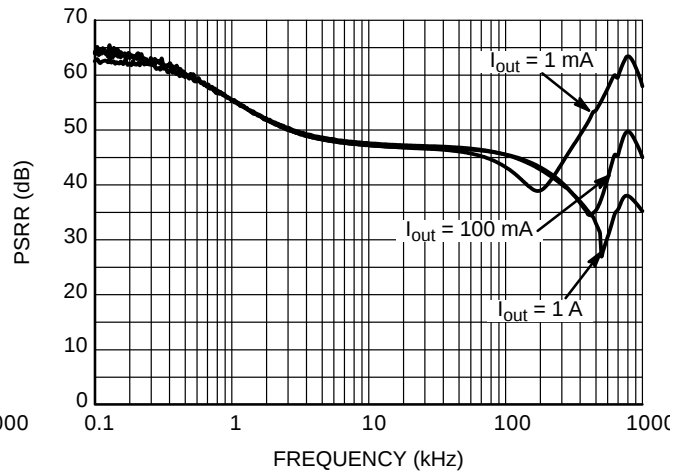


Figure 20. PSRR vs. Frequency at NCP4632xDT33

TYPICAL CHARACTERISTICS

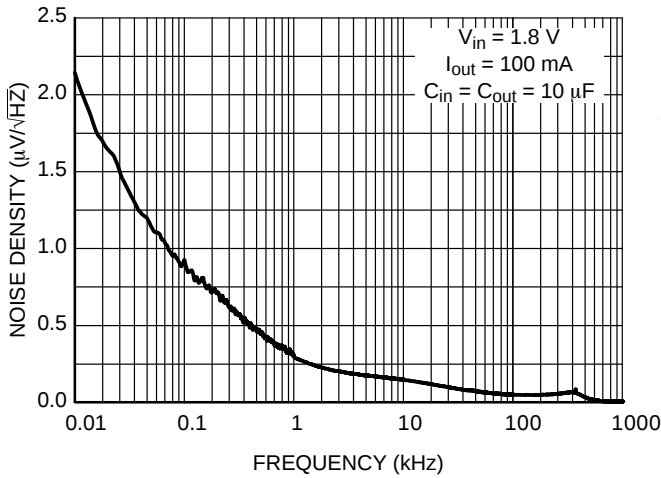


Figure 21. Output Noise Density vs. Frequency at NCP4632xDT08

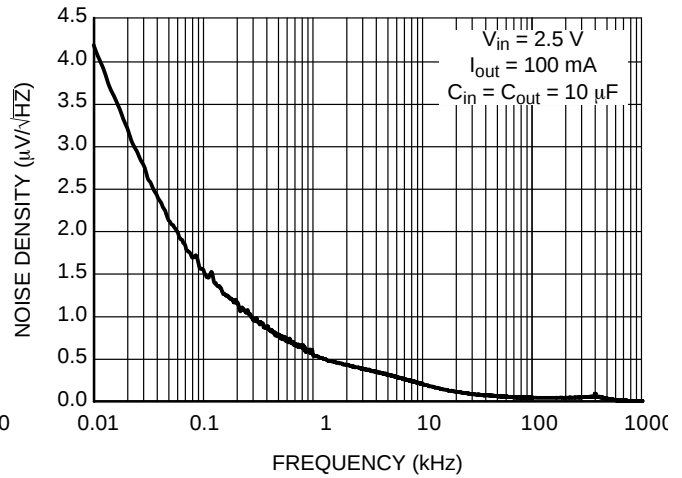


Figure 22. Output Noise Density vs. Frequency at NCP4632xDT15

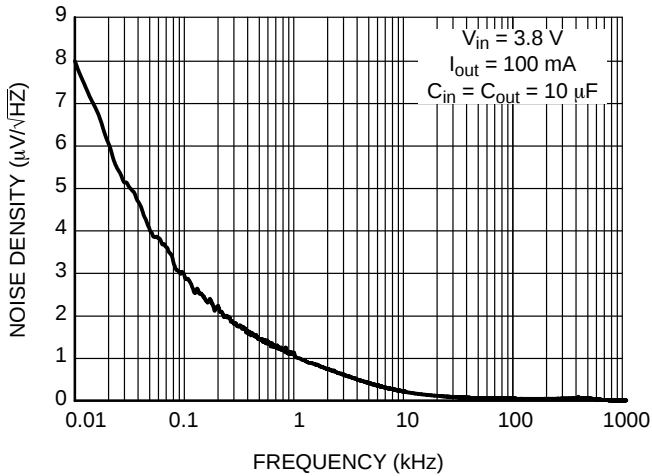


Figure 23. Output Noise Density vs. Frequency at NCP4632xDT28

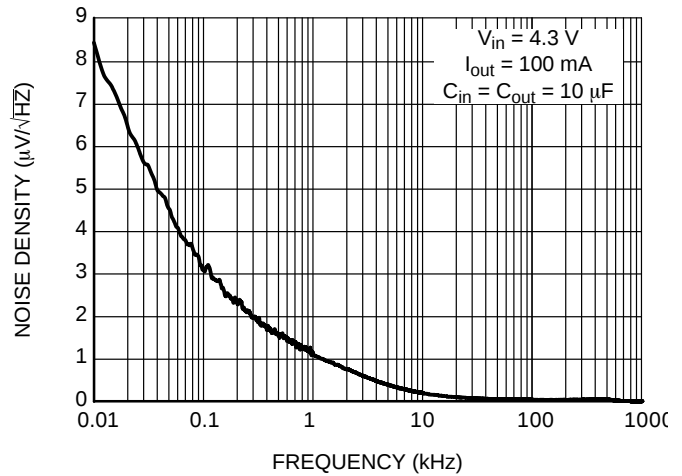


Figure 24. Output Noise density vs. Frequency at NCP4632xDT33

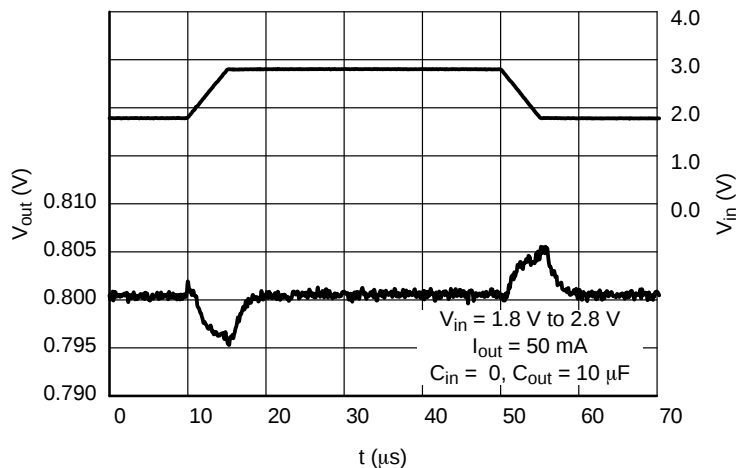


Figure 25. Line Transient Response at NCP4632xDT08

# NCP4632

## TYPICAL CHARACTERISTICS

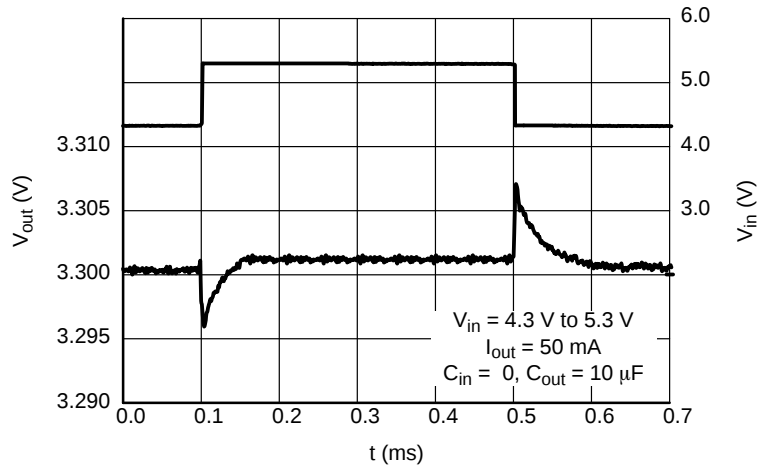


Figure 26. Line Transient Response at NCP4632xDT33

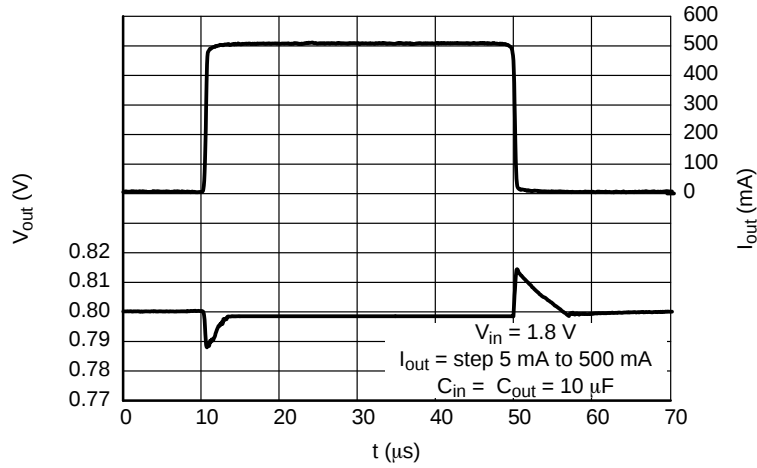


Figure 27. Load Transient Response at NCP4632xDT08

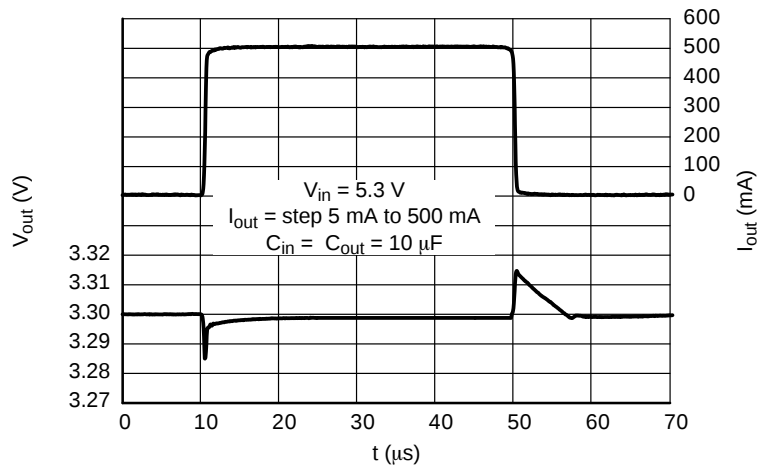


Figure 28. Load Transient Response at NCP4632xDT33

# NCP4632

## TYPICAL CHARACTERISTICS

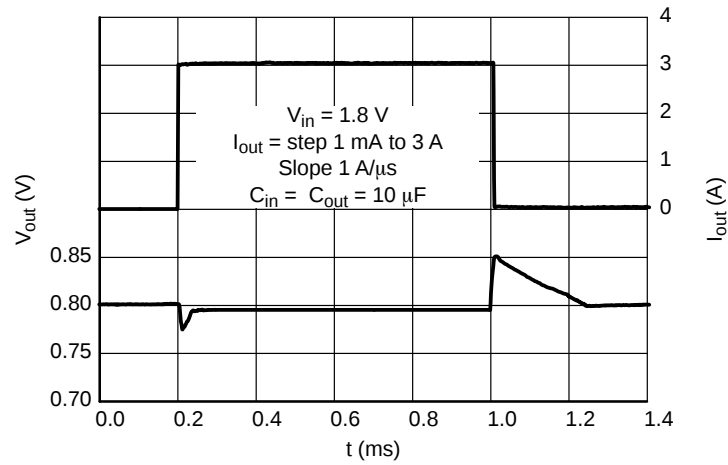


Figure 29. Load Transient Response at NCP4632xDT08

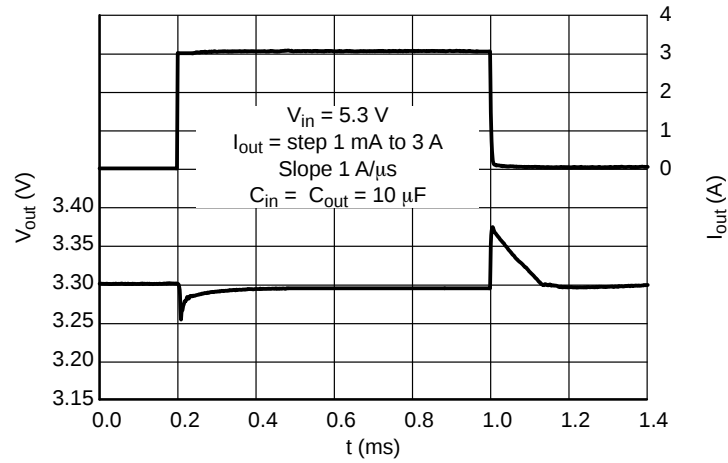


Figure 30. Load Transient Response at NCP4632xDT33

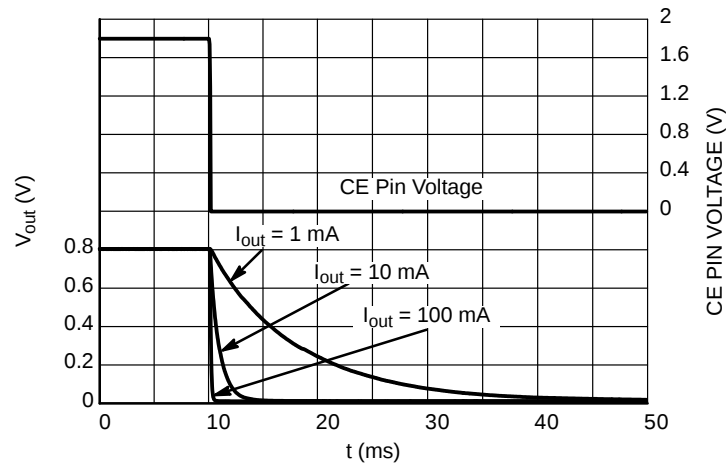


Figure 31. Turn Off with CE pin vs. Output Current at NCP4632BDT08

# NCP4632

## TYPICAL CHARACTERISTICS

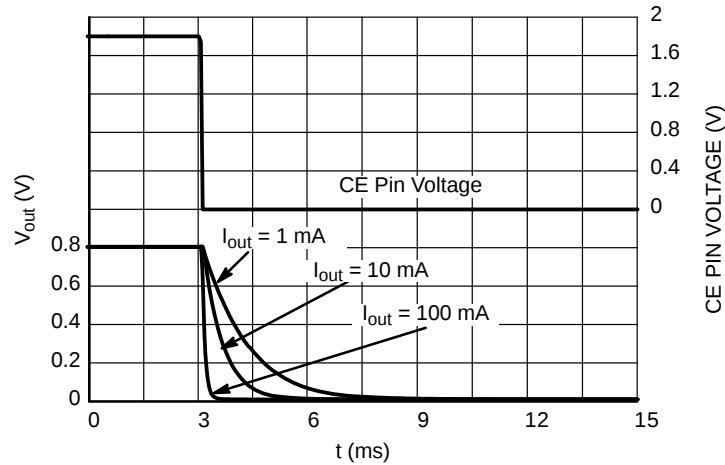


Figure 32. Turn Off with CE pin vs. Output Current at NCP4632DDT08

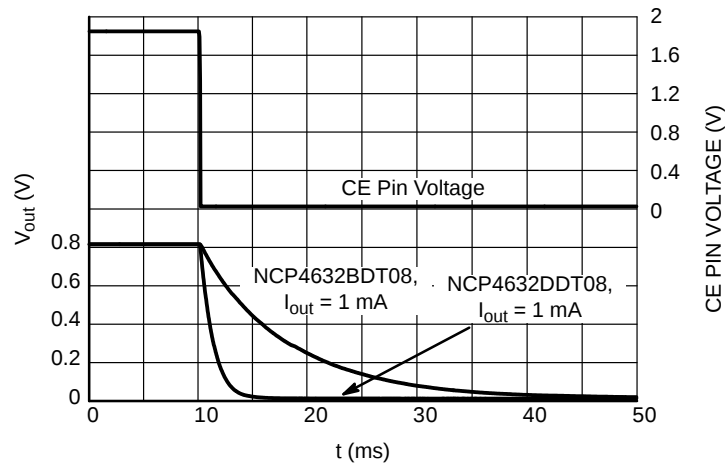


Figure 33. Turn Off with CE pin at NCP4632BDT08,  $I_{out} = 1$  mA

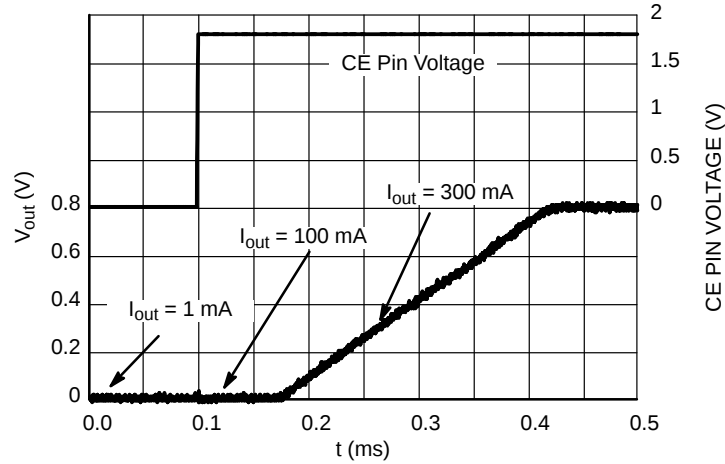


Figure 34. Turn On with CE pin at NCP4632xDT08

# NCP4632

## TYPICAL CHARACTERISTICS

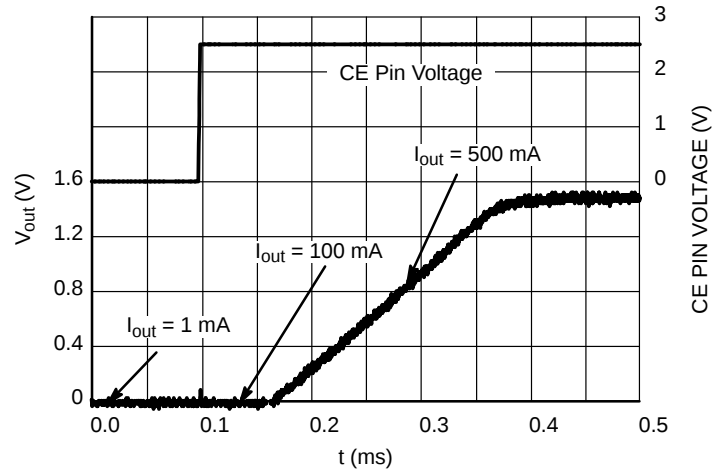


Figure 35. Turn On with CE Pin at  
NCP4632xDT15

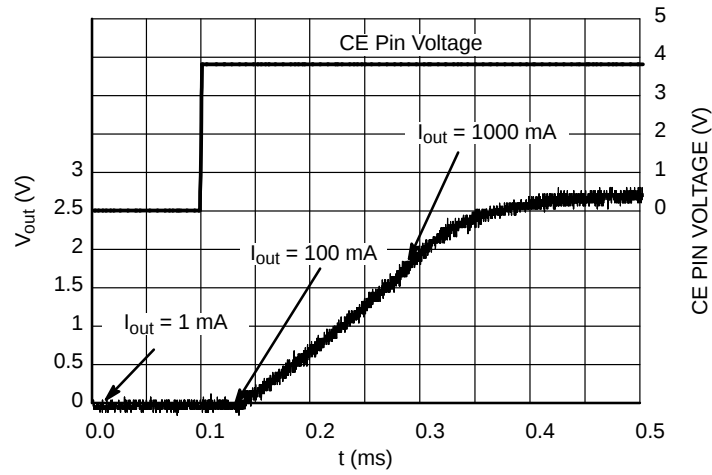


Figure 36. Turn On with CE Pin at  
NCP4632xDT28

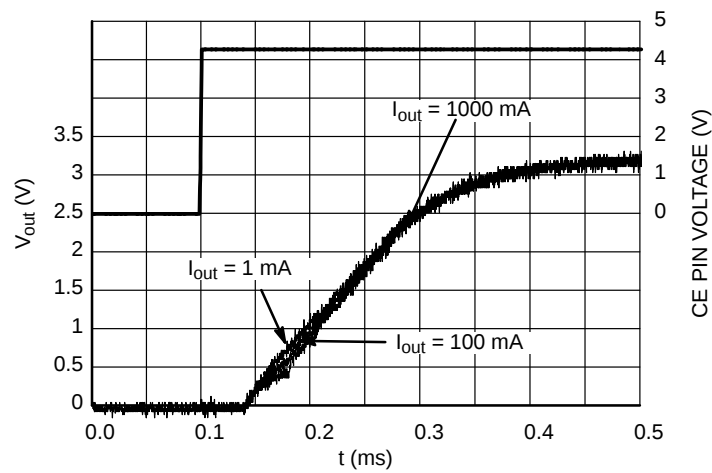


Figure 37. Turn On with CE Pin at  
NCP4632xDT33

## APPLICATION INFORMATION

A typical application circuit for NCP4632 series is shown in Figure 38.

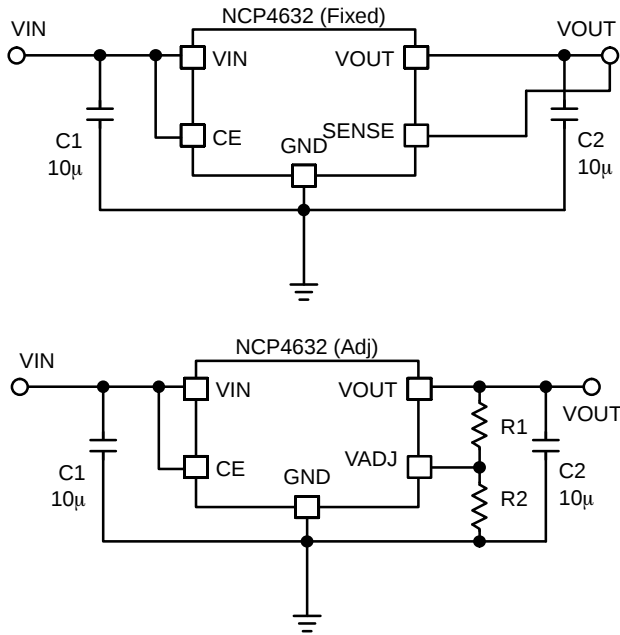


Figure 38. Typical Application Schematic

### Input Decoupling Capacitor (C1)

A 10 µF ceramic input decoupling capacitor should be connected as close as possible to the input and ground pin of the NCP4632. Higher values and lower ESR improves line transient response.

### Output Decoupling Capacitor (C2)

A 10 µF ceramic output decoupling capacitor is sufficient to achieve stable operation of the IC. If a tantalum capacitor is used, and its ESR is high, loop oscillation may result. Using multiple ceramic capacitors in parallel should be avoided if possible as this can lead to unstable operation. The Output capacitor should be connected as close as possible to the output and ground pin. Larger capacitance values and lower ESR improves dynamic parameters.

### Enable Operation

The Enable pin (CE) may be used for turning the regulator on and off. The regulator is switched on when the CE pin voltage is above logic high level. The Enable pin has an internal pull down current source with a 300 nA current capability. If the enable function is not needed, connect CE pin to VIN pin.

### Output Voltage Setting

For the Adjustable version of the NCP4632, the output voltage can be adjusted by using an external resistor divider. The output voltage can be calculated using Equation 1.

$$V_{OUT} = 0.8 \times \left(1 + \frac{R1}{R2}\right) + R1 \times I_{ADJ} \quad (\text{eq. 1})$$

The current consumption  $I_{ADJ}$  flowing into the ADJ pin can be described by Equation 2.

$$R1 \times I_{ADJ} = V_{SET} \times \frac{R1}{R_{ADJ}} \quad (\text{eq. 2})$$

By choosing  $R1 \ll R_{ADJ}$  ( $R_{ADJ}$  is typically around 1.6 MΩ), this value becomes very small in which case we can omit the term  $R1 \times I_{ADJ}$  in Equation 1. The simplified equation for the output voltage calculation is shown in Equation 3.

$$V_{OUT} = 0.8 \times \left(1 + \frac{R1}{R2}\right) \quad (\text{eq. 3})$$

The resistor divider should be kept to values below 500 kΩ to ensure stability.

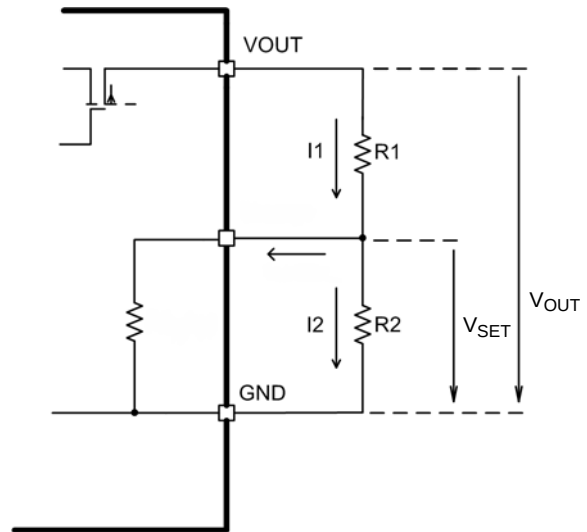


Figure 39. Output Voltage Setting

### Output Discharger

The D version includes a transistor between VOUT and GND that is used for faster discharging of the output capacitor. This function is activated when the IC goes into disable mode.

### Thermal

As power across the IC increases, it might become necessary to provide some thermal relief. The maximum power dissipation supported by the device is dependent upon board design and layout. Mounting pad configuration on the PCB, the board material, and also the ambient temperature affect the rate of temperature rise for the part. That is to say, when the device has good thermal conductivity through the PCB, the junction temperature will be relatively low with high power dissipation applications.

### PCB layout

Make VIN and GND line sufficient. If their impedance is high, noise pickup or unstable operation may result. Connect capacitors C1 and C2 as close as possible to the IC, and make wiring as short as possible.

### Reverse Current Protection

The NCP4632 device include a Reverse Current Protection Circuit, which stops a reverse current flowing from the VOUT pin to the VIN or GND pin when the voltage on VOUT becomes higher than VIN. The reverse current protection circuitry switches the output power device of the

regulator off as soon as VIN drops to < 30 mV above VOUT. In this state, reverse current is restricted to less than 10  $\mu$ A, which flows to ground. As VIN recovers, the power device is switched back on. In order to avoid unstable behavior, there is a 5 mV hysteresis incorporated in the design which will require the dropout to rise above 35 mV before the power device is switched on again. Therefore, the minimum voltage dropout of the device at small output current is limited to 35 mV. Figures 40 and 41 show the diagrams of both operating modes.

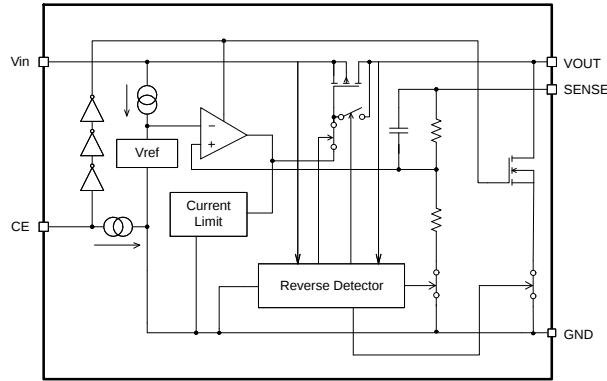


Figure 40. Normal Operating Mode

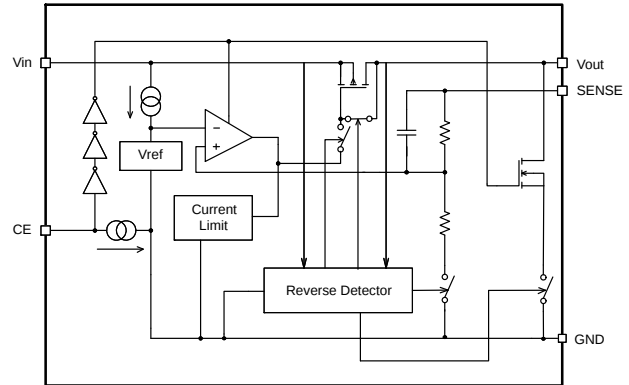



Figure 41. Reverse Operating Mode

### ORDERING INFORMATION

| Device           | Nominal Output Voltage | Description                | Marking | Package          | Shipping <sup>†</sup> |
|------------------|------------------------|----------------------------|---------|------------------|-----------------------|
| NCP4632DDTADJT5G | Adj                    | Adjustable, auto discharge | E1J081D | DPAK-5 (Pb-Free) | 3000 / Tape & Reel    |
| NCP4632BDT08T5G  | 0.8 V                  | W/O Auto discharge         | E1J081B | DPAK-5 (Pb-Free) | 3000 / Tape & Reel    |
| NCP4632DDT08T5G  | 0.8 V                  | Auto discharge             | E1J081D | DPAK-5 (Pb-Free) | 3000 / Tape & Reel    |
| NCP4632DDT15T5G  | 1.5 V                  | Auto discharge             | E1J151D | DPAK-5 (Pb-Free) | 3000 / Tape & Reel    |
| NCP4632DDT28T5G  | 2.8 V                  | Auto discharge             | E1J281D | DPAK-5 (Pb-Free) | 3000 / Tape & Reel    |
| NCP4632DDT33T5G  | 3.3 V                  | Auto discharge             | E1J331D | DPAK-5 (Pb-Free) | 3000 / Tape & Reel    |




NOTE: The Adjustable and the 0.8 V fixed voltage option devices are interchangeable and have the same device marking. Evaluation Boards are available for select devices. Consult our website for further details

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


**DPAK-5 (TO-252, 5 LEAD)**  
**CASE 369AE**  
**ISSUE A**



DATE 14 AUG 2013

SCALE 1:1

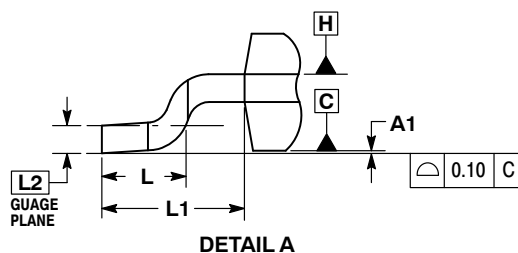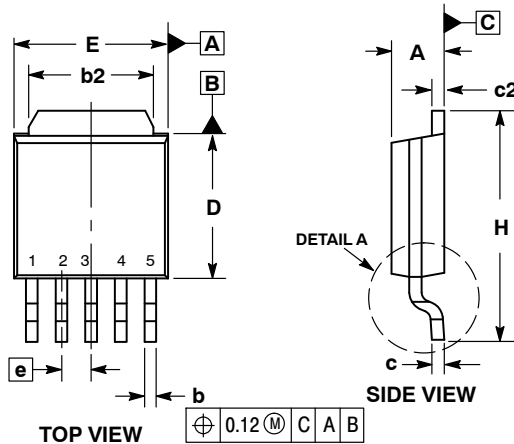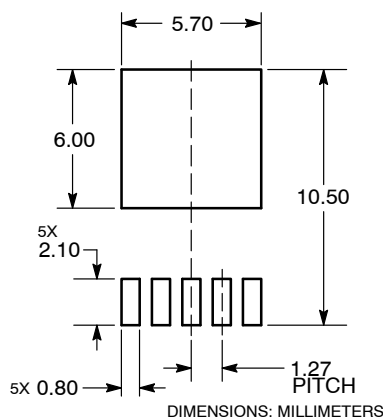
**RECOMMENDED  
SOLDERING FOOTPRINT\***



DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.


**BOTTOM VIEW**

**ALTERNATE  
CONSTRUCTION**
**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. THERMAL PAD CONTOUR OPTIONAL, WITHIN DIMENSIONS SHOWN.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.15mm PER SIDE.
5. DIMENSIONS D AND E ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.
6. DATUMS A AND B ARE DETERMINED AT DATUM PLANE H.

| MILLIMETERS |          |       |
|-------------|----------|-------|
| DIM         | MIN      | MAX   |
| A           | 2.10     | 2.50  |
| A1          | 0.00     | 0.13  |
| b           | 0.40     | 0.60  |
| b2          | 5.14     | 5.54  |
| c           | 0.40     | 0.60  |
| c2          | 0.40     | 0.60  |
| D           | 5.40     | 6.30  |
| D1          | 4.80     | 5.10  |
| E           | 6.35     | 6.80  |
| E1          | 4.75     | 5.05  |
| e           | 1.27 BSC |       |
| H           | 9.50     | 10.20 |
| L           | 1.39     | 1.78  |
| L1          | 2.50     | 2.90  |
| L2          | 0.51 BSC |       |

**GENERIC  
MARKING DIAGRAM\***


A = Assembly Location  
L = Wafer Lot  
Y = Year  
WW = Work Week  
G = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking.

|                         |                                |                                                                                                                                                                                  |
|-------------------------|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98AON53250E</b>             | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>DPAK-5 (TO-252, 5 LEAD)</b> | <b>PAGE 1 OF 1</b>                                                                                                                                                               |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)