


NEVO+600S

INDUSTRIAL DATA SHEET

AC/DC Modular Configurable PSU

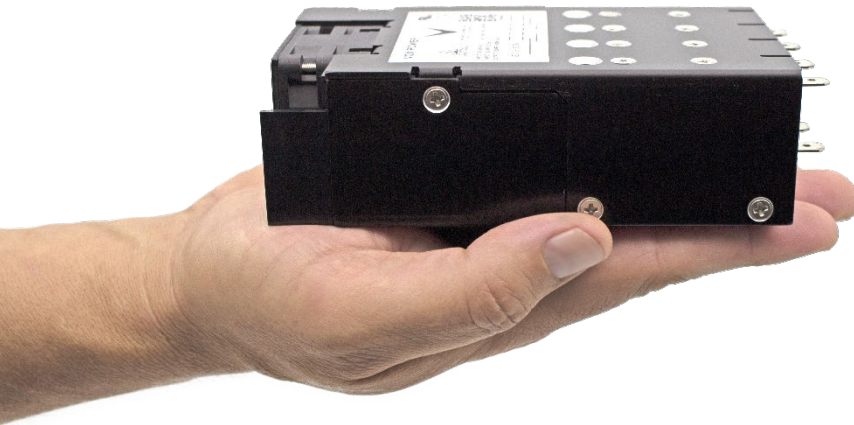

600W

Powerful

5" x 3" x 1.61"

Small

600g

Light

600 Watts in the palm of your hand

The innovative NEVO+600 configurable power supply series is the smallest in its class, the ultimate power solution for demanding industrial and medical applications where size, power density and weight are vital factors. Weighing only 600 grams, the compact 5" x 3" x 1.61" package delivers up to 600 Watts, equating to a power density of 25 Watts per cubic inch.

The NEVO+600S input module can accommodate up to four isolated output modules, ranging from 75W dual output to 150W or 300W single output, which can easily be configured into a high power 5" x 3" single output power supply or a multiple output power supply with up to eight isolated outputs. A low noise fan option is available for use in even the quietest of environments.



MAIN FEATURES & BENEFITS

- | | | |
|--|---|---|
| • Powerful 600 Watt | • Wide output voltage adjust range | • Accurate current sharing |
| • Small 5" x 3" x 1.61", 25W/in ³ | • Remote current/voltage programming | • Standard 5V 1A bias supply |
| • Weighs only 600g when fully configured | • Constant current & voltage operation | • Low noise fan option |
| • User & field configurable | • Efficiency up to 90% | • Series tracker & I ² C options |
| • Up to 8 isolated outputs | • Intelligent fan control | • Supplier & technology consolidation |
| • 300W dual slot output modules | • Parallel & series connection of modules | • 24-hour samples from distribution |
| • Instant fully safety approved power solutions based on proven technology | | • Expert technical support |
| • Approved to latest safety standards: IEC/UL62368-1 2 nd & 3 rd Ed. | | • 3 year warranty |

APPLICATIONS



- | | | |
|--------------------------------|-----------------------------------|---------------------------|
| • Test & Measurement equipment | • Laboratory & Analysis equipment | • LED lighting |
| • Robotics | • Display | • Retrofit of legacy PSUs |
| • Oil & Gas | • Avionics | • Lasers |
| • Telecommunications | | |



SPECIFICATIONS

All specifications are measured @ TA= 25°C, rated input & rated load unless otherwise stated.

INPUT MODULE SPECIFICATIONS					
Parameter	Details	Min	Typical	Max	Units
AC Input Voltage	Nominal range is 100V _{RMS} to 240V _{RMS}	85		264	V _{RMS}
AC Input Frequency	Contact factory for 400Hz operation.	47	50/60	63	Hz
DC Input Voltage	Not covered by safety approvals. Contact Vox Power.	120		370	V _{DC}
Output Power Rating	De-rate linearly from 600Watts at 120V _{RMS} to 450Watts at 85V _{RMS}			600	Watts
Input Current	600Watts output at 120 V _{RMS} input			6	Amps
Input Current Limit	Maintains power factor		8		Amps
Inrush Current	265V _{RMS} , 25°C (cold start)			20	Amps
Fusing	Live line fused (5x20 Fast acting)			8	Amps
Efficiency	See graphs		86	89	%
No load Power consumption	All outputs fitted and disabled/enabled		21/28		Watts
Power Factor	Typical value for 300 Watts output at 240Vrms input		0.96	0.99	
Holdup	600Watts output at 120V _{RMS} input	17	20	21	mS
UVP	Turn on under voltage protection	78		84	V _{RMS}
Over temperature	Internally monitored.	115		125	°C
Reliability ⁽¹⁾	Input module			1.207	FPMH
	Fan			2.7	FPMH
Warranty	Standard terms and conditions apply			3	Years
Size	133.7 (L) x 77.7 (W) x 41.0 (H). See diagram for tolerance details				mm
Weight	360 + 60 per output module				Grams
Note 1. 30°C base & ambient, 100% load, SR332 Issue 2 Method I, Case 3, Ground, Fixed, Controlled					

GLOBAL SIGNALS SPECIFICATIONS					
Parameter	Details	Min	Typical	Max	Units
Bias Voltage	One isolated Bias Output available	4.8	5	5.2	Volts
Bias Current	Hiccup type current limit	0		1	Amps
AC_OK Voltage	Low output level High output level	0 3.5	0.2 4.5	1 5.2	Volts
AC_OK Current		-10		20	mA
Power Good Voltage	Low output level. internal 10kΩ pull down. High output level. PNP open collector.	0 8	0 10	0 15	Volts
Power Good Current	Open collector output. Current source only. All Slots.			20	mA
Global Inhibit Voltage	Low input level High input level	0 3		1 15	Volts
Global Inhibit Current	5k input impedance.	0.6		3	mA
Inhibit Voltage	Low input level. All slots. High input level. All slots.	0 2.5		1 15	Volts
Inhibit Current	10k input impedance. All slots.	0.25		1.5	mA

OUTPUT MODULE SPECIFICATION SUMMARY												
MODEL	Output Voltage			Output Current	Rated Power	Peak ⁽⁴⁾ Power	Load Reg.	Line Reg.	Cross Reg.	Ripple & Noise	FPMH ⁽¹⁾	Feature Set ⁽²⁾
	Min.	Nom.	Max.									
OP1	1.5V	5V	7.5V	25A	125W	187.5W	±50mV	±5mV	±10mV	50mV _{PP}	0.5	ABCDEFGF
OP1D	0V	5V	7.5V	25A	125W	187.5W	±50mV	±5mV	±10mV	50mV _{PP}	0.5	ABCDEFGI
OP2	4.5V	12V	15V	15A	150W	225W	±100mV	±12mV	±24mV	120mV _{PP}	0.5	ABCDEFGF
OP2D	0V	12V	15V	15A	150W	225W	±100mV	±12mV	±24mV	120mV _{PP}	0.5	ABCDEFGI
OP3	9V	24V	30V	7.5A	150W	225W	±150mV	±24mV	±48mV	240mV _{PP}	0.5	ABCDEFGF
OP3D	0V	24V	30V	7.5A	150W	225W	±150mV	±24mV	±48mV	240mV _{PP}	0.5	ABCDEFGI
OP4	18V	48V	58V	3.75A	150W	217.5W	±300mV	±48mV	±96mV	480mV _{PP}	0.5	ABCDEFG
OP4D	0V	48V	58V	3.75A	150W	217.5W	±300mV	±48mV	±96mV	480mV _{PP}	0.5	ABCDEFGI
OP5	3.3V	12V	15V	5A	2x 75W	2x 75W	±50mV	±12mV	±24mV	240mV _{PP}	0.75	AFG
OPA2 ⁽³⁾	4.5V	12V	15V	25A	300W	375W	±100mV	±12mV	±24mV	120mV _{PP}	0.5	ABCDEFHGH
OPA2D ⁽³⁾	0V	12V	15V	25A	300W	375W	±100mV	±12mV	±24mV	120mV _{PP}	0.5	ABCDEFHGH
OPA3 ⁽³⁾	9V	24V	30V	15A	300W	450W	±150mV	±24mV	±48mV	240mV _{PP}	0.5	ABCDEFHGH
OPA3D ⁽³⁾	0V	24V	30V	15A	300W	450W	±150mV	±24mV	±48mV	240mV _{PP}	0.5	ABCDEFHGH
Note 1. Output module, 30°C base, 100% load, SR332 issue 2 Method I, Case 3, Ground, Fixed, Controlled Note 2. A = Remote Sense, B = External Voltage control, C = External constant current control, D = Current output signal, E = Current share, F =Over Voltage protection, G = Over Temperature Protection, H = Dual Slot module, I = PMBus interface Note 3. Can only be used with NEVO+600 chassis with date codes from 2048 onwards. e.g. 2048C080000 can use A2 or A3 module, 2047C089999 and before cannot use A2 or A3 module. Note 4. Individual Output Module Peak Power available < 5 seconds @ 50% duty cycle, Overall Input Module power must remain within specified limits. Note 5. Minimum Output levels achievable when using V-control and I-control may be >0 due to the minimum on-time of the PWM controllers												

SAFETY SPECIFICATIONS				
Parameter	Details	Typical	Max	Units
Isolation Voltages	Input to Output (2 MOPP). Do not perform test on assembled unit ⁽¹⁾		4000	V _{AC}
	Input to Chassis (1 MOPP)		1500	V _{AC}
	Global signals (J2) to Output/Chassis		250	V _{DC}
	Output to Output/Chassis (Standard modules)		250	V _{DC}
Earth Leakage Current	Normal condition, 264Vac, 63Hz, 25°C	209	1500	uA
Touch Leakage Current	Output to Earth. Standard modules 264Vac, 63Hz, 25°C NC/SFC	13/209	20/250	uA
Patient Leakage Current	Standard modules 264Vac, 63Hz, 25°C NC/SFC ⁽²⁾		-----	uA
Note 1. Testing an assembled unit to 4000V _{AC} may cause damage. Please refer to application note (APN-002) on Vox Power website or contact Vox Power representative.				
Note 2. Not Applicable				



INSTALLATION SPECIFICATIONS			
Parameter	Details	Parameter	Details
Equipment class	I	Flammability Rating	94V-2
Overvoltage category	II	Ingress protection rating	IP10
Material Group	IIIb (indoor use only)	ROHS compliance	2011/65/EU & 2015/863/EU
Pollution degree	2	Intended usage environment	Industrial Equipment

ENVIRONMENTAL SPECIFICATIONS						
Parameter	Details	Non-Operational		Operational		Units
		Min	Max	Min	Max	
Air Temperature	Operational limits subject to appropriate de-ratings	-40	+85	-20	70	°C
Humidity	Relative, non-condensing	5	95	5	95	%
Altitude		-200	5000	-200	5000 ⁽¹⁾	m
Air Pressure		52	106	52	106	kPa
Noise Level	Variable. Measured 1m from fan intake.	-	-	36	62	dBA
Shock	3000 bumps at 10G (16ms) half sine wave					
Vibration	1.5G 10 to 200Hz sine wave, 20G for 15min in 3 axes random vibration					
Notes: 1. Additional power derating may be necessary at high altitudes to ensure component temperatures remain within specification.						


ELECTROMAGNETIC COMPLIANCE – EMISSIONS		
Phenomenon	Basic EMC Standard	Test Details
Radiated emissions, electric field	EN55011/32, FCC	Class B compliant
Conducted emissions	EN55011/32, FCC part 15, CISPR 32/11	Class B compliant
Harmonic Distortion	IEC61000-3-2	Compliant
Flicker & Fluctuation	IEC61000-3-3	Compliant

ELECTROMAGNETIC COMPLIANCE – IMMUNITY		
Phenomenon	Basic EMC Standard	Test Details
Electrostatic discharge	IEC61000-4-2	Test level 4: 15kV air, 8kV contact
Radiated RF EM fields	IEC61000-4-3	Test Level 3: (10V/m, 80MHz-2.7GHz) sine wave AM 80% 1kHz
Proximity fields from RF wireless communications equipment	IEC61000-4-3	Test levels as per IEC60601-1-2:2014 Table 9
Electrical Fast Transients/bursts	IEC61000-4-4	Test Level 3: (2kV Power, 1kV I/O) 5kHz(ed3) & 100kHz(ed4)
Surges	IEC61000-4-5	Test Level 3: 1kV L-N, 2kV L/N-E
Conducted disturbances induced by RF fields	IEC61000-4-6	Test Level 3: 10V, 0.15 to 80Mhz sine wave AM 80% 1kHz
Power Frequency Magnetic Fields	IEC61000-4-8	Test level 4: 30A/m 50Hz
Voltage Dips & Sag Immunity	IEC61000-4-11 & SEMI-F47-0706 ⁽²⁾	0% 10ms, 0% 20ms, 80% 1s, 80% 10s, 90% continuous (Criterion A) 70% 0.5s, 40% 0.2s (Criterion A at 240V and Criterion B at 100V)
Voltage interruptions	IEC61000-4-11	0% 250/300 cycle as per IEC60601-1-2:2014 (Criterion B)
Notes: 1. Criterion A = No degradation of performance or loss of function. Criterion B = Temporary degradation of performance or loss of function is allowed, provided the function is self-recoverable. Criterion C = Temporary loss of function is allowed but requires operator intervention to recover. 2. Tested at nominal range (100V to 240V). Line deratings applied where appropriate.		

AGENCY APPROVALS		
Standard	Details	File
IEC 60950-1:2005+AMD1:2009+AMD2:2013, 2 nd Ed	Information Technology Equipment - Safety - Part 1: General Requirements	UL: E316486
UL 60950-1:2007, 2 nd Ed	Information Technology Equipment - Safety - Part 1: General Requirements	
CAN/CSA - C22.2 No. 60950-1-07 (R2012):2007+AMD1:2011+AMD2:2014, 2 nd Ed	Information Technology Equipment - Safety - Part 1: General Requirements	UL: E316486
IEC 62368-1:2014, 2 nd Ed & IEC 62368-1:2018, 3 rd Ed	Audio/video, information and communication technology equipment - Part 1: Safety requirements	
UL 62368-1:2014, 2 nd Ed & UL 62368-1:2019, 3 rd Ed	Audio/video, information and communication technology equipment - Part 1: Safety requirements	
CSA C22.2 No. 62368-1:14, 2 nd Ed & CSA C22.2 No. 62368-1:19, 3 rd Ed	Audio/video, information and communication technology equipment - Part 1: Safety requirements	
CE MARK	LVD 2014/35/EU, EMC 2014/30/EU, RoHS 2011/65/EU & 2015/863/EU	
CB certificate and report available on request		

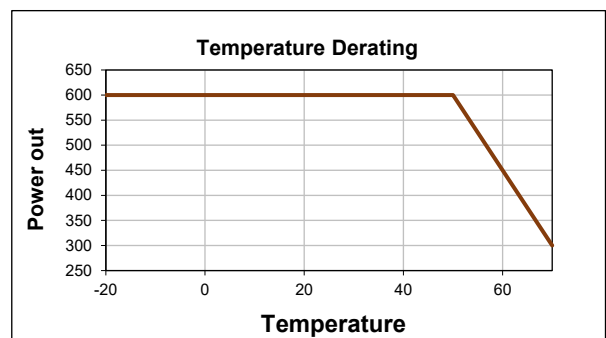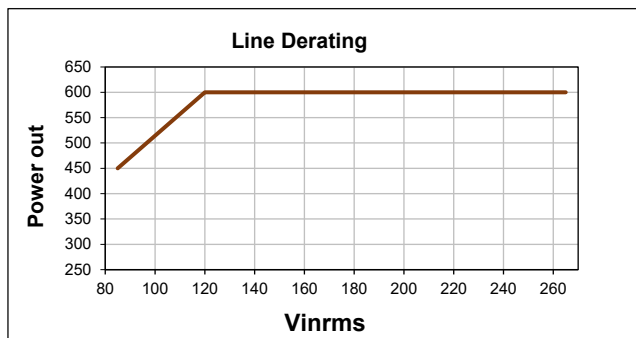


MECHANICAL DIMENSIONS AND MOUNTING SCREWS



N - Neutral
E - Earth
L - Live


SCREWS	
MH1, MH2, MH3, MH4, MH5	
Screw type	M4
Tightening	Tighten to 0.5 Nm ⁽¹⁾
Penetration depth	4.00mm max including chassis
Mounting Screw Penetration Depth	
OUTPUT MODULES x 8	
Screw type	M3x5, C/Sink, Posi, Stainless Steel
Tightening	Tighten to 0.50 Nm ⁽¹⁾
Penetration depth	Defined by screw
CHASSIS x 5	
Screw type	M3x5, C/Sink, Posi, Stainless Steel
Tightening	Tighten to 0.50 Nm ⁽¹⁾
Penetration depth	Defined by screw
FAN x 2	
Screw type	M3x30, C/Sink, Posi, Stainless Steel
Tightening	Tighten to 0.50 Nm ⁽¹⁾
Penetration depth	Defined by screw
1. Torque settings are for general reference only. The torque settings shown in the datasheet are the insert manufacturers recommended values.	

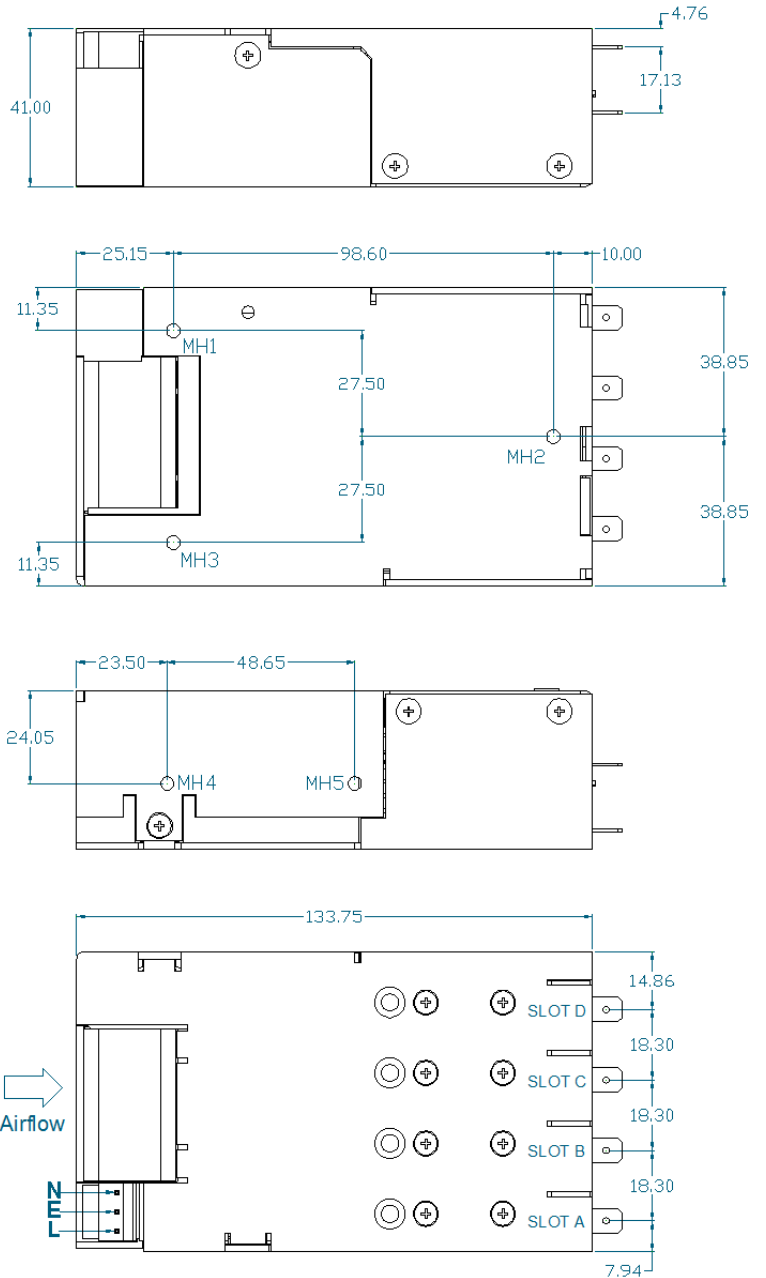

Airflow direction cannot be reversed

CONNECTORS

PINOUTS J1		
Circuit	Details	
1	Live	
2	Earth	
3	Neutral	
J2		
Circuit	Details	
1	Power good	Slot A
2	Inhibit	
3	Power good	Slot B
4	Inhibit	
5	Power good	Slot C
6	Inhibit	
7	Power good	Slot D
8	Inhibit	
9	Global inhibit	
10	AC OK	
11	+5V 1A bias supply	
12	COM	

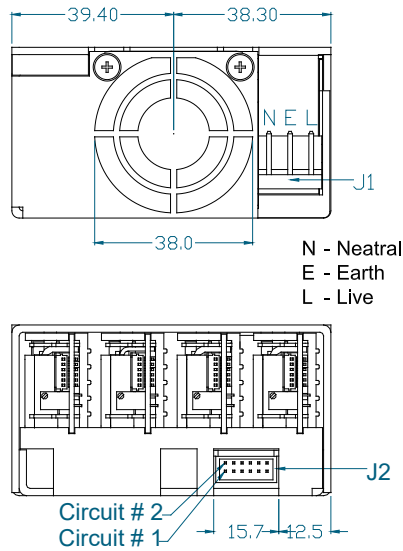


REF.	DETAILS	MANUFACTURER	HOUSING	TERMINAL
J1	MAINS INPUT: 3 Pin, 5.08mm, with Friction Lock, 18-24 AWG	MOLEX	10013036	0008701031
J2	GLOBAL SIGNALS: 12 Pin, 2mm, without Friction Lock, 24-30 AWG	MOLEX	511101251	0503948051

Notes

1. Direct equivalents may be used for any connector parts

PART NUMBERING SYSTEM

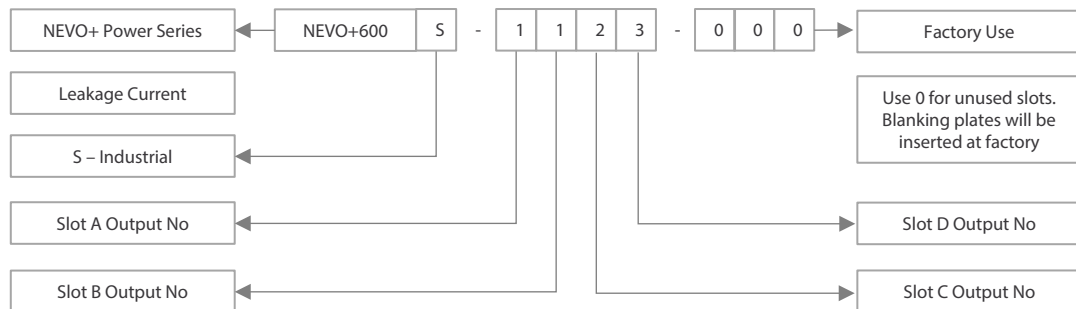

Our design team will assist with value-add requirement if an application requires standard/non-standard accessories or non-nominal voltage settings. Once approved, the factory will issue a 3 or 4 digit code for your specific configuration which can be used for all future orders of the same configuration. When ordering an input unit with no outputs inserted, simply order NEVO+600S.

All specifications are believed to be correct at time of publishing. Vox Power Ltd reserves the right to make changes to any of its products and to change or improve any part of the specification, electrical or mechanical design or manufacturing process without notice. Vox Power Ltd does not assume any liability arising out of the use or application of any of its products and of any information to the maximum extent permitted by law. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any products of Vox Power Ltd. VOX POWER LTD DISCLAIMS ALL WARRANTIES AND REPRESENTATIONS OF ANY KIND WHETHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF SUITABILITY, FITNESS FOR PURPOSE, MERCHANTABILITY AND NON-INFRINGEMENT.

Please consult your local distributor or Vox Power directly to ensure that you have the latest revision before using the product and refer to the latest relevant user manual for further information relating to the use of the product. Vox Power Ltd products are not intended for use in connection with life support systems, human implantations, nuclear facilities or systems, aircraft, spacecraft, military or naval missile, ground support or control equipment used for the purpose of guidance navigation or direction of any aircraft, spacecraft or military or naval missile or any other application where product failure could lead to loss of life or catastrophic property damage. The user will hold Vox Power Ltd harmless from any loss, cost or damage resulting from its breach of these provisions.