

DATA SHEET

SKY65081-70LF: 2000 to 3000 MHz Low-Noise Power Amplifier Driver

Applications

- UHF television
- TETRA radios
- 2.5G, 3G handsets
- ISM band transmitters
- WCS fixed wireless
- 802.16 WiMAX
- 3GPP LTE

Features

- Wideband frequency range: 2000 to 3000 MHz
- Low noise figure: 2.0 dB
- High linearity: IIP3 = +29.6 dBm
- Output P1dB = +22.3 dBm
- High gain: 14.3 dB
- Single DC supply: +5 V
- On-chip bias circuit
- SOT-89 (4-pin, 2.4 x 4.5 mm) package (MSL1, 260 °C per JEDEC J-STD-020)
- For RoHS and other product compliance information, see the [Skyworks Certificate of Conformance](#)

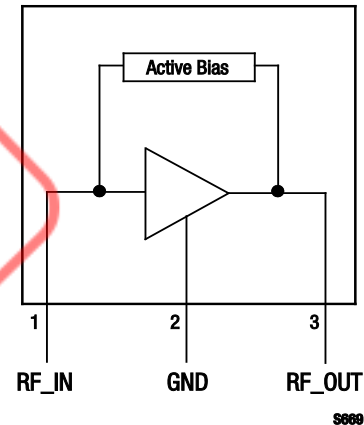


Figure 1. SKY65081-70LF Functional Block Diagram

Description

Skyworks SKY65081-70LF is a high performance, ultra-wideband power amplifier (PA) driver with superior output power, low noise, linearity, and efficiency. The device provides a 2.0 dB noise figure (NF) and a 1 dB output compression point (OP1dB) of +22.3 dBm, making the SKY65081-70LF ideal for use in the driver stage of infrastructure transmit chains.

The SKY65081-70LF uses low-cost surface-mount technology (SMT) in the form of a 4-pin, 2.4 x 4.5 mm Small Outline Transistor (SOT) package. A functional block diagram is provided in Figure 1. The device package and pinout are shown in Figure 2. Signal pin assignments and functional pin descriptions are described in Table 1.

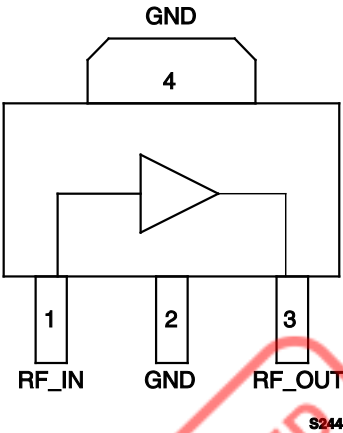


Figure 2. SKY65081-70LF Pinout (Top View)

Table 1. SKY65081-70LF Signal Descriptions

Pin	Name	Description
1	RF_IN	RF input
2	GND	Ground
3	RF_OUT	RF output
4	GND	Ground

Technical Description

The SKY65081-70LF is a single stage, low-noise PA that operates with a single 5 V power supply connected through an RF choke (inductor L1) to the output signal (pin 3). The bias current is set by the on-chip active bias composed of current mirror and reference voltage transistors, which allow excellent gain tracking over temperature and voltage variations. The device is externally RF matched using surface mount components to facilitate operation over a frequency range of 2000 to 3000 MHz.

Electrical and Mechanical Specifications

The absolute maximum ratings of the SKY65081-70LF are provided in Table 2. The recommended operating conditions are specified in Table 3, and electrical specifications are provided in Table 4.

Typical performance characteristics of the SKY65081-70LF are illustrated in Figures 3 through 12.

Table 2. SKY65081-70LF Absolute Maximum Ratings¹

Parameter	Symbol	Min	Max	Units
Supply voltage	VCC		6	V
RF output power	P _{OUT}		+24	dBm
RF input power	P _{IN}		+10	dBm
Supply current	I _{CC}		100	mA
Power dissipation	P _D		0.6	W
Operating case temperature	T _C	−40	+85	°C
Storage temperature	T _{ST}	−55	+125	°C
Junction temperature	T _J		+150	°C

¹ Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to device with only one parameter set at the limit and all other parameters set at or below their nominal values. Exceeding any of the limits listed here may result in permanent damage to the device.

ESD HANDLING: Although this device is designed to be as robust as possible, electrostatic discharge (ESD) can damage this device. This device must be protected at all times from ESD when handling or transporting. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD handling precautions should be used at all times.

Table 3. SKY65081-70LF Recommended Operating Conditions

Parameter	Symbol	Min	Typ	Max	Units
Supply voltage	VCC	4.75	5.0	5.5	V
Operating frequency	f	2000	2600	3000	MHz
Operating case temperature	T _J	−40	+25	+85	°C

Table 4. SKY65081-70LF Electrical Characteristics¹

(VCC = +5 V, T_C = 25 °C, f = 2600 MHz, Unless Otherwise Noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Frequency	f		2500		2700	MHz
Small signal gain	G	P _{IN} = −10 dBm	13.7	14.3		dB
Input return loss	S ₁₁	P _{IN} = −20 dBm	8.0	9.3		dB
Output return loss	S ₂₂	P _{IN} = −20 dBm	10.0	12.5		dB
1 dB output compression point	OP1dB	CW	+21.0	+22.3		dBm
1 dB input compression point	IP1dB		+8.3	+9.0		dBm
Operating current @ OP1dB	I _{CC,OP1dB}		50	75	90	mA
Power added efficiency	PAE	@ OP1dB	30	44		%
Third order input intercept point	IIP3	P _{IN} /tone = −10 dBm, Δf = 1 MHz	+28.0	+29.6		dBm
Third order output intercept point	OIP3	P _{IN} /tone = −10 dBm, Δf = 1 MHz	+41.7	+43.9		dBm
Noise figure	NF	Small signal		2.0	2.5	dB
Quiescent current	I _{CCQ}	No RF	40	55	70	mA

¹ Performance is guaranteed only under the conditions listed in this table.

Typical Performance Characteristics

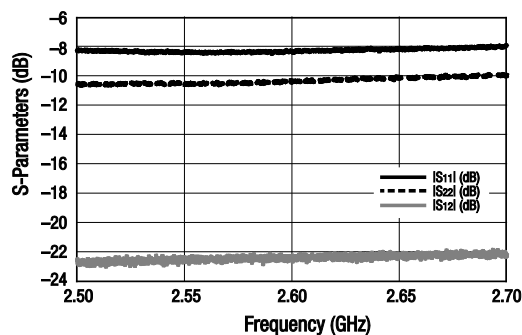


Figure 3. Return Loss vs Frequency

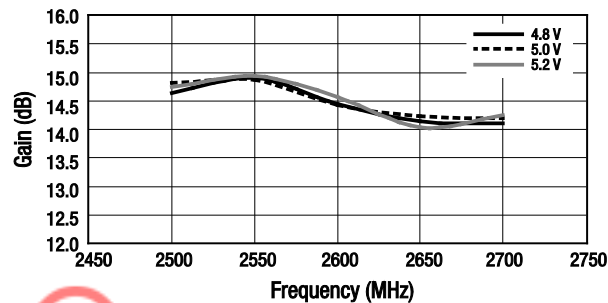


Figure 4. Gain vs Frequency Over Voltage

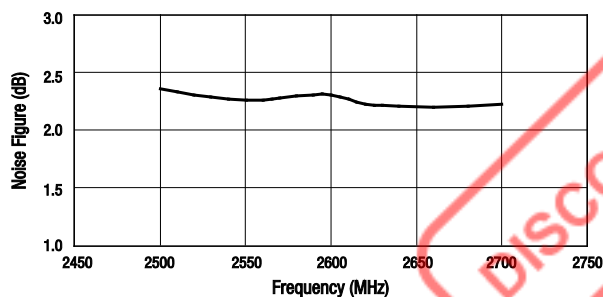


Figure 5. Noise Figure vs Frequency

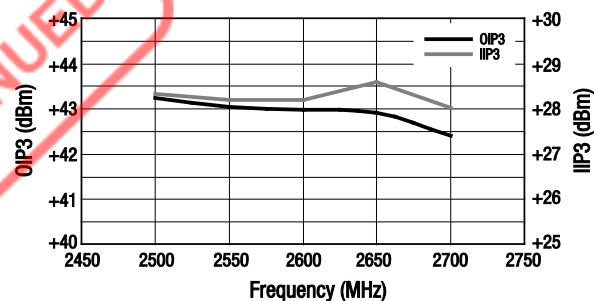


Figure 6. OIP3 vs Frequency

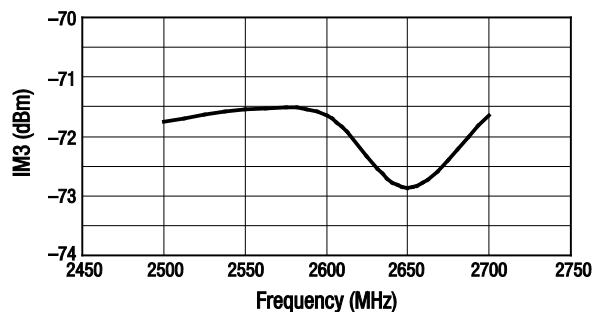


Figure 7. IM3 vs Frequency
($P_{IN} = -10$ dBm)

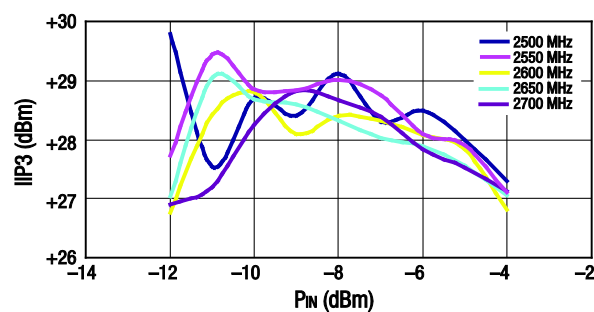


Figure 8. IIP3 vs Input Power Over Frequency

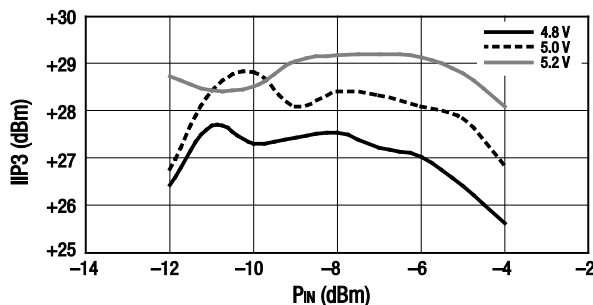


Figure 9. IIP3 vs Input Power Over Voltage

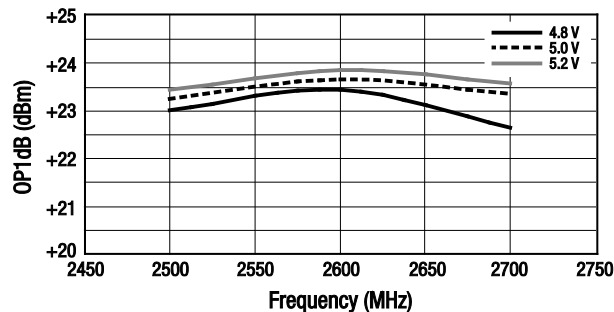


Figure 10. OP1dB vs Frequency Over Voltage

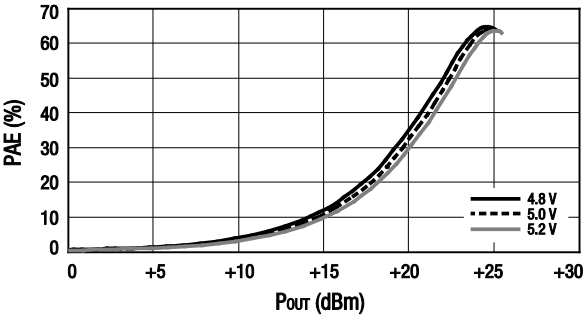


Figure 11. PAE vs Output Power Over Voltage

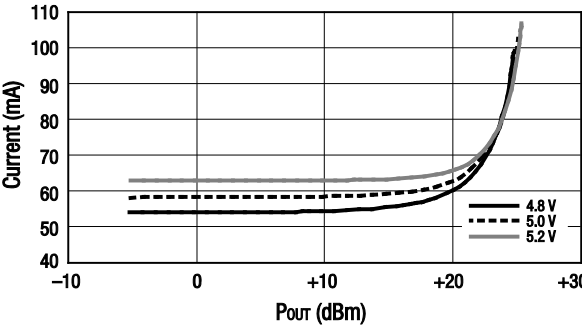


Figure 12. Current vs Output Power Over Voltage

DISCONTINUED

Evaluation Board Description

The Skyworks SKY65081-70LF Evaluation Board is used to test the performance of the SKY65081-70LF PA driver. An assembly drawing for the Evaluation Board is shown in Figure 13, and the layer detail is provided in Figure 14.

Capacitors C7, C8, and C9 provide DC bias decoupling for VCC. Pins 1 and 3 are the RF input and output signals, respectively. External DC blocking is required on the input and output, but can be implemented as part of the RF matching circuit. Pin 2 and the package backside metal, pin 4, are ground pins that provide the DC and RF ground, respectively.

Testing Procedure

Use the following procedure to set up the SKY65081-70LF Evaluation Board for testing:

1. Connect a 5.0 V supply to VCC. If available, enable the current limiting function of the power supply to 100 mA.
2. Connect a signal generator to the RF signal input port. Set it to the desired RF frequency at a power level of -15 dBm or less to the Evaluation Board but do NOT enable the RF signal.
3. Connect a spectrum analyzer to the RF signal output port.
4. Enable the power supply.
5. Enable the RF signal.
6. Take measurements.

CAUTION: If any of the output signals exceed the rated maximum values, the SKY65081-70LF Evaluation Board can be permanently damaged.


Circuit Design Configurations

The following design considerations are general in nature and must be followed regardless of final use or configuration.

- Paths to ground should be made as short as possible.
- The ground pad of the SKY65081-70LF power amplifier has special electrical and thermal grounding requirements. This pad is the main thermal conduit for heat dissipation. Since the circuit board acts as the heat sink, it must shunt as much heat as possible from the amplifier. As such, design the connection to the ground pad to dissipate the maximum wattage produced to the circuit board. Multiple vias to the grounding layer are required.

NOTE: Junction temperature (T_j) of the device increases with a poor connection to the slug and ground. This reduces the lifetime of the device.

- A suggested matching circuit is shown in Figure 15 with component values for the SKY65081-70LF-11 package option listed in Table 5. Component values for the SKY65081-70LF-21 package option are shown in Table 6.

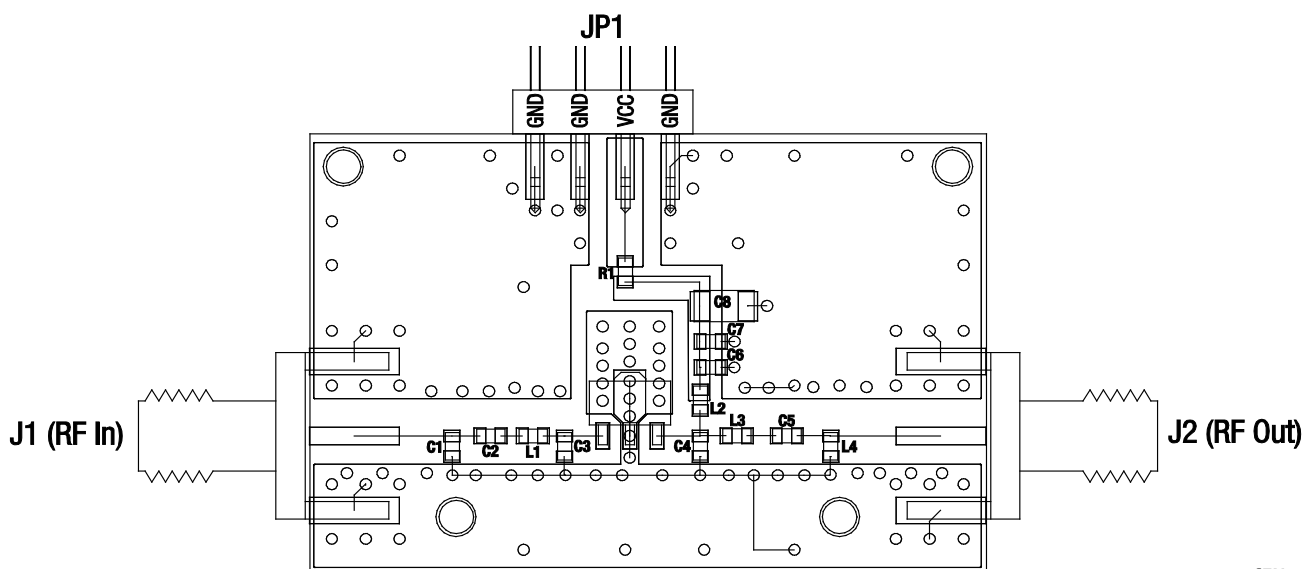

S708

Figure 13. Evaluation Board Assembly Drawing

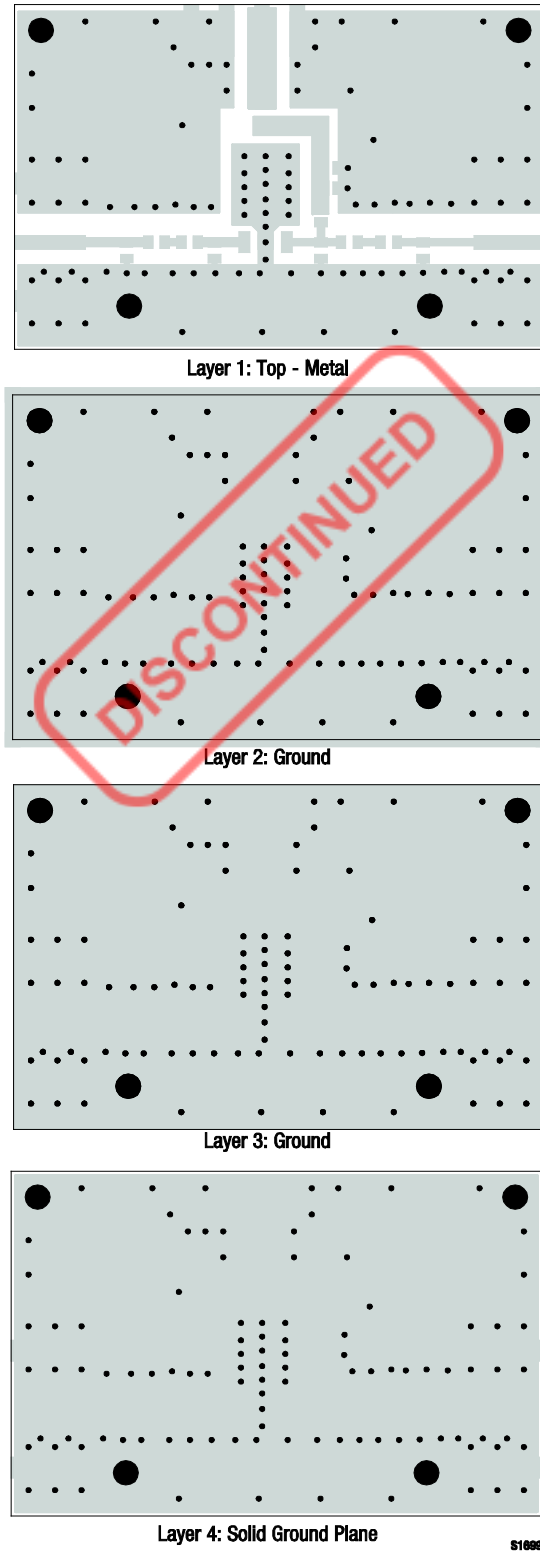


Figure 14. Evaluation Board Layer Detail

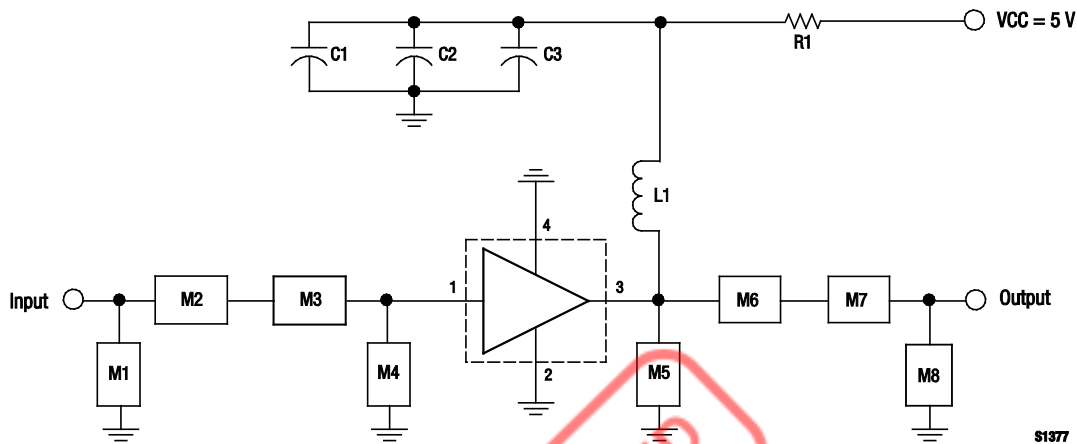


Figure 15. SKY65081-70LF Evaluation Board Schematic
(2500 MHz to 2700 MHz, IIP3 Matched)

Table 5. SKY65081-70LF (SOT-89 Package) Evaluation Board Bill of Materials

Component	Size	Value
C1	0805	10 μ F
C2	0603	2.7 pF
C3	0603	DNI
L1	0603	3.3 nH
M1	0603	DNI
M2	0603	1.0 pF
M3	0603	0 Ω
M4	0603	DNI
M5	0603	DNI
M6	0603	8.2 nH
M7	0603	0 Ω
M8	0603	DNI
R1	0603	0 Ω

Package Dimensions


Package dimensions are shown in Figure 16, and tape and reel dimensions are provided in Figure 17.

Package and Handling Information

Instructions on the shipping container label regarding exposure to moisture after the container seal is broken must be followed. Otherwise, problems related to moisture absorption may occur when the part is subjected to high temperature during solder assembly.

The SKY65081-70LF is rated to Moisture Sensitivity Level 1 (MSL1) at 260 °C. It can be used for lead or lead-free soldering.

Care must be taken when attaching this product, whether it is done manually or in a production solder reflow environment. Production quantities of this product are shipped in a standard tape and reel format. For packaging details, refer to the Skyworks Application Note *Tape and Reel*, document number 101568.

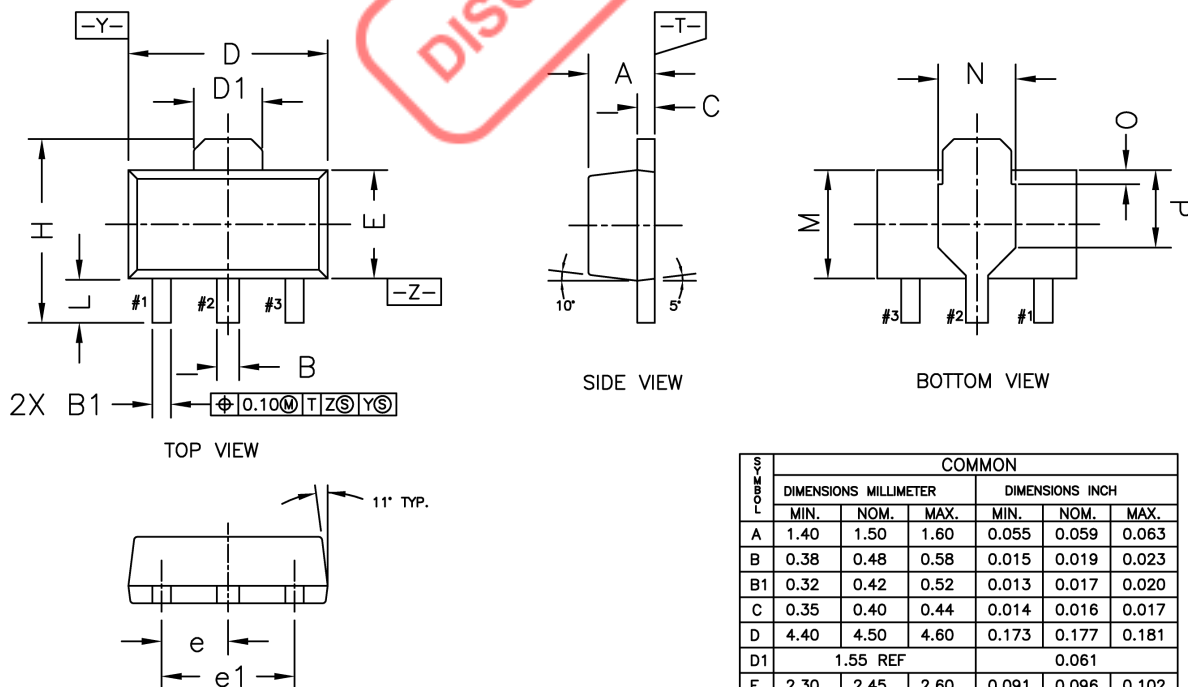


NOTES:

1. DIMENSIONING AND TOLERANCING CONFORM TO ANSI Y14.5M-1982.
2. PACKAGE DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS OR GATE BURRS. MOLD PROTRUSIONS AND GATE BURRS SHALL NOT EXCEED 0.005" PER END. BODY WIDTH DIMENSION DOES NOT INCLUDE INTERLEAD MOLD PROTRUSIONS. INTERLEAD PROTRUSIONS SHALL NOT EXCEED 0.005" PER SIDE.
3. LEADWIDTH DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSIONS. ALLOWABLE PROTRUSION SHALL NOT EXCEED 0.002" TOTAL IN EXCESS OF LEAD WIDTH DIMENSION AT MAXIMUM MATERIAL CONDITION.
4. PLATING REQUIREMENT PER SOURCE CONTROL DRAWING (SCD) 2504.

DIMENSIONS	COMMON					
	DIMENSIONS MILLIMETER			DIMENSIONS INCH		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	1.40	1.50	1.60	0.055	0.059	0.063
B	0.38	0.48	0.58	0.015	0.019	0.023
B1	0.32	0.42	0.52	0.013	0.017	0.020
C	0.35	0.40	0.44	0.014	0.016	0.017
D	4.40	4.50	4.60	0.173	0.177	0.181
D1	1.55 REF			0.061		
E	2.30	2.45	2.60	0.091	0.096	0.102
e	1.50 BSC			0.059 BSC		
e1	3.00 BSC			0.118 BSC		
H	3.94	4.15	4.25	0.155	0.163	0.167
L	0.90	1.00	1.20	0.035	0.039	0.047
M	2.38 REF			0.094		
N	1.75 REF			0.069		
O	0.32 REF			0.013		
P	1.75 REF			0.069		

201192-016

Figure 16. SKY65081-70LF Package Dimensions

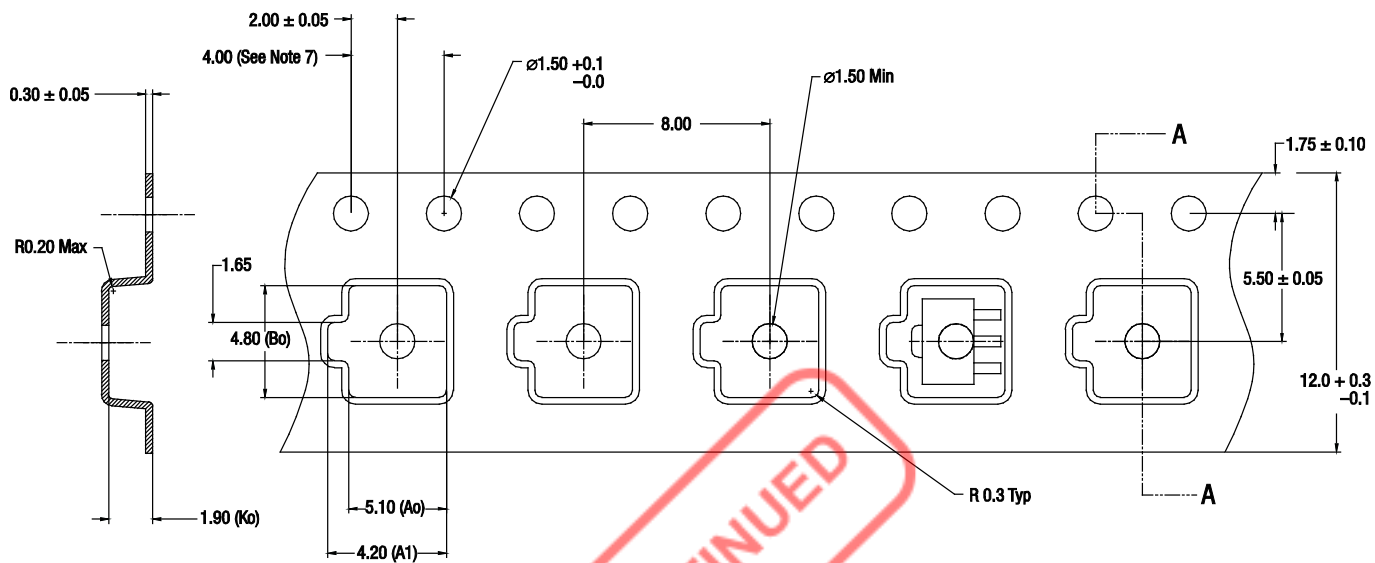

Notes:

1. Carrier tapes must meet all requirements of Skyworks GP01-D233 procurement spec for tape and reel shipping.
2. Carrier tape material: black conductive polycarbonate or polystyrene.
3. Cover tape material: transparent conductive PSA.
Cover tape size: 9.2 mm width.
4. Typical ESD surface resistivity must meet all ESD requirements of Skyworks specified in GP01-D233.
5. Ao and Bo measurement point to be 0.30 mm from bottom pocket.
6. All measurements are in millimeters.
7. 10-sprocket hole pitch cumulative tolerance 0.2 mm.

200953-100

Figure 17. SKY65081-70LF Tape and Reel Dimensions

Ordering Information

Part Number	Product Description	Evaluation Board Part Number
SKY65081-70LF	2000 to 3000 MHz Low-Noise Power Amplifier Driver	SKY65081-70-EVB



Copyright © 2010, 2016, 2018, 2025, Skyworks Solutions, Inc. All Rights Reserved.

Information in this document is provided in connection with Skyworks Solutions, Inc., and its subsidiaries ("Skyworks") products or services. These materials, including the information contained herein, are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials or the information contained herein. Skyworks may change its documentation, products, services, specifications or product descriptions at any time, without notice. Skyworks makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Skyworks assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Skyworks products, information or materials, except as may be provided in Skyworks' Terms and Conditions of Sale.

THE INFORMATION IN THIS DOCUMENT AND THE MATERIALS AND PRODUCTS DESCRIBED THEREIN ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. SKYWORKS DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Skyworks products are not designed, intended, authorized, or warranted for use or inclusion in life support or life endangering applications, devices, or systems where failure or inaccuracy might cause death or personal injury. Skyworks customers agree not to use or sell the Skyworks products for such applications, and further agree to, without limitation, fully defend, indemnify, and hold harmless Skyworks and its agents from and against any and all actions, suits, proceedings, costs, expenses, damages, and liabilities including attorneys' fees arising out of or in connection with such improper use or sale.

Skyworks assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Skyworks products outside of Skyworks' published specifications or parameters. Customers are solely responsible for their products and applications using the Skyworks products.

"Skyworks" and the Skyworks Starburst logo are registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only and are the property of their respective owners. Additional information, including relevant terms and conditions, posted at www.skyworksinc.com, are incorporated by reference.