

LM3046

LM3046 Transistor Array



Literature Number: SNLS372A

LM3046

Transistor Array

General Description

The LM3046 consists of five general purpose silicon NPN transistors on a common monolithic substrate. Two of the transistors are internally connected to form a differentially-connected pair. The transistors are well suited to a wide variety of applications in low power system in the DC through VHF range. They may be used as discrete transistors in conventional circuits however, in addition, they provide the very significant inherent integrated circuit advantages of close electrical and thermal matching. The LM3046 is supplied in a 14-lead molded small outline package.

Features


- Two matched pairs of transistors
 V_{BE} matched ± 5 mV
Input offset current $2 \mu\text{A}$ max at $I_C = 1$ mA
- Five general purpose monolithic transistors
- Operation from DC to 120 MHz
- Wide operating current range
- Low noise figure: 3.2 dB typ at 1 kHz

Applications

- General use in all types of signal processing systems operating anywhere in the frequency range from DC to VHF
- Custom designed differential amplifiers
- Temperature compensated amplifiers

Schematic and Connection Diagram

Small Outline Package

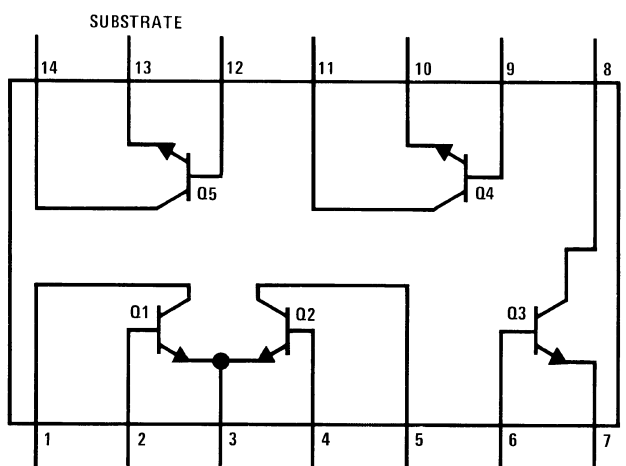

Top View

Order Number LM3046M
See NS Package Number M14A

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required,
please contact the National Semiconductor Sales Office/

Distributors for availability and specifications. ($T_A = 25^\circ\text{C}$)

	LM3046		Units
	Each Transistor	Total Package	
Power Dissipation:			
$T_A = 25^\circ\text{C}$	300	750	mW
$T_A = 25^\circ\text{C}$ to 55°C	300	750	mW
$T_A > 55^\circ\text{C}$	Derate at 6.67		mW/ $^\circ\text{C}$
$T_A = 25^\circ\text{C}$ to 75°C			mW
$T_A > 75^\circ\text{C}$			mW/ $^\circ\text{C}$
Collector to Emitter Voltage, V_{CEO}	15		V
Collector to Base Voltage, V_{CBO}	20		V
Collector to Substrate Voltage, V_{CIO} (Note 2)	20		V
Emitter to Base Voltage, V_{EBO}	5		V
Collector Current, I_C	50		mA
Operating Temperature Range	-40°C to $+85^\circ\text{C}$		
Storage Temperature Range	-65°C to $+85^\circ\text{C}$		
Soldering Information			
Dual-In-Line Package Soldering (10 Sec.)	260°C		
Small Outline Package			
Vapor Phase (60 Seconds)	215°C		
Infrared (15 Seconds)	220°C		

See AN-450 "Surface Mounting Methods and Their Effect on Product Reliability" for other methods of soldering surface mount devices.

Electrical Characteristics

($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Conditions	Limits			Units
		Min	Typ	Max	
Collector to Base Breakdown Voltage ($V_{(BR)CBO}$)	$I_C = 10\text{ }\mu\text{A}$, $I_E = 0$	20	60		V
Collector to Emitter Breakdown Voltage ($V_{(BR)CEO}$)	$I_C = 1\text{ mA}$, $I_B = 0$	15	24		V
Collector to Substrate Breakdown Voltage ($V_{(BR)CIO}$)	$I_C = 10\text{ }\mu\text{A}$, $I_{CI} = 0$	20	60		V
Emitter to Base Breakdown Voltage ($V_{(BR)EBO}$)	$I_E = 10\text{ }\mu\text{A}$, $I_C = 0$	5	7		V
Collector Cutoff Current (I_{CBO})	$V_{CB} = 10\text{ V}$, $I_E = 0$		0.002	40	nA
Collector Cutoff Current (I_{CEO})	$V_{CE} = 10\text{ V}$, $I_B = 0$			0.5	μA
Static Forward Current Transfer Ratio (Static Beta) (h_{FE})	$V_{CE} = 3\text{ V}$ $I_C = 10\text{ mA}$ $I_C = 1\text{ mA}$ $I_C = 10\text{ }\mu\text{A}$		100 40 54		
Input Offset Current for Matched Pair Q_1 and Q_2 $ I_{O1} - I_{O2} $	$V_{CE} = 3\text{ V}$, $I_C = 1\text{ mA}$		0.3	2	μA
Base to Emitter Voltage (V_{BE})	$V_{CE} = 3\text{ V}$ $I_E = 1\text{ mA}$ $I_E = 10\text{ mA}$		0.715 0.800		V
Magnitude of Input Offset Voltage for Differential Pair $ V_{BE1} - V_{BE2} $	$V_{CE} = 3\text{ V}$, $I_C = 1\text{ mA}$		0.45	5	mV
Magnitude of Input Offset Voltage for Isolated Transistors $ V_{BE3} - V_{BE4} $, $ V_{BE4} - V_{BE5} $, $ V_{BE5} - V_{BE3} $	$V_{CE} = 3\text{ V}$, $I_C = 1\text{ mA}$		0.45	5	mV

Electrical Characteristics (Continued)(T_A = 25°C unless otherwise specified)

Parameter	Conditions	Limits			Units
		Min	Typ	Max	
Temperature Coefficient of Base to Emitter Voltage $\left(\frac{\Delta V_{BE}}{\Delta T}\right)$	V _{CE} = 3V, I _C = 1 mA		-1.9		mV/°C
Collector to Emitter Saturation Voltage (V _{CE(SAT)})	I _B = 1 mA, I _C = 10 mA		0.23		V
Temperature Coefficient of Input Offset Voltage $\left(\frac{\Delta V_{10}}{\Delta T}\right)$	V _{CE} = 3V, I _C = 1 mA		1.1		μV/°C

Note 1: "Absolute Maximum Ratings" indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits.


Note 2: The collector of each transistor is isolated from the substrate by an integral diode. The substrate (terminal 13) must be connected to the most negative point in the external circuit to maintain isolation between transistors and to provide for normal transistor action.

Electrical Characteristics

Parameter	Conditions	Min	Typ	Max	Units
Low Frequency Noise Figure (NF)	f = 1 kHz, V _{CE} = 3V, I _C = 100 μA, R _S = 1 kΩ		3.25		dB
LOW FREQUENCY, SMALL SIGNAL EQUIVALENT CIRCUIT CHARACTERISTICS					
Forward Current Transfer Ratio (h _{fe})	f = 1 kHz, V _{CE} = 3V, I _C = 1 mA		110		
Short Circuit Input Impednace (h _{ie})			3.5		kΩ
Open Circuit Output Impedance (h _{oe})			15.6		μmho
Open Circuit Reverse Voltage Transfer Ratio (h _{re})			1.8 x 10 ⁻⁴		
ADMITTANCE CHARACTERISTICS					
Forward Transfer Admittance (Y _{fe})	f = 1 MHz, V _{CE} = 3V, I _C = 1 mA		31 – j 1.5		
Input Admittance (Y _{ie})			0.3+J 0.04		
Output Admittance (Y _{oe})			0.001+j 0.03		
Reverse Transfer Admittance (Y _{re})			See Curve		
Gain Bandwidth Product (f _T)	V _{CE} = 3V, I _C = 3 mA	300	550		
Emitter to Base Capacitance (C _{EB})	V _{EB} = 3V, I _E = 0		0.6		pF
Collector to Base Capacitance (C _{CB})	V _{CB} = 3V, I _C = 0		0.58		pF
Collector to Substrate Capacitance (C _{Cl})	V _{CS} = 3V, I _C = 0		2.8		pF


Typical Performance Characteristics

Typical Collector To Base
Cutoff Current vs Ambient
Temperature for Each
Transistor

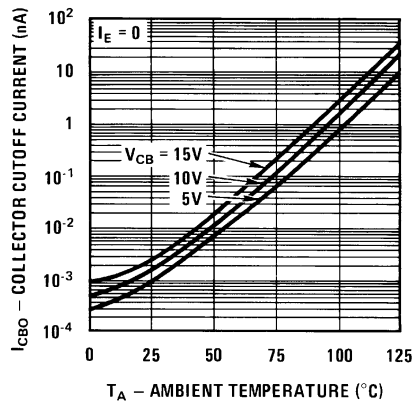


00795008

Typical Collector To Emitter
Cutoff Current vs Ambient
Temperature for Each
Transistor

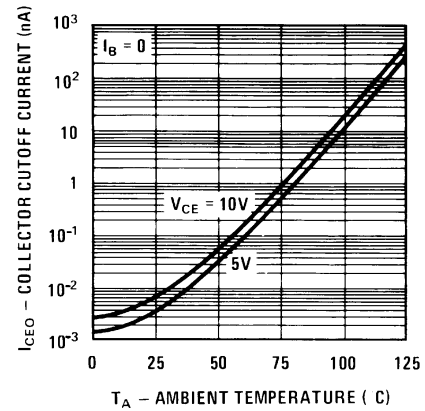


00795009

Typical Static Forward
Current-Transfer Ratio and
Beta Ratio for Transistors Q_1
and Q_2 vs Emitter Current

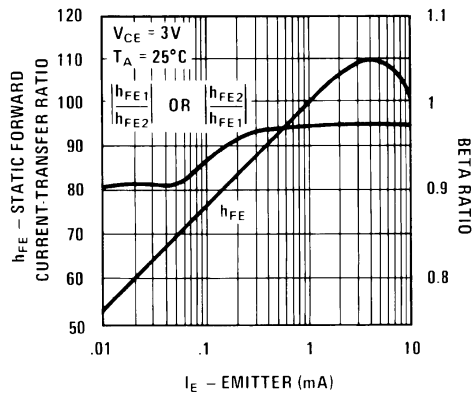


00795010

Typical Input Offset Current
for Matched Transistor Pair
 Q_1 Q_2 vs Collector Current

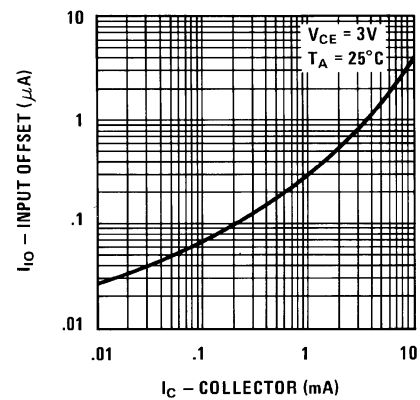


00795011

Typical Static Base To Emitter
Voltage Characteristic and Input
Offset Voltage for Differential
Pair and Paired Isolated
Transistors vs Emitter Current

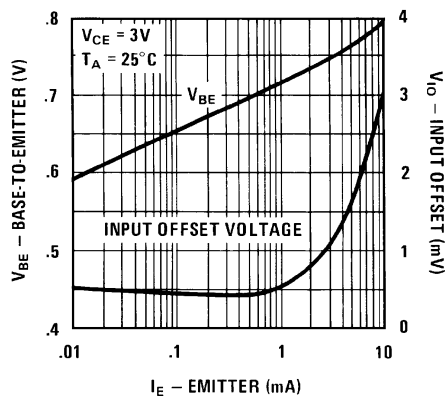

00795012


Typical Base To Emitter
Voltage Characteristic for
Each Transistor vs Ambient
Temperature

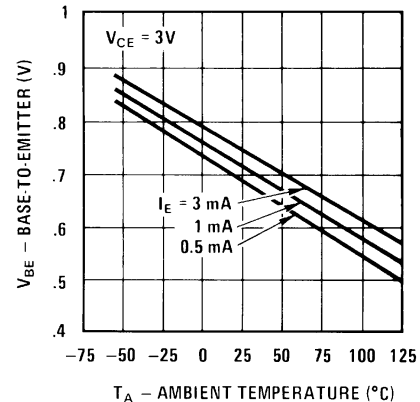

00795013


Typical Performance Characteristics (Continued)

Typical Input Offset Voltage
Characteristics for Differential
Pair and Paired Isolated
Transistors vs Ambient
Temperature

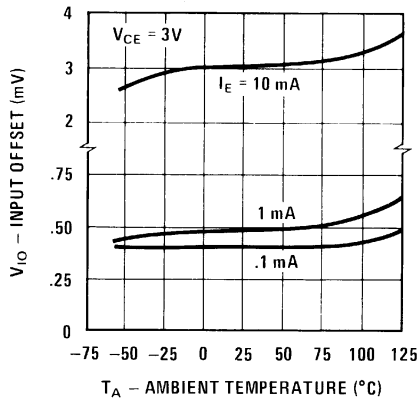


00795014

Typical Noise Figure vs
Collector Current

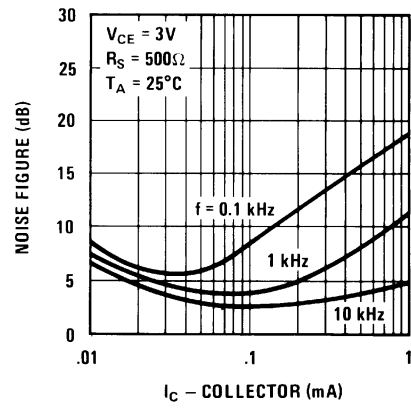


00795015

Typical Noise Figure vs
Collector Current

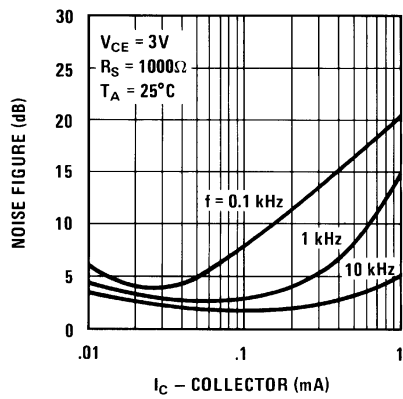

00795016


Typical Noise Figure vs
Collector Current

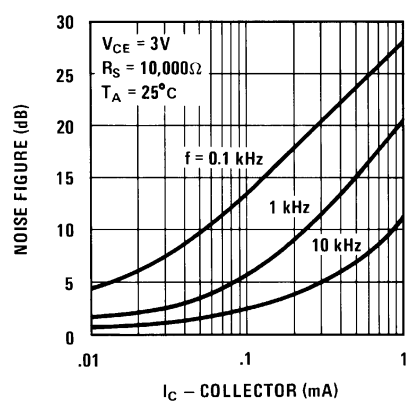

00795017


Typical Performance Characteristics (Continued)

Typical Normalized Forward Current Transfer Ratio, Short Circuit Input Impedance, Open Circuit Output Impedance, and Open Circuit Reverse Voltage Transfer Ratio vs Collector Current

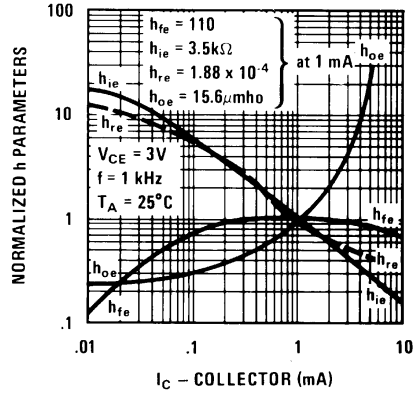


00795018

Typical Forward Transfer Admittance vs Frequency

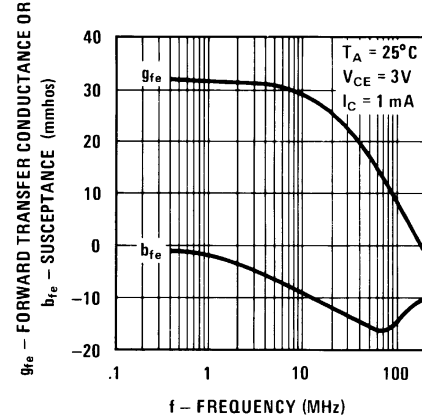


00795019

Typical Input Admittance vs Frequency

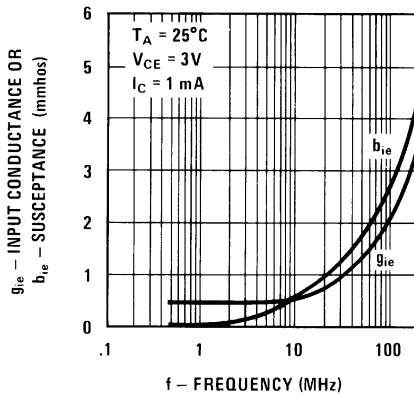


00795020

Typical Output Admittance vs Frequency

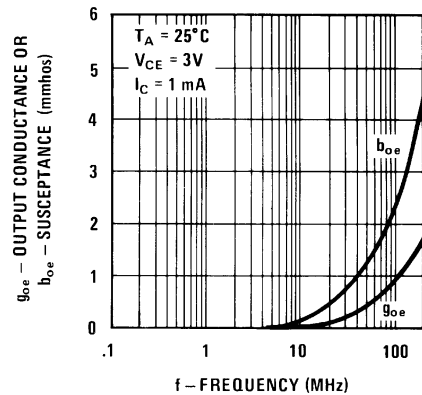


00795021

Typical Reverse Transfer Admittance vs Frequency

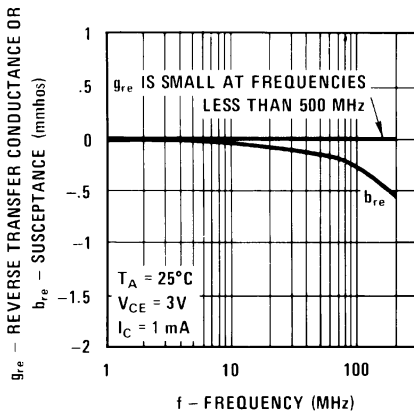

00795022


Typical Gain-Bandwidth Product vs Collector Current

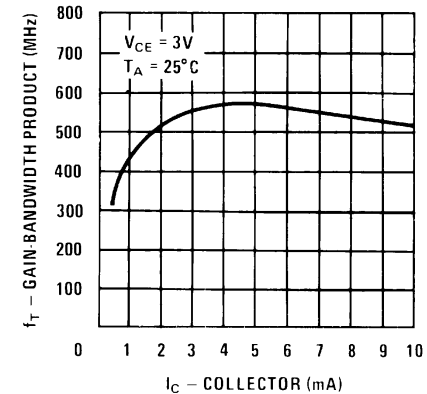

00795023

Physical Dimensions inches (millimeters)

unless otherwise noted

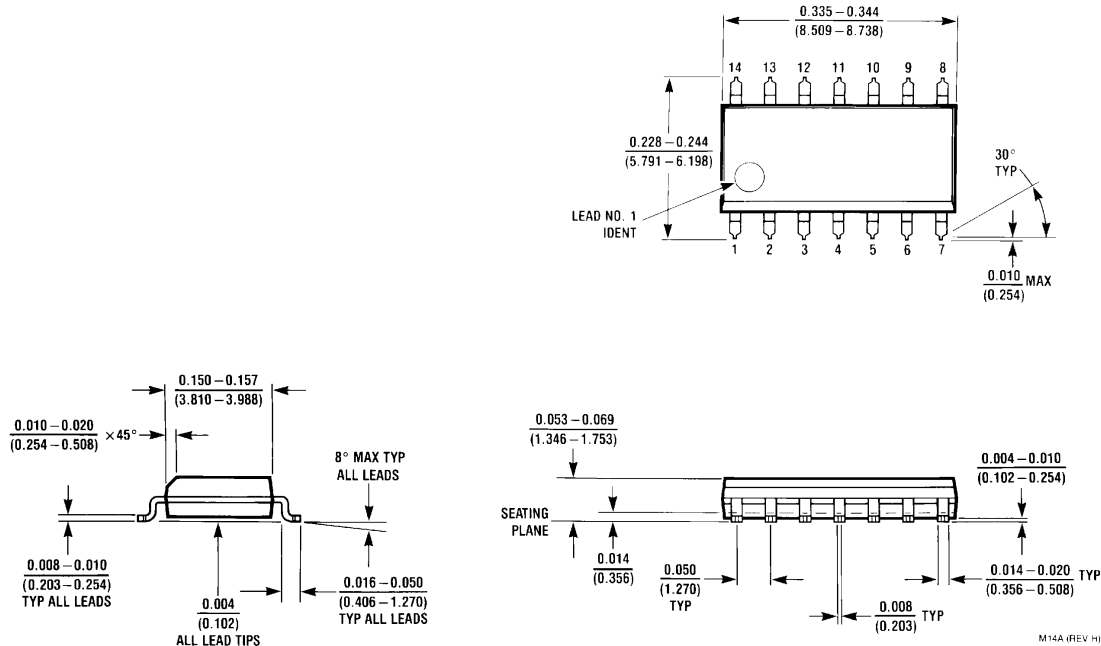

Molded Small Outline Package (M)
Order Number LM3046M
NS Package Number M14A

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

For the most current product information visit us at www.national.com.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

BANNED SUBSTANCE COMPLIANCE

National Semiconductor certifies that the products and packing materials meet the provisions of the Customer Products Stewardship Specification (CSP-9-111C2) and the Banned Substances and Materials of Interest Specification (CSP-9-111S2) and contain no "Banned Substances" as defined in CSP-9-111S2.



National Semiconductor
Americas Customer
Support Center
 Email: new.feedback@nsc.com
 Tel: 1-800-272-9959

www.national.com

National Semiconductor
Europe Customer Support Center
 Fax: +49 (0) 180-530 85 86
 Email: europe.support@nsc.com
 Deutsch Tel: +49 (0) 69 9508 6208
 English Tel: +44 (0) 870 24 0 2171
 Français Tel: +33 (0) 1 41 91 8790

National Semiconductor
Asia Pacific Customer
Support Center
 Email: ap.support@nsc.com

National Semiconductor
Japan Customer Support Center
 Fax: 81-3-5639-7507
 Email: jpn.feedback@nsc.com
 Tel: 81-3-5639-7560

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Transportation and Automotive	www.ti.com/automotive
Video and Imaging	www.ti.com/video

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated