



## Product Change Notification / SYST-05DCNC405

---

### Date:

31-Jan-2024

### Product Category:

General Purpose Fpgas, System On Chip Fpgas

### PCN Type:

Document Change

### Notification Subject:

Data Sheet - IGLOO® 2 FPGA and SmartFusion® 2 SoC FPGA Datasheet

### Affected CPNs:

[SYST-05DCNC405\\_Affected\\_CPN\\_01312024.pdf](#)

[SYST-05DCNC405\\_Affected\\_CPN\\_01312024.csv](#)

### Notification Text:

SYST-05DCNC405

Microchip has released a new Datasheet for the IGLOO® 2 FPGA and SmartFusion® 2 SoC FPGA Datasheet of devices. If you are using one of these devices please read the document located at [IGLOO® 2 FPGA and SmartFusion® 2 SoC FPGA Datasheet](#).

**Notification Status:** Final

**Description of Change:** • The "INTRODUCTION" section was updated by adding part numbers with prefixes for IGLOO 2 and SmartFusion 2.

- Updated the minimum timing values of SP6-SP9 in Table 3-274.
- Added "DEVRST\_N pulse width" details to DEVRST\_N Characteristics in Table 3-278.
- Removed bank numbers for FDDR and MDDR Reference voltage supply in Table 3-2.

**Impacts to Data Sheet:** See above details.

**Reason for Change:** To Improve Productivity

**Change Implementation Status:** Complete

**Date Document Changes Effective:** 31 January 2024

**NOTE:** Please be advised that this is a change to the document only the product has not been changed.

Markings to Distinguish Revised from Unrevised Devices: N/A

## Attachments:

[IGLOO® 2 FPGA and SmartFusion® 2 SoC FPGA Datasheet](#)

Please contact your local [Microchip sales office](#) with questions or concerns regarding this notification.

## Terms and Conditions:

If you wish to receive Microchip PCNs via email please register for our PCN email service at our [PCN home page](#) select register then fill in the required fields. You will find instructions about registering for Microchips PCN email service in the [PCN FAQ](#) section.

If you wish to change your PCN profile, including opt out, please go to the [PCN home page](#) select login and sign into your myMicrochip account. Select a profile option from the left navigation bar and make the applicable selections.

Affected Catalog Part Numbers (CPN)

M2GL005S-1TQG144T2  
M2GL005S-1VFG256T2  
M2GL005S-1VFG400T2  
M2GL005S-1FVG484T2  
M2GL005-1TQG144I  
M2GL005-1TQG144  
M2GL005-TQG144IX6  
M2GL005-TQG144I  
M2GL005-TQG144X417  
M2GL005-TQG144  
M2GL005S-1TQG144I  
M2GL005S-1TQG144  
M2GL005S-TQG144I  
M2GL005S-TQG144  
M2GL005-1VF256I  
M2GL005-1VF256  
M2GL005-VF256IX417  
M2GL005-VF256I  
M2GL005-VF256X456  
M2GL005-VF256  
M2GL005S-1VF256I  
M2GL005S-1VF256  
M2GL005S-VF256I  
M2GL005S-VF256  
M2GL005-1VFG256I  
M2GL005-1VFG256  
M2GL005-VFG256I  
M2GL005-VFG256Q134  
M2GL005-VFG256X416  
M2GL005-VFG256X456  
M2GL005-VFG256  
M2GL005S-1VFG256I  
M2GL005S-1VFG256  
M2GL005S-VFG256I  
M2GL005S-VFG256  
M2GL005-VFG256IX417  
M2GL005-VFG256IX546  
M2GL005-1VF400I  
M2GL005-1VF400  
M2GL005-VF400I  
M2GL005-VF400  
M2GL005S-1VF400I  
M2GL005S-1VF400  
M2GL005S-VF400I  
M2GL005S-VF400  
M2GL005-1VFG400I

M2GL005-1VFG400  
M2GL005-VFG400I  
M2GL005-VFG400X456  
M2GL005-VFG400  
M2GL005S-1VFG400I  
M2GL005S-1VFG400  
M2GL005S-VFG400I  
M2GL005S-VFG400  
M2GL005-1FG484IX417  
M2GL005-1FG484I  
M2GL005-1FG484  
M2GL005-FG484IX416  
M2GL005-FG484I  
M2GL005-FG484  
M2GL005S-1FG484I  
M2GL005S-1FG484  
M2GL005S-FG484I  
M2GL005S-FG484  
M2GL005-1FGG484I  
M2GL005-1FGG484  
M2GL005-FGG484IX377  
M2GL005-FGG484IX399  
M2GL005-FGG484IX416  
M2GL005-FGG484I  
M2GL005-FGG484  
M2GL005S-1FGG484I  
M2GL005S-1FGG484  
M2GL005S-FGG484I  
M2GL005S-FGG484  
M2GL005-1FGG484T1  
M2GL050T-1FG484MX399  
M2GL050T-1FG484MX440  
M2GL050T-1FG484MX471  
M2GL050T-1FG484MX512  
M2GL050T-1FG484M  
M2GL050TS-1FG484M  
M2GL050T-1FG484MX417  
M2GL050T-1FGG484M  
M2GL050TS-1FGG484M  
M2GL050-1VF400I  
M2GL050-1VF400  
M2GL050-VF400I  
M2GL050-VF400  
M2GL050T-1VF400I  
M2GL050T-1VF400  
M2GL050T-VF400I  
M2GL050T-VF400  
M2GL050TS-1VF400I  
M2GL050TS-1VF400

M2GL050TS-VF400I  
M2GL050TS-VF400  
M2GL050-1VFG400I  
M2GL050-1VFG400  
M2GL050-VFG400I  
M2GL050-VFG400  
M2GL050T-1VFG400I  
M2GL050T-1VFG400  
M2GL050T-VFG400I  
M2GL050T-VFG400  
M2GL050TS-1VFG400I  
M2GL050TS-1VFG400  
M2GL050TS-VFG400I  
M2GL050TS-VFG400  
M2GL050-1FG484IX417  
M2GL050-1FG484I  
M2GL050-1FG484  
M2GL050-FG484I  
M2GL050-FG484X413  
M2GL050-FG484X456  
M2GL050-FG484  
M2GL050T-1FG484I  
M2GL050T-1FG484  
M2GL050T-FG484I  
M2GL050T-FG484  
M2GL050TS-1FG484I  
M2GL050TS-1FG484  
M2GL050TS-FG484I  
M2GL050TS-FG484  
M2GL050-1FGG484I  
M2GL050-1FGG484  
M2GL050-FGG484I  
M2GL050-FGG484  
M2GL050T-1FGG484I  
M2GL050T-1FGG484X417  
M2GL050T-1FGG484X452  
M2GL050T-1FGG484  
M2GL050T-FGG484I  
M2GL050T-FGG484  
M2GL050TS-1FGG484I  
M2GL050TS-1FGG484  
M2GL050TS-FGG484I  
M2GL050TS-FGG484  
M2GL050-1FG896I  
M2GL050-1FG896  
M2GL050-FG896I  
M2GL050-FG896  
M2GL050T-1FG896I  
M2GL050T-1FG896

M2GL050T-FG896I  
M2GL050T-FG896  
M2GL050TS-1FG896I  
M2GL050TS-1FG896  
M2GL050TS-FG896I  
M2GL050TS-FG896  
M2GL050-1FGG896I  
M2GL050-1FGG896  
M2GL050-FGG896I  
M2GL050-FGG896X377  
M2GL050-FGG896X399  
M2GL050-FGG896  
M2GL050T-1FGG896IX417  
M2GL050T-1FGG896I  
M2GL050T-1FGG896X416  
M2GL050T-1FGG896X417  
M2GL050T-1FGG896X453  
M2GL050T-1FGG896  
M2GL050T-FGG896I  
M2GL050T-FGG896  
M2GL050TS-1FGG896I  
M2GL050TS-1FGG896  
M2GL050TS-FGG896I  
M2GL050TS-FGG896  
M2GL050-1FCS325I  
M2GL050-1FCS325  
M2GL050-FCS325I  
M2GL050-FCS325  
M2GL050T-1FCS325I  
M2GL050T-1FCS325  
M2GL050T-FCS325I  
M2GL050T-FCS325  
M2GL050TS-1FCS325I  
M2GL050TS-1FCS325  
M2GL050TS-FCS325I  
M2GL050TS-FCS325  
M2GL050-1FCSG325I  
M2GL050-1FCSG325  
M2GL050-FCSG325I  
M2GL050-FCSG325  
M2GL050T-1FCSG325I  
M2GL050T-1FCSG325  
M2GL050T-FCSG325I  
M2GL050T-FCSG325  
M2GL050TS-1FCSG325I  
M2GL050TS-1FCSG325  
M2GL050TS-FCSG325I  
M2GL050TS-FCSG325  
M2GL025TS-1VFG256T2

M2GL025TS-1VFG400T2  
M2GL025TS-1FVG484T2  
M2GL025T-1FG484MX130  
M2GL025T-1FG484MX3  
M2GL025T-1FG484MX417  
M2GL025T-1FG484MX471  
M2GL025T-1FG484MX488  
M2GL025T-1FG484M  
M2GL025TS-1FG484M  
M2GL025T-1FG484MX544  
M2GL025T-1FVG484M  
M2GL025TS-1FVG484M  
M2GL025-1VF256I  
M2GL025-1VF256  
M2GL025-VF256IX417  
M2GL025-VF256I  
M2GL025-VF256X456  
M2GL025-VF256  
M2GL025T-1VF256I  
M2GL025T-1VF256  
M2GL025T-VF256I  
M2GL025T-VF256  
M2GL025TS-1VF256I  
M2GL025TS-1VF256  
M2GL025TS-VF256I  
M2GL025TS-VF256  
M2GL025-1VFG256I  
M2GL025-1VFG256  
M2GL025-VFG256I  
M2GL025-VFG256X456  
M2GL025-VFG256  
M2GL025T-1VFG256I  
M2GL025T-1VFG256  
M2GL025T-VFG256I  
M2GL025T-VFG256  
M2GL025TS-1VFG256I  
M2GL025TS-1VFG256  
M2GL025TS-VFG256I  
M2GL025TS-VFG256  
M2GL025-1VF400I  
M2GL025-1VF400  
M2GL025-VF400IX3  
M2GL025-VF400I  
M2GL025-VF400  
M2GL025T-1VF400I  
M2GL025T-1VF400  
M2GL025T-VF400I  
M2GL025T-VF400  
M2GL025TS-1VF400I

M2GL025TS-1VF400  
M2GL025TS-VF400I  
M2GL025TS-VF400  
M2GL025-1VFG400I  
M2GL025-1VFG400  
M2GL025-VFG400IX416  
M2GL025-VFG400I  
M2GL025-VFG400X456  
M2GL025-VFG400  
M2GL025T-1VFG400I  
M2GL025T-1VFG400  
M2GL025T-VFG400I  
M2GL025T-VFG400  
M2GL025TS-1VFG400I  
M2GL025TS-1VFG400  
M2GL025TS-VFG400I  
M2GL025TS-VFG400  
M2GL025-1FG484IX417  
M2GL025-1FG484I  
M2GL025-1FG484  
M2GL025-FG484IX399  
M2GL025-FG484IX417  
M2GL025-FG484IX456  
M2GL025-FG484I  
M2GL025-FG484X417  
M2GL025-FG484X456  
M2GL025-FG484  
M2GL025T-1FG484IX417  
M2GL025T-1FG484I  
M2GL025T-1FG484  
M2GL025T-FG484I  
M2GL025T-FG484  
M2GL025TS-1FG484I  
M2GL025TS-1FG484  
M2GL025TS-FG484I  
M2GL025TS-FG484  
M2GL025-1FGG484I  
M2GL025-1FGG484X417  
M2GL025-1FGG484  
M2GL025-FGG484I  
M2GL025-FGG484X456  
M2GL025-FGG484  
M2GL025T-1FGG484IX416  
M2GL025T-1FGG484IX417  
M2GL025T-1FGG484I  
M2GL025T-1FGG484  
M2GL025T-FGG484IX416  
M2GL025T-FGG484I  
M2GL025T-FGG484X417

M2GL025T-FGG484  
M2GL025TS-1FGG484I  
M2GL025TS-1FGG484  
M2GL025TS-FGG484I  
M2GL025TS-FGG484  
M2GL025-FGG484IX417  
M2GL025-1FGG484T1  
M2GL025-1FCS325I  
M2GL025-1FCS325  
M2GL025-FCS325I  
M2GL025-FCS325  
M2GL025T-1FCS325I  
M2GL025T-1FCS325  
M2GL025T-FCS325I  
M2GL025T-FCS325  
M2GL025TS-1FCS325I  
M2GL025TS-1FCS325  
M2GL025TS-FCS325I  
M2GL025TS-FCS325  
M2GL025-1FCSG325I  
M2GL025-1FCSG325  
M2GL025-FCSG325I  
M2GL025-FCSG325  
M2GL025T-1FCSG325I  
M2GL025T-1FCSG325  
M2GL025T-FCSG325I  
M2GL025T-FCSG325  
M2GL025TS-1FCSG325I  
M2GL025TS-1FCSG325  
M2GL025TS-FCSG325I  
M2GL025TS-FCSG325  
M2GL025-1FGG484T1X7  
M2GL010S-1TQG144T2  
M2GL010TS-1VFG256T2  
M2GL010TS-1VFG400T2  
M2GL010TS-1FGG484T2  
M2GL010-FG484MX399  
M2GL010T-1FG484MX399  
M2GL010T-1FG484MX417  
M2GL010T-1FG484MX418  
M2GL010T-1FG484M  
M2GL010TS-1FG484M  
M2GL010T-1FGG484M  
M2GL010TS-1FGG484M  
M2GL010-1TQG144I  
M2GL010-1TQG144  
M2GL010-TQG144IX418  
M2GL010-TQG144I  
M2GL010-TQG144Q046

M2GL010-TQG144  
M2GL010S-1TQG144IX28  
M2GL010S-1TQG144I  
M2GL010S-1TQG144  
M2GL010S-TQG144I  
M2GL010S-TQG144  
M2GL010-1VF256I  
M2GL010-1VF256  
M2GL010-VF256I  
M2GL010-VF256X456  
M2GL010-VF256  
M2GL010T-1VF256I  
M2GL010T-1VF256  
M2GL010T-VF256I  
M2GL010T-VF256  
M2GL010TS-1VF256I  
M2GL010TS-1VF256  
M2GL010TS-VF256I  
M2GL010TS-VF256  
M2GL010-1VFG256IX418  
M2GL010-1VFG256I  
M2GL010-1VFG256  
M2GL010-VFG256I  
M2GL010-VFG256X456  
M2GL010-VFG256  
M2GL010T-1VFG256I  
M2GL010T-1VFG256  
M2GL010T-VFG256I  
M2GL010T-VFG256  
M2GL010TS-1VFG256I  
M2GL010TS-1VFG256  
M2GL010TS-VFG256I  
M2GL010TS-VFG256  
M2GL010-1VF400I  
M2GL010-1VF400  
M2GL010-VF400IX416  
M2GL010-VF400I  
M2GL010-VF400X416  
M2GL010-VF400  
M2GL010T-1VF400I  
M2GL010T-1VF400  
M2GL010T-VF400I  
M2GL010T-VF400  
M2GL010TS-1VF400I  
M2GL010TS-1VF400  
M2GL010TS-VF400I  
M2GL010TS-VF400  
M2GL010-1VFG400I  
M2GL010-1VFG400

M2GL010-VFG400IX413  
M2GL010-VFG400IX416  
M2GL010-VFG400I  
M2GL010-VFG400X416  
M2GL010-VFG400  
M2GL010T-1VFG400I  
M2GL010T-1VFG400  
M2GL010T-VFG400I  
M2GL010T-VFG400  
M2GL010TS-1VFG400I  
M2GL010TS-1VFG400  
M2GL010TS-VFG400I  
M2GL010TS-VFG400  
M2GL010-1FG484IX417  
M2GL010-1FG484I  
M2GL010-1FG484  
M2GL010-FG484I  
M2GL010-FG484X456  
M2GL010-FG484  
M2GL010T-1FG484IX418  
M2GL010T-1FG484I  
M2GL010T-1FG484  
M2GL010T-FG484I  
M2GL010T-FG484  
M2GL010TS-1FG484I  
M2GL010TS-1FG484  
M2GL010TS-FG484I  
M2GL010TS-FG484  
M2GL010-1FGG484I  
M2GL010-1FGG484  
M2GL010-FGG484I  
M2GL010-FGG484X413  
M2GL010-FGG484X416  
M2GL010-FGG484X417  
M2GL010-FGG484X440  
M2GL010-FGG484X456  
M2GL010-FGG484  
M2GL010T-1FGG484IX418  
M2GL010T-1FGG484I  
M2GL010T-1FGG484X416  
M2GL010T-1FGG484X417  
M2GL010T-1FGG484X418  
M2GL010T-1FGG484  
M2GL010T-FGG484IX377  
M2GL010T-FGG484I  
M2GL010T-FGG484X416  
M2GL010T-FGG484  
M2GL010TS-1FGG484I  
M2GL010TS-1FGG484

M2GL010TS-FGG484I  
M2GL010TS-FGG484  
M2GL010-FGG484IX417  
M2GL010-FGG484IX94  
M2GL010-1FGG484T1  
M2GL010-1FGG484T1X7  
M2GL150T-1FCV484M  
M2GL150TS-1FCV484M  
M2GL150T-1FC1152MX3  
M2GL150T-1FC1152MX441  
M2GL150T-1FC1152MX520  
M2GL150T-1FC1152M  
M2GL150TS-1FC1152M  
M2GL150T-1FCG1152M  
M2GL150TS-1FCG1152M  
M2GL150-1FCV484I  
M2GL150-1FCV484  
M2GL150-FCV484I  
M2GL150-FCV484  
M2GL150T-1FCV484I  
M2GL150T-1FCV484  
M2GL150T-FCV484I  
M2GL150T-FCV484  
M2GL150TS-1FCV484I  
M2GL150TS-1FCV484  
M2GL150TS-FCV484I  
M2GL150TS-FCV484  
M2GL150-1FCVG484I  
M2GL150-1FCVG484  
M2GL150-FCVG484IX475  
M2GL150-FCVG484I  
M2GL150-FCVG484  
M2GL150T-1FCVG484I  
M2GL150T-1FCVG484  
M2GL150T-FCVG484I  
M2GL150T-FCVG484  
M2GL150TS-1FCVG484I  
M2GL150TS-1FCVG484  
M2GL150TS-FCVG484I  
M2GL150TS-FCVG484  
M2GL150TS-1FCVG484IX323  
M2GL150-1FC1152IX441  
M2GL150-1FC1152IX520  
M2GL150-1FC1152I  
M2GL150-1FC1152  
M2GL150-FC1152I  
M2GL150-FC1152X417  
M2GL150-FC1152  
M2GL150T-1FC1152IX417

M2GL150T-1FC1152I  
M2GL150T-1FC1152  
M2GL150T-FC1152I  
M2GL150T-FC1152  
M2GL150TS-1FC1152I  
M2GL150TS-1FC1152  
M2GL150TS-FC1152I  
M2GL150TS-FC1152  
M2GL150-1FC1152IX259  
M2GL150-1FCG1152IX417  
M2GL150-1FCG1152I  
M2GL150-1FCG1152X417  
M2GL150-1FCG1152  
M2GL150-FCG1152I  
M2GL150-FCG1152  
M2GL150T-1FCG1152IX417  
M2GL150T-1FCG1152I  
M2GL150T-1FCG1152  
M2GL150T-FCG1152IX417  
M2GL150T-FCG1152I  
M2GL150T-FCG1152  
M2GL150TS-1FCG1152I  
M2GL150TS-1FCG1152  
M2GL150TS-FCG1152I  
M2GL150TS-FCG1152  
M2GL150T-1FCG1152IX538  
M2GL150-1FCG1152IX538  
M2GL150-1FCS536I  
M2GL150-1FCS536  
M2GL150-FCS536IX3  
M2GL150-FCS536I  
M2GL150-FCS536  
M2GL150T-1FCS536I  
M2GL150T-1FCS536  
M2GL150T-FCS536I  
M2GL150T-FCS536  
M2GL150TS-1FCS536I  
M2GL150TS-1FCS536  
M2GL150TS-FCS536I  
M2GL150TS-FCS536  
M2GL150-1FCSG536I  
M2GL150-1FCSG536  
M2GL150-FCSG536I  
M2GL150-FCSG536  
M2GL150T-1FCSG536I  
M2GL150T-1FCSG536  
M2GL150T-FCSG536I  
M2GL150T-FCSG536  
M2GL150TS-1FCSG536I

M2GL150TS-1FCSG536  
M2GL150TS-FCSG536I  
M2GL150TS-FCSG536  
M2GL090TS-1FGG484T2  
M2GL090TS-1FGG676T2  
M2GL090T-1FG484MX418  
M2GL090T-1FG484MX6  
M2GL090T-1FG484M  
M2GL090TS-1FG484M  
M2GL090T-1FGG484M  
M2GL090TS-1FGG484M  
M2GL090-1FCSG325I  
M2GL090-1FCSG325  
M2GL090-FCSG325I  
M2GL090-FCSG325  
M2GL090T-1FCSG325I  
M2GL090T-1FCSG325  
M2GL090T-FCSG325I  
M2GL090T-FCSG325  
M2GL090TS-1FCSG325I  
M2GL090TS-1FCSG325  
M2GL090TS-FCSG325I  
M2GL090TS-FCSG325  
M2GL090-1FG484IX417  
M2GL090-1FG484I  
M2GL090-1FG484  
M2GL090-FG484IX3  
M2GL090-FG484IX417  
M2GL090-FG484I  
M2GL090-FG484X416  
M2GL090-FG484X456  
M2GL090-FG484  
M2GL090T-1FG484IX417  
M2GL090T-1FG484I  
M2GL090T-1FG484  
M2GL090T-FG484I  
M2GL090T-FG484  
M2GL090TS-1FG484I  
M2GL090TS-1FG484  
M2GL090TS-FG484I  
M2GL090TS-FG484  
M2GL090-1FGG484IX417  
M2GL090-1FGG484I  
M2GL090-1FGG484  
M2GL090-FGG484IX417  
M2GL090-FGG484IX418  
M2GL090-FGG484I  
M2GL090-FGG484X416  
M2GL090-FGG484X418

M2GL090-FGG484X456  
M2GL090-FGG484X505  
M2GL090-FGG484  
M2GL090T-1FGG484I  
M2GL090T-1FGG484  
M2GL090T-FGG484IX416  
M2GL090T-FGG484I  
M2GL090T-FGG484  
M2GL090TS-1FGG484IX416  
M2GL090TS-1FGG484I  
M2GL090TS-1FGG484  
M2GL090TS-FGG484I  
M2GL090TS-FGG484  
M2GL090T-FGG484IX94  
M2GL090-1FGG484T1  
M2GL090-1FG676IX441  
M2GL090-1FG676I  
M2GL090-1FG676  
M2GL090-FG676I  
M2GL090-FG676X416  
M2GL090-FG676  
M2GL090T-1FG676I  
M2GL090T-1FG676  
M2GL090T-FG676I  
M2GL090T-FG676  
M2GL090TS-1FG676I  
M2GL090TS-1FG676  
M2GL090TS-FG676I  
M2GL090TS-FG676  
M2GL090-1FG676IX259  
M2GL090-1FG676IX417  
M2GL090-1FGG676IX417  
M2GL090-1FGG676IX441  
M2GL090-1FGG676I  
M2GL090-1FGG676  
M2GL090-FGG676I  
M2GL090-FGG676X416  
M2GL090-FGG676X456  
M2GL090-FGG676  
M2GL090T-1FGG676IX418  
M2GL090T-1FGG676I  
M2GL090T-1FGG676  
M2GL090T-FGG676IX416  
M2GL090T-FGG676I  
M2GL090T-FGG676  
M2GL090TS-1FGG676I  
M2GL090TS-1FGG676  
M2GL090TS-FGG676I  
M2GL090TS-FGG676

M2GL090-1FGG676IX259  
M2GL090-1FCS325I  
M2GL090-1FCS325  
M2GL090-FCS325I  
M2GL090-FCS325  
M2GL090T-1FCS325I  
M2GL090T-1FCS325  
M2GL090T-FCS325I  
M2GL090T-FCS325  
M2GL090TS-1FCS325I  
M2GL090TS-1FCS325  
M2GL090TS-FCS325I  
M2GL090TS-FCS325  
M2GL060TS-1VFG400T2  
M2GL060TS-1FGG484T2  
M2GL060TS-1FGG676T2  
M2GL060T-1FG484MX399  
M2GL060T-1FG484M  
M2GL060TS-1FG484M  
M2GL060T-1FGG484M  
M2GL060TS-1FGG484M  
M2GL060-1VF400I  
M2GL060-1VF400  
M2GL060-VF400I  
M2GL060-VF400  
M2GL060T-1VF400I  
M2GL060T-1VF400  
M2GL060T-VF400I  
M2GL060T-VF400  
M2GL060TS-1VF400I  
M2GL060TS-1VF400  
M2GL060TS-VF400I  
M2GL060TS-VF400  
M2GL060-1VFG400I  
M2GL060-1VFG400  
M2GL060-VFG400I  
M2GL060-VFG400X456  
M2GL060-VFG400  
M2GL060T-1VFG400I  
M2GL060T-1VFG400  
M2GL060T-VFG400I  
M2GL060T-VFG400  
M2GL060TS-1VFG400I  
M2GL060TS-1VFG400  
M2GL060TS-VFG400I  
M2GL060TS-VFG400  
M2GL060-1FG484I  
M2GL060-1FG484  
M2GL060-FG484I

M2GL060-FG484X456  
M2GL060-FG484  
M2GL060T-1FG484I  
M2GL060T-1FG484  
M2GL060T-FG484I  
M2GL060T-FG484  
M2GL060TS-1FG484I  
M2GL060TS-1FG484  
M2GL060TS-FG484I  
M2GL060TS-FG484  
M2GL060-1FGG484I  
M2GL060-1FGG484  
M2GL060-FGG484I  
M2GL060-FGG484X456  
M2GL060-FGG484  
M2GL060T-1FGG484I  
M2GL060T-1FGG484  
M2GL060T-FGG484I  
M2GL060T-FGG484  
M2GL060TS-1FGG484I  
M2GL060TS-1FGG484  
M2GL060TS-FGG484I  
M2GL060TS-FGG484  
M2GL060-1FGG484T1  
M2GL060-1FG676I  
M2GL060-1FG676  
M2GL060-FG676I  
M2GL060-FG676X456  
M2GL060-FG676  
M2GL060T-1FG676I  
M2GL060T-1FG676  
M2GL060T-FG676I  
M2GL060T-FG676  
M2GL060TS-1FG676I  
M2GL060TS-1FG676  
M2GL060TS-FG676I  
M2GL060TS-FG676  
M2GL060-1FGG676I  
M2GL060-1FGG676  
M2GL060-FGG676IX399  
M2GL060-FGG676I  
M2GL060-FGG676X456  
M2GL060-FGG676  
M2GL060T-1FGG676I  
M2GL060T-1FGG676  
M2GL060T-FGG676I  
M2GL060T-FGG676  
M2GL060TS-1FGG676I  
M2GL060TS-1FGG676

M2GL060TS-FGG676I  
M2GL060TS-FGG676  
M2GL060-1FCS325I  
M2GL060-1FCS325  
M2GL060-FCS325I  
M2GL060-FCS325  
M2GL060T-1FCS325I  
M2GL060T-1FCS325  
M2GL060T-FCS325I  
M2GL060T-FCS325  
M2GL060TS-1FCS325I  
M2GL060TS-1FCS325  
M2GL060TS-FCS325I  
M2GL060TS-FCS325  
M2GL060-1FCSG325I  
M2GL060-1FCSG325  
M2GL060-FCSG325I  
M2GL060-FCSG325  
M2GL060T-1FCSG325I  
M2GL060T-1FCSG325  
M2GL060T-FCSG325I  
M2GL060T-FCSG325  
M2GL060TS-1FCSG325I  
M2GL060TS-1FCSG325  
M2GL060TS-FCSG325I  
M2GL060TS-FCSG325  
M2GL060T-1VFG784I  
M2GL060T-1VFG784  
M2GL060T-VFG784I  
M2GL060T-VFG784  
M2GL060TS-1VFG784I  
M2GL060TS-1VFG784  
M2GL060TS-VFG784I  
M2GL060TS-VFG784  
M2S005S-1TQG144T2  
M2S005S-1VFG256T2  
M2S005S-1VFG400T2  
M2S005S-1FGG484T2  
M2S005-VFG256Q343  
M2S005S-WAFERLOT  
M2S005S-DIELOTW  
M2S005S-DIELOTWX551  
M2S005S-DIELOTWX552  
M2S005-1TQG144I  
M2S005-1TQG144  
M2S005-TQG144IX416  
M2S005-TQG144I  
M2S005-TQG144X486  
M2S005-TQG144

M2S005S-1TQG144I  
M2S005S-1TQG144  
M2S005S-TQG144H0001  
M2S005S-TQG144H0002  
M2S005S-TQG144H0003  
M2S005S-TQG144H0005  
M2S005S-TQG144H0006  
M2S005S-TQG144H0008  
M2S005S-TQG144H000  
M2S005S-TQG144H0023  
M2S005S-TQG144H0027  
M2S005S-TQG144H0033  
M2S005S-TQG144H0037  
M2S005S-TQG144H0040  
M2S005S-TQG144H0050  
M2S005S-TQG144H0075  
M2S005S-TQG144H0091  
M2S005S-TQG144H0127  
M2S005S-TQG144H0133  
M2S005S-TQG144H0141  
M2S005S-TQG144H0185  
M2S005S-TQG144H0187  
M2S005S-TQG144H0191  
M2S005S-TQG144H0217  
M2S005S-TQG144H0225  
M2S005S-TQG144H0232  
M2S005S-TQG144H0237  
M2S005S-TQG144H0247  
M2S005S-TQG144H0251  
M2S005S-TQG144H0264  
M2S005S-TQG144H0289  
M2S005S-TQG144H0291  
M2S005S-TQG144H0295  
M2S005S-TQG144IH0054  
M2S005S-TQG144IH0055  
M2S005S-TQG144IH0057  
M2S005S-TQG144IH0062  
M2S005S-TQG144IH0064  
M2S005S-TQG144IH0065  
M2S005S-TQG144IH0068  
M2S005S-TQG144IH0073  
M2S005S-TQG144IH0074  
M2S005S-TQG144IH0078  
M2S005S-TQG144IX416  
M2S005S-TQG144I  
M2S005S-TQG144X416  
M2S005S-TQG144X486  
M2S005S-TQG144  
M2S005S-TQG144H0352

M2S005-1VF256I  
M2S005-1VF256  
M2S005-VF256I  
M2S005-VF256X416  
M2S005-VF256X456  
M2S005-VF256  
M2S005S-1VF256I  
M2S005S-1VF256  
M2S005S-VF256I  
M2S005S-VF256X416  
M2S005S-VF256  
M2S005-1VFG256I  
M2S005-1VFG256  
M2S005-VFG256IX416  
M2S005-VFG256IZ049  
M2S005-VFG256I  
M2S005-VFG256X416  
M2S005-VFG256X456  
M2S005-VFG256X486  
M2S005-VFG256  
M2S005S-1VFG256I  
M2S005S-1VFG256  
M2S005S-VFG256H0004  
M2S005S-VFG256H0007  
M2S005S-VFG256H0011  
M2S005S-VFG256H0014  
M2S005S-VFG256H0016  
M2S005S-VFG256H0018  
M2S005S-VFG256H0021  
M2S005S-VFG256H0030  
M2S005S-VFG256H0045  
M2S005S-VFG256H0047  
M2S005S-VFG256H0051  
M2S005S-VFG256H0083  
M2S005S-VFG256H0099  
M2S005S-VFG256H0109  
M2S005S-VFG256H0113  
M2S005S-VFG256H0120  
M2S005S-VFG256H0124  
M2S005S-VFG256H0126  
M2S005S-VFG256H0128  
M2S005S-VFG256H0130  
M2S005S-VFG256H0148  
M2S005S-VFG256H0149  
M2S005S-VFG256H0154  
M2S005S-VFG256H0170  
M2S005S-VFG256H0175  
M2S005S-VFG256H0176  
M2S005S-VFG256H0177

M2S005S-VFG256H0189  
M2S005S-VFG256H0190  
M2S005S-VFG256H0197  
M2S005S-VFG256H0200  
M2S005S-VFG256H0215  
M2S005S-VFG256H0219  
M2S005S-VFG256H0221  
M2S005S-VFG256H0224  
M2S005S-VFG256H0233  
M2S005S-VFG256H0234  
M2S005S-VFG256H0243  
M2S005S-VFG256H0244  
M2S005S-VFG256H0245  
M2S005S-VFG256H0260  
M2S005S-VFG256H0276  
M2S005S-VFG256H0290  
M2S005S-VFG256IH0048  
M2S005S-VFG256IH0094  
M2S005S-VFG256IH0098  
M2S005S-VFG256IH0116  
M2S005S-VFG256IH0143  
M2S005S-VFG256IH0156  
M2S005S-VFG256IH0194  
M2S005S-VFG256IH0211  
M2S005S-VFG256IS0014  
M2S005S-VFG256IS0020  
M2S005S-VFG256IX416  
M2S005S-VFG256I  
M2S005S-VFG256X416  
M2S005S-VFG256  
M2S005-VFG256Q321  
M2S005S-VFG256H0317  
M2S005S-VFG256H0319  
M2S005-VFG256Q332  
M2S005S-VFG256H0332  
M2S005S-VFG256H0341  
M2S005S-VFG256H0345  
M2S005S-VFG256H0346  
M2S005-VFG256Q351  
M2S005S-VFG256H0360  
M2S005S-VFG256S0037  
M2S005S-VFG256S0042  
M2S005S-VFG256S0043  
M2S005-VFG256Z363  
M2S005-1VF400I  
M2S005-1VF400  
M2S005-VF400I  
M2S005-VF400  
M2S005S-1VF400I

M2S005S-1VF400  
M2S005S-VF400I  
M2S005S-VF400  
M2S005-1VFG400IX416  
M2S005-1VFG400I  
M2S005-1VFG400  
M2S005-VFG400IX516  
M2S005-VFG400I  
M2S005-VFG400X416  
M2S005-VFG400X417  
M2S005-VFG400X456  
M2S005-VFG400  
M2S005S-1VFG400I  
M2S005S-1VFG400  
M2S005S-VFG400I  
M2S005S-VFG400  
M2S005-1FG484I  
M2S005-1FG484  
M2S005-FG484I  
M2S005-FG484  
M2S005S-1FG484I  
M2S005S-1FG484  
M2S005S-FG484I  
M2S005S-FG484  
M2S005-1FGG484I  
M2S005-1FGG484  
M2S005-FGG484IX3  
M2S005-FGG484IX417  
M2S005-FGG484I  
M2S005-FGG484X417  
M2S005-FGG484X456  
M2S005-FGG484X486  
M2S005-FGG484  
M2S005S-1FGG484I  
M2S005S-1FGG484  
M2S005S-FGG484IX417  
M2S005S-FGG484I  
M2S005S-FGG484  
M2S050T-1FG484M  
M2S050TS-1FG484M  
M2S050T-1FGG484M  
M2S050TS-1FGG484M  
M2S050-1VF400I  
M2S050-1VF400  
M2S050-VF400I  
M2S050-VF400  
M2S050T-1VF400I  
M2S050T-1VF400  
M2S050T-VF400I

M2S050T-VF400  
M2S050TS-1VF400I  
M2S050TS-1VF400  
M2S050TS-VF400I  
M2S050TS-VF400  
M2S050-1VFG400I  
M2S050-1VFG400  
M2S050-VFG400I  
M2S050-VFG400  
M2S050T-1VFG400I  
M2S050T-1VFG400  
M2S050T-VFG400I  
M2S050T-VFG400  
M2S050TS-1VFG400I  
M2S050TS-1VFG400  
M2S050TS-VFG400I  
M2S050TS-VFG400  
M2S050-1FG484I  
M2S050-1FG484  
M2S050-FG484IX11  
M2S050-FG484I  
M2S050-FG484  
M2S050T-1FG484I  
M2S050T-1FG484  
M2S050T-FG484I  
M2S050T-FG484  
M2S050TS-1FG484I  
M2S050TS-1FG484  
M2S050TS-FG484I  
M2S050TS-FG484  
M2S050-1FGG484I  
M2S050-1FGG484  
M2S050-FGG484IX417  
M2S050-FGG484I  
M2S050-FGG484X417  
M2S050-FGG484  
M2S050T-1FGG484IX416  
M2S050T-1FGG484I  
M2S050T-1FGG484  
M2S050T-FGG484IX538  
M2S050T-FGG484I  
M2S050T-FGG484  
M2S050TS-1FGG484I  
M2S050TS-1FGG484  
M2S050TS-FGG484I  
M2S050TS-FGG484  
M2S050-1FG896I  
M2S050-1FG896  
M2S050-FG896ESX423

M2S050-FG896I  
M2S050-FG896  
M2S050T-1FG896ESX423  
M2S050T-1FG896IX417  
M2S050T-1FG896I  
M2S050T-1FG896  
M2S050T-FG896I  
M2S050T-FG896  
M2S050TS-1FG896I  
M2S050TS-1FG896  
M2S050TS-FG896I  
M2S050TS-FG896  
M2S050T-1FG896IX259  
M2S050-1FGG896I  
M2S050-1FGG896  
M2S050-FGG896I  
M2S050-FGG896  
M2S050T-1FGG896I  
M2S050T-1FGG896  
M2S050T-FGG896I  
M2S050T-FGG896  
M2S050TS-1FGG896I  
M2S050TS-1FGG896  
M2S050TS-FGG896I  
M2S050TS-FGG896  
M2S050-1FCS325I  
M2S050-1FCS325  
M2S050-FCS325I  
M2S050-FCS325  
M2S050T-1FCS325I  
M2S050T-1FCS325  
M2S050T-FCS325I  
M2S050T-FCS325  
M2S050TS-1FCS325I  
M2S050TS-1FCS325  
M2S050TS-FCS325I  
M2S050TS-FCS325  
M2S050-1FCSG325I  
M2S050-1FCSG325  
M2S050-FCSG325I  
M2S050-FCSG325  
M2S050T-1FCSG325I  
M2S050T-1FCSG325  
M2S050T-FCSG325I  
M2S050T-FCSG325X416  
M2S050T-FCSG325  
M2S050TS-1FCSG325I  
M2S050TS-1FCSG325  
M2S050TS-FCSG325I

M2S050TS-FCSG325  
M2S025TS-1VFG256T2  
M2S025TS-1VFG400T2  
M2S025TS-1FGG484T2  
M2S025T-1FG484M  
M2S025TS-1FG484M  
M2S025T-1FGG484M  
M2S025TS-1FGG484M  
M2S025TS-DIELOTWX553  
M2S025TS-DIELOTW  
M2S025-1VF256I  
M2S025-1VF256  
M2S025-VF256I  
M2S025-VF256  
M2S025T-1VF256I  
M2S025T-1VF256  
M2S025T-VF256I  
M2S025T-VF256  
M2S025TS-1VF256I  
M2S025TS-1VF256  
M2S025TS-VF256I  
M2S025TS-VF256  
M2S025-1VFG256I  
M2S025-1VFG256Q168  
M2S025-1VFG256  
M2S025-VFG256H0049  
M2S025-VFG256I  
M2S025-VFG256Q177  
M2S025-VFG256Q256  
M2S025-VFG256Q264  
M2S025-VFG256Q273  
M2S025-VFG256Q307  
M2S025-VFG256Q309  
M2S025-VFG256X416  
M2S025-VFG256X456  
M2S025-VFG256Z203  
M2S025-VFG256Z279  
M2S025-VFG256  
M2S025T-1VFG256I  
M2S025T-1VFG256  
M2S025T-VFG256I  
M2S025T-VFG256  
M2S025TS-1VFG256I  
M2S025TS-1VFG256  
M2S025TS-VFG256H0010  
M2S025TS-VFG256H0025  
M2S025TS-VFG256H0056  
M2S025TS-VFG256H0123  
M2S025TS-VFG256H0152

M2S025TS-VFG256H0206  
M2S025TS-VFG256H0293  
M2S025TS-VFG256I  
M2S025TS-VFG256S0023  
M2S025TS-VFG256X416  
M2S025TS-VFG256  
M2S025TS-VFG256Q320  
M2S025-VFG256Q325  
M2S025TS-VFG256H0314  
M2S025TS-VFG256H0315  
M2S025T-VFG256X538  
M2S025-VFG256S0034  
M2S025-VFG256Q345  
M2S025-VFG256S0035  
M2S025-VFG256IH0368  
M2S025-VFG256IX416  
M2S025-VFG256IS0040  
M2S025-1VF400I  
M2S025-1VF400  
M2S025-VF400I  
M2S025-VF400  
M2S025T-1VF400I  
M2S025T-1VF400  
M2S025T-VF400I  
M2S025T-VF400  
M2S025TS-1VF400I  
M2S025TS-1VF400  
M2S025TS-VF400I  
M2S025TS-VF400  
M2S025-1VFG400IX416  
M2S025-1VFG400IZ288  
M2S025-1VFG400I  
M2S025-1VFG400  
M2S025-VFG400IX413  
M2S025-VFG400IX416  
M2S025-VFG400I  
M2S025-VFG400  
M2S025T-1VFG400I  
M2S025T-1VFG400  
M2S025T-VFG400I  
M2S025T-VFG400  
M2S025TS-1VFG400I  
M2S025TS-1VFG400  
M2S025TS-VFG400H0283  
M2S025TS-VFG400IH0069  
M2S025TS-VFG400IH0101  
M2S025TS-VFG400IH0147  
M2S025TS-VFG400IH0162  
M2S025TS-VFG400IH0172

M2S025TS-VFG400IH0173  
M2S025TS-VFG400IH0184  
M2S025TS-VFG400IH0241  
M2S025TS-VFG400IH0256  
M2S025TS-VFG400IH0262  
M2S025TS-VFG400IH0265  
M2S025TS-VFG400IH0285  
M2S025TS-VFG400IQ270  
M2S025TS-VFG400IX416  
M2S025TS-VFG400IX417  
M2S025TS-VFG400I  
M2S025TS-VFG400X416  
M2S025TS-VFG400  
M2S025TS-VFG400IH0305  
M2S025TS-VFG400IH0325  
M2S025TS-VFG400IH0355  
M2S025TS-VFG400IH0369  
M2S025TS-VFG400H0371  
M2S025TS-VFG400IH0372  
M2S025TS-VFG400H0381  
M2S025TS-VFG400IH0388  
M2S025TS-VFG400IH0383  
M2S025TS-VFG400IH0404  
M2S025TS-VFG400IH0409  
M2S025TS-VFG400IH0406  
M2S025-1FG484I  
M2S025-1FG484  
M2S025-FG484I  
M2S025-FG484  
M2S025T-1FG484I  
M2S025T-1FG484  
M2S025T-FG484I  
M2S025T-FG484  
M2S025TS-1FG484I  
M2S025TS-1FG484  
M2S025TS-FG484I  
M2S025TS-FG484  
M2S025-1FGG484I  
M2S025-1FGG484  
M2S025-FGG484IX417  
M2S025-FGG484I  
M2S025-FGG484X486  
M2S025-FGG484  
M2S025T-1FGG484I  
M2S025T-1FGG484  
M2S025T-FGG484I  
M2S025T-FGG484X416  
M2S025T-FGG484X417  
M2S025T-FGG484

M2S025TS-1FGG484IX416  
M2S025TS-1FGG484I  
M2S025TS-1FGG484  
M2S025TS-FGG484H0013  
M2S025TS-FGG484H0015  
M2S025TS-FGG484H0058  
M2S025TS-FGG484H0059  
M2S025TS-FGG484H0066  
M2S025TS-FGG484H0070  
M2S025TS-FGG484H0079  
M2S025TS-FGG484H0080  
M2S025TS-FGG484H0096  
M2S025TS-FGG484H0100  
M2S025TS-FGG484H0103  
M2S025TS-FGG484H0139  
M2S025TS-FGG484H0167  
M2S025TS-FGG484H0178  
M2S025TS-FGG484H0182  
M2S025TS-FGG484H0203  
M2S025TS-FGG484H0236  
M2S025TS-FGG484H0249  
M2S025TS-FGG484H0253  
M2S025TS-FGG484H0268  
M2S025TS-FGG484H0282  
M2S025TS-FGG484IH0257  
M2S025TS-FGG484IX416  
M2S025TS-FGG484IX486  
M2S025TS-FGG484I  
M2S025TS-FGG484X416  
M2S025TS-FGG484X486  
M2S025TS-FGG484  
M2S025TS-FGG484IH0298  
M2S025TS-FGG484H0302  
M2S025TS-FGG484H0308  
M2S025TS-FGG484H0321  
M2S025TS-FGG484H0330  
M2S025TS-FGG484H0347  
M2S025TS-FGG484H0362  
M2S025TS-FGG484H0364  
M2S025TS-FGG484H0386  
M2S025TS-1FGG484H0398  
M2S025TS-1FGG484X416  
M2S025T-1FCSG158HZ221  
M2S025T-FCSG158IZ222  
M2S025T-1FCSG158I  
M2S025T-FCSG158I  
M2S025-1FCS325I  
M2S025-1FCS325  
M2S025-FCS325I

M2S025-FCS325  
M2S025T-1FCS325I  
M2S025T-1FCS325  
M2S025T-FCS325I  
M2S025T-FCS325  
M2S025TS-1FCS325I  
M2S025TS-1FCS325  
M2S025TS-FCS325I  
M2S025TS-FCS325  
M2S025-1FCSG325I  
M2S025-1FCSG325  
M2S025-FCSG325I  
M2S025-FCSG325  
M2S025T-1FCSG325I  
M2S025T-1FCSG325  
M2S025T-FCSG325I  
M2S025T-FCSG325  
M2S025TS-1FCSG325I  
M2S025TS-1FCSG325  
M2S025TS-FCSG325I  
M2S025TS-FCSG325  
M2S010S-1TQG144T2  
M2S010TS-1VFG256T2  
M2S010TS-1VFG400T2  
M2S010TS-1FGG484T2  
M2S010T-1FG484M  
M2S010TS-1FG484M  
M2S010T-1FGG484MX417  
M2S010T-1FGG484M  
M2S010TS-1FGG484M  
M2S010TS-DIELOTW  
M2S010-TQ144I  
M2S010-TQ144  
M2S010S-TQ144  
M2S010-1TQG144I  
M2S010-1TQG144  
M2S010-TQG144I  
M2S010-TQG144Q143  
M2S010-TQG144Q159  
M2S010-TQG144Q179  
M2S010-TQG144Q184  
M2S010-TQG144S0018  
M2S010-TQG144X416  
M2S010-TQG144X417  
M2S010-TQG144X486  
M2S010-TQG144X52  
M2S010-TQG144Z228  
M2S010-TQG144  
M2S010S-1TQG144I

M2S010S-1TQG144  
M2S010S-TQG144I  
M2S010S-TQG144  
M2S010-1VF256I  
M2S010-1VF256  
M2S010-VF256I  
M2S010-VF256  
M2S010T-1VF256I  
M2S010T-1VF256  
M2S010T-VF256I  
M2S010T-VF256  
M2S010TS-1VF256I  
M2S010TS-1VF256  
M2S010TS-VF256I  
M2S010TS-VF256  
M2S010-1VFG256I  
M2S010-1VFG256X416  
M2S010-1VFG256  
M2S010-VFG256I  
M2S010-VFG256Q178  
M2S010-VFG256S0017  
M2S010-VFG256X416  
M2S010-VFG256X456  
M2S010-VFG256X486  
M2S010-VFG256  
M2S010T-1VFG256I  
M2S010T-1VFG256  
M2S010T-VFG256I  
M2S010T-VFG256  
M2S010TS-1VFG256I  
M2S010TS-1VFG256  
M2S010TS-VFG256H0009  
M2S010TS-VFG256H0022  
M2S010TS-VFG256H0024  
M2S010TS-VFG256H0026  
M2S010TS-VFG256H0029  
M2S010TS-VFG256H0034  
M2S010TS-VFG256H0035  
M2S010TS-VFG256H0041  
M2S010TS-VFG256H0052  
M2S010TS-VFG256H0060  
M2S010TS-VFG256H0063  
M2S010TS-VFG256H0077  
M2S010TS-VFG256H0082  
M2S010TS-VFG256H0086  
M2S010TS-VFG256H0087  
M2S010TS-VFG256H0088  
M2S010TS-VFG256H0097  
M2S010TS-VFG256H0104

M2S010TS-VFG256H0106  
M2S010TS-VFG256H0114  
M2S010TS-VFG256H0119  
M2S010TS-VFG256H0129  
M2S010TS-VFG256H0131  
M2S010TS-VFG256H0134  
M2S010TS-VFG256H0135  
M2S010TS-VFG256H0140  
M2S010TS-VFG256H0146  
M2S010TS-VFG256H0150  
M2S010TS-VFG256H0159  
M2S010TS-VFG256H0164  
M2S010TS-VFG256H0168  
M2S010TS-VFG256H0174  
M2S010TS-VFG256H0188  
M2S010TS-VFG256H0201  
M2S010TS-VFG256H0208  
M2S010TS-VFG256H0209  
M2S010TS-VFG256H0210  
M2S010TS-VFG256H0212  
M2S010TS-VFG256H0214  
M2S010TS-VFG256H0226  
M2S010TS-VFG256H0227  
M2S010TS-VFG256H0228  
M2S010TS-VFG256H0259  
M2S010TS-VFG256H0294  
M2S010TS-VFG256H0296  
M2S010TS-VFG256IH0112  
M2S010TS-VFG256IH0230  
M2S010TS-VFG256IH0292  
M2S010TS-VFG256IX416  
M2S010TS-VFG256I  
M2S010TS-VFG256X416  
M2S010TS-VFG256X486  
M2S010TS-VFG256  
M2S010TS-VFG256H0306  
M2S010TS-VFG256H0307  
M2S010TS-VFG256H0312  
M2S010TS-VFG256IH0322  
M2S010TS-VFG256H0326  
M2S010TS-VFG256IH0333  
M2S010TS-VFG256IH0337  
M2S010TS-VFG256H0340  
M2S010TS-VFG256IH0380  
M2S010TS-VFG256IH0384  
M2S010TS-VFG256H0392  
M2S010TS-VFG256IH0403  
M2S010TS-VFG256H0407  
M2S010-1VF400I

M2S010-1VF400  
M2S010-VF400I  
M2S010-VF400  
M2S010T-1VF400I  
M2S010T-1VF400  
M2S010T-VF400I  
M2S010T-VF400  
M2S010TS-1VF400I  
M2S010TS-1VF400  
M2S010TS-VF400I  
M2S010TS-VF400  
M2S010-1VFG400IX416  
M2S010-1VFG400IZ202  
M2S010-1VFG400IZ227  
M2S010-1VFG400I  
M2S010-1VFG400X416  
M2S010-1VFG400  
M2S010-VFG400IX416  
M2S010-VFG400I  
M2S010-VFG400X416  
M2S010-VFG400  
M2S010T-1VFG400I  
M2S010T-1VFG400  
M2S010T-VFG400I  
M2S010T-VFG400  
M2S010TS-1VFG400I  
M2S010TS-1VFG400X416  
M2S010TS-1VFG400  
M2S010TS-VFG400H0117  
M2S010TS-VFG400H0153  
M2S010TS-VFG400H0155  
M2S010TS-VFG400H0216  
M2S010TS-VFG400H0277  
M2S010TS-VFG400H0284  
M2S010TS-VFG400I  
M2S010TS-VFG400S0008  
M2S010TS-VFG400S0009  
M2S010TS-VFG400S0010  
M2S010TS-VFG400S0011  
M2S010TS-VFG400X416  
M2S010TS-VFG400  
M2S010TS-VFG400H0303  
M2S010-1VFG400IZ361  
M2S010-1FG484I  
M2S010-1FG484  
M2S010-FG484I  
M2S010-FG484  
M2S010T-1FG484I  
M2S010T-1FG484

M2S010T-FG484I  
M2S010T-FG484  
M2S010TS-1FG484I  
M2S010TS-1FG484  
M2S010TS-FG484I  
M2S010TS-FG484  
M2S010-1FVG484I  
M2S010-1FVG484  
M2S010-FVG484IX414  
M2S010-FVG484IX416  
M2S010-FVG484IX417  
M2S010-FVG484IX418  
M2S010-FVG484I  
M2S010-FVG484X416  
M2S010-FVG484  
M2S010T-1FVG484I  
M2S010T-1FVG484X417  
M2S010T-1FVG484  
M2S010T-FVG484IX418  
M2S010T-FVG484I  
M2S010T-FVG484X416  
M2S010T-FVG484XZ82  
M2S010T-FVG484  
M2S010TS-1FVG484I  
M2S010TS-1FVG484  
M2S010TS-FVG484IH0199  
M2S010TS-FVG484IH0235  
M2S010TS-FVG484IS0005  
M2S010TS-FVG484IX416  
M2S010TS-FVG484IX418  
M2S010TS-FVG484I  
M2S010TS-FVG484X418  
M2S010TS-FVG484  
M2S150T-1FCV484M  
M2S150TS-1FCV484M  
M2S150T-1FCV484MX259  
M2S150T-1FC1152M  
M2S150TS-1FC1152M  
M2S150T-1FC1152MX259  
M2S150TS-1FC1152MX417  
M2S150TS-1FC1152MX259  
M2S150T-1FCG1152M  
M2S150TS-1FCG1152M  
M2S150TS-WAFERLOTX417  
M2S150TS-WAFERLOT  
M2S150TS-DIELOTWX555  
M2S150TS-DIELOTWX556  
M2S150TS-DIELOTW  
M2S150-1FCV484I

M2S150-1FCV484  
M2S150-FCV484I  
M2S150-FCV484  
M2S150T-1FCV484IX259  
M2S150T-1FCV484I  
M2S150T-1FCV484  
M2S150T-FCV484I  
M2S150T-FCV484  
M2S150TS-1FCV484I  
M2S150TS-1FCV484  
M2S150TS-FCV484I  
M2S150TS-FCV484  
M2S150T-1FCV484IX3  
M2S150-1FCVG484I  
M2S150-1FCVG484  
M2S150-FCVG484I  
M2S150-FCVG484  
M2S150T-1FCVG484I  
M2S150T-1FCVG484  
M2S150T-FCVG484IX94  
M2S150T-FCVG484I  
M2S150T-FCVG484  
M2S150TS-1FCVG484I  
M2S150TS-1FCVG484  
M2S150TS-FCVG484I  
M2S150TS-FCVG484  
M2S150-1FC1152I  
M2S150-1FC1152  
M2S150-FC1152I  
M2S150-FC1152  
M2S150T-1FC1152IX3  
M2S150T-1FC1152I  
M2S150T-1FC1152  
M2S150T-FC1152I  
M2S150T-FC1152X416  
M2S150T-FC1152  
M2S150TS-1FC1152IX130  
M2S150TS-1FC1152IX167  
M2S150TS-1FC1152I  
M2S150TS-1FC1152  
M2S150TS-FC1152I  
M2S150TS-FC1152X416  
M2S150TS-FC1152  
M2S150TS-1FC1152IX3  
M2S150-1FCG1152I  
M2S150-1FCG1152  
M2S150-FCG1152I  
M2S150-FCG1152X486  
M2S150-FCG1152

M2S150T-1FCG1152IX417  
M2S150T-1FCG1152I  
M2S150T-1FCG1152X416  
M2S150T-1FCG1152  
M2S150T-FCG1152I  
M2S150T-FCG1152X416  
M2S150T-FCG1152X417  
M2S150T-FCG1152  
M2S150TS-1FCG1152H0012  
M2S150TS-1FCG1152H0038  
M2S150TS-1FCG1152H0061  
M2S150TS-1FCG1152H0084  
M2S150TS-1FCG1152H0105  
M2S150TS-1FCG1152H0121  
M2S150TS-1FCG1152H0163  
M2S150TS-1FCG1152H0186  
M2S150TS-1FCG1152H0195  
M2S150TS-1FCG1152H0261  
M2S150TS-1FCG1152IX417  
M2S150TS-1FCG1152I  
M2S150TS-1FCG1152X416  
M2S150TS-1FCG1152X417  
M2S150TS-1FCG1152  
M2S150TS-FCG1152H0012  
M2S150TS-FCG1152H0138  
M2S150TS-FCG1152I  
M2S150TS-FCG1152X416  
M2S150TS-FCG1152  
M2S150TS-1FCG1152H0313  
M2S150TS-1FCG1152H0327  
M2S150TS-1FCG1152H0338  
M2S150TS-1FCG1152H0342  
M2S150TS-1FCG1152H0343  
M2S150TS-1FCG1152H0354  
M2S150TS-1FCG1152H0363  
M2S150-1FCS536I  
M2S150-1FCS536  
M2S150-FCS536I  
M2S150-FCS536  
M2S150T-1FCS536I  
M2S150T-1FCS536  
M2S150T-FCS536I  
M2S150T-FCS536  
M2S150TS-1FCS536I  
M2S150TS-1FCS536  
M2S150TS-FCS536I  
M2S150TS-FCS536  
M2S150-1FCSG536I  
M2S150-1FCSG536

M2S150-FCSG536I  
M2S150-FCSG536  
M2S150T-1FCSG536I  
M2S150T-1FCSG536  
M2S150T-FCSG536I  
M2S150T-FCSG536  
M2S150TS-1FCSG536I  
M2S150TS-1FCSG536  
M2S150TS-FCSG536I  
M2S150TS-FCSG536X416  
M2S150TS-FCSG536  
M2S090TS-1FGG484T2  
M2S090TS-1FGG676T2  
M2S090T-1FG484M  
M2S090TS-1FG484MX3  
M2S090TS-1FG484MX471  
M2S090TS-1FG484M  
M2S090TS-1FG484MX399  
M2S090T-1FGG484MX399  
M2S090T-1FGG484MX416  
M2S090T-1FGG484MX417  
M2S090T-1FGG484M  
M2S090TS-1FGG484M  
M2S090T-1FGG484IX538  
M2S090TS-DIELOTW  
M2S090-1FCSG325I  
M2S090-1FCSG325  
M2S090-FCSG325I  
M2S090-FCSG325  
M2S090T-1FCSG325I  
M2S090T-1FCSG325Q183  
M2S090T-1FCSG325  
M2S090T-FCSG325I  
M2S090T-FCSG325  
M2S090TS-1FCSG325IX416  
M2S090TS-1FCSG325IX418  
M2S090TS-1FCSG325I  
M2S090TS-1FCSG325  
M2S090TS-FCSG325IX418  
M2S090TS-FCSG325I  
M2S090TS-FCSG325  
M2S090-1FG484IX6  
M2S090-1FG484I  
M2S090-1FG484  
M2S090-FG484IX416  
M2S090-FG484I  
M2S090-FG484X416  
M2S090-FG484X456  
M2S090-FG484

M2S090T-1FG484IX399  
M2S090T-1FG484IX416  
M2S090T-1FG484IX538  
M2S090T-1FG484I  
M2S090T-1FG484  
M2S090T-FG484I  
M2S090T-FG484X538  
M2S090T-FG484  
M2S090TS-1FG484IX416  
M2S090TS-1FG484IX418  
M2S090TS-1FG484I  
M2S090TS-1FG484  
M2S090TS-FG484IX416  
M2S090TS-FG484IX456  
M2S090TS-FG484I  
M2S090TS-FG484X416  
M2S090TS-FG484  
M2S090TS-1FG484IX3  
M2S090-FG484IX538  
M2S090-1FGG484IX418  
M2S090-1FGG484I  
M2S090-1FGG484X418  
M2S090-1FGG484  
M2S090-FGG484IX416  
M2S090-FGG484IX417  
M2S090-FGG484IX418  
M2S090-FGG484I  
M2S090-FGG484X416  
M2S090-FGG484X417  
M2S090-FGG484X418  
M2S090-FGG484X456  
M2S090-FGG484  
M2S090T-1FGG484IX417  
M2S090T-1FGG484IX418  
M2S090T-1FGG484I  
M2S090T-1FGG484  
M2S090T-FGG484IX417  
M2S090T-FGG484IX418  
M2S090T-FGG484I  
M2S090T-FGG484X416  
M2S090T-FGG484X417  
M2S090T-FGG484  
M2S090TS-1FGG484IX416  
M2S090TS-1FGG484IX418  
M2S090TS-1FGG484I  
M2S090TS-1FGG484X416  
M2S090TS-1FGG484X418  
M2S090TS-1FGG484  
M2S090TS-FGG484IX416

M2S090TS-FGG484IX418  
M2S090TS-FGG484I  
M2S090TS-FGG484X416  
M2S090TS-FGG484  
M2S090T-1FGG484X538  
M2S090TS-FGG484IH0365  
M2S090TS-FGG484IH0382  
M2S090-1FG676IX417  
M2S090-1FG676I  
M2S090-1FG676  
M2S090-FG676IX416  
M2S090-FG676I  
M2S090-FG676X416  
M2S090-FG676  
M2S090T-1FG676I  
M2S090T-1FG676  
M2S090T-FG676IX417  
M2S090T-FG676I  
M2S090T-FG676  
M2S090TS-1FG676IX417  
M2S090TS-1FG676I  
M2S090TS-1FG676  
M2S090TS-FG676I  
M2S090TS-FG676  
M2S090-1FGG676I  
M2S090-1FGG676  
M2S090-FGG676I  
M2S090-FGG676ORT  
M2S090-FGG676X416  
M2S090-FGG676X425  
M2S090-FGG676  
M2S090T-1FGG676I  
M2S090T-1FGG676Q149  
M2S090T-1FGG676S0001  
M2S090T-1FGG676S0002  
M2S090T-1FGG676S0003  
M2S090T-1FGG676S0006  
M2S090T-1FGG676S0007  
M2S090T-1FGG676S0012  
M2S090T-1FGG676S0016  
M2S090T-1FGG676S0027  
M2S090T-1FGG676S0028  
M2S090T-1FGG676X416  
M2S090T-1FGG676Z246  
M2S090T-1FGG676  
M2S090T-FGG676I  
M2S090T-FGG676Q189  
M2S090T-FGG676S0006  
M2S090T-FGG676X416

M2S090T-FGG676  
M2S090TS-1FGG676H0017  
M2S090TS-1FGG676H0044  
M2S090TS-1FGG676H0046  
M2S090TS-1FGG676H0071  
M2S090TS-1FGG676H0090  
M2S090TS-1FGG676H0132  
M2S090TS-1FGG676H0144  
M2S090TS-1FGG676H0223  
M2S090TS-1FGG676H0280  
M2S090TS-1FGG676IX418  
M2S090TS-1FGG676I  
M2S090TS-1FGG676X416  
M2S090TS-1FGG676  
M2S090TS-FGG676H0137  
M2S090TS-FGG676IH0053  
M2S090TS-FGG676IH0076  
M2S090TS-FGG676IH0107  
M2S090TS-FGG676IH0122  
M2S090TS-FGG676IH0145  
M2S090TS-FGG676IH0231  
M2S090TS-FGG676IH0258  
M2S090TS-FGG676IH0275  
M2S090TS-FGG676IH0279  
M2S090TS-FGG676IS0004  
M2S090TS-FGG676IX416  
M2S090TS-FGG676I  
M2S090TS-FGG676  
M2S090T-1FGG676Q326  
M2S090TS-FGG676H0309  
M2S090T-1FGG676H0316  
M2S090TS-FGG676X416  
M2S090T-FGG676S0029  
M2S090-1FGG676IX538  
M2S090T-1FGG676S0030  
M2S090T-1FGG676S0032  
M2S090TS-FGG676IH0334  
M2S090T-1FGG676Q353  
M2S090T-1FGG676Q355  
M2S090TS-FGG676IH0370  
M2S090TS-1FGG676H0374  
M2S090TS-FGG676H0376  
M2S090TS-FGG676H0379  
M2S090TS-1FGG676H0396  
M2S090TS-1FGG676H0399  
M2S090TS-1FGG676H0408  
M2S090T-1FGG676S0044  
M2S090T-1FGG676S0047  
M2S090-1FCS325I

M2S090-1FCS325  
M2S090-FCS325I  
M2S090-FCS325X339  
M2S090-FCS325  
M2S090T-1FCS325I  
M2S090T-1FCS325  
M2S090T-FCS325I  
M2S090T-FCS325  
M2S090TS-1FCS325IX417  
M2S090TS-1FCS325IX418  
M2S090TS-1FCS325I  
M2S090TS-1FCS325  
M2S090TS-FCS325IX416  
M2S090TS-FCS325IX417  
M2S090TS-FCS325I  
M2S090TS-FCS325  
M2S060TS-1VFG400T2  
M2S060TS-1FGG484T2  
M2S060TS-1FGG676T2  
M2S060T-1FG484M  
M2S060TS-1FG484M  
M2S060T-1FGG484M  
M2S060TS-1FGG484M  
M2S060TS-WAFERLOT  
M2S060TS-DIELOTWX554  
M2S060TS-DIELOTW  
M2S060-1VF400I  
M2S060-1VF400  
M2S060-VF400I  
M2S060-VF400  
M2S060T-1VF400I  
M2S060T-1VF400  
M2S060T-VF400I  
M2S060T-VF400  
M2S060TS-1VF400I  
M2S060TS-1VF400  
M2S060TS-VF400I  
M2S060TS-VF400  
M2S060-1VFG400I  
M2S060-1VFG400  
M2S060-VFG400I  
M2S060-VFG400  
M2S060T-1VFG400I  
M2S060T-1VFG400  
M2S060T-VFG400I  
M2S060T-VFG400  
M2S060TS-1VFG400I  
M2S060TS-1VFG400  
M2S060TS-VFG400IH0115

M2S060TS-VFG400IH0204  
M2S060TS-VFG400IH0213  
M2S060TS-VFG400IH0248  
M2S060TS-VFG400IH0269  
M2S060TS-VFG400IH0270  
M2S060TS-VFG400IH0278  
M2S060TS-VFG400IH0286  
M2S060TS-VFG400IH0297  
M2S060TS-VFG400I  
M2S060TS-VFG400  
M2S060TS-VFG400IH0301  
M2S060TS-VFG400IH0323  
M2S060TS-VFG400IH0331  
M2S060-VFG400X456  
M2S060-1FG484I  
M2S060-1FG484  
M2S060-FG484I  
M2S060-FG484X456  
M2S060-FG484  
M2S060T-1FG484I  
M2S060T-1FG484  
M2S060T-FG484I  
M2S060T-FG484  
M2S060TS-1FG484I  
M2S060TS-1FG484  
M2S060TS-FG484I  
M2S060TS-FG484  
M2S060-1FGG484I  
M2S060-1FGG484  
M2S060-FGG484IX486  
M2S060-FGG484I  
M2S060-FGG484X456  
M2S060-FGG484X486  
M2S060-FGG484  
M2S060T-1FGG484I  
M2S060T-1FGG484  
M2S060T-FGG484IX416  
M2S060T-FGG484I  
M2S060T-FGG484X486  
M2S060T-FGG484  
M2S060TS-1FGG484I  
M2S060TS-1FGG484  
M2S060TS-FGG484H0028  
M2S060TS-FGG484H0110  
M2S060TS-FGG484H0125  
M2S060TS-FGG484H0246  
M2S060TS-FGG484IH0020  
M2S060TS-FGG484IH0028  
M2S060TS-FGG484IH0032

M2S060TS-FGG484IH0039  
M2S060TS-FGG484IH0043  
M2S060TS-FGG484IH0067  
M2S060TS-FGG484IH0081  
M2S060TS-FGG484IH0118  
M2S060TS-FGG484IH0158  
M2S060TS-FGG484IH0165  
M2S060TS-FGG484IH0169  
M2S060TS-FGG484IH0181  
M2S060TS-FGG484IH0183  
M2S060TS-FGG484IH0193  
M2S060TS-FGG484IH0205  
M2S060TS-FGG484IH0220  
M2S060TS-FGG484IH0229  
M2S060TS-FGG484IH0254  
M2S060TS-FGG484IH0281  
M2S060TS-FGG484IX486  
M2S060TS-FGG484I  
M2S060TS-FGG484X486  
M2S060TS-FGG484  
M2S060TS-FGG484IH0299  
M2S060TS-FGG484IH0300  
M2S060TS-FGG484IH0304  
M2S060TS-FGG484IH0320  
M2S060TS-FGG484IH0324  
M2S060TS-FGG484IH0328  
M2S060TS-FGG484IH0329  
M2S060TS-FGG484IH0335  
M2S060TS-FGG484IH0336  
M2S060TS-FGG484IH0344  
M2S060TS-FGG484IH0348  
M2S060TS-FGG484IH0351  
M2S060TS-FGG484IH0353  
M2S060TS-FGG484IH0359  
M2S060TS-FGG484IH0361  
M2S060TS-FGG484IH0373  
M2S060TS-FGG484IH0375  
M2S060TS-FGG484IH0377  
M2S060TS-FGG484IH0378  
M2S060TS-FGG484IH0385  
M2S060TS-FGG484IH0389  
M2S060TS-FGG484IH0391  
M2S060TS-FGG484IH0393  
M2S060TS-FGG484IH0394  
M2S060TS-FGG484IH0400  
M2S060TS-FGG484IH0401  
M2S060TS-FGG484IH0402  
M2S060TS-FGG484IH0405  
M2S060TS-FGG484IS0046

M2S060-1FG676I  
M2S060-1FG676  
M2S060-FG676I  
M2S060-FG676X456  
M2S060-FG676  
M2S060T-1FG676I  
M2S060T-1FG676  
M2S060T-FG676I  
M2S060T-FG676  
M2S060TS-1FG676I  
M2S060TS-1FG676  
M2S060TS-FG676I  
M2S060TS-FG676  
M2S060-1FGG676I  
M2S060-1FGG676  
M2S060-FGG676IX486  
M2S060-FGG676I  
M2S060-FGG676X456  
M2S060-FGG676X486  
M2S060-FGG676  
M2S060T-1FGG676I  
M2S060T-1FGG676S0013  
M2S060T-1FGG676S0015  
M2S060T-1FGG676S0019  
M2S060T-1FGG676S0024  
M2S060T-1FGG676  
M2S060T-FGG676IX486  
M2S060T-FGG676I  
M2S060T-FGG676Q128  
M2S060T-FGG676Q174  
M2S060T-FGG676X486  
M2S060T-FGG676  
M2S060TS-1FGG676I  
M2S060TS-1FGG676  
M2S060TS-FGG676H0093  
M2S060TS-FGG676H0095  
M2S060TS-FGG676H0157  
M2S060TS-FGG676H0160  
M2S060TS-FGG676H0161  
M2S060TS-FGG676H0171  
M2S060TS-FGG676H0192  
M2S060TS-FGG676H0198  
M2S060TS-FGG676H0207  
M2S060TS-FGG676H0255  
M2S060TS-FGG676H0287  
M2S060TS-FGG676H0288  
M2S060TS-FGG676IH0019  
M2S060TS-FGG676IH0031  
M2S060TS-FGG676IH0042

M2S060TS-FGG676IH0085  
M2S060TS-FGG676IH0089  
M2S060TS-FGG676IH0092  
M2S060TS-FGG676IH0102  
M2S060TS-FGG676IH0108  
M2S060TS-FGG676IH0111  
M2S060TS-FGG676IH0151  
M2S060TS-FGG676IH0166  
M2S060TS-FGG676IH0179  
M2S060TS-FGG676IH0180  
M2S060TS-FGG676IH0196  
M2S060TS-FGG676IH0202  
M2S060TS-FGG676IH0218  
M2S060TS-FGG676IH0222  
M2S060TS-FGG676IH0238  
M2S060TS-FGG676IH0239  
M2S060TS-FGG676IH0240  
M2S060TS-FGG676IH0242  
M2S060TS-FGG676IH0250  
M2S060TS-FGG676IH0252  
M2S060TS-FGG676IH0263  
M2S060TS-FGG676IH0266  
M2S060TS-FGG676IH0267  
M2S060TS-FGG676IH0271  
M2S060TS-FGG676IH0272  
M2S060TS-FGG676IH0273  
M2S060TS-FGG676IH0274  
M2S060TS-FGG676IX486  
M2S060TS-FGG676I  
M2S060TS-FGG676Q173  
M2S060TS-FGG676Q269  
M2S060TS-FGG676S0021  
M2S060TS-FGG676S0022  
M2S060TS-FGG676S0025  
M2S060TS-FGG676S0026  
M2S060TS-FGG676X486  
M2S060TS-FGG676  
M2S060T-1FGG676Q327  
M2S060TS-FGG676IH0318  
M2S060T-1FGG676S0031  
M2S060TS-FGG676H0339  
M2S060TS-FGG676S0033  
M2S060TS-FGG676IH0349  
M2S060TS-FGG676IH0350  
M2S060T-1FGG676S0036  
M2S060TS-FGG676IH0356  
M2S060TS-FGG676IH0357  
M2S060TS-FGG676IH0358  
M2S060TS-FGG676IH0366

M2S060TS-FGG676IH0367  
M2S060T-1FGG676S0041  
M2S060TS-FGG676IH0387  
M2S060TS-FGG676IH0390  
M2S060TS-FGG676IH0395  
M2S060TS-FGG676IH0397  
M2S060T-1FGG676S0045  
M2S060-1FCS325I  
M2S060-1FCS325  
M2S060-FCS325I  
M2S060-FCS325  
M2S060T-1FCS325I  
M2S060T-1FCS325  
M2S060T-FCS325I  
M2S060T-FCS325  
M2S060TS-1FCS325I  
M2S060TS-1FCS325  
M2S060TS-FCS325I  
M2S060TS-FCS325  
M2S060-1FCSG325I  
M2S060-1FCSG325  
M2S060-FCSG325I  
M2S060-FCSG325  
M2S060T-1FCSG325I  
M2S060T-1FCSG325  
M2S060T-FCSG325I  
M2S060T-FCSG325  
M2S060TS-1FCSG325I  
M2S060TS-1FCSG325  
M2S060TS-FCSG325I  
M2S060TS-FCSG325  
M2S060T-1VFG784I  
M2S060T-1VFG784  
M2S060T-VFG784I  
M2S060T-VFG784  
M2S060TS-1VFG784I  
M2S060TS-1VFG784  
M2S060TS-VFG784I  
M2S060TS-VFG784



---

## IGLOO 2 FPGA and SmartFusion 2 SoC FPGA

---

### INTRODUCTION

This datasheet covers the electrical AC and DC specifications for five temperature grades of devices (part number prefixes M2GL005, M2GL010, M2GL025, M2GL050, M2GL060, M2GL090, M2GL150) and four temperature grades of devices (part number prefixes M2S005, M2S010, M2S025, M2S050, M2S060, M2S090 and M2S150). AC and DC electrical characteristics and parametric values, unless otherwise noted, apply to all the temperature grade devices. Users are expected to close timing using SmartTime for the speed and temperature grade of the device chosen.

Microchip's mainstream SmartFusion<sup>®</sup> 2 SoC and IGLOO<sup>®</sup> 2 FPGA families integrate an industry standard 4-input LookUp Table (LUT)-based FPGA fabric with integrated math blocks, multiple embedded memory blocks, and high-performance SerDes communication interfaces on a single chip. Both families benefit from low-power flash technology and are the most secure and reliable FPGAs in the industry. These next generation devices offer up to 150K Logic Elements, up to 5 MBs of embedded RAM, up to 16 SerDes lanes, up to four PCI Express Gen 2 endpoints, and integrated hard DDR3 memory controllers with error correction.

SmartFusion 2 devices integrate an entire low-power, real-time Microcontroller Subsystem (MSS) with a rich set of industry-standard peripherals including Ethernet, USB, and CAN, while IGLOO 2 devices integrate a high-performance memory subsystem with on-chip flash, 32 KB embedded SRAM, and multiple DMA controllers.

---

# Contents

---

|                                                                          |     |
|--------------------------------------------------------------------------|-----|
| INTRODUCTION .....                                                       | 1   |
| 1.0 Device Status .....                                                  | 3   |
| 2.0 References .....                                                     | 4   |
| 3.0 Electrical Specifications .....                                      | 5   |
| 3.1 Operating Conditions .....                                           | 5   |
| 3.2 Power Consumption .....                                              | 11  |
| 3.3 Average Fabric Temperature and Voltage Derating Factors .....        | 13  |
| 3.4 Timing Model .....                                                   | 13  |
| 3.5 User I/O Characteristics .....                                       | 15  |
| 3.6 Memory Interface and Voltage Referenced I/O Standards .....          | 38  |
| 3.7 Differential I/O Standards .....                                     | 51  |
| 3.8 I/O Register Specifications .....                                    | 60  |
| 3.9 DDR Module Specification .....                                       | 64  |
| 3.10 Logic Element Specifications .....                                  | 68  |
| 3.11 Global Resource Characteristics .....                               | 70  |
| 3.12 FPGA Fabric SRAM .....                                              | 71  |
| 3.13 Programming Times .....                                             | 85  |
| 3.14 Math Block Timing Characteristics .....                             | 90  |
| 3.15 Embedded NVM (eNVM) Characteristics .....                           | 91  |
| 3.16 SRAM PUF .....                                                      | 91  |
| 3.17 Non-Deterministic Random Bit Generator (NRBG) Characteristics ..... | 92  |
| 3.18 Cryptographic Block Characteristics .....                           | 93  |
| 3.19 Crystal Oscillator .....                                            | 93  |
| 3.20 On-Chip Oscillator .....                                            | 95  |
| 3.21 Clock Conditioning Circuits (CCC) .....                             | 96  |
| 3.22 JTAG .....                                                          | 99  |
| 3.23 System Controller SPI Characteristics .....                         | 100 |
| 3.24 Power-up to Functional Times .....                                  | 101 |
| 3.25 DEVRST_N Characteristics .....                                      | 103 |
| 3.26 DEVRST_N to Functional Times .....                                  | 104 |
| 3.27 Flash*Freeze Timing Characteristics .....                           | 106 |
| 3.28 DDR Memory Interface Characteristics .....                          | 107 |
| 3.29 SFP Transceiver Characteristics .....                               | 107 |
| 3.30 SerDes Electrical and Timing AC and DC Characteristics .....        | 107 |
| 3.31 SmartFusion 2 Specifications .....                                  | 110 |
| 3.32 CAN Controller Characteristics .....                                | 114 |
| 3.33 USB Characteristics .....                                           | 114 |
| 3.34 MMUART Characteristics .....                                        | 114 |
| 3.35 IGLOO 2 Specifications .....                                        | 114 |
| Appendix A: Revision History .....                                       | 117 |
| The Microchip WebSite .....                                              | 121 |
| Customer Change Notification Service .....                               | 121 |
| Customer Support .....                                                   | 121 |

---

## 1.0 DEVICE STATUS

The following table lists the design security densities and development status of the IGLOO 2 FPGA and SmartFusion 2 SoC FPGA devices,

**TABLE 1-1: IGLOO 2 AND SMARTFUSION 2 DESIGN SECURITY DENSITIES**

| Design Security Device Densities | Status     |
|----------------------------------|------------|
| 005                              | Production |
| 010, 010T                        | Production |
| 025, 025T                        | Production |
| 050, 050T                        | Production |
| 060, 060T                        | Production |
| 090, 090T                        | Production |
| 150, 150T                        | Production |

The following table lists the data security densities and development status of the IGLOO 2 FPGA and SmartFusion 2 SoC FPGA devices.

**TABLE 1-2: IGLOO 2 AND SMARTFUSION 2 DATA SECURITY DENSITIES**

| Data Security Device Densities | Status     |
|--------------------------------|------------|
| 005S                           | Production |
| 010TS                          | Production |
| 025TS                          | Production |
| 050TS                          | Production |
| 060TS                          | Production |
| 090TS                          | Production |
| 150TS                          | Production |

---

## 2.0 REFERENCES

The following documents are recommended references:

- *PB0121: IGLOO2 Product Brief*
- *DS0124: IGLOO2 Pin Descriptions*
- *PB0115: SmartFusion2 SoC FPGA Product Brief*
- *DS0115: SmartFusion2 Pin Descriptions*

All product documentation for IGLOO 2 and SmartFusion 2 is available at:

- For IGLOO 2: <https://www.microchip.com/en-us/products/fpgas-and-plds/fpgas/igloo-2-fpgas#Documentation>
- For SmartFusion 2: <https://www.microchip.com/en-us/products/fpgas-and-plds/system-on-chip-fpgas/smartfusion-2-fpgas#Documentation>

## 3.0 ELECTRICAL SPECIFICATIONS

### 3.1 Operating Conditions

The following table lists the stress limits. Stress applied above the specified limit may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Absolute maximum ratings are stress ratings only; functional operation of the device at these or any other conditions beyond those listed under the recommended operating conditions specified in the following table are not implied.

**TABLE 3-1: ABSOLUTE MAXIMUM RATINGS**

| Parameter                                                                                                 | Symbol                       | Min. | Max. | Unit |
|-----------------------------------------------------------------------------------------------------------|------------------------------|------|------|------|
| DC core supply voltage. Must always power this pin.                                                       | V <sub>DD</sub>              | -0.3 | 1.32 | V    |
| Power supply for charge pumps (for normal operation and programming). Must always power this pin.         | V <sub>PP</sub>              | -0.3 | 3.63 | V    |
| Analog power pad for MDDR PLL                                                                             | MSS_MDDR_PLL_VDDA            | -0.3 | 3.63 | V    |
| Analog power pad for MDDR PLL                                                                             | HPMS_MDDR_PLL_VDDA           | -0.3 | 3.63 | V    |
| Analog power pad for FDDR PLL                                                                             | FDDR_PLL_VDDA                | -0.3 | 3.63 | V    |
| Analog power pad for MDDR PLL                                                                             | PLL0_PLL1_MSS_MDDR_VDDA      | -0.3 | 3.63 | V    |
| Analog power pad for MDDR PLL                                                                             | PLL0_PLL1_HPMS_MDDR_VDDA     | -0.3 | 3.63 | V    |
| Analog power pad for PLL0-5                                                                               | CCC_XX[01]_PLL_VDDA          | -0.3 | 3.63 | V    |
| High supply voltage for PLL SerDes[01]                                                                    | SERDES_[01]_PLL_VDDA         | -0.3 | 3.63 | V    |
| Analog power for SerDes[01] PLL lane0 to lane3. This is a 2.5V SerDes internal PLL supply.                | SERDES_[01]_L[0123]_VDDAPLL  | -0.3 | 2.75 | V    |
| TX/RX analog I/O voltage. Low voltage power for the lanes of SerDesIF0. This is a 1.2V SerDes PMA supply. | SERDES_[01]_L[0123]_VDDAIO   | -0.3 | 1.32 | V    |
| PCIe/PCS power supply                                                                                     | SERDES_[01]_VDD              | -0.3 | 1.32 | V    |
| DC FPGA I/O buffer supply voltage for MSIO I/O bank                                                       | V <sub>DDI<sub>x</sub></sub> | -0.3 | 3.63 | V    |
| DC FPGA I/O buffer supply voltage for MSIOD/DDRIO I/O banks                                               | V <sub>DDI<sub>x</sub></sub> | -0.3 | 2.75 | V    |
| I/O Input voltage for MSIO I/O bank                                                                       | V <sub>I</sub>               | -0.3 | 3.63 | V    |
| I/O Input voltage for MSIOD/DDRIO I/O bank                                                                | V <sub>I</sub>               | -0.3 | 2.75 | V    |
| Analog sense circuit supply of embedded nonvolatile memory (eNVM). Must be shorted to V <sub>PP</sub> .   | V <sub>PPNVM</sub>           | -0.3 | 3.63 | V    |
| Storage temperature                                                                                       | T <sub>STG</sub>             | -65  | 150  | °C   |
| Junction temperature                                                                                      | T <sub>J</sub>               | -55  | 135  | °C   |

See [Table 3-3](#) for flash programming and retention maximum limits. See [Table 3-2](#) for recommended operating conditions.

**TABLE 3-2: RECOMMENDED OPERATING CONDITIONS**

| Parameter                                                                                                    | Symbol          | Min.  | Typ. | Max.  | Unit | Conditions |
|--------------------------------------------------------------------------------------------------------------|-----------------|-------|------|-------|------|------------|
| Operating junction temperature                                                                               | T <sub>J</sub>  | 0     | 25   | 85    | °C   | Commercial |
|                                                                                                              |                 | -40   | 25   | 100   | °C   | Industrial |
| Programming junction temperatures <sup>†</sup>                                                               | T <sub>J</sub>  | 0     | 25   | 85    | °C   | Commercial |
|                                                                                                              |                 | -40   | 25   | 100   | °C   | Industrial |
| DC core supply voltage. Must always power this pin.                                                          | V <sub>DD</sub> | 1.14  | 1.2  | 1.26  | V    |            |
| Power supply for charge pumps (for normal operation and programming) for the 005, 010, 025, 050, 060 devices | V <sub>PP</sub> | 2.375 | 2.5  | 2.625 | V    | 2.5V range |
|                                                                                                              |                 | 3.15  | 3.3  | 3.45  | V    | 3.3V range |

**TABLE 3-2: RECOMMENDED OPERATING CONDITIONS (CONTINUED)**

| Parameter                                                                                                 | Symbol                     | Min.                     | Typ.                    | Max.                     | Unit | Conditions |
|-----------------------------------------------------------------------------------------------------------|----------------------------|--------------------------|-------------------------|--------------------------|------|------------|
| Power supply for charge pumps (for normal operation and programming) for the 090 and 150 devices          | V <sub>PP</sub>            | 3.15                     | 3.3                     | 3.45                     | V    | 3.3V range |
| Analog power pad for MDDR PLL                                                                             | MSS_MDDR_PLL_VDDA          | 2.375                    | 2.5                     | 2.625                    | V    | 2.5V range |
|                                                                                                           |                            | 3.15                     | 3.3                     | 3.45                     | V    | 3.3V range |
| Analog power pad for MDDR PLL                                                                             | HPMS_MDDR_PLL_VDDA         | 2.375                    | 2.5                     | 2.625                    | V    | 2.5V range |
|                                                                                                           |                            | 3.15                     | 3.3                     | 3.45                     | V    | 3.3V range |
| Analog power pad for FDDR PLL                                                                             | FDDR_PLL_VDDA              | 2.375                    | 2.5                     | 2.625                    | V    | 2.5V range |
|                                                                                                           |                            | 3.15                     | 3.3                     | 3.45                     | V    | 3.3V range |
| Analog power pad for MDDR PLL                                                                             | PLL0_PLL1_MSS_MDDR_VDDA    | 2.375                    | 2.5                     | 2.625                    | V    | 2.5V range |
|                                                                                                           |                            | 3.15                     | 3.3                     | 3.45                     | V    | 3.3V range |
| Analog power pad for MDDR PLL                                                                             | PLL0_PLL1_HPMS_MD-DR_VDDA  | 2.375                    | 2.5                     | 2.625                    | V    | 2.5V range |
|                                                                                                           |                            | 3.15                     | 3.3                     | 3.45                     | V    | 3.3V range |
| Analog power pad for PLL0 to PLL5                                                                         | CCC_XX[01]_PLL_VDDA        | 2.375                    | 2.5                     | 2.625                    | V    | 2.5V range |
|                                                                                                           |                            | 3.15                     | 3.3                     | 3.45                     | V    | 3.3V range |
| High supply voltage for PLL SerDes[01]                                                                    | SERDES_[01]_PLL_VDDA       | 2.375                    | 2.5                     | 2.625                    | V    | 2.5V range |
|                                                                                                           |                            | 3.15                     | 3.3                     | 3.45                     | V    | 3.3V range |
| Analog power for SerDes[01] PLL Lane 0 to Lane 3. This is a 2.5V SerDes internal PLL supply.              | SERDES_[01]_L[0123]_VDAPLL | 2.375                    | 2.5                     | 2.625                    | V    | —          |
| TX/RX analog I/O voltage. Low voltage power for the lanes of SerDesIF0. This is a 1.2V SerDes PMA supply. | SERDES_[01]_L[0123]_VDDAIO | 1.14                     | 1.2                     | 1.26                     | V    | —          |
| PCIe/PCS power supply                                                                                     | SERDES_[01]_VDD            | 1.14                     | 1.2                     | 1.26                     | V    | —          |
| 1.2V DC supply voltage                                                                                    | V <sub>DDIX</sub>          | 1.14                     | 1.2                     | 1.26                     | V    | —          |
| 1.5V DC supply voltage                                                                                    | V <sub>DDIX</sub>          | 1.425                    | 1.5                     | 1.575                    | V    | —          |
| 1.8V DC supply voltage                                                                                    | V <sub>DDIX</sub>          | 1.71                     | 1.8                     | 1.89                     | V    | —          |
| 2.5V DC supply voltage                                                                                    | V <sub>DDIX</sub>          | 2.375                    | 2.5                     | 2.625                    | V    | —          |
| 3.3V DC supply voltage                                                                                    | V <sub>DDIX</sub>          | 3.15                     | 3.3                     | 3.45                     | V    | —          |
| LVDS differential I/O                                                                                     | V <sub>DDIX</sub>          | 2.375                    | 2.5                     | 3.45                     | V    | —          |
| B-LVDS, M-LVDS, Mini-LVDS, RSDS differential I/O                                                          | V <sub>DDIX</sub>          | 2.375                    | 2.5                     | 2.625                    | V    | —          |
| LVPECL differential I/O                                                                                   | V <sub>DDIX</sub>          | 3.15                     | 3.3                     | 3.45                     | V    | —          |
| Reference voltage supply for FDDR and MDDR                                                                | V <sub>REFx</sub>          | 0.49 × V <sub>DDIX</sub> | 0.5 × V <sub>DDIX</sub> | 0.51 × V <sub>DDIX</sub> | V    | —          |
| Analog sense circuit supply of embedded nonvolatile memory (eNVM). Must be shorted to V <sub>PP</sub> .   | V <sub>PPNVM</sub>         | 2.375                    | 2.5                     | 2.625                    | V    | 2.5V range |
|                                                                                                           |                            | 3.15                     | 3.3                     | 3.45                     | V    | 3.3V range |

‡ The SERDES\_[01]\_VDD supply must be connected to V<sub>DD</sub>.

† Programming at Industrial temperature range is available only with V<sub>PP</sub> = 3.3V.

**Note:** All power supply ramps must be strictly monotonic, without plateaus.

**TABLE 3-3: FPGA OPERATING LIMITS (2, 3, AND 4)**

| Product Grade           | Element | Programming Temperature                                      | Operating Temperature                                        | Programming Cycles | Digest Temperature                                           | Digest Cycles | Retention (Biased/Unbiased) |
|-------------------------|---------|--------------------------------------------------------------|--------------------------------------------------------------|--------------------|--------------------------------------------------------------|---------------|-----------------------------|
| Commercial              | FPGA    | Min. T <sub>J</sub> = 0 °C<br>Max. T <sub>J</sub> = 85 °C    | Min. T <sub>J</sub> = 0 °C<br>Max. T <sub>J</sub> = 85 °C    | 500                | Min. T <sub>J</sub> = 0 °C<br>Max. T <sub>J</sub> = 85 °C    | 2000          | 20 years                    |
| Industrial <sup>1</sup> | FPGA    | Min. T <sub>J</sub> = -40 °C<br>Max. T <sub>J</sub> = 100 °C | Min. T <sub>J</sub> = -40 °C<br>Max. T <sub>J</sub> = 100 °C | 500                | Min. T <sub>J</sub> = -40 °C<br>Max. T <sub>J</sub> = 100 °C | 2000          | 20 years                    |

1. Programming at Industrial temperature range is available only with V<sub>PP</sub> = 3.3V.
2. The device will have 20 years of retention after 500 programming cycles.
3. Digest verifies integrity and is a cryptographic hash of programmed nonvolatile data.
4. If your product qualification requires accelerated programming cycles, see the Microchip FPGA Reliability Report about recommended methodologies. To get a copy of Microchip FPGA Reliability Report contact Tech Support: <https://microchipsupport.force.com/s/>.

The following table lists the embedded operating flash limits.

**TABLE 3-4: EMBEDDED OPERATING FLASH LIMITS**

| Product Grade | Element        | Programming Temperature                                      | Maximum Operating Temperature                                | Programming Cycles                                              | Retention (Biased/Unbiased) |
|---------------|----------------|--------------------------------------------------------------|--------------------------------------------------------------|-----------------------------------------------------------------|-----------------------------|
| Commercial    | Embedded flash | Min. T <sub>J</sub> = 0 °C<br>Max. T <sub>J</sub> = 85 °C    | Min. T <sub>J</sub> = 0 °C<br>Max. T <sub>J</sub> = 85 °C    | < 1000 cycles per page, up to two million cycles per eNVM array | 20 years                    |
|               |                |                                                              | Min. T <sub>J</sub> = 0 °C<br>Max. T <sub>J</sub> = 85 °C    | < 10000 cycles per page, up to 20 million cycles per eNVM array | 10 years                    |
| Industrial    | Embedded flash | Min. T <sub>J</sub> = -40 °C<br>Max. T <sub>J</sub> = 100 °C | Min T <sub>J</sub> = -40 °C<br>Max T <sub>J</sub> = 100 °C   | < 1000 cycles per page, up to two million cycles per eNVM array | 20 years                    |
|               |                |                                                              | Min. T <sub>J</sub> = -40 °C<br>Max. T <sub>J</sub> = 100 °C | < 10000 cycles per page, up to 20 million cycles per eNVM array | 10 years                    |

**Note:** If your product qualification requires accelerated programming cycles, see the Microchip FPGA Reliability Report about recommended methodologies. To get a copy of Microchip FPGA Reliability Report contact Tech Support: <https://microchipsupport.force.com/s/>.

**TABLE 3-5: DEVICE STORAGE TEMPERATURE AND RETENTION**

| Product Grade | Storage Temperature (T <sub>stg</sub> )                      | Retention |
|---------------|--------------------------------------------------------------|-----------|
| Commercial    | Min. T <sub>J</sub> = 0 °C<br>Max. T <sub>J</sub> = 85 °C    | 20 years  |
| Industrial    | Min. T <sub>J</sub> = -40 °C<br>Max. T <sub>J</sub> = 100 °C | 20 years  |


**TABLE 3-6: HIGH TEMPERATURE DATA RETENTION (HTR) LIFETIME**

| T <sub>J</sub> (C) | HTR Lifetime (yrs) |
|--------------------|--------------------|
| 90                 | 20.5               |

**TABLE 3-6: HIGH TEMPERATURE DATA RETENTION (HTR) LIFETIME (CONTINUED)**

|     |      |
|-----|------|
| 95  | 20.5 |
| 100 | 20.5 |
| 105 | 17.0 |
| 110 | 15.0 |
| 115 | 13.0 |
| 120 | 11.5 |
| 125 | 10.0 |
| 130 | 8.0  |
| 135 | 6.0  |
| 140 | 4.5  |
| 145 | 3.0  |
| 150 | 1.5  |

HTR Lifetime is the period during which a verify failure is not expected due to flash leakage.

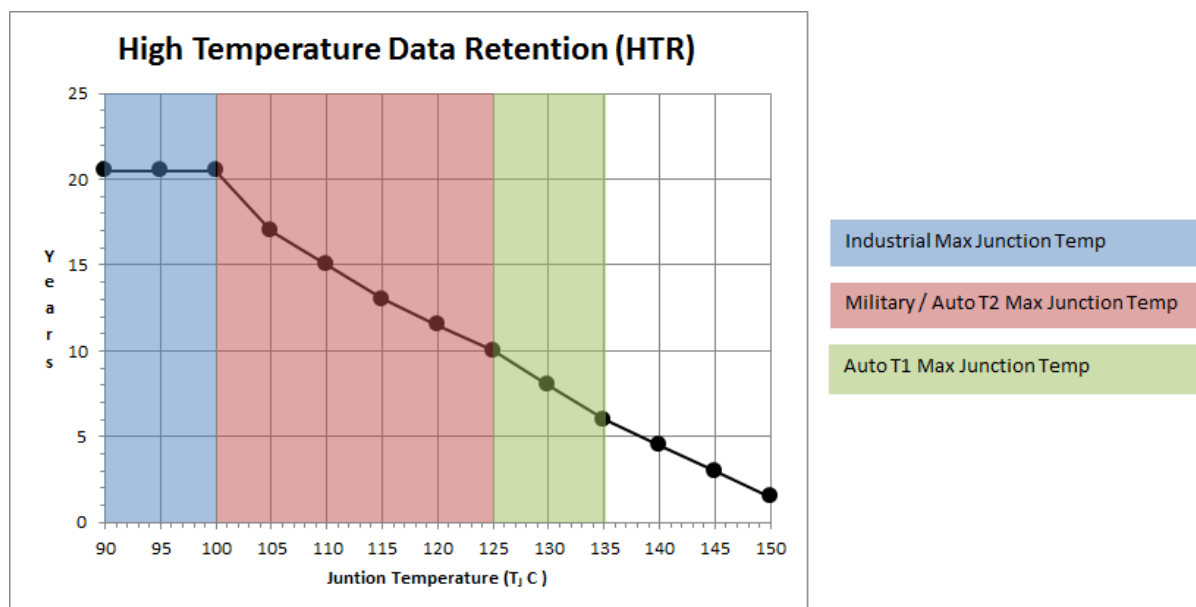**FIGURE 3-1: HIGH TEMPERATURE DATA RETENTION (HTR)**

### 3.1.1 OVERSHOOT/UNDERSHOOT LIMITS

For AC signals, the input signal may undershoot during transitions to  $-1.0V$  for no longer than 10% of the period. The current during the transition must not exceed 100 mA.

For AC signals, the input signal may overshoot during transitions to  $V_{CCI} + 1.0V$  for no longer than 10% of the period. The current during the transition must not exceed 100 mA.

**Note:** The preceding specifications do not apply to the PCI standard. The IGLOO 2 and SmartFusion 2 PCI I/Os are compliant with the PCI standard including the PCI overshoot/undershoot specifications.

### 3.1.2 THERMAL CHARACTERISTICS

The temperature variable in the Microchip SoC Products Group Designer software refers to the junction temperature, not the ambient, case, or board temperatures. This is an important distinction because dynamic and static power consumption causes the chip's junction temperature to be higher than the ambient, case, or board temperatures.

EQ1 through EQ3 give the relationship between thermal resistance, temperature gradient, and power.

EQ1

$$\theta_{JA} = \frac{T_J - T_A}{P}$$

EQ2

$$\theta_{JB} = \frac{T_J - T_B}{P}$$

EQ3

$$\theta_{JC} = \frac{T_J - T_C}{P}$$

where:

|               |   |                                                                |
|---------------|---|----------------------------------------------------------------|
| $\theta_{JA}$ | = | Junction-to-air thermal resistance                             |
| $\theta_{JB}$ | = | Junction-to-board thermal resistance                           |
| $\theta_{JC}$ | = | Junction-to-case thermal resistance                            |
| $T_J$         | = | Junction temperature                                           |
| $T_A$         | = | Ambient temperature                                            |
| $T_B$         | = | Board temperature (measured 1.0 mm away from the package edge) |
| $T_C$         | = | Case temperature                                               |
| P             | = | Total power dissipated by the device                           |

**TABLE 3-7: PACKAGE THERMAL RESISTANCE OF SMARTFUSION 2 AND IGLOO 2 DEVICES**

| Device | Still Air     | 1.0 m/s | 2.5 m/s | $\theta_{JB}$ | $\theta_{JC}$ | Unit |
|--------|---------------|---------|---------|---------------|---------------|------|
|        | $\theta_{JA}$ |         |         |               |               |      |
| 005    |               |         |         |               |               |      |
| FG484  | 19.36         | 15.81   | 14.63   | 9.74          | 5.27          | °C/W |
| VF256  | 41.30         | 38.16   | 35.30   | 28.41         | 3.94          | °C/W |
| VF400  | 20.19         | 16.94   | 15.41   | 8.86          | 4.95          | °C/W |
| TQ144  | 42.80         | 36.80   | 34.50   | 37.20         | 10.80         | °C/W |
| 010    |               |         |         |               |               |      |
| FG484  | 18.22         | 14.83   | 13.62   | 8.83          | 4.92          | °C/W |
| VF256  | 37.36         | 34.26   | 31.45   | 24.84         | 7.89          | °C/W |
| VF400  | 19.40         | 15.75   | 14.22   | 8.11          | 4.22          | °C/W |
| TQ144  | 38.60         | 32.60   | 30.30   | 31.80         | 8.60          | °C/W |
| 025    |               |         |         |               |               |      |
| FG484  | 17.03         | 13.66   | 12.45   | 7.66          | 4.18          | °C/W |
| VF256  | 33.85         | 30.59   | 27.85   | 21.63         | 6.13          | °C/W |
| VF400  | 18.36         | 14.89   | 13.36   | 7.12          | 3.41          | °C/W |
| FCS325 | 29.17         | 24.87   | 23.12   | 14.44         | 2.31          | °C/W |
| FCS158 | 36.12         | 32.05   | 29.66   | 19.02         | 5.4           | °C/W |
| 050    |               |         |         |               |               |      |
| FG484  | 15.29         | 12.19   | 10.99   | 6.27          | 3.24          | °C/W |
| FG896  | 14.70         | 12.50   | 10.90   | 7.20          | 4.90          | °C/W |
| VF400  | 17.53         | 14.17   | 12.63   | 6.32          | 2.81          | °C/W |
| FCS325 | 27.38         | 23.18   | 21.41   | 12.47         | 1.59          | °C/W |

**TABLE 3-7: PACKAGE THERMAL RESISTANCE OF SMARTFUSION 2 AND IGLOO 2 DEVICES**

| Device | Still Air     | 1.0 m/s | 2.5 m/s | $\theta_{JB}$ | $\theta_{JC}$ | Unit |
|--------|---------------|---------|---------|---------------|---------------|------|
|        | $\theta_{JA}$ |         |         |               |               |      |
| 060    |               |         |         |               |               |      |
| FG484  | 15.40         | 12.06   | 10.85   | 6.14          | 3.15          | °C/W |
| FG676  | 15.49         | 12.21   | 11.06   | 7.07          | 3.87          | °C/W |
| VF400  | 17.45         | 14.01   | 12.47   | 6.22          | 2.69          | °C/W |
| FCS325 | 27.03         | 22.91   | 21.25   | 12.33         | 1.54          | °C/W |
| VF784  | 15.51         | 11.63   | 10.44   | 5.83          | 3.05          | °C/W |
| 090    |               |         |         |               |               |      |
| FG484  | 14.64         | 11.37   | 10.16   | 5.43          | 2.77          | °C/W |
| FG676  | 14.52         | 11.19   | 10.37   | 6.17          | 3.24          | °C/W |
| FCS325 | 26.63         | 22.26   | 20.13   | 14.24         | 2.50          | °C/W |
| 150    |               |         |         |               |               |      |
| FC1152 | 9.08          | 6.81    | 5.87    | 2.56          | 0.38          | °C/W |
| FCS536 | 15.01         | 12.06   | 10.76   | 3.69          | 1.55          | °C/W |
| FCV484 | 16.21         | 13.11   | 11.84   | 6.73          | 0.10          | °C/W |

### 3.1.2.1 Theta-JA

Junction-to-ambient thermal resistance ( $\theta_{JA}$ ) is determined under standard conditions specified by JEDEC (JESD-51), but it has little relevance in the actual performance of the product. It must be used with caution, but it is useful for comparing the thermal performance of one package with another.

The maximum power dissipation allowed is calculated using EQ4.

**EQ4**

$$\text{Maximum power allowed} = \frac{T_{J(\text{MAX})} - T_{A(\text{MAX})}}{\theta_{JA}}$$

The absolute maximum junction temperature is 100 °C. EQ5 shows a sample calculation of the absolute maximum power dissipation allowed for the M2GL050T-FG896 package at commercial temperature and in still air, where:

**Table 1-1 •**

$\theta_{JA}$  = 14.7 °C/W (taken from [Table 3-7](#)).

$T_A$  = 85 °C

**EQ5**

$$\text{Maximum power allowed} = \frac{100\text{ °C} - 85\text{ °C}}{14.7\text{ °C/W}} = 1.088\text{ W}$$

The power consumption of a device can be calculated using the Microchip SoC Products Group power calculator. The device's power consumption must be lower than the calculated maximum power dissipation by the package.

If the power consumption is higher than the device's maximum allowable power dissipation, a heat sink may be attached to the top of the case, or the airflow inside the system must be increased.

### 3.1.2.2 Theta-JB

Junction-to-board thermal resistance ( $\theta_{JB}$ ) measures the ability of the package to dissipate heat from the surface of the chip to the PCB. As defined by the JEDEC (JESD-51) standard, the thermal resistance from the junction to the board uses an isothermal ring cold plate zone concept. The ring cold plate is simply a means to generate an isothermal boundary condition at the perimeter. The cold plate is mounted on a JEDEC standard board with a minimum distance of 5.0 mm away from the package edge.

### 3.1.2.3 Theta-JC

Junction-to-case thermal resistance ( $\theta_{JC}$ ) measures the ability of a device to dissipate heat from the surface of the chip to the top or bottom surface of the package. It is applicable to packages used with external heat sinks. Constant temperature is applied to the surface, which acts as a boundary condition.

This only applies to situations where all or nearly all the heat is dissipated through the surface in consideration.

### 3.1.3 ESD PERFORMANCE

To get information about ESD, see Microchip FPGA Reliability Report. To get a copy of Microchip FPGA Reliability Report, contact Tech Support: <https://microchipsupport.force.com/s/>.

## 3.2 Power Consumption

The following sections describe the power consumptions of the devices.

### 3.2.1 QUIESCENT SUPPLY CURRENT

**TABLE 3-8: QUIESCENT SUPPLY CURRENT CHARACTERISTICS**

| Power Supplies/Blocks                                                             | Modes and Configurations |              |
|-----------------------------------------------------------------------------------|--------------------------|--------------|
|                                                                                   | Non-Flash*Freeze         | Flash*Freeze |
| FPGA Core                                                                         | On                       | Off          |
| V <sub>DD</sub> /SERDES_[01]_VDD                                                  | On                       | On           |
| V <sub>PP</sub> /V <sub>PPNVM</sub>                                               | On                       | On           |
| HPMS_MDDR_PLL_VDDA/FDDR_PLL_VDDA/<br>CCC_XX[01]_PLL_VDDA/PLL0_PLL1_HPMS_MDDR_VDDA | 0V                       | 0V           |
| SERDES_[01]_PLL_VDDA <sup>†</sup>                                                 | 0V                       | 0V           |
| SERDES_[01]_L[0123]_VDDAPLL/VDD_2V5 <sup>2</sup>                                  | On                       | On           |
| SERDES_[01]_L[0123]_VDDAIO <sup>2</sup>                                           | On                       | On           |
| V <sub>DDIX</sub> <sup>‡, *</sup>                                                 | On                       | On           |
| V <sub>REFx</sub>                                                                 | On                       | On           |
| MSSDDR CLK                                                                        | 32 kHz                   | 32 kHz       |
| RAM                                                                               | On                       | Sleep state  |
| System controller                                                                 | 50 MHz                   | 50 MHz       |
| 50 MHz oscillator (enable/disable)                                                | Enable                   | Disable      |
| 1 MHz oscillator (enable/disable)                                                 | Disable                  | Enable       |
| Crystal oscillator (enable/disable)                                               | Disable                  | Disable      |

. SERDES\_[01]\_VDD Power Supply is shorted to V<sub>DD</sub>.

†. SerDes and DDR blocks to be unused.

‡. V<sub>DDIX</sub> has been set to ON for test conditions as described. Banks on the east side should always be powered with the appropriate V<sub>DDI</sub> bank supplies. For details on bank power supplies, see “Recommendation for Unused Bank Supplies” table in the [Board and Layout Design Guidelines for SmartFusion®2 SoC and IGLOO®2 FPGAs](#).

\*. No Differential (that is, LVDS) I/Os or ODT attributes must be used.

**TABLE 3-9: SMARTFUSION 2 AND IGLOO 2 QUIESCENT SUPPLY CURRENT ( $V_{DD} = 1.2V$ )—TYPICAL PROCESS**

| Symbol | Modes            | 005  | 010  | 025  | 050   | 060   | 090   | 150   | Unit | Conditions                                         |
|--------|------------------|------|------|------|-------|-------|-------|-------|------|----------------------------------------------------|
| IDC1   | Non-Flash*Freeze | 6.2  | 6.9  | 8.9  | 13.1  | 15.3  | 15.4  | 27.5  | mA   | Typical ( $T_J = 25\text{ }^{\circ}\text{C}$ )     |
|        |                  | 24.0 | 28.4 | 40.6 | 67.8  | 80.6  | 81.4  | 144.7 | mA   | Commercial ( $T_J = 85\text{ }^{\circ}\text{C}$ )  |
|        |                  | 35.2 | 41.9 | 60.5 | 102.1 | 121.4 | 122.6 | 219.1 | mA   | Industrial ( $T_J = 100\text{ }^{\circ}\text{C}$ ) |
| IDC2   | Flash*Freeze     | 1.4  | 2.6  | 3.7  | 5.1   | 5.0   | 5.1   | 8.9   | mA   | Typical ( $T_J = 25\text{ }^{\circ}\text{C}$ )     |
|        |                  | 12.0 | 20.0 | 26.6 | 35.3  | 35.4  | 35.7  | 57.8  | mA   | Commercial ( $T_J = 85\text{ }^{\circ}\text{C}$ )  |
|        |                  | 18.5 | 30.8 | 41.0 | 54.5  | 54.5  | 55.0  | 89.0  | mA   | Industrial ( $T_J = 100\text{ }^{\circ}\text{C}$ ) |

**TABLE 3-10: SMARTFUSION 2 AND IGLOO 2 QUIESCENT SUPPLY CURRENT ( $V_{DD} = 1.26V$ )—WORST-CASE PROCESS**

| Symbol | Modes            | 005  | 010  | 025   | 050   | 060   | 090   | 150   | Unit | Conditions                                         |
|--------|------------------|------|------|-------|-------|-------|-------|-------|------|----------------------------------------------------|
| IDC1   | Non-Flash*Freeze | 43.8 | 57.0 | 84.6  | 132.3 | 161.4 | 163.0 | 242.5 | mA   | Commercial ( $T_J = 85\text{ }^{\circ}\text{C}$ )  |
|        |                  | 65.3 | 85.7 | 127.8 | 200.9 | 245.4 | 247.8 | 369.0 | mA   | Industrial ( $T_J = 100\text{ }^{\circ}\text{C}$ ) |
| IDC2   | Flash*Freeze     | 29.1 | 45.6 | 51.7  | 62.7  | 69.3  | 70.0  | 84.8  | mA   | Commercial ( $T_J = 85\text{ }^{\circ}\text{C}$ )  |
|        |                  | 44.9 | 70.3 | 79.7  | 96.5  | 106.8 | 107.8 | 130.6 | mA   | Industrial ( $T_J = 100\text{ }^{\circ}\text{C}$ ) |

### 3.2.2 PROGRAMMING CURRENTS

The following tables list programming, verify, and Inrush currents for SmartFusion 2 SoC and IGLOO 2 FPGA devices.

**TABLE 3-11: CURRENTS DURING PROGRAM CYCLE,  $0\text{ }^{\circ}\text{C} \leq T_J \leq 85\text{ }^{\circ}\text{C}$ —TYPICAL PROCESS**

| Power Supplies  | Voltage (V) | 005 | 010 | 025 | 050 | 060 | 090 | 150 | Unit |
|-----------------|-------------|-----|-----|-----|-----|-----|-----|-----|------|
| $V_{DD}$        | 1.26        | 46  | 53  | 55  | 58  | 30  | 42  | 52  | mA   |
| $V_{PP}$        | 3.46        | 8   | 11  | 6   | 10  | 9   | 12  | 12  | mA   |
| $V_{PPNVM}$     | 3.46        | 1   | 2   | 2   | 3   | 3   | 3   |     | mA   |
| $V_{DDI}$       | 2.62        | 31  | 16  | 17  | 1   | 12  | 12  | 81  | mA   |
|                 | 3.46        | 62  | 31  | 36  | 1   | 12  | 17  | 84  | mA   |
| Number of banks | —           | 7   | 8   | 8   | 10  | 10  | 9   | 19  |      |

.  $V_{PP}$  and  $V_{PPNVM}$  are internally shorted.

**TABLE 3-12: CURRENTS DURING VERIFY CYCLE,  $0\text{ }^{\circ}\text{C} \leq T_J \leq 85\text{ }^{\circ}\text{C}$ —TYPICAL PROCESS**

| Power Supplies | Voltage (V) | 005 | 010 | 025 | 050 | 060 | 090 | 150 | Unit |
|----------------|-------------|-----|-----|-----|-----|-----|-----|-----|------|
| $V_{DD}$       | 1.26        | 44  | 53  | 55  | 58  | 33  | 41  | 51  | mA   |
| $V_{PP}$       | 3.46        | 6   | 5   | 3   | 15  | 8   | 11  | 12  | mA   |
| $V_{PPNVM}$    | 3.46        | 1   | 0   | 0   | 1   | 1   | 1   |     | mA   |

**TABLE 3-12: CURRENTS DURING VERIFY CYCLE,  $0\text{ }^{\circ}\text{C} \leq T_J \leq 85\text{ }^{\circ}\text{C}$ —TYPICAL PROCESS**

|                 |      |    |    |    |    |    |    |    |    |
|-----------------|------|----|----|----|----|----|----|----|----|
| $V_{DDI}$       | 2.62 | 31 | 16 | 17 | 1  | 12 | 11 | 81 | mA |
|                 | 3.46 | 61 | 32 | 36 | 1  | 12 | 17 | 84 | mA |
| Number of banks | —    | 7  | 8  | 8  | 10 | 10 | 9  | 19 | —  |

.  $V_{PP}$  and  $V_{PPNVM}$  are internally shorted.

**TABLE 3-13: INRUSH CURRENTS AT POWER UP,  $-40\text{ }^{\circ}\text{C} \leq T_J \leq 100\text{ }^{\circ}\text{C}$ —TYPICAL PROCESS**

| Power Supplies  | Voltage (V) | 005 | 010 | 025 | 050 | 060 | 090 | 150 | Unit |
|-----------------|-------------|-----|-----|-----|-----|-----|-----|-----|------|
| $V_{DD}$        | 1.26        | 25  | 32  | 38  | 48  | 45  | 77  | 109 | mA   |
| $V_{PP}$        | 3.46        | 33  | 49  | 36  | 180 | 13  | 36  | 51  | mA   |
| $V_{DDI}$       | 2.62        | 134 | 141 | 161 | 187 | 93  | 272 | 388 | mA   |
| Number of banks | —           | 7   | 8   | 8   | 10  | 10  | 9   | 19  | —    |

### 3.3 Average Fabric Temperature and Voltage Derating Factors

The following table lists the average temperature and voltage derating factors for fabric timing delays normalized to  $T_J = 85\text{ }^{\circ}\text{C}$ , in worst-case  $V_{DD} = 1.14\text{V}$ .


**TABLE 3-14: AVERAGE JUNCTION TEMPERATURE AND VOLTAGE DERATING FACTORS FOR FABRIC TIMING DELAYS**

| Array Voltage $V_{DD}$ (V) | $-40\text{ }^{\circ}\text{C}$ | $0\text{ }^{\circ}\text{C}$ | $25\text{ }^{\circ}\text{C}$ | $70\text{ }^{\circ}\text{C}$ | $85\text{ }^{\circ}\text{C}$ | $100\text{ }^{\circ}\text{C}$ |
|----------------------------|-------------------------------|-----------------------------|------------------------------|------------------------------|------------------------------|-------------------------------|
| 1.14                       | 0.83                          | 0.89                        | 0.92                         | 0.98                         | 1.00                         | 1.02                          |
| 1.2                        | 0.75                          | 0.80                        | 0.83                         | 0.89                         | 0.91                         | 0.93                          |
| 1.26                       | 0.69                          | 0.73                        | 0.76                         | 0.81                         | 0.83                         | 0.85                          |

### 3.4 Timing Model

This section describes timing model and timing parameters.

**FIGURE 3-2: TIMING MODEL**

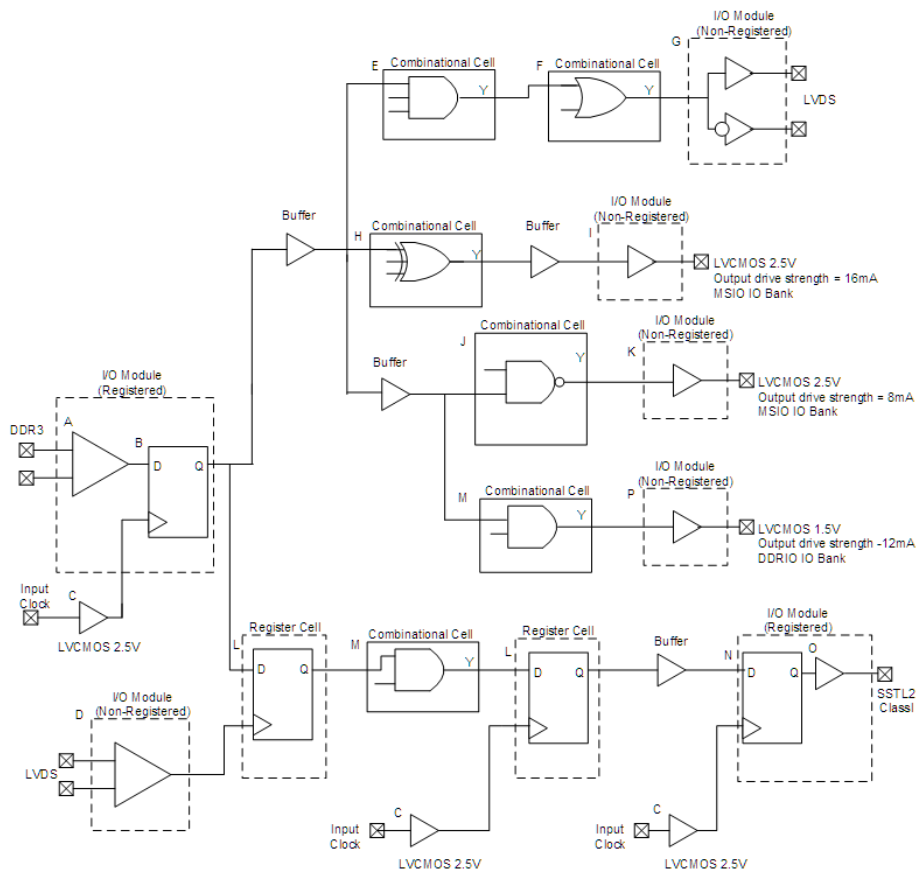

The following table lists the timing model parameters in worst commercial-case conditions when  $T_J = 85^\circ\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-15: TIMING MODEL PARAMETERS**

| Index | Symbol      | Description                                 | -1    | Unit | For More Information            |
|-------|-------------|---------------------------------------------|-------|------|---------------------------------|
| A     | $T_{PY}$    | Propagation delay of DDR3 receiver          | 1.605 | ns   | See <a href="#">Table 3-137</a> |
| B     | $T_{ICLKQ}$ | Clock-to-Q of the input data register       | 0.16  | ns   | See <a href="#">Table 3-221</a> |
|       | $T_{ISUD}$  | Setup time of the input data register       | 0.357 | ns   | See <a href="#">Table 3-221</a> |
| C     | $T_{RCKH}$  | Input high delay for global clock           | 1.53  | ns   | See <a href="#">Table 3-227</a> |
|       | $T_{RCKL}$  | Input low delay for global clock            | 0.897 | ns   | See <a href="#">Table 3-227</a> |
| D     | $T_{PY}$    | Input propagation delay of LVDS receiver    | 2.774 | ns   | See <a href="#">Table 3-167</a> |
| E     | $T_{DP}$    | Propagation delay of a three-input AND gate | 0.198 | ns   | See <a href="#">Table 3-223</a> |
| F     | $T_{DP}$    | Propagation delay of an OR gate             | 0.179 | ns   | See <a href="#">Table 3-223</a> |
| G     | $T_{DP}$    | Propagation delay of an LVDS transmitter    | 2.136 | ns   | See <a href="#">Table 3-169</a> |
| H     | $T_{DP}$    | Propagation delay of a three-input XOR Gate | 0.241 | ns   | See <a href="#">Table 3-223</a> |

**TABLE 3-15: TIMING MODEL PARAMETERS (CONTINUED)**

| Index | Symbol      | Description                                                                                        | –1    | Unit | For More Information            |
|-------|-------------|----------------------------------------------------------------------------------------------------|-------|------|---------------------------------|
| I     | $T_{DP}$    | Propagation delay of LVCMOS 2.5V transmitter, drive strength of 16 mA on the MSIO bank             | 2.412 | ns   | See <a href="#">Table 3-46</a>  |
| J     | $T_{DP}$    | Propagation delay of a two-input NAND gate                                                         | 0.179 | ns   | See <a href="#">Table 3-223</a> |
| K     | $T_{DP}$    | Propagation delay of LVCMOS 2.5V transmitter, drive strength of 8 mA on the MSIO bank              | 2.309 | ns   | See <a href="#">Table 3-46</a>  |
| L     | $T_{CLKQ}$  | Clock-to-Q of the data register                                                                    | 0.108 | ns   | See <a href="#">Table 3-224</a> |
|       | $T_{SUD}$   | Setup time of the data register                                                                    | 0.254 | ns   | See <a href="#">Table 3-224</a> |
| M     | $T_{DP}$    | Propagation delay of a two-input AND gate                                                          | 0.179 | ns   | See <a href="#">Table 3-223</a> |
| N     | $T_{OCLKQ}$ | Clock-to-Q of the output data register                                                             | 0.263 | ns   | See <a href="#">Table 3-220</a> |
|       | $T_{OSUD}$  | Setup time of the output data register                                                             | 0.19  | ns   | See <a href="#">Table 3-220</a> |
| O     | $T_{DP}$    | Propagation delay of SSTL2, Class I transmitter on the MSIO bank                                   | 2.055 | ns   | See <a href="#">Table 3-114</a> |
| P     | $T_{DP}$    | Propagation delay of LVCMOS 1.5V transmitter, drive strength of 12 mA, fast slew on the DDRIO bank | 3.316 | ns   | See <a href="#">Table 3-70</a>  |


### 3.5 User I/O Characteristics

There are three types of I/Os supported in the IGLOO 2 FPGA and SmartFusion 2 SoC FPGA families: MSIO, MSIOD, and DDRIO I/O banks. The I/O standards supported by the different I/O banks is described in the I/Os section of the [UG0445: IGLOO2 FPGA and SmartFusion2 SoC FPGA Fabric User Guide](#).

3.5.1 INPUT BUFFER AND AC LOADING

The following figure shows the input buffer and AC loading.


FIGURE 3-3: INPUT BUFFER AC LOADING

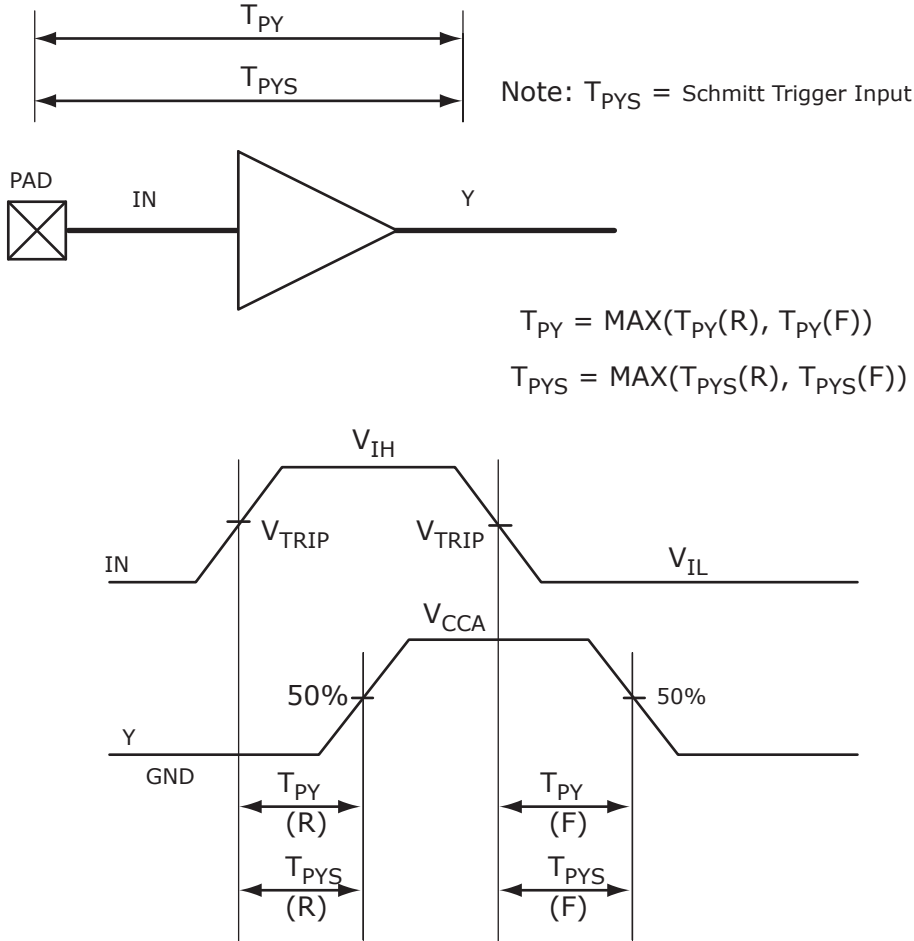

### 3.5.2 OUTPUT BUFFER AND AC LOADING

The following figure shows the output buffer and AC loading.


**FIGURE 3-4: OUTPUT BUFFER AC LOADING**

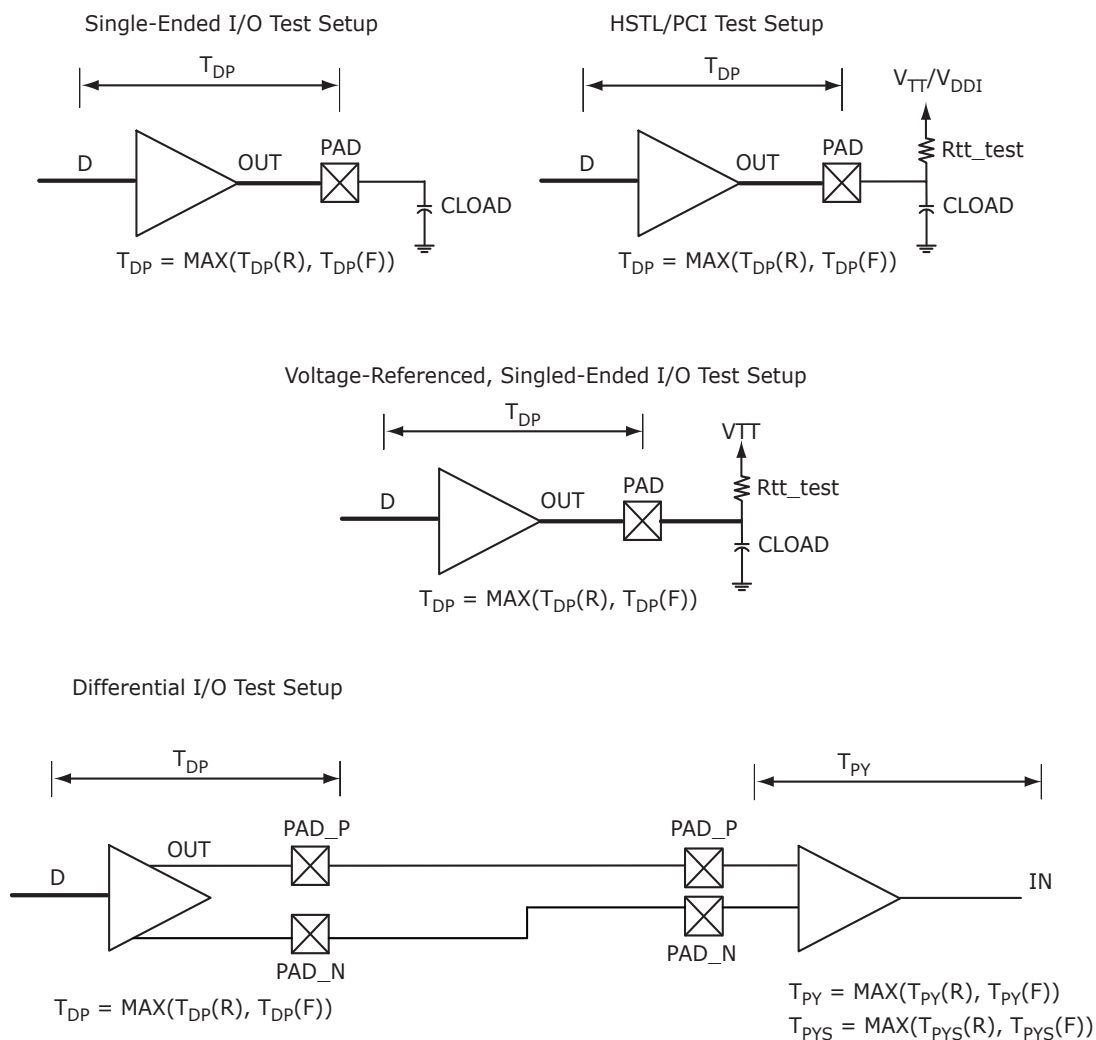

### 3.5.3 TRISTATE BUFFER AND AC LOADING

The tristate path for enable path loadings is described in the respective specifications. The following figure shows the methodology of characterization illustrated by the enable path test point.

**FIGURE 3-5: TRISTATE BUFFER FOR ENABLE PATH TEST POINT**

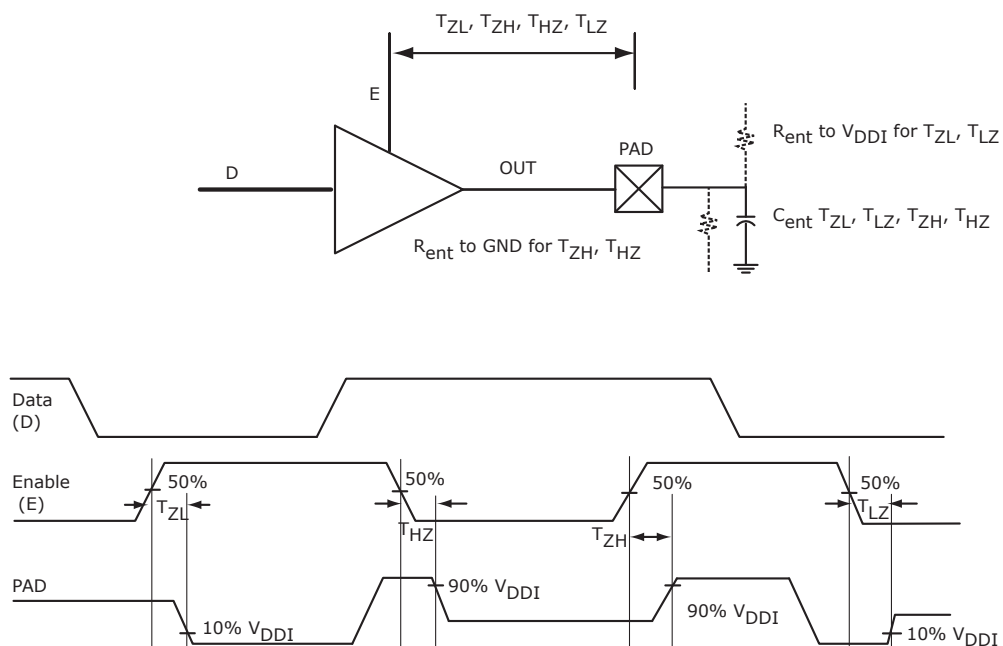

### 3.5.4 I/O SPEEDS

This section describes the maximum data rate summary of I/O in worst-case industrial conditions. See the individual I/O standards for operating conditions.

**TABLE 3-16: MAXIMUM DATA RATE SUMMARY TABLE FOR SINGLE-ENDED I/O IN WORST-CASE INDUSTRIAL CONDITIONS**

| I/O                     | MSIO | MSIOD | DDRIO | Unit |
|-------------------------|------|-------|-------|------|
| PCI 3.3V                | 630  | —     | —     | Mbps |
| LVTTL 3.3V              | 600  | —     | —     | Mbps |
| LVC MOS 3.3V            | 600  | —     | —     | Mbps |
| LVC MOS 2.5V            | 410  | 420   | 400   | Mbps |
| LVC MOS 1.8V            | 295  | 400   | 400   | Mbps |
| LVC MOS 1.5V            | 160  | 220   | 235   | Mbps |
| LVC MOS 1.2V            | 120  | 160   | 200   | Mbps |
| LPDDR-LVC MOS 1.8V mode | —    | —     | 400   | Mbps |

**TABLE 3-17: MAXIMUM DATA RATE SUMMARY TABLE FOR VOLTAGE-REFERENCED I/O IN WORST-CASE INDUSTRIAL CONDITIONS**

| I/O       | MSIO | MSIOD | DDRIO | Unit |
|-----------|------|-------|-------|------|
| LPDDR     | —    | —     | 400   | Mbps |
| HSTL1.5V  | —    | —     | 400   | Mbps |
| SSTL 2.5V | 510  | 700   | 400   | Mbps |
| SSTL 1.8V | —    | —     | 667   | Mbps |
| SSTL 1.5V | —    | —     | 667   | Mbps |

**TABLE 3-18: MAXIMUM DATA RATE SUMMARY TABLE FOR DIFFERENTIAL I/O IN WORST-CASE INDUSTRIAL CONDITIONS**

| I/O                 | MSIO | MSIOD | Unit |
|---------------------|------|-------|------|
| LVPECL (input only) | 900  | —     | Mbps |
| LVDS 3.3V           | 535  | —     | Mbps |
| LVDS 2.5V           | 535  | 700   | Mbps |
| RSDS                | 520  | 700   | Mbps |
| BLVDS               | 500  | —     | Mbps |
| MLVDS               | 500  | —     | Mbps |
| Mini-LVDS           | 520  | 700   | Mbps |

**TABLE 3-19: MAXIMUM FREQUENCY SUMMARY TABLE FOR SINGLE-ENDED I/O IN WORST-CASE INDUSTRIAL CONDITIONS**

| I/O                      | MSIO  | MSIOD | DDRIO | Unit |
|--------------------------|-------|-------|-------|------|
| PCI 3.3V                 | 315   | —     | —     | MHz  |
| LVTTL 3.3V               | 300   | —     | —     | MHz  |
| LVC MOS 3.3V             | 300   | —     | —     | MHz  |
| LVC MOS 2.5V             | 205   | 210   | 200   | MHz  |
| LVC MOS 1.8V             | 147.5 | 200   | 200   | MHz  |
| LVC MOS 1.5V             | 80    | 110   | 118   | MHz  |
| LVC MOS 1.2V             | 60    | 80    | 100   | MHz  |
| LPDDR— LVC MOS 1.8V mode | —     | —     | 200   | MHz  |

**TABLE 3-20: MAXIMUM FREQUENCY SUMMARY TABLE FOR VOLTAGE-REFERENCED I/O IN WORST-CASE INDUSTRIAL CONDITIONS**

| I/O       | MSIO | MSIOD | DDRIO | Unit |
|-----------|------|-------|-------|------|
| LPDDR     | —    | —     | 200   | MHz  |
| HSTL 1.5V | —    | —     | 200   | MHz  |
| SSTL 2.5V | 255  | 350   | 200   | MHz  |
| SSTL 1.8V | —    | —     | 334   | MHz  |
| SSTL 1.5V | —    | —     | 334   | MHz  |

**TABLE 3-21: MAXIMUM FREQUENCY SUMMARY TABLE FOR DIFFERENTIAL I/O IN WORST-CASE INDUSTRIAL CONDITIONS**

| I/O                 | MSIO  | MSIOD | Unit |
|---------------------|-------|-------|------|
| LVPECL (input only) | 450   | —     | MHz  |
| LVDS 3.3V           | 267.5 | —     | MHz  |
| LVDS 2.5V           | 267.5 | 350   | MHz  |
| RSDS                | 260   | 350   | MHz  |
| BLVDS               | 250   | —     | MHz  |
| MLVDS               | 250   | —     | MHz  |
| Mini-LVDS           | 260   | 350   | MHz  |

### 3.5.5 DETAILED I/O CHARACTERISTICS

**TABLE 3-22: INPUT CAPACITANCE, LEAKAGE CURRENT, AND RAMP TIME**

| Symbol              | Description                                                    | Maximum | Unit    | Conditions         |
|---------------------|----------------------------------------------------------------|---------|---------|--------------------|
| $C_{IN}$            | Input capacitance                                              | 10      | pF      | —                  |
| $I_{IL}$ (dc)       | Input current low<br>(Applicable to HSTL/SSTL inputs only)     | 400     | $\mu A$ | $V_{DDI} = 2.5V$   |
|                     |                                                                | 500     | $\mu A$ | $V_{DDI} = 1.8V$   |
|                     |                                                                | 600     | $\mu A$ | $V_{DDI} = 1.5V$   |
|                     | Input current low<br>(Applicable to all other digital inputs)  | 10      | $\mu A$ | —                  |
| $I_{IH}$ (dc)       | Input current high<br>(Applicable to HSTL/SSTL inputs only)    | 400     | $\mu A$ | $V_{DDI} = 2.5V$   |
|                     |                                                                | 500     | $\mu A$ | $V_{DDI} = 1.8V$   |
|                     |                                                                | 600     | $\mu A$ | $V_{DDI} = 1.5V^1$ |
|                     | Input current high<br>(Applicable to all other digital inputs) | 10      | $\mu A$ | —                  |
| $T_{RAMPIN}^{2, 3}$ | Input ramp time<br>(Applicable to all digital inputs)          | 50      | ns      | —                  |

- 1. Applicable when I/O pair is programmed with an HSTL/SSTL I/O type on IOP and an un-terminated I/O type (for example, LVCMOS) on ION pad.
- 2. Input signal must be monotonic.
- 3. Device inputs on MSIO, MSIOD, and DEVRST pins verified to function up to 1 ms ramp rate with no reliability issues. Timing is only characterized to 50 ns.

The following table lists the minimum and maximum I/O weak pull-up/pull-down resistance values of DDRIO I/O bank at  $V_{OH}/V_{OL}$  level.

**TABLE 3-23: I/O WEAK PULL-UP/PULL-DOWN RESISTANCES FOR DDRIO I/O BANK**

| $V_{DDI}$ Domain      | R (WEAK PULL-UP) at $V_{OH}$ ( $\Omega$ ) |       | R (WEAK PULL-DOWN) at $V_{OL}$ ( $\Omega$ ) |       |
|-----------------------|-------------------------------------------|-------|---------------------------------------------|-------|
|                       | Min.                                      | Max.  | Min.                                        | Max.  |
| 2.5 V <sup>†</sup>    | 10K                                       | 17.8K | 9.98K                                       | 18K   |
| 1.8 V <sup>1, 2</sup> | 10.3K                                     | 19.1K | 10.3K                                       | 19.5K |
| 1.5 V <sup>1, 2</sup> | 10.6K                                     | 20.2K | 10.6K                                       | 21.1K |
| 1.2 V <sup>1, 2</sup> | 11.1K                                     | 22.7K | 11.2K                                       | 24.6K |

- 1.  $R(WEAK\ PULL-DOWN) = (VOL_{spec})/I(WEAK\ PULL-DOWN\ MAX)$ .
- †.  $R(WEAK\ PULL-UP) = (VDDI_{max} - VOH_{spec})/I(WEAK\ PULL-UP\ MIN)$ .

The following table lists the minimum and maximum I/O weak pull-up/pull-down resistance values of MSIO I/O bank at  $V_{OH}/V_{OL}$  level.

**TABLE 3-24: I/O WEAK PULL-UP/PULL-DOWN RESISTANCES FOR MSIO I/O BANK**

| $V_{DDI}$ Domain      | R (WEAK PULL-UP) at $V_{OH}$ ( $\Omega$ ) |       | R (WEAK PULL-DOWN) at $V_{OL}$ ( $\Omega$ ) |       |
|-----------------------|-------------------------------------------|-------|---------------------------------------------|-------|
|                       | Min.                                      | Max.  | Min.                                        | Max.  |
| 3.3 V                 | 9.9K                                      | 17.1K | 9.98K                                       | 17.5K |
| 2.5 V <sup>†</sup>    | 10K                                       | 17.6K | 10.1K                                       | 18.4K |
| 1.8 V <sup>1, 2</sup> | 10.4K                                     | 19.1K | 10.4K                                       | 20.4K |
| 1.5 V <sup>1, 2</sup> | 10.7K                                     | 20.4K | 10.8K                                       | 22.2K |
| 1.2 V <sup>1, 2</sup> | 11.3K                                     | 23.2K | 11.5K                                       | 26.7K |

- 1.  $R(WEAK\ PULL-DOWN) = (VOL_{spec})/I(WEAK\ PULL-DOWN\ MAX)$ .

†.  $R(\text{WEAK PULL-UP}) = (V_{DDI\text{max}} - V_{OH\text{spec}})/I(\text{WEAK PULL-UP MIN})$ .

The following table lists the minimum and maximum I/O weak pull-up/pull-down resistance values of MSIOD I/O bank at  $V_{OH}/V_{OL}$  level.

**TABLE 3-25: I/O WEAK PULL-UP/PULL-DOWN RESISTANCES FOR MSIOD I/O BANK**

| $V_{DDI}$ Domain      | R (WEAK PULL-UP) at $V_{OH}$ ( $\Omega$ ) |       | R (WEAK PULL-DOWN) at $V_{OL}$ ( $\Omega$ ) |       |
|-----------------------|-------------------------------------------|-------|---------------------------------------------|-------|
|                       | Min.                                      | Max.  | Min.                                        | Max.  |
| 2.5 V <sup>†</sup>    | 9.6K                                      | 16.6K | 9.5K                                        | 16.4K |
| 1.8 V <sup>1, 2</sup> | 9.7K                                      | 17.3K | 9.7K                                        | 17.1K |
| 1.5 V <sup>1, 2</sup> | 9.9K                                      | 18K   | 9.8K                                        | 17.6K |
| 1.2 V <sup>1, 2</sup> | 10.3K                                     | 19.6K | 10K                                         | 19.1K |

.  $R(\text{WEAK PULL-DOWN}) = (V_{OL\text{spec}})/I(\text{WEAK PULL-DOWN MAX})$ .

†.  $R(\text{WEAK PULL-UP}) = (V_{DDI\text{max}} - V_{OH\text{spec}})/I(\text{WEAK PULL-UP MIN})$ .

The following table lists the hysteresis voltage value for schmitt trigger mode input buffers.

**TABLE 3-26: SCHMITT TRIGGER INPUT HYSTERESIS**

| Input Buffer Configuration       | Hysteresis Value (Typical, Unless Otherwise Noted) |
|----------------------------------|----------------------------------------------------|
| 3.3V LVTTTL/LVCMOS/<br>PCI/PCI-X | $0.05 \times V_{DDI}$ (worst-case)                 |
| 2.5V LVCMOS                      | $0.05 \times V_{DDI}$ (worst-case)                 |
| 1.8V LVCMOS                      | $0.1 \times V_{DDI}$ (worst-case)                  |
| 1.5V LVCMOS                      | 60 mV                                              |
| 1.2V LVCMOS                      | 20 mV                                              |

### 3.5.5.1 Device Reset

**TABLE 3-27: DEVICE RESET**

| Pin                      | Type  | Description                                                                                                                                                | Unused Conditions                                     |
|--------------------------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| <b>Device Reset I/Os</b> |       |                                                                                                                                                            |                                                       |
| DEVRST_N                 | Input | Device reset. Active-low and powered by $V_{PP}$ . It is an asynchronous signal and Schmitt trigger input with the maximum slew rate must not exceed 1 us. | Pull-up to $V_{PP}$ through a 10 K $\Omega$ resistor. |

### 3.5.5.2 JTAG Pins

JTAG pins can operate at any voltage: 1.2V/1.5V/1.8V/2.5V or 3.3V (nominal). The debug port is implemented using a Serial Wire JTAG Debug Port (SWJ-DP), than a Serial Wire Debug Port (SW-DP). This enables either the M3 JTAG or the software protocol for debugging.

**TABLE 3-28: JTAG PIN NAMES AND DESCRIPTIONS**

| Name                    | Type  | Description                                                                                                                                                                                                                                                                                                                                                                                                                     | Unused Conditions                                                                             |
|-------------------------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| JTAGSEL                 | Input | JTAG controller selection.<br>If JTAGSEL is pulled High, then an external TAP controller connects to the JTAG interface—system controller TAP.<br>If JTAGSEL is pulled Low, then an external TAP controller connects to either the Cortex-M3 JTAG TAP (if debug is enabled) or an auxiliary TAP) if debug is disabled).                                                                                                         | Pull-up to $V_{DDI}$ (JTAG bank) through 1 K $\Omega$ resistor.                               |
| JTAG_TCK/M3_TCK         | Input | Test clock.<br>Serial input for JTAG boundary scan, ISP, and UJTAG. The TCK pin does not have an internal pull-up/pull-down resistor. If JTAG is not used, Microchip recommends tying it off. Connect TCK through the 1 K $\Omega$ resistor to GND or 3.3V through a resistor placed close to the FPGA pin.                                                                                                                     | Connect to either $V_{DD\#}$ (JTAG) or VSS through a 200 K $\Omega$ to 1 K $\Omega$ resistor. |
| JTAG_TDI/M3_TDI         | Input | Test data.<br>Serial input for JTAG boundary scan, ISP, and UJTAG usage. TDI pin has an internal weak pull-up resistor.                                                                                                                                                                                                                                                                                                         | Do Not Connect (DNC).                                                                         |
| JTAG_TDO/M3_TDO/M3_SWO  | Input | Test data.<br>Serial input for JTAG boundary scan, ISP, and UJTAG usage. The TDO pin does not have an internal pull-up/pull-down resistor. M3_SWO: Serial Wire Viewer Output.                                                                                                                                                                                                                                                   | DNC                                                                                           |
| JTAG_TMS/M3_TMS/M3SWDIO | Input | Test mode select.<br>The TMS pin has an internal weak pull-up resistor. M3_SWDIO: Serial Wire Debug data Input/Output.                                                                                                                                                                                                                                                                                                          | DNC                                                                                           |
| JTAG_TRSTB/M3_TRSTB     | Input | Boundary Scan Reset Pin.<br>The TRSTB pin functions as an active low input to asynchronously initialize (or reset) the boundary scan circuitry. The TRSTB pin has an internal weak pull-up resistor. In critical applications, an upset in the JTAG circuit can allow entering an undesired JTAG state. In such cases, Microchip recommends that you tie off TRSTB to GND through a resistor (1K) placed close to the FPGA pin. | DNC or pull-down to VSS through a K $\Omega$ resistor for upset immunity.                     |

JTAG pins can operate at any voltage: 1.2V/1.5V/1.8V/2.5V or 3.3V (nominal). The debug port is implemented using a Serial Wire JTAG Debug Port (SWJ-DP), than a Serial Wire Debug Port (SW-DP). This enables either the M3 JTAG or the software protocol for debugging.

### 3.5.6 SINGLE-ENDED I/O STANDARDS

#### 3.5.6.1 Low Voltage Complementary Metal Oxide Semiconductor (LVCMOS)

LVCMOS is a widely used switching standard implemented in CMOS transistors. This standard is defined by JEDEC (JESD 8-5). The LVCMOS standards supported in IGLOO 2 FPGAs and SmartFusion 2 SoC FPGAs are: LVCMOS12, LVCMOS15, LVCMOS18, LVCMOS25, and LVCMOS33.

#### 3.5.6.2 3.3V LVCMOS/LVTTL

LVCMOS 3.3V or Low-Voltage Transistor-Transistor Logic (LVTTL) is a general standard for 3.3V applications.

#### Minimum and Maximum DC/AC Input and Output Levels Specification

**TABLE 3-29: LVTTL/LVCMOS 3.3V DC RECOMMENDED DC OPERATING CONDITIONS (APPLICABLE TO MSIO I/O BANK ONLY)**

| Parameter      | Symbol    | Min. | Typ. | Max. | Unit |
|----------------|-----------|------|------|------|------|
| Supply voltage | $V_{DDI}$ | 3.15 | 3.3  | 3.45 | V    |

**TABLE 3-30: LVTTL/LVCMOS 3.3V INPUT VOLTAGE SPECIFICATION (APPLICABLE TO MSIO I/O BANK ONLY)**

| Parameter                      | Symbol        | Min. | Max. | Unit |
|--------------------------------|---------------|------|------|------|
| DC input logic high            | $V_{IH}$ (DC) | 2.0  | 3.45 | V    |
| DC input logic low             | $V_{IL}$ (DC) | -0.3 | 0.8  | V    |
| Input current high             | $I_{IH}$ (DC) | —    | —    | —    |
| Input current low <sup>1</sup> | $I_{IL}$ (DC) | —    | —    | —    |

. See [Table 3-22](#).

**TABLE 3-31: LVCMOS 3.3V DC OUTPUT VOLTAGE SPECIFICATION (APPLICABLE TO MSIO I/O BANK ONLY)**

| Parameter                        | Symbol   | Min.          | Max. | Unit |
|----------------------------------|----------|---------------|------|------|
| DC output logic high             | $V_{OH}$ | $V_{DDI}-0.4$ | —    | V    |
| DC output logic low <sup>1</sup> | $V_{OL}$ | —             | 0.4  | V    |

. The  $V_{OH}/V_{OL}$  test points selected ensure compliance with LVCMOS 3.3V JESD8-B requirements.

**TABLE 3-32: LVTTL 3.3V DC OUTPUT VOLTAGE SPECIFICATION (APPLICABLE TO MSIO I/O BANK ONLY)**

| Parameter            | Symbol   | Min. | Max. | Unit |
|----------------------|----------|------|------|------|
| DC output logic high | $V_{OH}$ | 2.4  | —    | V    |
| DC output logic low  | $V_{OL}$ | —    | 0.4  | V    |

**TABLE 3-33: LVTTL/LVCMOS 3.3V AC MAXIMUM SWITCHING SPEED (APPLICABLE TO MSIO I/O BANK ONLY)**

| Parameter                             | Symbol    | Max. | Unit | Conditions                                 |
|---------------------------------------|-----------|------|------|--------------------------------------------|
| Maximum data rate (for MSIO I/O bank) | $D_{MAX}$ | 600  | Mbps | AC loading: 17 pF load, maximum drive/slew |

**TABLE 3-34: LVTTTL/LVCMOS 3.3V AC TEST PARAMETER SPECIFICATIONS (APPLICABLE TO MSIO I/O BANK ONLY)**

| Parameter                                                                        | Symbol     | Typ. | Unit     |
|----------------------------------------------------------------------------------|------------|------|----------|
| Measuring/trip point for data path                                               | $V_{TRIP}$ | 1.4  | V        |
| Resistance for enable path ( $T_{ZH}$ , $T_{ZL}$ , $T_{HZ}$ , $T_{LZ}$ )         | $R_{ENT}$  | 2K   | $\Omega$ |
| Capacitive loading for enable path ( $T_{ZH}$ , $T_{ZL}$ , $T_{HZ}$ , $T_{LZ}$ ) | $C_{ENT}$  | 5    | pF       |
| Capacitive loading for data path ( $T_{DP}$ )                                    | $C_{LOAD}$ | 5    | pF       |

**TABLE 3-35: LVTTTL/LVCMOS 3.3V TRANSMITTER DRIVE STRENGTH SPECIFICATIONS FOR MSIO I/O BANK**

| Output Drive Selection | $V_{OH}$<br>(V) | $V_{OL}$<br>(V) | IOH (at $V_{OH}$ )<br>mA | IOL (at $V_{OL}$ )<br>mA |
|------------------------|-----------------|-----------------|--------------------------|--------------------------|
| 2 mA                   | $V_{DDI}-0.4$   | 0.4             | 2                        | 2                        |
| 4 mA                   | $V_{DDI}-0.4$   | 0.4             | 4                        | 4                        |
| 8 mA                   | $V_{DDI}-0.4$   | 0.4             | 8                        | 8                        |
| 12 mA                  | $V_{DDI}-0.4$   | 0.4             | 12                       | 12                       |
| 16 mA                  | $V_{DDI}-0.4$   | 0.4             | 16                       | 16                       |
| 20 mA                  | $V_{DDI}-0.4$   | 0.4             | 20                       | 20                       |

**Note:** For a detailed I/V curve, use the corresponding IBIS models:

- For IGLOO 2: <https://www.microchip.com/en-us/products/fpgas-and-plds/fpgas/igloo-2-fpgas#Documentation>.
- For SmartFusion 2: <https://www.microchip.com/en-us/products/fpgas-and-plds/system-on-chip-fpgas/smartfusion-2-fpgas#Documentation>.

### AC Switching Characteristics

Worst commercial-case conditions:  $T_J = 85^\circ\text{C}$ ,  $V_{DD} = 1.14\text{V}$ , and  $V_{DDI} = 3.0\text{V}$ .

**TABLE 3-36: LVTTTL/LVCMOS 3.3V RECEIVER CHARACTERISTICS FOR MSIO I/O BANK (INPUT BUFFERS)**

| On-Die Termination<br>(ODT) | $T_{PY}$ |       | $T_{PYS}$ |       | Unit |
|-----------------------------|----------|-------|-----------|-------|------|
|                             | -1       | -Std  | -1        | -Std  |      |
| None                        | 2.262    | 2.663 | 2.289     | 2.695 | ns   |

**TABLE 3-37: LVTTTL/LVCMOS 3.3V TRANSMITTER CHARACTERISTICS FOR MSIO I/O BANK (OUTPUT AND TRISTATE BUFFERS)**

| Output Drive Selection | Slew Control | $T_{DP}$ |       | $T_{ZL}$ |       | $T_{ZH}$ |       | $T_{HZ}$ |       | $T_{LZ}^1$ |       | Unit |
|------------------------|--------------|----------|-------|----------|-------|----------|-------|----------|-------|------------|-------|------|
|                        |              | -1       | -Std  | -1       | -Std  | -1       | -Std  | -1       | -Std  | -1         | -Std  |      |
| 2 mA                   | Slow         | 3.192    | 3.755 | 3.47     | 4.083 | 2.969    | 3.494 | 1.856    | 2.183 | 3.337      | 3.926 | ns   |
| 4 mA                   | Slow         | 2.331    | 2.742 | 2.673    | 3.145 | 2.526    | 2.973 | 3.034    | 3.569 | 4.451      | 5.236 | ns   |
| 8 mA                   | Slow         | 2.135    | 2.511 | 2.33     | 2.741 | 2.297    | 2.703 | 4.532    | 5.331 | 4.825      | 5.676 | ns   |
| 12 mA                  | Slow         | 2.052    | 2.414 | 2.107    | 2.479 | 2.162    | 2.544 | 5.75     | 6.764 | 5.445      | 6.406 | ns   |
| 16 mA                  | Slow         | 2.062    | 2.425 | 2.072    | 2.438 | 2.145    | 2.525 | 5.993    | 7.05  | 5.625      | 6.618 | ns   |
| 20 mA                  | Slow         | 2.148    | 2.527 | 1.999    | 2.353 | 2.088    | 2.458 | 6.262    | 7.367 | 5.876      | 6.913 | ns   |

- Delay increases with drive strength are inherent to built-in slew control circuitry for Simultaneous Switching Output (SSO) management.

### 3.5.7 2.5V LVCMOS

LVCMOS 2.5V is a general standard for 2.5V applications and is supported in IGLOO 2 FPGA and SmartFusion 2 SoC FPGAs that follow the JEDEC specification JESD8-5A.

#### Minimum and Maximum DC/AC Input and Output Levels Specification

**TABLE 3-38: LVCMOS 2.5 V DC RECOMMENDED DC OPERATING CONDITIONS**

| Parameter      | Symbol           | Min.  | Typ. | Max.  | Unit |
|----------------|------------------|-------|------|-------|------|
| Supply voltage | V <sub>DDI</sub> | 2.375 | 2.5  | 2.625 | V    |

**TABLE 3-39: LVCMOS 2.5 V DC INPUT VOLTAGE SPECIFICATION**

| Parameter                                           | Symbol               | Min. | Max.  | Unit |
|-----------------------------------------------------|----------------------|------|-------|------|
| DC input logic high (for MSIOD and DDRIO I/O banks) | V <sub>IH</sub> (DC) | 1.7  | 2.625 | V    |
| DC input logic high (for MSIO I/O bank)             | V <sub>IH</sub> (DC) | 1.7  | 3.45  | V    |
| DC input logic low                                  | V <sub>IL</sub> (DC) | −0.3 | 0.7   | V    |
| Input current high                                  | I <sub>IH</sub> (DC) | —    | —     | —    |
| Input current low <sup>1</sup>                      | I <sub>IL</sub> (DC) | —    | —     | —    |

- See [Table 3-22](#).

**TABLE 3-40: LVCMOS 2.5V DC OUTPUT VOLTAGE SPECIFICATION**

| Parameter            | Symbol                       | Min.                   | Max. | Unit |
|----------------------|------------------------------|------------------------|------|------|
| DC output logic high | V <sub>OH</sub>              | V <sub>DDI</sub> − 0.4 | —    | V    |
| DC output logic low  | V <sub>OL</sub> <sup>1</sup> | —                      | 0.4  | V    |

- The VOH/VOL test points selected ensure compliance with LVCMOS 2.5 V JEDEC8-5A requirements.

**TABLE 3-41: LVCMOS 2.5V AC MINIMUM AND MAXIMUM SWITCHING SPEED**

| Parameter                              | Symbol           | Max. | Unit | Conditions                                 |
|----------------------------------------|------------------|------|------|--------------------------------------------|
| Maximum data rate (for DDRIO I/O bank) | D <sub>MAX</sub> | 400  | Mbps | AC loading: 17 pF load, maximum drive/slew |
| Maximum data rate (for MSIO I/O bank)  | D <sub>MAX</sub> | 410  | Mbps | AC loading: 17 pF load, maximum drive/slew |
| Maximum data rate (for MSIOD I/O bank) | D <sub>MAX</sub> | 420  | Mbps | AC loading: 17 pF load, maximum drive/slew |

**TABLE 3-42: LVCMOS 2.5V AC CALIBRATED IMPEDANCE OPTION**

| Parameter                                                         | Symbol               | Typ.                   | Unit |
|-------------------------------------------------------------------|----------------------|------------------------|------|
| Supported output driver calibrated impedance (for DDRIO I/O bank) | R <sub>odt_cal</sub> | 75, 60, 50, 33, 25, 20 | Ω    |

**TABLE 3-43: LVCMOS 2.5V AC TEST PARAMETER SPECIFICATIONS**

| Parameter                                                                                           | Symbol            | Typ. | Unit |
|-----------------------------------------------------------------------------------------------------|-------------------|------|------|
| Measuring/trip point for data path                                                                  | V <sub>TRIP</sub> | 1.2  | V    |
| Resistance for enable path (T <sub>ZH</sub> , T <sub>ZL</sub> , T <sub>HZ</sub> , T <sub>LZ</sub> ) | R <sub>ENT</sub>  | 2K   | Ωσ   |

**TABLE 3-43: LVCMOS 2.5V AC TEST PARAMETER SPECIFICATIONS (CONTINUED)**

|                                                                                  |            |   |    |
|----------------------------------------------------------------------------------|------------|---|----|
| Capacitive loading for enable path ( $T_{ZH}$ , $T_{ZL}$ , $T_{HZ}$ , $T_{LZ}$ ) | $C_{ENT}$  | 5 | pF |
| Capacitive loading for data path ( $T_{DP}$ )                                    | $C_{LOAD}$ | 5 | pF |

**TABLE 3-44: LVCMOS 2.5V TRANSMITTER DRIVE STRENGTH SPECIFICATIONS**

| Output Drive Selection |                |                                                      | VOH (V)       | VOL (V) | IOH (at VOH) mA | IOL (at VOL) mA |
|------------------------|----------------|------------------------------------------------------|---------------|---------|-----------------|-----------------|
| MSIO I/O Bank          | MSIOD I/O Bank | DDRIO I/O Bank<br>(With Software Default Fixed Code) | Min.          | Max.    |                 |                 |
| 2 mA                   | 2 mA           | 2 mA                                                 | $V_{DDI}-0.4$ | 0.4     | 2               | 2               |
| 4 mA                   | 4 mA           | 4 mA                                                 | $V_{DDI}-0.4$ | 0.4     | 4               | 4               |
| 6 mA                   | 6 mA           | 6 mA                                                 | $V_{DDI}-0.4$ | 0.4     | 6               | 6               |
| 8 mA                   | 8 mA           | 8 mA                                                 | $V_{DDI}-0.4$ | 0.4     | 8               | 8               |
| 12 mA                  | 12 mA          | 12 mA                                                | $V_{DDI}-0.4$ | 0.4     | 12              | 12              |
| 16 mA                  | —              | 16 mA                                                | $V_{DDI}-0.4$ | 0.4     | 16              | 16              |

**Note:** For board design considerations, output slew rates extraction, detailed output buffer resistances, and I/V curve, use the corresponding IBIS models located at:

- For IGLOO 2: <https://www.microchip.com/en-us/products/fpgas-and-plds/fpgas/igloo-2-fpgas#Documentation>
- For SmartFusion 2: <https://www.microchip.com/en-us/products/fpgas-and-plds/system-on-chip-fpgas/smartfusion-2-fpgas#Documentation>

#### AC Switching Characteristics

Worst commercial-case conditions:  $T_J = 85^\circ\text{C}$ ,  $V_{DD} = 1.14\text{V}$ , and  $V_{DDI} = 2.375\text{V}$ .

**TABLE 3-45: LVCMOS 2.5V RECEIVER CHARACTERISTICS (INPUT BUFFERS)**

|                                   | On-Die Termination (ODT) | $T_{PY}$ |       | $T_{PYS}$ |       | Unit |
|-----------------------------------|--------------------------|----------|-------|-----------|-------|------|
|                                   |                          | –1       | –Std  | –1        | –Std  |      |
| LVCMOS 2.5 V (for DDRIO I/O bank) | None                     | 1.823    | 2.145 | 1.932     | 2.274 | ns   |
| LVCMOS 2.5 V (for MSIO I/O bank)  | None                     | 2.486    | 2.925 | 2.495     | 2.935 | ns   |
| LVCMOS 2.5 V (for MSIOD I/O bank) | None                     | 2.29     | 2.694 | 2.305     | 2.712 | ns   |

**TABLE 3-46: LVCMOS 2.5V TRANSMITTER CHARACTERISTICS FOR DDRIO BANK (OUTPUT AND TRISTATE BUFFERS)**

| Output Drive Selection | Slew Control | $T_{DP}$ |       | $T_{ZL}$ |       | $T_{ZH}$ |       | $T_{HZ}$ |       | $T_{LZ}^1$ |       | Unit |
|------------------------|--------------|----------|-------|----------|-------|----------|-------|----------|-------|------------|-------|------|
|                        |              | –1       | –Std  | –1       | –Std  | –1       | –Std  | –1       | –Std  | –1         | –Std  |      |
| 2 mA                   | Slow         | 3.657    | 4.302 | 3.393    | 3.991 | 3.675    | 4.323 | 3.894    | 4.582 | 3.552      | 4.18  | ns   |
|                        | Medium       | 3.374    | 3.97  | 3.139    | 3.693 | 3.396    | 3.995 | 3.635    | 4.277 | 3.253      | 3.828 | ns   |
|                        | Medium fast  | 3.239    | 3.811 | 3.036    | 3.572 | 3.261    | 3.836 | 3.519    | 4.141 | 3.128      | 3.681 | ns   |
|                        | Fast         | 3.224    | 3.793 | 3.029    | 3.563 | 3.246    | 3.818 | 3.512    | 4.132 | 3.119      | 3.67  | ns   |
| 4 mA                   | Slow         | 3.095    | 3.641 | 2.705    | 3.182 | 3.088    | 3.633 | 4.738    | 5.575 | 4.348      | 5.116 | ns   |
|                        | Medium       | 2.825    | 3.324 | 2.488    | 2.927 | 2.823    | 3.321 | 4.492    | 5.285 | 4.063      | 4.781 | ns   |
|                        | Medium fast  | 2.701    | 3.178 | 2.384    | 2.804 | 2.698    | 3.173 | 4.364    | 5.135 | 3.945      | 4.642 | ns   |
|                        | Fast         | 2.69     | 3.165 | 2.377    | 2.796 | 2.687    | 3.161 | 4.359    | 5.129 | 3.94       | 4.636 | ns   |

**TABLE 3-46: LVCMOS 2.5V TRANSMITTER CHARACTERISTICS FOR DDRIO BANK (OUTPUT AND TRISTATE BUFFERS) (CONTINUED)**

| Output Drive Selection | Slew Control | T <sub>DP</sub> |       | T <sub>ZL</sub> |       | T <sub>ZH</sub> |       | T <sub>HZ</sub> |       | T <sub>LZ</sub> <sup>1</sup> |       | Unit |
|------------------------|--------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|------------------------------|-------|------|
|                        |              | -1              | -Std  | -1              | -Std  | -1              | -Std  | -1              | -Std  | -1                           | -Std  |      |
| 6 mA                   | Slow         | 2.919           | 3.434 | 2.491           | 2.93  | 2.902           | 3.414 | 5.085           | 5.983 | 4.674                        | 5.5   | ns   |
|                        | Medium       | 2.65            | 3.118 | 2.279           | 2.681 | 2.642           | 3.108 | 4.845           | 5.701 | 4.375                        | 5.148 | ns   |
|                        | Medium fast  | 2.529           | 2.975 | 2.176           | 2.56  | 2.521           | 2.965 | 4.724           | 5.558 | 4.259                        | 5.011 | ns   |
|                        | Fast         | 2.516           | 2.96  | 2.168           | 2.551 | 2.508           | 2.95  | 4.717           | 5.55  | 4.251                        | 5.002 | ns   |
| 8 mA                   | Slow         | 2.863           | 3.368 | 2.427           | 2.855 | 2.844           | 3.346 | 5.196           | 6.114 | 4.769                        | 5.612 | ns   |
|                        | Medium       | 2.599           | 3.058 | 2.217           | 2.608 | 2.59            | 3.047 | 4.952           | 5.827 | 4.471                        | 5.261 | ns   |
|                        | Medium fast  | 2.483           | 2.921 | 2.114           | 2.487 | 2.473           | 2.91  | 4.832           | 5.685 | 4.364                        | 5.134 | ns   |
|                        | Fast         | 2.467           | 2.902 | 2.106           | 2.478 | 2.457           | 2.89  | 4.826           | 5.678 | 4.348                        | 5.116 | ns   |
| 12 mA                  | Slow         | 2.747           | 3.232 | 2.296           | 2.701 | 2.724           | 3.204 | 5.39            | 6.342 | 4.938                        | 5.81  | ns   |
|                        | Medium       | 2.493           | 2.934 | 2.102           | 2.473 | 2.483           | 2.921 | 5.166           | 6.078 | 4.65                         | 5.471 | ns   |
|                        | Medium fast  | 2.382           | 2.803 | 2.006           | 2.36  | 2.371           | 2.789 | 5.067           | 5.962 | 4.546                        | 5.349 | ns   |
|                        | Fast         | 2.369           | 2.787 | 1.999           | 2.352 | 2.357           | 2.773 | 5.063           | 5.958 | 4.538                        | 5.339 | ns   |
| 16 mA                  | Slow         | 2.677           | 3.149 | 2.213           | 2.604 | 2.649           | 3.116 | 5.575           | 6.56  | 5.08                         | 5.977 | ns   |
|                        | Medium       | 2.432           | 2.862 | 2.028           | 2.386 | 2.421           | 2.848 | 5.372           | 6.32  | 4.801                        | 5.649 | ns   |
|                        | Medium fast  | 2.324           | 2.734 | 1.937           | 2.278 | 2.311           | 2.718 | 5.297           | 6.233 | 4.7                          | 5.531 | ns   |
|                        | Fast         | 2.313           | 2.721 | 1.929           | 2.269 | 2.3             | 2.706 | 5.296           | 6.231 | 4.699                        | 5.529 | ns   |

. Delay increases with drive strength are inherent to built-in slew control circuitry for SSO management.

**TABLE 3-47: LVCMOS 2.5V TRANSMITTER CHARACTERISTICS FOR MSIO BANK (OUTPUT AND TRISTATE BUFFERS)**

| Output Drive Selection | Slew Control | T <sub>DP</sub> |       | T <sub>ZL</sub> |       | T <sub>ZH</sub> |       | T <sub>HZ</sub> |       | T <sub>LZ</sub> <sup>1</sup> |       | Unit |
|------------------------|--------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|------------------------------|-------|------|
|                        |              | -1              | -Std  | -1              | -Std  | -1              | -Std  | -1              | -Std  | -1                           | -Std  |      |
| 2 mA                   | Slow         | 3.48            | 4.095 | 3.855           | 4.534 | 3.785           | 4.453 | 2.12            | 2.494 | 3.45                         | 4.059 | ns   |
| 4 mA                   | Slow         | 2.583           | 3.039 | 3.042           | 3.579 | 3.138           | 3.691 | 4.143           | 4.874 | 4.687                        | 5.513 | ns   |
| 6 mA                   | Slow         | 2.392           | 2.815 | 2.669           | 3.139 | 2.82            | 3.317 | 4.909           | 5.775 | 5.083                        | 5.98  | ns   |
| 8 mA                   | Slow         | 2.309           | 2.717 | 2.565           | 3.017 | 2.74            | 3.223 | 5.812           | 6.837 | 5.523                        | 6.497 | ns   |
| 12 mA                  | Slow         | 2.333           | 2.745 | 2.437           | 2.867 | 2.626           | 3.089 | 6.131           | 7.213 | 5.712                        | 6.72  | ns   |
| 16 mA                  | Slow         | 2.412           | 2.838 | 2.335           | 2.747 | 2.533           | 2.979 | 6.54            | 7.694 | 6.007                        | 7.067 | ns   |

. Delay increases with drive strength are inherent to built-in slew control circuitry for SSO management.

**TABLE 3-48: LVCMOS 2.5V TRANSMITTER CHARACTERISTICS FOR MSIOD BANK (OUTPUT AND TRISTATE BUFFERS)**

| Output Drive Selection | Slew Control | T <sub>DP</sub> |       | T <sub>ZL</sub> |       | T <sub>ZH</sub> |       | T <sub>HZ</sub> |       | T <sub>LZ</sub> <sup>1</sup> |       | Unit |
|------------------------|--------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|------------------------------|-------|------|
|                        |              | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1                           | –Std  |      |
| 2 mA                   | Slow         | 2.206           | 2.596 | 2.678           | 3.15  | 2.64            | 3.106 | 4.935           | 5.805 | 4.74                         | 5.576 | ns   |
| 4 mA                   | Slow         | 1.835           | 2.159 | 2.242           | 2.637 | 2.256           | 2.654 | 5.413           | 6.368 | 5.15                         | 6.059 | ns   |
| 6 mA                   | Slow         | 1.709           | 2.01  | 2.132           | 2.508 | 2.167           | 2.549 | 5.813           | 6.838 | 5.499                        | 6.469 | ns   |
| 8 mA                   | Slow         | 1.63            | 1.918 | 1.958           | 2.303 | 2.012           | 2.367 | 6.226           | 7.324 | 5.816                        | 6.842 | ns   |
| 12 mA                  | Slow         | 1.648           | 1.939 | 1.86            | 2.187 | 1.921           | 2.259 | 6.519           | 7.669 | 6.027                        | 7.09  | ns   |

. Delay increases with drive strength are inherent to built-in slew control circuitry for SSO management.

### 3.5.8 1.8V LVCMOS

LVCMOS 1.8 is a general standard for 1.8V applications and is supported in IGLOO 2 FPGAs and SmartFusion 2 SoC FPGAs in compliance to the JEDEC specification JESD8-7A.

#### Minimum and Maximum DC/AC Input and Output Levels Specification

**TABLE 3-49: LVCMOS 1.8V DC RECOMMENDED OPERATING CONDITIONS**

| Parameter                                              | Symbol           | Min.  | Typ. | Max. | Unit |
|--------------------------------------------------------|------------------|-------|------|------|------|
| <b>LVCMOS 1.8V DC Recommended Operating Conditions</b> |                  |       |      |      |      |
| Supply voltage                                         | V <sub>DDI</sub> | 1.710 | 1.8  | 1.89 | V    |

**TABLE 3-50: LVCMOS 1.8V DC INPUT VOLTAGE SPECIFICATION**

| Parameter                                           | Symbol               | Min.                    | Max.                    | Unit |
|-----------------------------------------------------|----------------------|-------------------------|-------------------------|------|
| DC input logic high (for MSIOD and DDRIO I/O banks) | V <sub>IH</sub> (DC) | 0.65 × V <sub>DDI</sub> | 1.89                    | V    |
| DC input logic high (for MSIO I/O bank)             | V <sub>IH</sub> (DC) | 0.65 × V <sub>DDI</sub> | 3.45                    | V    |
| DC input logic low                                  | V <sub>IL</sub> (DC) | –0.3                    | 0.35 × V <sub>DDI</sub> | V    |
| Input current high                                  | I <sub>IH</sub> (DC) | —                       | —                       | —    |
| Input current low <sup>1</sup>                      | I <sub>IL</sub> (DC) | —                       | —                       | —    |

. See [Table 3-22](#).

**TABLE 3-51: LVCMOS 1.8V DC OUTPUT VOLTAGE SPECIFICATION**

| Parameter            | Symbol          | Min.                    | Max. | Unit |
|----------------------|-----------------|-------------------------|------|------|
| DC output logic high | V <sub>OH</sub> | V <sub>DDI</sub> – 0.45 | —    | V    |
| DC output logic low  | V <sub>OL</sub> | —                       | 0.45 | V    |

**TABLE 3-52: LVCMOS 1.8V MINIMUM AND MAXIMUM AC SWITCHING SPEED**

| Parameter                                           | Symbol           | Max. | Unit | Conditions                                 |
|-----------------------------------------------------|------------------|------|------|--------------------------------------------|
| Maximum data rate (for DDRIO I/O bank)              | D <sub>MAX</sub> | 400  | Mbps | AC loading: 17 pF load, maximum drive/slew |
| Maximum data rate (for MSIO I/O bank)               | D <sub>MAX</sub> | 295  | Mbps | AC loading: 17 pF load, maximum drive/slew |
| Maximum data rate (for MSIOD I/O bank) <sup>1</sup> | D <sub>MAX</sub> | 400  | Mbps | AC loading: 17 pF load, maximum drive/slew |

. Maximum Data Rate applies for Drive Strength 8 mA and above, All Slews.

**TABLE 3-53: LVCMOS 1.8V AC CALIBRATED IMPEDANCE OPTION**

| Parameter                                                         | Symbol   | Typ.                   | Unit     |
|-------------------------------------------------------------------|----------|------------------------|----------|
| Supported output driver calibrated impedance (for DDRIO I/O bank) | Rodt_cal | 75, 60, 50, 33, 25, 20 | $\Omega$ |

**TABLE 3-54: LVCMOS 1.8V AC TEST PARAMETER SPECIFICATIONS**

| Parameter                                                                                                   | Symbol            | Typ. | Unit     |
|-------------------------------------------------------------------------------------------------------------|-------------------|------|----------|
| Measuring/trip point for data path                                                                          | V <sub>TRIP</sub> | 0.9  | V        |
| Resistance for enable path (T <sub>ZH</sub> , T <sub>ZL</sub> , T <sub>HZ</sub> , T <sub>LZ</sub> )         | R <sub>ENT</sub>  | 2k   | $\Omega$ |
| Capacitive loading for enable path (T <sub>ZH</sub> , T <sub>ZL</sub> , T <sub>HZ</sub> , T <sub>LZ</sub> ) | C <sub>ENT</sub>  | 5    | pF       |
| Capacitive loading for data path (T <sub>DP</sub> )                                                         | C <sub>LOAD</sub> | 5    | pF       |

**TABLE 3-55: LVCMOS 1.8 V TRANSMITTER DRIVE STRENGTH SPECIFICATIONS**

| Output Drive Selection |                |                | V <sub>OH</sub> (V)    | V <sub>OL</sub> (V) | IOH (at V <sub>OH</sub> )<br>mA | IOL (at V <sub>OL</sub> )<br>mA |
|------------------------|----------------|----------------|------------------------|---------------------|---------------------------------|---------------------------------|
| MSIO I/O Bank          | MSIOD I/O Bank | DDRIO I/O Bank | Min.                   | Max.                |                                 |                                 |
| 2 mA                   | 2 mA           | 2 mA           | V <sub>DDI</sub> -0.45 | 0.45                | 2                               | 2                               |
| 4 mA                   | 4 mA           | 4 mA           | V <sub>DDI</sub> -0.45 | 0.45                | 4                               | 4                               |
| 6 mA                   | 6 mA           | 6 mA           | V <sub>DDI</sub> -0.45 | 0.45                | 6                               | 6                               |
| 8 mA                   | 8 mA           | 8 mA           | V <sub>DDI</sub> -0.45 | 0.45                | 8                               | 8                               |
| 10 mA                  | 10 mA          | 10 mA          | V <sub>DDI</sub> -0.45 | 0.45                | 10                              | 10                              |
| 12 mA                  | —              | 12 mA          | V <sub>DDI</sub> -0.45 | 0.45                | 12                              | 12                              |
| —                      | —              | 16 mA          | V <sub>DDI</sub> -0.45 | 0.45                | 16                              | 16                              |

. 16 mA drive strengths, all slews, meets LPDDR JEDEC electrical compliance.

#### AC Switching Characteristics

Worst commercial-case conditions: T<sub>J</sub> = 85 °C, V<sub>DD</sub> = 1.14 V, V<sub>DDI</sub> = 1.71V.

**TABLE 3-56: LVCMOS 1.8 V RECEIVER CHARACTERISTICS (INPUT BUFFERS)**

|                                                                  | On-Die Termination<br>(ODT) | T <sub>PY</sub> |       | T <sub>PYS</sub> |       | Unit |
|------------------------------------------------------------------|-----------------------------|-----------------|-------|------------------|-------|------|
|                                                                  |                             | -1              | -Std  | -1               | -Std  |      |
| <b>LVCMOS 1.8V<br/>(for DDRIO I/O bank<br/>with Fixed Codes)</b> | None                        | 1.968           | 2.315 | 2.099            | 2.47  | ns   |
| <b>LVCMOS 1.8V<br/>(for MSIO I/O bank)</b>                       | None                        | 2.898           | 3.411 | 2.883            | 3.393 | ns   |
|                                                                  | 50                          | 3.05            | 3.59  | 3.044            | 3.583 | ns   |
|                                                                  | 75                          | 2.999           | 3.53  | 2.987            | 3.516 | ns   |
|                                                                  | 150                         | 2.947           | 3.469 | 2.933            | 3.452 | ns   |
| <b>LVCMOS 1.8V<br/>(for MSIOD I/O bank)</b>                      | None                        | 2.611           | 3.071 | 2.598            | 3.057 | ns   |
|                                                                  | 50                          | 2.775           | 3.264 | 2.775            | 3.265 | ns   |
|                                                                  | 75                          | 2.72            | 3.2   | 2.712            | 3.19  | ns   |
|                                                                  | 150                         | 2.666           | 3.137 | 2.655            | 3.123 | ns   |

**TABLE 3-57: LVCMOS 1.8V TRANSMITTER CHARACTERISTICS FOR DDRIO I/O BANK WITH FIXED CODE (OUTPUT AND TRISTATE BUFFERS)**

| Output Drive Selection | Slew Control | T <sub>DP</sub> |       | T <sub>ZL</sub> |       | T <sub>ZH</sub> |       | T <sub>HZ</sub> |       | T <sub>LZ</sub> <sup>1</sup> |       | Unit |
|------------------------|--------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|------------------------------|-------|------|
|                        |              | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1                           | –Std  |      |
| 2 mA                   | Slow         | 4.234           | 4.981 | 3.646           | 4.29  | 4.245           | 4.995 | 4.908           | 5.774 | 4.434                        | 5.216 | ns   |
|                        | Medium       | 3.824           | 4.498 | 3.282           | 3.861 | 3.834           | 4.511 | 4.625           | 5.441 | 4.116                        | 4.843 | ns   |
|                        | Medium fast  | 3.627           | 4.267 | 3.111           | 3.66  | 3.637           | 4.279 | 4.481           | 5.272 | 3.984                        | 4.687 | ns   |
|                        | Fast         | 3.605           | 4.241 | 3.097           | 3.644 | 3.615           | 4.253 | 4.472           | 5.262 | 3.973                        | 4.674 | ns   |
| 4 mA                   | Slow         | 3.923           | 4.615 | 3.314           | 3.9   | 3.918           | 4.61  | 5.403           | 6.356 | 4.894                        | 5.757 | ns   |
|                        | Medium       | 3.518           | 4.138 | 2.961           | 3.484 | 3.515           | 4.135 | 5.121           | 6.025 | 4.561                        | 5.366 | ns   |
|                        | Medium fast  | 3.321           | 3.907 | 2.783           | 3.275 | 3.317           | 3.903 | 4.966           | 5.843 | 4.426                        | 5.206 | ns   |
|                        | Fast         | 3.301           | 3.883 | 2.77            | 3.259 | 3.296           | 3.878 | 4.957           | 5.831 | 4.417                        | 5.196 | ns   |
| 6 mA                   | Slow         | 3.71            | 4.364 | 3.104           | 3.652 | 3.702           | 4.355 | 5.62            | 6.612 | 5.08                         | 5.977 | ns   |
|                        | Medium       | 3.333           | 3.921 | 2.779           | 3.27  | 3.325           | 3.913 | 5.346           | 6.289 | 4.777                        | 5.62  | ns   |
|                        | Medium fast  | 3.155           | 3.712 | 2.62            | 3.083 | 3.146           | 3.702 | 5.21            | 6.13  | 4.657                        | 5.479 | ns   |
|                        | Fast         | 3.134           | 3.688 | 2.608           | 3.068 | 3.125           | 3.677 | 5.202           | 6.12  | 4.648                        | 5.468 | ns   |
| 8 mA                   | Slow         | 3.619           | 4.258 | 3.007           | 3.538 | 3.607           | 4.244 | 5.815           | 6.841 | 5.249                        | 6.175 | ns   |
|                        | Medium       | 3.246           | 3.819 | 2.686           | 3.16  | 3.236           | 3.807 | 5.542           | 6.52  | 4.936                        | 5.807 | ns   |
|                        | Medium fast  | 3.066           | 3.607 | 2.525           | 2.971 | 3.054           | 3.593 | 5.405           | 6.359 | 4.811                        | 5.66  | ns   |
|                        | Fast         | 3.046           | 3.584 | 2.513           | 2.957 | 3.034           | 3.57  | 5.401           | 6.353 | 4.803                        | 5.651 | ns   |
| 10 mA                  | Slow         | 3.498           | 4.115 | 2.878           | 3.386 | 3.481           | 4.096 | 6.046           | 7.113 | 5.444                        | 6.404 | ns   |
|                        | Medium       | 3.138           | 3.692 | 2.569           | 3.023 | 3.126           | 3.678 | 5.782           | 6.803 | 5.129                        | 6.034 | ns   |
|                        | Medium fast  | 2.966           | 3.489 | 2.414           | 2.841 | 2.951           | 3.472 | 5.666           | 6.665 | 5.013                        | 5.897 | ns   |
|                        | Fast         | 2.945           | 3.464 | 2.401           | 2.826 | 2.93            | 3.448 | 5.659           | 6.658 | 5.003                        | 5.886 | ns   |
| 12 mA                  | Slow         | 3.417           | 4.02  | 2.807           | 3.303 | 3.401           | 4.002 | 6.083           | 7.156 | 5.464                        | 6.428 | ns   |
|                        | Medium       | 3.076           | 3.618 | 2.519           | 2.964 | 3.063           | 3.604 | 5.828           | 6.856 | 5.176                        | 6.089 | ns   |
|                        | Medium fast  | 2.913           | 3.427 | 2.376           | 2.795 | 2.898           | 3.41  | 5.725           | 6.736 | 5.072                        | 5.966 | ns   |
|                        | Fast         | 2.894           | 3.405 | 2.362           | 2.78  | 2.879           | 3.388 | 5.715           | 6.724 | 5.064                        | 5.957 | ns   |
| 16 mA                  | Slow         | 3.366           | 3.96  | 2.751           | 3.237 | 3.348           | 3.939 | 6.226           | 7.324 | 5.576                        | 6.56  | ns   |
|                        | Medium       | 3.03            | 3.565 | 2.47            | 2.906 | 3.017           | 3.55  | 5.981           | 7.036 | 5.282                        | 6.214 | ns   |
|                        | Medium fast  | 2.87            | 3.377 | 2.328           | 2.739 | 2.854           | 3.358 | 5.895           | 6.935 | 5.18                         | 6.094 | ns   |
|                        | Fast         | 2.853           | 3.357 | 2.314           | 2.723 | 2.837           | 3.338 | 5.889           | 6.929 | 5.177                        | 6.09  | ns   |

. Delay increases with drive strength are inherent to built-in slew control circuitry for SSO management.

**TABLE 3-58: LVCMOS 1.8V TRANSMITTER CHARACTERISTICS FOR MSIO I/O BANK**

| Output Drive Selection | Slew Control | T <sub>DP</sub> |       | T <sub>ZL</sub> |       | T <sub>ZH</sub> |       | T <sub>HZ</sub> |       | T <sub>LZ</sub> <sup>1</sup> |       | Unit |
|------------------------|--------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|------------------------------|-------|------|
|                        |              | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1                           | –Std  |      |
| 2 mA                   | Slow         | 3.441           | 4.047 | 4.165           | 4.9   | 4.413           | 5.192 | 4.891           | 5.755 | 5.138                        | 6.044 | ns   |
| 4 mA                   | Slow         | 3.218           | 3.786 | 3.642           | 4.284 | 3.941           | 4.636 | 5.665           | 6.665 | 5.568                        | 6.551 | ns   |
| 6 mA                   | Slow         | 3.141           | 3.694 | 3.501           | 4.118 | 3.823           | 4.498 | 6.587           | 7.75  | 6.032                        | 7.096 | ns   |
| 8 mA                   | Slow         | 3.165           | 3.723 | 3.319           | 3.904 | 3.654           | 4.298 | 6.898           | 8.115 | 6.216                        | 7.313 | ns   |
| 10 mA                  | Slow         | 3.202           | 3.767 | 3.278           | 3.857 | 3.616           | 4.254 | 7.25            | 8.529 | 6.435                        | 7.571 | ns   |
| 12 mA                  | Slow         | 3.277           | 3.855 | 3.175           | 3.736 | 3.519           | 4.139 | 7.392           | 8.697 | 6.538                        | 7.692 | ns   |

. Delay increases with drive strength are inherent to built-in slew control circuitry for SSO management.

**TABLE 3-59: LVCMOS 1.8V TRANSMITTER CHARACTERISTICS FOR MSIOD I/O BANK**

| Output Drive Selection | Slew Control | T <sub>DP</sub> |       | T <sub>ZL</sub> |       | T <sub>ZH</sub> |       | T <sub>HZ</sub> |       | T <sub>LZ</sub> <sup>1</sup> |       | Unit |
|------------------------|--------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|------------------------------|-------|------|
|                        |              | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1                           | –Std  |      |
| 2 mA                   | Slow         | 2.725           | 3.206 | 3.316           | 3.901 | 3.484           | 4.099 | 5.204           | 6.123 | 4.997                        | 5.88  | ns   |
| 4 mA                   | Slow         | 2.242           | 2.638 | 2.777           | 3.267 | 2.947           | 3.466 | 5.729           | 6.74  | 5.448                        | 6.41  | ns   |
| 6 mA                   | Slow         | 1.995           | 2.347 | 2.466           | 2.901 | 2.63            | 3.094 | 6.372           | 7.496 | 5.987                        | 7.043 | ns   |
| 8 mA                   | Slow         | 2.001           | 2.354 | 2.44            | 2.87  | 2.6             | 3.058 | 6.633           | 7.804 | 6.193                        | 7.286 | ns   |
| 10 mA                  | Slow         | 2.025           | 2.382 | 2.312           | 2.719 | 2.47            | 2.906 | 6.94            | 8.165 | 6.412                        | 7.544 | ns   |

. Delay increases with drive strength are inherent to built-in slew control circuitry for SSO management.

### 3.5.9 1.5V LVCMOS

LVCMOS 1.5 is a general standard for 1.5V applications and is supported in IGLOO 2 FPGAs and SmartFusion 2 SoC FPGAs in compliance to the JEDEC specification JESD8-11A.

#### Minimum and Maximum DC/AC Input and Output Levels Specification

**TABLE 3-60: LVCMOS 1.5 V<sub>DC</sub> RECOMMENDED OPERATING CONDITIONS**

| Parameter      | Symbol           | Min.  | Typ. | Max.  | Unit |
|----------------|------------------|-------|------|-------|------|
| Supply voltage | V <sub>DDI</sub> | 1.425 | 1.5  | 1.575 | V    |

**TABLE 3-61: LVCMOS 1.5 V<sub>DC</sub> INPUT VOLTAGE SPECIFICATION**

| Parameter                                           | Symbol               | Min.                    | Max.                    | Unit |
|-----------------------------------------------------|----------------------|-------------------------|-------------------------|------|
| DC input logic high for (MSIOD and DDRIO I/O banks) | V <sub>IH</sub> (DC) | 0.65 × V <sub>DDI</sub> | 1.575                   | V    |
| DC input logic high (for MSIO I/O bank)             | V <sub>IH</sub> (DC) | 0.65 × V <sub>DDI</sub> | 3.45                    | V    |
| DC input logic low                                  | V <sub>IL</sub> (DC) | –0.3                    | 0.35 × V <sub>DDI</sub> | V    |
| Input current high                                  | I <sub>IH</sub> (DC) | —                       | —                       | —    |
| Input current low <sup>1</sup>                      | I <sub>IL</sub> (DC) | —                       | —                       | —    |

. See [Table 3-22](#).

**TABLE 3-62: LVCMOS 1.5 V<sub>DC</sub> OUTPUT VOLTAGE SPECIFICATION**

| Parameter            | Symbol | Min.                    | Max.                    | Unit |
|----------------------|--------|-------------------------|-------------------------|------|
| DC output logic high | VOH    | V <sub>DDI</sub> × 0.75 | —                       | V    |
| DC output logic low  | VOL    | —                       | V <sub>DDI</sub> × 0.25 | V    |

**TABLE 3-63: LVCMOS 1.5V AC MINIMUM AND MAXIMUM SWITCHING SPEED**

| Parameter                              | Symbol           | Max. | Unit | Conditions                                 |
|----------------------------------------|------------------|------|------|--------------------------------------------|
| Maximum data rate (for DDRIO I/O bank) | D <sub>MAX</sub> | 235  | Mbps | AC loading: 17 pF load, maximum drive/slew |
| Maximum data rate (for MSIO I/O bank)  | D <sub>MAX</sub> | 160  | Mbps | AC loading: 17 pF load, maximum drive/slew |
| Maximum data rate (for MSIOD I/O bank) | D <sub>MAX</sub> | 220  | Mbps | AC loading: 17 pF load, maximum drive/slew |

**TABLE 3-64: LVCMOS 1.5V AC CALIBRATED IMPEDANCE OPTION**

| Parameter                                                         | Symbol       | Typ.              | Unit |
|-------------------------------------------------------------------|--------------|-------------------|------|
| Supported output driver calibrated impedance (for DDRIO I/O bank) | RODT_<br>CAL | 75, 60,<br>50, 40 | Ω    |

**TABLE 3-65: LVCMOS 1.5V AC TEST PARAMETER SPECIFICATIONS**

| Parameter                                                                        | Symbol     | Typ. | Unit     |
|----------------------------------------------------------------------------------|------------|------|----------|
| Measuring/trip point                                                             | $V_{TRIP}$ | 0.75 | V        |
| Resistance for enable path ( $T_{ZH}$ , $T_{ZL}$ , $T_{HZ}$ , $T_{LZ}$ )         | $R_{ENT}$  | 2K   | $\Omega$ |
| Capacitive loading for enable path ( $T_{ZH}$ , $T_{ZL}$ , $T_{HZ}$ , $T_{LZ}$ ) | $C_{ENT}$  | 5    | pF       |
| Capacitive loading for data path ( $T_{DP}$ )                                    | $C_{LOAD}$ | 5    | pF       |

**TABLE 3-66: LVCMOS 1.5V TRANSMITTER DRIVE STRENGTH SPECIFICATIONS**

| Output Drive Selection |                |                | $V_{OH}$ (V)          | $V_{OL}$ (V)          | IOH (at $V_{OH}$ )<br>mA | IOL (at $V_{OL}$ )<br>mA |
|------------------------|----------------|----------------|-----------------------|-----------------------|--------------------------|--------------------------|
| MSIO I/O Bank          | MSIOD I/O Bank | DDRIO I/O Bank | Min.                  | Max.                  |                          |                          |
| 2 mA                   | 2 mA           | 2 mA           | $V_{DDI} \times 0.75$ | $V_{DDI} \times 0.25$ | 2                        | 2                        |
| 4 mA                   | 4 mA           | 4 mA           | $V_{DDI} \times 0.75$ | $V_{DDI} \times 0.25$ | 4                        | 4                        |
| 6 mA                   | 6 mA           | 6 mA           | $V_{DDI} \times 0.75$ | $V_{DDI} \times 0.25$ | 6                        | 6                        |
| 8 mA                   | —              | 8 mA           | $V_{DDI} \times 0.75$ | $V_{DDI} \times 0.25$ | 8                        | 8                        |
| —                      | —              | 10 mA          | $V_{DDI} \times 0.75$ | $V_{DDI} \times 0.25$ | 10                       | 10                       |
| —                      | —              | 12 mA          | $V_{DDI} \times 0.75$ | $V_{DDI} \times 0.25$ | 12                       | 12                       |

**Note:** For a detailed I/V curve, use the corresponding IBIS models:

- For IGLOO 2: <https://www.microchip.com/en-us/products/fpgas-and-plds/fpgas/igloo-2-fpgas#Documentation>
- For SmartFusion 2: <https://www.microchip.com/en-us/products/fpgas-and-plds/system-on-chip-fpgas/smartfusion-2-fpgas#Documentation>

#### AC Switching Characteristics

Worst commercial-case conditions:  $T_J = 85^\circ\text{C}$ ,  $V_{DD} = 1.14\text{ V}$ ,  $V_{DDI} = 1.425\text{ V}$ .

**TABLE 3-67: LVCMOS 1.5V RECEIVER CHARACTERISTICS FOR DDRIO I/O BANK WITH FIXED CODES (INPUT BUFFERS)**

| On-Die Termination (ODT) | $T_{PY}$ |       | $T_{PYS}$ |       | Unit |
|--------------------------|----------|-------|-----------|-------|------|
|                          | –1       | –Std  | –1        | –Std  |      |
| None                     | 2.051    | 2.413 | 2.086     | 2.455 | ns   |

**TABLE 3-68: LVCMOS 1.5V RECEIVER CHARACTERISTICS FOR MSIO I/O BANK (INPUT BUFFERS)**

| On-Die Termination (ODT) | $T_{PY}$ |       | $T_{PYS}$ |       | Unit |
|--------------------------|----------|-------|-----------|-------|------|
|                          | –1       | –Std  | –1        | –Std  |      |
| None                     | 3.311    | 3.896 | 3.285     | 3.865 | ns   |
| 50                       | 3.654    | 4.299 | 3.623     | 4.263 | ns   |
| 75                       | 3.533    | 4.156 | 3.501     | 4.119 | ns   |
| 150                      | 3.415    | 4.018 | 3.388     | 3.986 | ns   |

**TABLE 3-69: LVCMOS 1.5V RECEIVER CHARACTERISTICS FOR MSIOD I/O BANK (INPUT BUFFERS)**

| On-Die Termination (ODT) | $T_{PY}$ |       | $T_{PYS}$ |       | Unit |
|--------------------------|----------|-------|-----------|-------|------|
|                          | –1       | –Std  | –1        | –Std  |      |
| None                     | 2.959    | 3.481 | 2.93      | 3.447 | ns   |
| 50                       | 3.298    | 3.88  | 3.268     | 3.845 | ns   |
| 75                       | 3.162    | 3.719 | 3.128     | 3.68  | ns   |

**TABLE 3-69: LVCMOS 1.5V RECEIVER CHARACTERISTICS FOR MSIOD I/O BANK (INPUT BUFFERS) (CONTINUED)**

|     |       |       |       |       |    |
|-----|-------|-------|-------|-------|----|
| 150 | 3.053 | 3.592 | 3.021 | 3.554 | ns |
|-----|-------|-------|-------|-------|----|

**TABLE 3-70: LVCMOS 1.5V TRANSMITTER CHARACTERISTICS FOR DDRIO I/O BANK (OUTPUT AND TRISTATE BUFFERS)**

| Output Drive Selection | Slew Control | T <sub>DP</sub> |       | T <sub>ZL</sub> |       | T <sub>ZH</sub> |       | T <sub>HZ</sub> |       | T <sub>LZ</sub> <sup>1</sup> |       | Unit |
|------------------------|--------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|------------------------------|-------|------|
|                        |              | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1                           | –Std  |      |
| 2 mA                   | Slow         | 5.122           | 6.026 | 4.31            | 5.07  | 5.145           | 6.052 | 5.258           | 6.186 | 4.672                        | 5.496 | ns   |
|                        | Medium       | 4.58            | 5.389 | 3.86            | 4.54  | 4.6             | 5.411 | 4.977           | 5.855 | 4.357                        | 5.126 | ns   |
|                        | Medium fast  | 4.323           | 5.086 | 3.629           | 4.269 | 4.341           | 5.107 | 4.804           | 5.652 | 4.228                        | 4.974 | ns   |
|                        | Fast         | 4.296           | 5.054 | 3.609           | 4.245 | 4.314           | 5.075 | 4.791           | 5.636 | 4.219                        | 4.963 | ns   |
| 4 mA                   | Slow         | 4.449           | 5.235 | 3.707           | 4.361 | 4.443           | 5.227 | 6.058           | 7.127 | 5.458                        | 6.421 | ns   |
|                        | Medium       | 3.961           | 4.66  | 3.264           | 3.839 | 3.954           | 4.651 | 5.778           | 6.797 | 5.116                        | 6.018 | ns   |
|                        | Medium fast  | 3.729           | 4.387 | 3.043           | 3.579 | 3.72            | 4.376 | 5.63            | 6.624 | 4.981                        | 5.86  | ns   |
|                        | Fast         | 3.704           | 4.358 | 3.027           | 3.56  | 3.695           | 4.347 | 5.624           | 6.617 | 4.973                        | 5.851 | ns   |
| 6 mA                   | Slow         | 4.244           | 4.993 | 3.465           | 4.076 | 4.233           | 4.979 | 6.39            | 7.518 | 5.736                        | 6.748 | ns   |
|                        | Medium       | 3.774           | 4.44  | 3.05            | 3.587 | 3.762           | 4.426 | 6.114           | 7.193 | 5.397                        | 6.35  | ns   |
|                        | Medium fast  | 3.544           | 4.17  | 2.839           | 3.339 | 3.529           | 4.152 | 5.978           | 7.033 | 5.27                         | 6.2   | ns   |
|                        | Fast         | 3.519           | 4.14  | 2.82            | 3.317 | 3.504           | 4.122 | 5.965           | 7.017 | 5.259                        | 6.187 | ns   |
| 8 mA                   | Slow         | 4.099           | 4.823 | 3.311           | 3.894 | 4.087           | 4.807 | 6.584           | 7.746 | 5.854                        | 6.888 | ns   |
|                        | Medium       | 3.656           | 4.301 | 2.927           | 3.443 | 3.642           | 4.284 | 6.311           | 7.425 | 5.553                        | 6.533 | ns   |
|                        | Medium fast  | 3.437           | 4.044 | 2.731           | 3.213 | 3.42            | 4.023 | 6.182           | 7.273 | 5.435                        | 6.394 | ns   |
|                        | Fast         | 3.41            | 4.012 | 2.715           | 3.193 | 3.393           | 3.991 | 6.178           | 7.269 | 5.425                        | 6.383 | ns   |
| 10 mA                  | Slow         | 4.029           | 4.74  | 3.238           | 3.809 | 4.015           | 4.723 | 6.732           | 7.921 | 5.965                        | 7.018 | ns   |
|                        | Medium       | 3.601           | 4.237 | 2.867           | 3.372 | 3.586           | 4.218 | 6.473           | 7.615 | 5.669                        | 6.669 | ns   |
|                        | Medium fast  | 3.384           | 3.981 | 2.672           | 3.143 | 3.365           | 3.958 | 6.351           | 7.471 | 5.55                         | 6.529 | ns   |
|                        | Fast         | 3.357           | 3.949 | 2.655           | 3.123 | 3.338           | 3.927 | 6.345           | 7.464 | 5.54                         | 6.518 | ns   |
| 12 mA                  | Slow         | 3.974           | 4.675 | 3.196           | 3.759 | 3.958           | 4.656 | 6.842           | 8.049 | 6.068                        | 7.139 | ns   |
|                        | Medium       | 3.55            | 4.176 | 2.827           | 3.326 | 3.534           | 4.157 | 6.584           | 7.746 | 5.751                        | 6.766 | ns   |
|                        | Medium fast  | 3.345           | 3.935 | 2.638           | 3.103 | 3.325           | 3.911 | 6.488           | 7.633 | 5.641                        | 6.637 | ns   |
|                        | Fast         | 3.316           | 3.902 | 2.621           | 3.083 | 3.297           | 3.878 | 6.486           | 7.63  | 5.626                        | 6.619 | ns   |

. Delay increases with drive strength are inherent to built-in slew control circuitry for SSO management.

**TABLE 3-71: LVCMOS 1.5V TRANSMITTER CHARACTERISTICS FOR MSIO I/O BANK (OUTPUT AND TRISTATE BUFFERS)**

| Output Drive Selection | Slew Control | T <sub>DP</sub> |       | T <sub>ZL</sub> |       | T <sub>ZH</sub> |       | T <sub>HZ</sub> |       | T <sub>LZ</sub> <sup>1</sup> |       | Unit |
|------------------------|--------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|------------------------------|-------|------|
|                        |              | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1                           | –Std  |      |
| 2 mA                   | Slow         | 4.423           | 5.203 | 5.397           | 6.35  | 5.686           | 6.69  | 5.609           | 6.599 | 5.561                        | 6.542 | ns   |
| 4 mA                   | Slow         | 4.05            | 4.765 | 4.503           | 5.298 | 4.92            | 5.788 | 7.358           | 8.657 | 6.525                        | 7.677 | ns   |

**TABLE 3-71: LVCMOS 1.5V TRANSMITTER CHARACTERISTICS FOR MSIO I/O BANK (OUTPUT AND TRISTATE BUFFERS) (CONTINUED)**

| Output Drive Selection | Slew Control | T <sub>DP</sub> |       | T <sub>ZL</sub> |       | T <sub>ZH</sub> |       | T <sub>HZ</sub> |       | T <sub>LZ</sub> <sup>1</sup> |       | Unit |
|------------------------|--------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|------------------------------|-------|------|
|                        |              | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1                           | –Std  |      |
| 6 mA                   | Slow         | 4.081           | 4.801 | 4.259           | 5.012 | 4.699           | 5.528 | 7.659           | 9.011 | 6.709                        | 7.893 | ns   |
| 8 mA                   | Slow         | 4.234           | 4.98  | 4.068           | 4.786 | 4.521           | 5.319 | 8.218           | 9.668 | 7.05                         | 8.294 | ns   |

. Delay increases with drive strength are inherent to built-in slew control circuitry for SSO management.

**TABLE 3-72: LVCMOS 1.5V TRANSMITTER CHARACTERISTICS FOR MSIOD I/O BANK (OUTPUT AND TRISTATE BUFFERS)**

| Output Drive Selection | Slew Control | T <sub>DP</sub> |       | T <sub>ZL</sub> |       | T <sub>ZH</sub> |       | T <sub>HZ</sub> |       | T <sub>LZ</sub> <sup>1</sup> |       | Unit |
|------------------------|--------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|------------------------------|-------|------|
|                        |              | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1                           | –Std  |      |
| 2 mA                   | Slow         | 2.735           | 3.218 | 3.371           | 3.966 | 3.618           | 4.257 | 6.03            | 7.095 | 5.705                        | 6.712 | ns   |
| 4 mA                   | Slow         | 2.426           | 2.854 | 2.992           | 3.521 | 3.221           | 3.79  | 6.738           | 7.927 | 6.298                        | 7.41  | ns   |
| 6 mA                   | Slow         | 2.433           | 2.862 | 2.81            | 3.306 | 3.031           | 3.566 | 7.123           | 8.38  | 6.596                        | 7.76  | ns   |

. Delay increases with drive strength are inherent to built-in slew control circuitry for SSO management.

### 3.5.10 1.2V LVCMOS

LVCMOS 1.2 is a general standard for 1.2V applications and is supported in IGLOO 2 FPGAs and SmartFusion 2 SoC FPGAs in compliance to the JEDEC specification JESD8-12A.

#### Minimum and Maximum DC/AC Input and Output Levels Specification

**TABLE 3-73: LVCMOS 1.2V DC RECOMMENDED DC OPERATING CONDITIONS**

| Parameter      | Symbol           | Min.  | Typ. | Max. | Unit |
|----------------|------------------|-------|------|------|------|
| Supply voltage | V <sub>DDI</sub> | 1.140 | 1.2  | 1.26 | V    |

**TABLE 3-74: LVCMOS 1.2V DC INPUT VOLTAGE SPECIFICATION**

| Parameter                                           | Symbol               | Min.                    | Max.                    | Unit |
|-----------------------------------------------------|----------------------|-------------------------|-------------------------|------|
| DC input logic high (for MSIOD and DDRIO I/O banks) | V <sub>IH</sub> (DC) | 0.65 × V <sub>DDI</sub> | 1.26                    | V    |
| DC input logic high (for MSIO I/O bank)             | V <sub>IH</sub> (DC) | 0.65 × V <sub>DDI</sub> | 3.45                    | V    |
| DC input logic low                                  | V <sub>IL</sub> (DC) | –0.3                    | 0.35 × V <sub>DDI</sub> | V    |
| Input current high                                  | I <sub>IH</sub> (DC) | —                       | —                       | —    |
| Input current low <sup>1</sup>                      | I <sub>IL</sub> (DC) | —                       | —                       | —    |

. See [Table 3-22](#).

**TABLE 3-75: LVCMOS 1.2V DC OUTPUT VOLTAGE SPECIFICATION**

| Parameter            | Symbol          | Min.                    | Max.                    | Unit |
|----------------------|-----------------|-------------------------|-------------------------|------|
| DC output logic high | V <sub>OH</sub> | V <sub>DDI</sub> × 0.75 | —                       | V    |
| DC output logic low  | V <sub>OL</sub> | —                       | V <sub>DDI</sub> × 0.25 | V    |

**TABLE 3-76: LVCMOS 1.2V MINIMUM AND MAXIMUM AC SWITCHING SPEED**

| Parameter                              | Symbol           | Max. | Unit | Conditions                                 |
|----------------------------------------|------------------|------|------|--------------------------------------------|
| Maximum data rate (for DDRIO I/O bank) | D <sub>MAX</sub> | 200  | Mbps | AC loading: 17 pF load, maximum drive/slew |
| Maximum data rate (for MSIO I/O bank)  | D <sub>MAX</sub> | 120  | Mbps | AC loading: 17 pF load, maximum drive/slew |
| Maximum data rate (for MSIOD I/O bank) | D <sub>MAX</sub> | 160  | Mbps | AC loading: 17 pF load, maximum drive/slew |

**TABLE 3-77: LVCMOS 1.2V AC CALIBRATED IMPEDANCE OPTION**

| Parameter                                                         | Symbol   | Typ.           | Unit |
|-------------------------------------------------------------------|----------|----------------|------|
| Supported output driver calibrated impedance (for DDRIO I/O bank) | RODT_CAL | 75, 60, 50, 40 | Ω    |

**TABLE 3-78: LVCMOS 1.2V AC TEST PARAMETER SPECIFICATIONS**

| Parameter                                                                                                   | Symbol            | Typ. | Unit |
|-------------------------------------------------------------------------------------------------------------|-------------------|------|------|
| Measuring/trip point                                                                                        | V <sub>TRIP</sub> | 0.6  | V    |
| Resistance for enable path (T <sub>ZH</sub> , T <sub>ZL</sub> , T <sub>HZ</sub> , T <sub>LZ</sub> )         | R <sub>ENT</sub>  | 2K   | Ω    |
| Capacitive loading for enable path (T <sub>ZH</sub> , T <sub>ZL</sub> , T <sub>HZ</sub> , T <sub>LZ</sub> ) | C <sub>ENT</sub>  | 5    | pF   |
| Capacitive loading for data path (T <sub>DP</sub> )                                                         | C <sub>LOAD</sub> | 5    | pF   |

**TABLE 3-79: LVCMOS 1.2V TRANSMITTER DRIVE STRENGTH SPECIFICATIONS**

| Output Drive Selection |                |                | V <sub>OH</sub> (V)     | V <sub>OL</sub> (V)     | IOH (at V <sub>OH</sub> )<br>mA | IOL (at V <sub>OL</sub> )<br>mA |
|------------------------|----------------|----------------|-------------------------|-------------------------|---------------------------------|---------------------------------|
| MSIO I/O Bank          | MSIOD I/O Bank | DDRIO I/O Bank | Min.                    | Max.                    |                                 |                                 |
| 2 mA                   | 2 mA           | 2 mA           | V <sub>DDI</sub> × 0.75 | V <sub>DDI</sub> × 0.25 | 2                               | 2                               |
| 4 mA                   | 4 mA           | 4 mA           | V <sub>DDI</sub> × 0.75 | V <sub>DDI</sub> × 0.25 | 4                               | 4                               |
|                        |                | 6 mA           | V <sub>DDI</sub> × 0.75 | V <sub>DDI</sub> × 0.25 | 6                               | 6                               |

**Note:** For a detailed I/V curve, use the corresponding IBIS models:

- For IGLOO 2: <https://www.microchip.com/en-us/products/fpgas-and-plds/fpgas/igloo-2-fpgas#Documentation>.
- For SmartFusion 2: <https://www.microchip.com/en-us/products/fpgas-and-plds/system-on-chip-fpgas/smartfusion-2-fpgas#Documentation>.

#### AC Switching Characteristics

Worst commercial-case conditions: T<sub>J</sub> = 85 °C, V<sub>DD</sub> = 1.14 V, V<sub>DDI</sub> = 1.14V.

**TABLE 3-80: LVCMOS 1.2V RECEIVER CHARACTERISTICS FOR DDRIO I/O BANK WITH FIXED CODE (INPUT BUFFERS)**

| On-Die Termination (ODT) | T <sub>py</sub> |      | T <sub>pys</sub> |       | Unit |
|--------------------------|-----------------|------|------------------|-------|------|
|                          | -1              | -Std | -1               | -Std  |      |
| None                     | 2.448           | 2.88 | 2.466            | 2.901 | ns   |

**TABLE 3-81: LVCMOS 1.2V RECEIVER CHARACTERISTICS FOR MSIO I/O BANK (INPUT BUFFERS)**

| On-Die Termination ODT) | T <sub>py</sub> |       | T <sub>pys</sub> |       | Unit |
|-------------------------|-----------------|-------|------------------|-------|------|
|                         | -1              | -Std  | -1               | -Std  |      |
| None                    | 4.714           | 5.545 | 4.675            | 5.5   | ns   |
| 50                      | 6.668           | 7.845 | 6.579            | 7.74  | ns   |
| 75                      | 5.832           | 6.862 | 5.76             | 6.777 | ns   |

**TABLE 3-81: LVCMOS 1.2V RECEIVER CHARACTERISTICS FOR MSIO I/O BANK (INPUT BUFFERS) (CONTINUED)**

|     |       |       |       |       |    |
|-----|-------|-------|-------|-------|----|
| 150 | 5.162 | 6.073 | 5.111 | 6.014 | ns |
|-----|-------|-------|-------|-------|----|

**TABLE 3-82: LVCMOS 1.2V RECEIVER CHARACTERISTICS FOR MSIOD I/O BANK (INPUT BUFFERS)**

| On-Die Termination (ODT) | T <sub>py</sub> |       | T <sub>pys</sub> |       | Unit |
|--------------------------|-----------------|-------|------------------|-------|------|
|                          | –1              | –Std  | –1               | –Std  |      |
| None                     | 4.154           | 4.887 | 4.114            | 4.84  | ns   |
| 50                       | 6.918           | 8.139 | 6.806            | 8.008 | ns   |
| 75                       | 5.613           | 6.603 | 5.533            | 6.509 | ns   |
| 150                      | 4.716           | 5.549 | 4.657            | 5.479 | ns   |

**TABLE 3-83: LVCMOS 1.2V TRANSMITTER CHARACTERISTICS FOR DDRIO I/O BANK (OUTPUT AND TRISTATE BUFFERS)**

| Output Drive Selection | Slew Control | T <sub>DP</sub> |       | T <sub>ZL</sub> |       | T <sub>ZH</sub> |       | T <sub>HZ</sub> |       | T <sub>LZ</sub> <sup>1</sup> |       | Unit |
|------------------------|--------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|------------------------------|-------|------|
|                        |              | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1                           | –Std  |      |
| 2 mA                   | Slow         | 6.713           | 7.897 | 5.362           | 6.308 | 6.723           | 7.909 | 7.233           | 8.51  | 6.375                        | 7.499 | ns   |
|                        | Medium       | 5.912           | 6.955 | 4.616           | 5.43  | 5.915           | 6.959 | 6.887           | 8.102 | 6.009                        | 7.069 | ns   |
|                        | Medium fast  | 5.5             | 6.469 | 4.231           | 4.978 | 5.5             | 6.471 | 6.672           | 7.849 | 5.835                        | 6.865 | ns   |
|                        | Fast         | 5.462           | 6.426 | 4.194           | 4.935 | 5.463           | 6.427 | 6.646           | 7.819 | 5.828                        | 6.857 | ns   |
| 4 mA                   | Slow         | 6.109           | 7.186 | 4.708           | 5.539 | 6.098           | 7.174 | 8.005           | 9.418 | 7.033                        | 8.274 | ns   |
|                        | Medium       | 5.355           | 6.299 | 4.034           | 4.746 | 5.338           | 6.28  | 7.637           | 8.985 | 6.672                        | 7.849 | ns   |
|                        | Medium fast  | 4.953           | 5.826 | 3.685           | 4.336 | 4.932           | 5.802 | 7.44            | 8.752 | 6.499                        | 7.646 | ns   |
|                        | Fast         | 4.911           | 5.777 | 3.658           | 4.303 | 4.89            | 5.754 | 7.427           | 8.737 | 6.488                        | 7.632 | ns   |
| 6 mA                   | Slow         | 5.89            | 6.929 | 4.506           | 5.301 | 5.874           | 6.911 | 8.337           | 9.808 | 7.315                        | 8.605 | ns   |
|                        | Medium       | 5.176           | 6.089 | 3.862           | 4.543 | 5.155           | 6.065 | 7.986           | 9.394 | 6.943                        | 8.168 | ns   |
|                        | Medium fast  | 4.792           | 5.637 | 3.523           | 4.145 | 4.765           | 5.606 | 7.808           | 9.186 | 6.775                        | 7.97  | ns   |
|                        | Fast         | 4.754           | 5.593 | 3.486           | 4.101 | 4.728           | 5.563 | 7.777           | 9.149 | 6.769                        | 7.963 | ns   |

. Delay increases with drive strength are inherent to built-in slew control circuitry for SSO management.

**TABLE 3-84: LVCMOS 1.2V TRANSMITTER CHARACTERISTICS FOR MSIO I/O BANK (OUTPUT AND TRISTATE BUFFERS)**

| Output Drive Selection | Slew Control | T <sub>DP</sub> |       | T <sub>ZL</sub> |       | T <sub>ZH</sub> |       | T <sub>HZ</sub> |        | T <sub>LZ</sub> <sup>1</sup> |        | Unit |
|------------------------|--------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|--------|------------------------------|--------|------|
|                        |              | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1              | –Std   | –1                           | –Std   |      |
| 2 mA                   | Slow         | 6.746           | 7.937 | 7.458           | 8.774 | 8.172           | 9.614 | 9.867           | 11.608 | 8.393                        | 9.874  | ns   |
| 4 mA                   | Slow         | 7.068           | 8.315 | 6.678           | 7.857 | 7.474           | 8.793 | 10.98<br>6      | 12.924 | 9.043                        | 10.638 | ns   |

. Delay increases with drive strength are inherent to built-in slew control circuitry for SSO management.

**TABLE 3-85: LVCMOS 1.2V TRANSMITTER CHARACTERISTICS FOR MSIOD I/O BANK (OUTPUT AND TRISTATE BUFFERS)**

| Output Drive Selection | Slew Control | T <sub>DP</sub> |       | T <sub>ZL</sub> |       | T <sub>ZH</sub> |       | T <sub>HZ</sub> |        | T <sub>LZ</sub> <sup>1</sup> |       | Unit |
|------------------------|--------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|--------|------------------------------|-------|------|
|                        |              | -1              | -Std  | -1              | -Std  | -1              | -Std  | -1              | -Std   | -1                           | -Std  |      |
| 2 mA                   | Slow         | 3.883           | 4.568 | 4.868           | 5.726 | 5.329           | 6.269 | 7.994           | 9.404  | 7.527                        | 8.855 | ns   |
| 4 mA                   | Slow         | 3.774           | 4.44  | 4.188           | 4.926 | 4.613           | 5.426 | 8.972           | 10.555 | 8.315                        | 9.782 | ns   |

. Delay increases with drive strength are inherent to built-in slew control circuitry for SSO management.

### 3.5.11 3.3V PCI/PCIX

Peripheral Component Interface (PCI) for 3.3V standards specify support for 33 MHz and 66 MHz PCI bus applications.

#### Minimum and Maximum DC/AC Input and Output Levels Specification (Applicable to MSIO Bank Only)

**TABLE 3-86: PCI/PCI-X DC RECOMMENDED OPERATING CONDITIONS**

| Parameter      | Symbol           | Min. | Typ. | Max. | Unit |
|----------------|------------------|------|------|------|------|
| Supply voltage | V <sub>DDI</sub> | 3.15 | 3.3  | 3.45 | V    |

**TABLE 3-87: PCI/PCI-X DC INPUT VOLTAGE SPECIFICATION**

| Parameter                      | Symbol               | Min. | Max. | Unit |
|--------------------------------|----------------------|------|------|------|
| DC input voltage               | V <sub>I</sub>       | 0    | 3.45 | V    |
| Input current high             | I <sub>IH</sub> (DC) | —    | —    | —    |
| Input current low <sup>1</sup> | I <sub>IL</sub> (DC) | —    | —    | —    |

. See [Table 3-22](#).

**TABLE 3-88: PCI/PCI-X DC OUTPUT VOLTAGE SPECIFICATION**

| Parameter            | Symbol          | Min.                  | Typ. | Max. | Unit |
|----------------------|-----------------|-----------------------|------|------|------|
| DC output logic high | V <sub>OH</sub> | Per PCI specification |      |      | V    |
| DC output logic low  | V <sub>OL</sub> | Per PCI specification |      |      | V    |

**TABLE 3-89: PCI/PCI-X MINIMUM AND MAXIMUM AC SWITCHING SPEED**

| Parameter                         | Symbol           | Max. | Unit | Conditions                           |
|-----------------------------------|------------------|------|------|--------------------------------------|
| Maximum data rate (MSIO I/O bank) | D <sub>MAX</sub> | 630  | Mbps | AC Loading: per JEDEC specifications |

**TABLE 3-90: PCI/PCI-X AC TEST PARAMETER SPECIFICATIONS**

| Parameter                                                                                                   | Symbol            | Typ.                     | Unit |
|-------------------------------------------------------------------------------------------------------------|-------------------|--------------------------|------|
| Measuring/trip point for data path (falling edge)                                                           | V <sub>TRIP</sub> | 0.615 × V <sub>DDI</sub> | V    |
| Measuring/trip point for data path (rising edge)                                                            | V <sub>TRIP</sub> | 0.285 × V <sub>DDI</sub> | V    |
| Resistance for data test path                                                                               | RTT_TEST          | 25                       | Ω    |
| Resistance for enable path (T <sub>ZH</sub> , T <sub>ZL</sub> , T <sub>HZ</sub> , T <sub>LZ</sub> )         | R <sub>ENT</sub>  | 2K                       | Ω    |
| Capacitive loading for enable path (T <sub>ZH</sub> , T <sub>ZL</sub> , T <sub>HZ</sub> , T <sub>LZ</sub> ) | C <sub>ENT</sub>  | 5                        | pF   |
| Capacitive loading for data path (T <sub>DP</sub> )                                                         | C <sub>LOAD</sub> | 10                       | pF   |

#### AC Switching Characteristics

Worst commercial-case conditions: T<sub>J</sub> = 85 °C, V<sub>DD</sub> = 1.14 V, and V<sub>DDI</sub> = 3.0V.

**TABLE 3-91: PCI/PCIX AC SWITCHING CHARACTERISTICS FOR RECEIVER FOR MSIO I/O BANK (INPUT BUFFERS)**

| On-Die Termination (ODT) | T <sub>py</sub> |       | T <sub>pys</sub> |       | Unit |
|--------------------------|-----------------|-------|------------------|-------|------|
|                          | –1              | –Std  | –1               | –Std  |      |
| None                     | 2.229           | 2.623 | 2.238            | 2.633 | ns   |

**TABLE 3-92: PCI/PCIX AC SWITCHING CHARACTERISTICS FOR TRANSMITTER FOR MSIO I/O BANK (OUTPUT AND TRISTATE BUFFERS)**

| T <sub>DP</sub> |       | T <sub>ZL</sub> |       | T <sub>ZH</sub> |       | T <sub>HZ</sub> |       | T <sub>LZ</sub> |       | Unit |
|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|------|
| –1              | –Std  | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1              | –Std  |      |
| 2.146           | 2.525 | 2.043           | 2.404 | 2.084           | 2.452 | 6.095           | 7.171 | 5.558           | 6.539 | ns   |

### 3.6 Memory Interface and Voltage Referenced I/O Standards

This section describes High-Speed Transceiver Logic (HSTL) memory interface and voltage reference I/O standards.

#### 3.6.1 HIGH-SPEED TRANSCEIVER LOGIC (HSTL)

The HSTL standard is a general purpose high-speed bus standard sponsored by IBM (EIA/JESD8-6). IGLOO 2 FPGA and SmartFusion 2 SoC FPGA devices support two classes of the 1.5V HSTL. These differential versions of the standard require a differential amplifier input buffer and a push-pull output buffer.

**Minimum and Maximum DC/AC Input and Output Levels Specification (Applicable to DDRIO Bank Only)**

**TABLE 3-93: HSTL RECOMMENDED DC OPERATING CONDITIONS**

| Parameter               | Symbol           | Min.  | Typ.  | Max.  | Unit |
|-------------------------|------------------|-------|-------|-------|------|
| Supply voltage          | V <sub>DDI</sub> | 1.425 | 1.5   | 1.575 | V    |
| Termination voltage     | V <sub>TT</sub>  | 0.698 | 0.750 | 0.803 | V    |
| Input reference voltage | V <sub>REF</sub> | 0.698 | 0.750 | 0.803 | V    |

**TABLE 3-94: HSTL DC INPUT VOLTAGE SPECIFICATION**

| Parameter                      | Symbol               | Min.                   | Max.                   | Unit |
|--------------------------------|----------------------|------------------------|------------------------|------|
| DC input logic high            | V <sub>IH</sub> (DC) | V <sub>REF</sub> + 0.1 | 1.575                  | V    |
| DC input logic low             | V <sub>IL</sub> (DC) | –0.3                   | V <sub>REF</sub> – 0.1 | V    |
| Input current high             | I <sub>IH</sub> (DC) | —                      | —                      | —    |
| Input current low <sup>1</sup> | I <sub>IL</sub> (DC) | —                      | —                      | —    |

. See [Table 3-22](#).

**TABLE 3-95: HSTL DC OUTPUT VOLTAGE SPECIFICATION APPLICABLE TO DDRIO I/O BANK ONLY**

| Parameter                                                   | Symbol                             | Min.                   | Max. | Unit |
|-------------------------------------------------------------|------------------------------------|------------------------|------|------|
| <b>HSTL Class I</b>                                         |                                    |                        |      |      |
| DC output logic high                                        | V <sub>OH</sub>                    | V <sub>DDI</sub> – 0.4 | —    | V    |
| DC output logic low                                         | V <sub>OL</sub>                    | —                      | 0.4  | V    |
| Output minimum source DC current (MSIO and DDRIO I/O banks) | I <sub>OH</sub> at V <sub>OH</sub> | –8.0                   | —    | mA   |
| Output minimum sink current (MSIO and DDRIO I/O banks)      | I <sub>OL</sub> at V <sub>OL</sub> | 8.0                    | —    | mA   |
| <b>HSTL Class II</b>                                        |                                    |                        |      |      |
| DC output logic high                                        | V <sub>OH</sub>                    | V <sub>DDI</sub> – 0.4 | —    | V    |

**TABLE 3-95: HSTL DC OUTPUT VOLTAGE SPECIFICATION APPLICABLE TO DDRIO I/O BANK ONLY (CONTINUED)**

| Parameter                        | Symbol               | Min.  | Max. | Unit |
|----------------------------------|----------------------|-------|------|------|
| DC output logic low              | $V_{OL}$             | —     | 0.4  | V    |
| Output minimum source DC current | $I_{OH}$ at $V_{OH}$ | –16.0 | —    | mA   |
| Output minimum sink current      | $I_{OL}$ at $V_{OL}$ | 16.0  | —    | mA   |

**TABLE 3-96: HSTL DC DIFFERENTIAL VOLTAGE SPECIFICATION**

| Parameter                     | Symbol        | Min. | Unit |
|-------------------------------|---------------|------|------|
| DC input differential voltage | $V_{ID}$ (DC) | 0.2  | V    |

**TABLE 3-97: HSTL AC DIFFERENTIAL VOLTAGE SPECIFICATIONS**

| Parameter                           | Symbol     | Min. | Max. | Unit |
|-------------------------------------|------------|------|------|------|
| AC input differential voltage       | $V_{DIFF}$ | 0.4  | —    | V    |
| AC differential cross point voltage | $V_x$      | 0.68 | 0.9  | V    |

**TABLE 3-98: HSTL MINIMUM AND MAXIMUM AC SWITCHING SPEED**

| Parameter         | Symbol    | Max. | Unit | Conditions                           |
|-------------------|-----------|------|------|--------------------------------------|
| Maximum data rate | $D_{MAX}$ | 400  | Mbps | AC loading: per JEDEC specifications |

**TABLE 3-99: HSTL IMPEDANCE SPECIFICATION**

| Parameter                                                         | Symbol    | Typ.       | Unit     | Conditions                          |
|-------------------------------------------------------------------|-----------|------------|----------|-------------------------------------|
| Supported output driver calibrated impedance (for DDRIO I/O bank) | $R_{REF}$ | 25.5, 47.8 | $\Omega$ | Reference resistance = 191 $\Omega$ |
| Effective impedance value (ODT for DDRIO I/O bank only)           | $R_{TT}$  | 47.8       | $\Omega$ | Reference resistance = 191 $\Omega$ |

**TABLE 3-100: HSTL AC TEST PARAMETER SPECIFICATION**

| Parameter                                                                        | Symbol         | Typ. | Unit     |
|----------------------------------------------------------------------------------|----------------|------|----------|
| Measuring/trip point for data path                                               | $V_{TRIP}$     | 0.75 | V        |
| Resistance for enable path ( $T_{ZH}$ , $T_{ZL}$ , $T_{HZ}$ , $T_{LZ}$ )         | $R_{ENT}$      | 2K   | $\Omega$ |
| Capacitive loading for enable path ( $T_{ZH}$ , $T_{ZL}$ , $T_{HZ}$ , $T_{LZ}$ ) | $C_{ENT}$      | 5    | pF       |
| Reference resistance for data test path for HSTL15 Class I ( $T_{DP}$ )          | $R_{TT\_TEST}$ | 50   | $\Omega$ |
| Reference resistance for data test path for HSTL15 Class II ( $T_{DP}$ )         | $R_{TT\_TEST}$ | 25   | $\Omega$ |
| Capacitive loading for data path ( $T_{DP}$ )                                    | $C_{LOAD}$     | 5    | pF       |

AC Switching Characteristics

Worst-case commercial conditions:  $T_J = 85^\circ\text{C}$ ,  $V_{DD} = 1.14\text{V}$ , and worst-case  $V_{DDI}$ .

**TABLE 3-101: HSTL RECEIVER CHARACTERISTICS FOR DDRIO I/O BANK WITH FIXED CODE (INPUT BUFFERS)**

|                     | On-Die Termination (ODT) | $T_{PY}$ |       | Unit |
|---------------------|--------------------------|----------|-------|------|
|                     |                          | –1       | –Std  |      |
| Pseudo differential | None                     | 1.605    | 1.888 | ns   |
|                     | 47.8                     | 1.614    | 1.898 | ns   |
| True differential   | None                     | 1.622    | 1.909 | ns   |
|                     | 47.8                     | 1.628    | 1.916 | ns   |

**TABLE 3-102: HSTL TRANSMITTER CHARACTERISTICS FOR DDRIO I/O BANK (OUTPUT AND TRISTATE BUFFERS)**

|               | T <sub>DP</sub> |       | T <sub>ZL</sub> |       | T <sub>ZH</sub> |       | T <sub>HZ</sub> |       | T <sub>LZ</sub> |       | Unit |
|---------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|------|
|               | −1              | −Std  | −1              | −Std  | −1              | −Std  | −1              | −Std  | −1              | −Std  |      |
| HSTL Class I  |                 |       |                 |       |                 |       |                 |       |                 |       |      |
| Single-ended  | 2.6             | 3.059 | 2.514           | 2.958 | 2.514           | 2.958 | 2.431           | 2.86  | 2.431           | 2.86  | ns   |
| Differential  | 2.621           | 3.083 | 2.648           | 3.115 | 2.647           | 3.113 | 2.925           | 3.442 | 2.923           | 3.44  | ns   |
| HSTL Class II |                 |       |                 |       |                 |       |                 |       |                 |       |      |
| Single-ended  | 2.511           | 2.954 | 2.488           | 2.927 | 2.49            | 2.93  | 2.409           | 2.833 | 2.411           | 2.836 | ns   |
| Differential  | 2.528           | 2.974 | 2.552           | 3.003 | 2.551           | 3.001 | 2.897           | 3.409 | 2.896           | 3.408 | ns   |

### 3.6.2 STUB-SERIES TERMINATED LOGIC

Stub-Series Terminated Logic (SSTL) for 2.5V (SSTL2), 1.8V (SSTL18), and 1.5V (SSTL15) is supported in IGLOO 2 and SmartFusion 2 SoC FPGAs. SSTL2 is defined by JEDEC standard JESD8-9B and SSTL18 is defined by JEDEC standard JESD8-15. IGLOO 2 SSTL I/O configurations are designed to meet double data rate standards DDR/2/3 for general purpose memory buses. Double data rate standards are designed to meet their JEDEC specifications as defined by JEDEC standard JESD79F for DDR, JEDEC standard JESD79-2F for DDR, JEDEC standard JESD79-3D for DDR3, and JEDEC standard JESD209A for LPDDR.

### 3.6.3 STUB-SERIES TERMINATED LOGIC 2.5V (SSTL2)

SSTL2 Class I and Class II are supported in IGLOO 2 and SmartFusion 2 SoC FPGAs and also comply with reduced and full drive of double data rate (DDR) standards. IGLOO 2 and SmartFusion 2 SoC FPGA I/Os supports both standards for single-ended signaling and differential signaling for SSTL2. This standard requires a differential amplifier input buffer and a push-pull output buffer.

#### Minimum and Maximum DC/AC Input and Output Levels Specification

**TABLE 3-103: DDR1/SSTL2 DC RECOMMENDED OPERATING CONDITIONS**

| Parameter               | Symbol    | Min.  | Typ.  | Max.  | Unit |
|-------------------------|-----------|-------|-------|-------|------|
| Supply voltage          | $V_{DDI}$ | 2.375 | 2.5   | 2.625 | V    |
| Termination voltage     | $V_{TT}$  | 1.164 | 1.250 | 1.339 | V    |
| Input reference voltage | $V_{REF}$ | 1.164 | 1.250 | 1.339 | V    |

**TABLE 3-104: DDR1/SSTL2 DC INPUT VOLTAGE SPECIFICATION**

| Parameter                      | Symbol        | Min.             | Max.             | Unit |
|--------------------------------|---------------|------------------|------------------|------|
| DC input logic high            | $V_{IH}$ (DC) | $V_{REF} + 0.15$ | 2.625            | V    |
| DC input logic low             | $V_{IL}$ (DC) | -0.3             | $V_{REF} - 0.15$ | V    |
| Input current high             | $I_{IH}$ (DC) | —                | —                | —    |
| Input current low <sup>1</sup> | $I_{IL}$ (DC) | —                | —                | —    |

. See [Table 3-22](#).

**TABLE 3-105: DDR1/SSTL2 DC OUTPUT VOLTAGE SPECIFICATION**

| Parameter                                | Symbol               | Min.             | Max.             | Unit |
|------------------------------------------|----------------------|------------------|------------------|------|
| <b>SSTL2 Class I (DDR Reduced Drive)</b> |                      |                  |                  |      |
| DC output logic high                     | $V_{OH}$             | $V_{TT} + 0.608$ | —                | V    |
| DC output logic low                      | $V_{OL}$             | —                | $V_{TT} - 0.608$ | V    |
| Output minimum source DC current         | $I_{OH}$ at $V_{OH}$ | 8.1              | —                | mA   |
| Output minimum sink current              | $I_{OL}$ at $V_{OL}$ | -8.1             | —                | mA   |

**TABLE 3-105: DDR1/SSTL2 DC OUTPUT VOLTAGE SPECIFICATION (CONTINUED)**

| Parameter                                                                           | Symbol               | Min.            | Max.            | Unit |
|-------------------------------------------------------------------------------------|----------------------|-----------------|-----------------|------|
| <b>SSTL2 Class II (DDR Full Drive) – Applicable to MSIO and DDRIO I/O Bank Only</b> |                      |                 |                 |      |
| DC output logic high                                                                | $V_{OH}$             | $V_{TT} + 0.81$ | —               | V    |
| DC output logic low                                                                 | $V_{OL}$             | —               | $V_{TT} - 0.81$ | V    |
| Output minimum source DC current                                                    | $I_{OH}$ at $V_{OH}$ | 16.2            | —               | mA   |
| Output minimum sink current                                                         | $I_{OL}$ at $V_{OL}$ | –16.2           | —               | mA   |

**TABLE 3-106: DDR1/SSTL2 DC DIFFERENTIAL VOLTAGE SPECIFICATION**

| Parameter                     | Symbol        | Min | Unit |
|-------------------------------|---------------|-----|------|
| DC input differential voltage | $V_{ID}$ (DC) | 0.3 | V    |

**TABLE 3-107: SSTL2 AC DIFFERENTIAL VOLTAGE SPECIFICATIONS**

| Parameter                           | Symbol          | Min.                       | Max.                       | Unit |
|-------------------------------------|-----------------|----------------------------|----------------------------|------|
| AC input differential voltage       | $V_{DIFF}$ (AC) | 0.7                        | —                          | V    |
| AC differential cross point voltage | $V_x$ (AC)      | $0.5 \times V_{DDI} - 0.2$ | $0.5 \times V_{DDI} + 0.2$ | V    |

**TABLE 3-108: SSTL2 MINIMUM AND MAXIMUM AC SWITCHING SPEEDS**

| Parameter                              | Symbol    | Max. | Unit | Conditions                           |
|----------------------------------------|-----------|------|------|--------------------------------------|
| Maximum data rate (for DDRIO I/O bank) | $D_{MAX}$ | 400  | Mbps | AC loading: per JEDEC specifications |
| Maximum data rate (for MSIO I/O bank)  | $D_{MAX}$ | 575  | Mbps | AC loading: 17 pF load               |
| Maximum data rate (for MSIOD I/O bank) | $D_{MAX}$ | 700  | Mbps | AC loading: 3 pF/50 $\Omega$ load    |
|                                        |           | 510  | Mbps | AC loading: 17pF load                |

**TABLE 3-109: SSTL2 AC IMPEDANCE SPECIFICATIONS**

| Parameter                                                         | Typ.   | Unit     | Conditions                        |
|-------------------------------------------------------------------|--------|----------|-----------------------------------|
| Supported output driver calibrated impedance (for DDRIO I/O bank) | 20, 42 | $\Omega$ | Reference resistor = 150 $\Omega$ |

**TABLE 3-110: DDR1/SSTL2 AC TEST PARAMETER SPECIFICATIONS**

| Parameter                                                                        | Symbol      | Typ  | Unit     |
|----------------------------------------------------------------------------------|-------------|------|----------|
| Measuring/trip point for data path                                               | $V_{TRIP}$  | 1.25 | V        |
| Resistance for enable path ( $T_{ZH}$ , $T_{ZL}$ , $T_{HZ}$ , $T_{LZ}$ )         | $R_{ENT}$   | 2K   | $\Omega$ |
| Capacitive loading for enable path ( $T_{ZH}$ , $T_{ZL}$ , $T_{HZ}$ , $T_{LZ}$ ) | $C_{ENT}$   | 5    | pF       |
| Reference resistance for data test path for SSTL2 Class I ( $T_{DP}$ )           | $RTT\_TEST$ | 50   | $\Omega$ |
| Reference resistance for data test path for SSTL2 Class II ( $T_{DP}$ )          | $RTT\_TEST$ | 25   | $\Omega$ |
| Capacitive loading for data path ( $T_{DP}$ )                                    | $C_{LOAD}$  | 5    | pF       |

**AC Switching Characteristics**

Worst commercial-case conditions:  $T_J = 85\text{ }^{\circ}\text{C}$ ,  $V_{DD} = 1.14\text{V}$ , and  $V_{DDI} = 2.375\text{V}$ .

**TABLE 3-111: SSTL2 RECEIVER CHARACTERISTICS FOR DDRIO I/O BANK (INPUT BUFFERS)**

|                     | On-Die Termination (ODT) | $T_{PY}$ |       | Unit |
|---------------------|--------------------------|----------|-------|------|
|                     |                          | -1       | -Std  |      |
| Pseudo differential | None                     | 1.549    | 1.821 | ns   |
| True differential   | None                     | 1.589    | 1.87  | ns   |

**TABLE 3-112: SSTL2 RECEIVER CHARACTERISTICS FOR MSIO I/O BANK (INPUT BUFFERS)**

|                     | On-Die Termination (ODT) | $T_{PY}$ |       | Unit |
|---------------------|--------------------------|----------|-------|------|
|                     |                          | -1       | -Std  |      |
| Pseudo differential | None                     | 2.798    | 3.293 | ns   |
| True differential   | None                     | 2.733    | 3.215 | ns   |

**TABLE 3-113: DDR1/SSTL2 RECEIVER CHARACTERISTICS FOR MSIOD I/O BANK (INPUT BUFFERS)**

|                     | On-Die Termination (ODT) | $T_{PY}$ |       | Unit |
|---------------------|--------------------------|----------|-------|------|
|                     |                          | -1       | -Std  |      |
| Pseudo differential | None                     | 2.476    | 2.913 | ns   |
| True differential   | None                     | 2.475    | 2.911 | ns   |

**TABLE 3-114: SSTL2 CLASS I TRANSMITTER CHARACTERISTICS FOR DDRIO I/O BANK (OUTPUT AND TRISTATE BUFFERS)**

|              | $T_{DP}$ |       | $T_{ZL}$ |       | $T_{ZH}$ |       | $T_{HZ}$ |       | $T_{LZ}$ |       | Unit |
|--------------|----------|-------|----------|-------|----------|-------|----------|-------|----------|-------|------|
|              | -1       | -Std  | -1       | -Std  | -1       | -Std  | -1       | -Std  | -1       | -Std  |      |
| Single-ended | 2.26     | 2.66  | 1.99     | 2.341 | 1.985    | 2.335 | 2.135    | 2.512 | 2.13     | 2.505 | ns   |
| Differential | 2.26     | 2.658 | 2.202    | 2.591 | 2.201    | 2.589 | 2.393    | 2.815 | 2.392    | 2.814 | ns   |

**TABLE 3-115: DDR1/SSTL2 CLASS I TRANSMITTER CHARACTERISTICS FOR MSIO I/O BANK (OUTPUT AND TRISTATE BUFFERS)**

|              | $T_{DP}$ |       | $T_{ZL}$ |       | $T_{ZH}$ |       | $T_{HZ}$ |       | $T_{LZ}$ |       | Unit |
|--------------|----------|-------|----------|-------|----------|-------|----------|-------|----------|-------|------|
|              | -1       | -Std  | -1       | -Std  | -1       | -Std  | -1       | -Std  | -1       | -Std  |      |
| Single-ended | 2.055    | 2.417 | 2.037    | 2.396 | 2.03     | 2.388 | 2.068    | 2.433 | 2.061    | 2.425 | ns   |
| Differential | 2.192    | 2.58  | 2.434    | 2.864 | 2.425    | 2.852 | 2.164    | 2.545 | 2.156    | 2.536 | ns   |

**TABLE 3-116: DDR1/SSTL2 CLASS I TRANSMITTER CHARACTERISTICS FOR MSIOD I/O BANK (OUTPUT AND TRISTATE BUFFERS)**

|              | $T_{DP}$ |       | $T_{ZL}$ |       | $T_{ZH}$ |       | $T_{HZ}$ |       | $T_{LZ}$ |       | Unit |
|--------------|----------|-------|----------|-------|----------|-------|----------|-------|----------|-------|------|
|              | -1       | -Std  | -1       | -Std  | -1       | -Std  | -1       | -Std  | -1       | -Std  |      |
| Single-ended | 1.512    | 1.779 | 1.462    | 1.72  | 1.462    | 1.72  | 1.676    | 1.972 | 1.676    | 1.971 | ns   |
| Differential | 1.676    | 1.971 | 1.774    | 2.087 | 1.766    | 2.077 | 1.854    | 2.181 | 1.845    | 2.171 | ns   |

**TABLE 3-117: DDR1/SSTL2 CLASS II TRANSMITTER CHARACTERISTICS FOR DDRIO I/O BANK (OUTPUT AND TRISTATE BUFFERS)**

|  | $T_{DP}$ |      | $T_{ZL}$ |      | $T_{ZH}$ |      | $T_{HZ}$ |      | $T_{LZ}$ |      | Unit |
|--|----------|------|----------|------|----------|------|----------|------|----------|------|------|
|  | -1       | -Std | -1       | -Std | -1       | -Std | -1       | -Std | -1       | -Std |      |

**TABLE 3-117: DDR1/SSTL2 CLASS II TRANSMITTER CHARACTERISTICS FOR DDRIO I/O BANK (OUTPUT AND TRISTATE BUFFERS) (CONTINUED)**

|              |       |       |       |       |       |       |       |       |       |       |    |
|--------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|----|
| Single-ended | 2.122 | 2.497 | 1.906 | 2.243 | 1.902 | 2.237 | 2.061 | 2.424 | 2.056 | 2.418 | ns |
| Differential | 2.127 | 2.501 | 2.042 | 2.402 | 2.043 | 2.403 | 2.363 | 2.78  | 2.365 | 2.781 | ns |

**TABLE 3-118: DDR1/SSTL2 CLASS II TRANSMITTER CHARACTERISTICS FOR MSIO I/O BANK (OUTPUT AND TRISTATE BUFFERS)**

|              | $T_{DP}$ |       | $T_{ZL}$ |       | $T_{ZH}$ |       | $T_{HZ}$ |       | $T_{LZ}$ |       | Unit |
|--------------|----------|-------|----------|-------|----------|-------|----------|-------|----------|-------|------|
|              | -1       | -Std  | -1       | -Std  | -1       | -Std  | -1       | -Std  | -1       | -Std  |      |
| Single-ended | 2.29     | 2.693 | 1.988    | 2.338 | 1.978    | 2.326 | 1.989    | 2.34  | 1.979    | 2.328 | ns   |
| Differential | 2.418    | 2.846 | 2.304    | 2.711 | 2.297    | 2.702 | 2.131    | 2.506 | 2.124    | 2.499 | ns   |

### 3.6.4 STUB-SERIES TERMINATED LOGIC 1.8V (SSTL18)

SSTL18 Class I and Class II are supported in IGLOO 2 and SmartFusion 2 SoC FPGAs, and comply with the reduced and full drive double data rate (DDR2) standard. IGLOO 2 and SmartFusion 2 SoC FPGA I/Os support both standards for single-ended signaling and differential signaling for SSTL18. This standard requires a differential amplifier input buffer and a push-pull output buffer.

#### Minimum and Maximum DC/AC Input and Output Levels Specification

**TABLE 3-119: SSTL18 DC RECOMMENDED DC OPERATING CONDITIONS**

| Parameter               | Symbol    | Min.  | Typ.  | Max.  | Unit |
|-------------------------|-----------|-------|-------|-------|------|
| Supply voltage          | $V_{DDI}$ | 1.71  | 1.8   | 1.89  | V    |
| Termination voltage     | $V_{TT}$  | 0.838 | 0.900 | 0.964 | V    |
| Input reference voltage | $V_{REF}$ | 0.838 | 0.900 | 0.964 | V    |

**TABLE 3-120: SSTL18 DC INPUT VOLTAGE SPECIFICATION**

| Parameter                      | Symbol        | Min.              | Max.              | Unit |
|--------------------------------|---------------|-------------------|-------------------|------|
| DC input logic high            | $V_{IH} (DC)$ | $V_{REF} + 0.125$ | 1.89              | V    |
| DC input logic low             | $V_{IL} (DC)$ | -0.3              | $V_{REF} - 0.125$ | V    |
| Input current high             | $I_{IH} (DC)$ | —                 | —                 | —    |
| Input current low <sup>1</sup> | $I_{IL} (DC)$ | —                 | —                 | —    |

. See [Table 3-22](#).

**TABLE 3-121: SSTL18 DC OUTPUT VOLTAGE SPECIFICATION**

| Parameter                                              | Symbol               | Min.             | Max.             | Unit |
|--------------------------------------------------------|----------------------|------------------|------------------|------|
| <b>SSTL18 Class I (DDR2 Reduced Drive)</b>             |                      |                  |                  |      |
| DC output logic high                                   | $V_{OH}$             | $V_{TT} + 0.603$ | —                | V    |
| DC output logic low                                    | $V_{OL}$             | —                | $V_{TT} - 0.603$ | V    |
| Output minimum source DC current (DDRIO I/O bank only) | $I_{OH}$ at $V_{OH}$ | 6.5              | —                | mA   |
| Output minimum sink current (DDRIO I/O bank only)      | $I_{OL}$ at $V_{OL}$ | -6.5             | —                | mA   |
| <b>SSTL18 Class II (DDR2 Full Drive)</b>               |                      |                  |                  |      |
| DC output logic high                                   | $V_{OH}$             | $V_{TT} + 0.603$ | —                | V    |
| DC output logic low                                    | $V_{OL}$             | —                | $V_{TT} - 0.603$ | V    |
| Output minimum source DC current (DDRIO I/O bank only) | $I_{OH}$ at $V_{OH}$ | 13.4             | —                | mA   |
| Output minimum sink current (DDRIO I/O bank only)      | $I_{OL}$ at $V_{OL}$ | -13.4            | —                | mA   |

. To meet JEDEC Electrical Compliance, use DDR2 Full Drive Transmitter.

**TABLE 3-122: SSTL18 DC DIFFERENTIAL VOLTAGE SPECIFICATION**

| Parameter                     | Symbol        | Min. | Unit |
|-------------------------------|---------------|------|------|
| DC input differential voltage | $V_{ID}$ (DC) | 0.3  | V    |

**TABLE 3-123: SSTL18 AC DIFFERENTIAL VOLTAGE SPECIFICATIONS (APPLICABLE TO DDRIO BANK ONLY)**

| Parameter                           | Symbol          | Min.                         | Max.                         | Unit |
|-------------------------------------|-----------------|------------------------------|------------------------------|------|
| AC input differential voltage       | $V_{DIFF}$ (AC) | 0.5                          | —                            | V    |
| AC differential cross point voltage | $V_x$ (AC)      | $0.5 \times V_{DDI} - 0.175$ | $0.5 \times V_{DDI} + 0.175$ | V    |

**TABLE 3-124: SSTL18 MINIMUM AND MAXIMUM AC SWITCHING SPEED (APPLICABLE TO DDRIO BANK ONLY)**

| Parameter                              | Symbol    | Max. | Unit | Conditions                          |
|----------------------------------------|-----------|------|------|-------------------------------------|
| Maximum data rate (for DDRIO I/O bank) | $D_{MAX}$ | 667  | Mbps | AC loading: per JEDEC specification |

**TABLE 3-125: SSTL18 AC IMPEDANCE SPECIFICATIONS (APPLICABLE TO DDRIO BANK ONLY)**

| Parameter                                                         | Symbol    | Typ.        | Unit     | Conditions                        |
|-------------------------------------------------------------------|-----------|-------------|----------|-----------------------------------|
| Supported output driver calibrated impedance (for DDRIO I/O bank) | $R_{REF}$ | 20, 42      | $\Omega$ | Reference resistor = 150 $\Omega$ |
| Effective impedance value (ODT)                                   | $R_{TT}$  | 50, 75, 150 | $\Omega$ | Reference resistor = 150 $\Omega$ |

**TABLE 3-126: SSTL18 AC TEST PARAMETER SPECIFICATIONS (APPLICABLE TO DDRIO BANK ONLY)**

| Parameter                                                                        | Symbol         | Typ. | Unit     |
|----------------------------------------------------------------------------------|----------------|------|----------|
| Measuring/trip point for data path                                               | $V_{TRIP}$     | 0.9  | V        |
| Resistance for enable path ( $T_{ZH}$ , $T_{ZL}$ , $T_{HZ}$ , $T_{LZ}$ )         | $R_{ENT}$      | 2K   | $\Omega$ |
| Capacitive loading for enable path ( $T_{ZH}$ , $T_{ZL}$ , $T_{HZ}$ , $T_{LZ}$ ) | $C_{ENT}$      | 5    | pF       |
| Reference resistance for data test path for SSTL18 Class I ( $T_{DP}$ )          | $R_{TT\_TEST}$ | 50   | $\Omega$ |
| Reference resistance for data test path for SSTL18 Class II ( $T_{DP}$ )         | $R_{TT\_TEST}$ | 25   | $\Omega$ |
| Capacitive loading for data path ( $T_{DP}$ )                                    | $C_{LOAD}$     | 5    | pF       |

#### AC Switching Characteristics

Worst commercial-case conditions:  $T_J = 85^\circ\text{C}$ ,  $V_{DD} = 1.14\text{V}$ , and  $V_{DDI} = 1.71\text{V}$ .

**TABLE 3-127: DDR2/SSTL18 RECEIVER CHARACTERISTICS FOR DDRIO I/O BANK WITH FIXED CODE**

|                     | On-Die Termination (ODT) | $T_{PY}$ |       | Unit |
|---------------------|--------------------------|----------|-------|------|
|                     |                          | -1       | -Std  |      |
| Pseudo differential | None                     | 1.567    | 1.844 | ns   |
| True differential   | None                     | 1.588    | 1.869 | ns   |

**TABLE 3-128: DDR2/SSTL18 TRANSMITTER CHARACTERISTICS (OUTPUT AND TRISTATE BUFFERS)**

|                                      | T <sub>DP</sub> |       | T <sub>ZL</sub> |       | T <sub>ZH</sub> |       | T <sub>HZ</sub> |       | T <sub>LZ</sub> |       | Unit |
|--------------------------------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|------|
|                                      | −1              | −Std  | −1              | −Std  | −1              | −Std  | −1              | −Std  | −1              | −Std  |      |
| SSTL18 Class I (for DDRIO I/O Bank)  |                 |       |                 |       |                 |       |                 |       |                 |       |      |
| Single-ended                         | 2.383           | 2.804 | 2.23            | 2.623 | 2.229           | 2.622 | 2.202           | 2.591 | 2.201           | 2.59  | ns   |
| Differential                         | 2.413           | 2.84  | 2.797           | 3.29  | 2.797           | 3.29  | 2.282           | 2.685 | 2.282           | 2.685 | ns   |
| SSTL18 Class II (for DDRIO I/O Bank) |                 |       |                 |       |                 |       |                 |       |                 |       |      |
| Single-ended                         | 2.281           | 2.683 | 2.196           | 2.584 | 2.195           | 2.583 | 2.171           | 2.555 | 2.17            | 2.554 | ns   |
| Differential                         | 2.315           | 2.724 | 2.698           | 3.173 | 2.698           | 3.173 | 2.242           | 2.639 | 2.242           | 2.639 | ns   |

### 3.6.5 STUB-SERIES TERMINATED LOGIC 1.5V (SSTL15)

SSTL15 Class I and Class II are supported in IGLOO 2 FPGAs and SmartFusion 2 SoC FPGAs, and also comply with the reduced and full drive double data rate (DDR3) standard. IGLOO 2 FPGA and SmartFusion 2 SoC FPGA I/Os supports both standards for single-ended signaling and differential signaling for SSTL18. This standard requires a differential amplifier input buffer and a push-pull output buffer.

#### Minimum and Maximum DC/AC Input and Output Levels Specification

The following table lists the SSTL15 DC voltage specifications for DDRIO bank.

**TABLE 3-129: SSTL15 DC RECOMMENDED DC OPERATING CONDITIONS (FOR DDRIO I/O BANK ONLY)**

| Parameter               | Symbol    | Min.  | Typ.  | Max.  | Unit |
|-------------------------|-----------|-------|-------|-------|------|
| Supply voltage          | $V_{DDI}$ | 1.425 | 1.5   | 1.575 | V    |
| Termination voltage     | $V_{TT}$  | 0.698 | 0.750 | 0.803 | V    |
| Input reference voltage | $V_{REF}$ | 0.698 | 0.750 | 0.803 | V    |

**TABLE 3-130: SSTL15 DC INPUT VOLTAGE SPECIFICATION (FOR DDRIO I/O BANK ONLY)**

| Parameter                      | Symbol       | Min.            | Max.            | Unit |
|--------------------------------|--------------|-----------------|-----------------|------|
| DC input logic high            | $V_{IH}(DC)$ | $V_{REF} + 0.1$ | 1.575           | V    |
| DC input logic low             | $V_{IL}(DC)$ | -0.3            | $V_{REF} - 0.1$ | V    |
| Input current high             | $I_{IH}(DC)$ | —               | —               | —    |
| Input current low <sup>1</sup> | $I_{IL}(DC)$ | —               | —               | —    |

. See [Table 3-22](#).

**TABLE 3-131: SSTL15 DC OUTPUT VOLTAGE SPECIFICATION (FOR DDRIO I/O BANK ONLY)**

| Parameter                                       | Symbol               | Min.                 | Max.                 | Unit |
|-------------------------------------------------|----------------------|----------------------|----------------------|------|
| <b>DDR3/SSTL15 Class I (DDR3 Reduced Drive)</b> |                      |                      |                      |      |
| DC output logic high                            | $V_{OH}$             | $0.8 \times V_{DDI}$ | —                    | V    |
| DC output logic low                             | $V_{OL}$             | —                    | $0.2 \times V_{DDI}$ | V    |
| Output minimum source DC current                | $I_{OH}$ at $V_{OH}$ | 6.5                  | —                    | mA   |
| Output minimum sink current                     | $I_{OL}$ at $V_{OL}$ | -6.5                 | —                    | mA   |
| <b>DDR3/SSTL15 Class II (DDR3 Full Drive)</b>   |                      |                      |                      |      |
| DC output logic high                            | $V_{OH}$             | $0.8 \times V_{DDI}$ | —                    | V    |
| DC output logic low                             | $V_{OL}$             | —                    | $0.2 \times V_{DDI}$ | V    |

**TABLE 3-131: SSTL15 DC OUTPUT VOLTAGE SPECIFICATION (FOR DDRIO I/O BANK ONLY)**

| Parameter                        | Symbol               | Min. | Max. | Unit |
|----------------------------------|----------------------|------|------|------|
| Output minimum source DC current | $I_{OH}$ at $V_{OH}$ | 7.6  | —    | mA   |
| Output minimum sink current      | $I_{OL}$ at $V_{OL}$ | –7.6 | —    | mA   |

**TABLE 3-132: SSTL15 DC DIFFERENTIAL VOLTAGE SPECIFICATION (FOR DDRIO I/O BANK ONLY)**

| Parameter                     | Symbol   | Min. | Unit |
|-------------------------------|----------|------|------|
| DC input differential voltage | $V_{ID}$ | 0.2  | V    |

**Note:** To meet JEDEC electrical compliance, use DDR3 full drive transmitter.

**TABLE 3-133: SSTL15 AC SSTL15 MINIMUM AND MAXIMUM AC SWITCHING SPEED (FOR DDRIO I/O BANK ONLY)**

| Parameter                           | Symbol          | Min.                         | Max.                         | Unit |
|-------------------------------------|-----------------|------------------------------|------------------------------|------|
| AC input differential voltage       | $V_{DIFF}$ (AC) | 0.3                          | —                            | V    |
| AC differential cross point voltage | $V_X$ (AC)      | $0.5 \times V_{DDI} - 0.150$ | $0.5 \times V_{DDI} + 0.150$ | V    |

**TABLE 3-134: SSTL15 MINIMUM AND MAXIMUM AC SWITCHING SPEED (FOR DDRIO I/O BANK ONLY)**

| Parameter         | Symbol    | Max. | Unit | Conditions                           |
|-------------------|-----------|------|------|--------------------------------------|
| Maximum data rate | $D_{MAX}$ | 667  | Mbps | AC loading: per JEDEC specifications |

**TABLE 3-135: SSTL15 AC CALIBRATED IMPEDANCE OPTION (FOR DDRIO I/O BANK ONLY)**

| Parameter                                    | Symbol    | Typ.                | Unit     | Conditions                        |
|----------------------------------------------|-----------|---------------------|----------|-----------------------------------|
| Supported output driver calibrated impedance | $R_{REF}$ | 34, 40              | $\Omega$ | Reference resistor = 240 $\Omega$ |
| Effective impedance value (ODT)              | $R_{TT}$  | 20, 30, 40, 60, 120 | $\Omega$ | Reference resistor = 240 $\Omega$ |

**TABLE 3-136: SSTL15 AC TEST PARAMETER SPECIFICATIONS (FOR DDRIO I/O BANK ONLY)**

| Parameter                                                                        | Symbol         | Typ. | Unit     |
|----------------------------------------------------------------------------------|----------------|------|----------|
| Measuring/trip point for data path                                               | $V_{TRIP}$     | 0.75 | V        |
| Resistance for enable path ( $T_{ZH}$ , $T_{ZL}$ , $T_{HZ}$ , $T_{LZ}$ )         | $R_{ENT}$      | 2K   | $\Omega$ |
| Capacitive loading for enable path ( $T_{ZH}$ , $T_{ZL}$ , $T_{HZ}$ , $T_{LZ}$ ) | $C_{ENT}$      | 5    | pF       |
| Reference resistance for data test path for SSTL15 Class I ( $T_{DP}$ )          | $R_{TT\_TEST}$ | 50   | $\Omega$ |
| Reference resistance for data test path for SSTL15 Class II ( $T_{DP}$ )         | $R_{TT\_TEST}$ | 25   | $\Omega$ |
| Capacitive loading for data path ( $T_{DP}$ )                                    | $C_{LOAD}$     | 5    | pF       |

## AC Switching Characteristics

Worst commercial-case conditions:  $T_J = 85\text{ }^{\circ}\text{C}$ ,  $V_{DD} = 1.14\text{V}$ , and  $V_{DDI} = 1.425\text{V}$ .

**TABLE 3-137: DDR3/SSTL15 RECEIVER CHARACTERISTICS FOR DDRIO I/O BANK—WITH CALIBRATION ONLY**

| On-Die Termination (ODT) |      | $T_{PY}$ |       | Unit |
|--------------------------|------|----------|-------|------|
|                          |      | –1       | –Std  |      |
| Pseudo differential      | None | 1.605    | 1.888 | ns   |
|                          | 20   | 1.616    | 1.901 | ns   |
|                          | 30   | 1.613    | 1.897 | ns   |
|                          | 40   | 1.611    | 1.895 | ns   |
|                          | 60   | 1.609    | 1.893 | ns   |
|                          | 120  | 1.607    | 1.89  | ns   |
| True differential        | None | 1.623    | 1.91  | ns   |
|                          | 20   | 1.637    | 1.926 | ns   |
|                          | 30   | 1.63     | 1.918 | ns   |
|                          | 40   | 1.626    | 1.914 | ns   |
|                          | 60   | 1.622    | 1.91  | ns   |
|                          | 120  | 1.619    | 1.905 | ns   |

**TABLE 3-138: DDR3/SSTL15 TRANSMITTER CHARACTERISTICS (OUTPUT AND TRISTATE BUFFERS)**

|                                                        | T <sub>DP</sub> |       | T <sub>ZL</sub> |       | T <sub>ZH</sub> |       | T <sub>HZ</sub> |       | T <sub>LZ</sub> |       | Unit |
|--------------------------------------------------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|------|
|                                                        | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1              | –Std  |      |
| DDR3 Reduced Drive/SSTL15 Class I (for DDRIO I/O Bank) |                 |       |                 |       |                 |       |                 |       |                 |       |      |
| Single-ended                                           | 2.533           | 2.98  | 2.522           | 2.967 | 2.523           | 2.968 | 2.427           | 2.855 | 2.428           | 2.856 | ns   |
| Differential                                           | 2.555           | 3.005 | 3.073           | 3.615 | 3.073           | 3.615 | 2.416           | 2.843 | 2.416           | 2.843 | ns   |
| DDR3 Full Drive/SSTL15 Class II (for DDRIO I/O Bank)   |                 |       |                 |       |                 |       |                 |       |                 |       |      |
| Single-ended                                           | 2.53            | 2.977 | 2.514           | 2.958 | 2.516           | 2.96  | 2.422           | 2.849 | 2.425           | 2.852 | ns   |
| Differential                                           | 2.552           | 3.002 | 2.591           | 3.048 | 2.59            | 3.047 | 2.882           | 3.391 | 2.881           | 3.39  | ns   |

### 3.6.6 LOW POWER DOUBLE DATA RATE (LPDDR)

LPDDR reduced and full drive low power double data rate standards are supported in IGLOO 2 FPGA and SmartFusion 2 SoC FPGA I/Os. This standard requires a differential amplifier input buffer and a push-pull output buffer.

#### Minimum and Maximum DC/AC Input and Output Levels Specification

**TABLE 3-139: LPDDR DC RECOMMENDED DC OPERATING CONDITIONS**

| Parameter               | Symbol    | Min.  | Typ.  | Max.  |
|-------------------------|-----------|-------|-------|-------|
| Supply voltage          | $V_{DDI}$ | 1.71  | 1.8   | 1.89  |
| Termination voltage     | $V_{TT}$  | 0.838 | 0.900 | 0.964 |
| Input reference voltage | $V_{REF}$ | 0.838 | 0.900 | 0.964 |

**TABLE 3-140: LPDDR DC INPUT VOLTAGE SPECIFICATION**

| Parameter           | Symbol        | Min.                 | Max.                 |
|---------------------|---------------|----------------------|----------------------|
| DC input logic high | $V_{IH}$ (DC) | $0.7 \times V_{DDI}$ | 1.89                 |
| DC input logic low  | $V_{IL}$ (DC) | –0.3                 | $0.3 \times V_{DDI}$ |

**TABLE 3-140: LPDDR DC INPUT VOLTAGE SPECIFICATION (CONTINUED)**

| Parameter                      | Symbol        | Min. | Max. |
|--------------------------------|---------------|------|------|
| Input current high             | $I_{IH}$ (DC) | —    | —    |
| Input current low <sup>1</sup> | $I_{IL}$ (DC) | —    | —    |

. See Table 3-22.

**TABLE 3-141: LPDDR DC OUTPUT VOLTAGE SPECIFICATION REDUCED DRIVE**

| Parameter                        | Symbol               | Min.                 | Max.                 |
|----------------------------------|----------------------|----------------------|----------------------|
| DC output logic high             | $V_{OH}$             | $0.9 \times V_{DDI}$ | —                    |
| DC output logic low              | $V_{OL}$             | —                    | $0.1 \times V_{DDI}$ |
| Output minimum source DC current | $I_{OH}$ at $V_{OH}$ | 0.1                  | —                    |
| Output minimum sink current      | $I_{OL}$ at $V_{OL}$ | –0.1                 | —                    |

**TABLE 3-142: LPDDR DC OUTPUT VOLTAGE SPECIFICATION FULL DRIVE**

| Parameter                        | Symbol               | Min.                 | Max.                 |
|----------------------------------|----------------------|----------------------|----------------------|
| DC output logic high             | $V_{OH}$             | $0.9 \times V_{DDI}$ | —                    |
| DC output logic low              | $V_{OL}$             | —                    | $0.1 \times V_{DDI}$ |
| Output minimum source DC current | $I_{OH}$ at $V_{OH}$ | 0.1                  | —                    |
| Output minimum sink current      | $I_{OL}$ at $V_{OL}$ | –0.1                 | —                    |

. To meet JEDEC Electrical Compliance, use LPDDR Full Drive Transmitter.

**TABLE 3-143: LPDDR DC DIFFERENTIAL VOLTAGE SPECIFICATION**

| Parameter                     | Symbol        | Min.                 |
|-------------------------------|---------------|----------------------|
| DC input differential voltage | $V_{ID}$ (DC) | $0.4 \times V_{DDI}$ |

**TABLE 3-144: LPDDR AC DIFFERENTIAL VOLTAGE SPECIFICATIONS (FOR DDRIO I/O BANK ONLY)**

| Parameter                           | Symbol     | Min.                 | Max.                 | Unit |
|-------------------------------------|------------|----------------------|----------------------|------|
| AC input differential voltage       | $V_{DIFF}$ | $0.6 \times V_{DDI}$ | —                    | V    |
| AC differential cross point voltage | $V_x$      | $0.4 \times V_{DDI}$ | $0.6 \times V_{DDI}$ | V    |

**TABLE 3-145: LPDDR AC SPECIFICATIONS (FOR DDRIO I/O BANK ONLY)**

| Parameter         | Symbol    | Max. | Unit | Conditions                           |
|-------------------|-----------|------|------|--------------------------------------|
| Maximum data rate | $D_{MAX}$ | 400  | Mbps | AC loading: per JEDEC specifications |

**TABLE 3-146: LPDDR AC CALIBRATED IMPEDANCE OPTION (FOR DDRIO I/O BANK ONLY)**

| Parameter                                    | Symbol    | Typ.        | Unit     | Conditions                        |
|----------------------------------------------|-----------|-------------|----------|-----------------------------------|
| Supported output driver calibrated impedance | $R_{REF}$ | 20, 42      | $\Omega$ | Reference resistor = 150 $\Omega$ |
| Effective impedance value (ODT)              | $R_{TT}$  | 50, 70, 150 | $\Omega$ | Reference resistor = 150 $\Omega$ |

**TABLE 3-147: LPDDR AC TEST PARAMETER SPECIFICATIONS (FOR DDRIO I/O BANK ONLY)**

| Parameter                                                                        | Symbol     | Typ. | Unit     |
|----------------------------------------------------------------------------------|------------|------|----------|
| Measuring/trip point for data path                                               | $V_{TRIP}$ | 0.9  | V        |
| Resistance for enable path ( $T_{ZH}$ , $T_{ZL}$ , $T_{HZ}$ , $T_{LZ}$ )         | $R_{ENT}$  | 2K   | $\Omega$ |
| Capacitive loading for enable path ( $T_{ZH}$ , $T_{ZL}$ , $T_{HZ}$ , $T_{LZ}$ ) | $C_{ENT}$  | 5    | pF       |

**TABLE 3-147: LPDDR AC TEST PARAMETER SPECIFICATIONS (FOR DDRIO I/O BANK ONLY)**

|                                                                |            |    |          |
|----------------------------------------------------------------|------------|----|----------|
| Reference resistance for data test path for LPDDR ( $T_{DP}$ ) | RTT_TEST   | 50 | $\Omega$ |
| Capacitive loading for data path ( $T_{DP}$ )                  | $C_{LOAD}$ | 5  | $\Omega$ |

**AC Switching Characteristics**

Worst-case commercial conditions:  $T_J = 85^\circ\text{C}$ ,  $V_{DD} = 1.14\text{ V}$ , and worst-case  $V_{DDI}$ .

**TABLE 3-148: LPDDR RECEIVER CHARACTERISTICS FOR DDRIO I/O BANK WITH FIXED CODES**

|                     | On-Die Termination (ODT) | $T_{PY}$ |       | Unit |
|---------------------|--------------------------|----------|-------|------|
|                     |                          | –1       | –Std  |      |
| Pseudo differential | None                     | 1.568    | 1.845 | ns   |
| True differential   | None                     | 1.588    | 1.869 | ns   |

**TABLE 3-149: LPDDR REDUCED DRIVE FOR DDRIO I/O BANK (OUTPUT AND TRISTATE BUFFERS)**

|              | $T_{DP}$ |       | $T_{ENZL}$ |       | $T_{ENZH}$ |       | $T_{ENHZ}$ |       | $T_{ENLZ}$ |       | Unit |
|--------------|----------|-------|------------|-------|------------|-------|------------|-------|------------|-------|------|
|              | –1       | –Std  | –1         | –Std  | –1         | –Std  | –1         | –Std  | –1         | –Std  |      |
| Single-ended | 2.383    | 2.804 | 2.23       | 2.623 | 2.229      | 2.622 | 2.202      | 2.591 | 2.201      | 2.59  | ns   |
| Differential | 2.396    | 2.819 | 2.764      | 3.252 | 2.764      | 3.252 | 2.255      | 2.653 | 2.255      | 2.653 | ns   |

**TABLE 3-150: LPDDR FULL DRIVE FOR DDRIO I/O BANK (OUTPUT AND TRISTATE BUFFERS)**

|              | $T_{DP}$ |       | $T_{ENZL}$ |       | $T_{ENZH}$ |       | $T_{ENHZ}$ |       | $T_{ENLZ}$ |       | Unit |
|--------------|----------|-------|------------|-------|------------|-------|------------|-------|------------|-------|------|
|              | –1       | –Std  | –1         | –Std  | –1         | –Std  | –1         | –Std  | –1         | –Std  |      |
| Single-ended | 2.281    | 2.683 | 2.196      | 2.584 | 2.195      | 2.583 | 2.171      | 2.555 | 2.17       | 2.554 | ns   |
| Differential | 2.298    | 2.703 | 2.288      | 2.692 | 2.288      | 2.692 | 2.593      | 3.051 | 2.593      | 3.051 | ns   |

**Minimum and Maximum DC/AC Input and Output Levels Specification using LPDDR-LVCMOS 1.8V Mode**

**TABLE 3-151: LPDDR-LVCMOS 1.8V MODE RECOMMENDED DC OPERATING CONDITIONS**

| Parameter      | Symbol    | Min.  | Typ. | Max. | Unit |
|----------------|-----------|-------|------|------|------|
| Supply voltage | $V_{DDI}$ | 1.710 | 1.8  | 1.89 | V    |

**TABLE 3-152: LPDDR-LVCMOS 1.8V MODE DC INPUT VOLTAGE SPECIFICATION**

| Parameter                                           | Symbol        | Min.                  | Max.                  | Unit |
|-----------------------------------------------------|---------------|-----------------------|-----------------------|------|
| DC input logic high (for MSIOD and DDRIO I/O banks) | $V_{IH}$ (DC) | $0.65 \times V_{DDI}$ | 1.89                  | V    |
| DC input logic high (for MSIO I/O bank)             | $V_{IH}$ (DC) | $0.65 \times V_{DDI}$ | 3.45                  | V    |
| DC input logic low                                  | $V_{IL}$ (DC) | –0.3                  | $0.35 \times V_{DDI}$ | V    |
| Input current high                                  | $I_{IH}$ (DC) | —                     | —                     | —    |
| Input current low <sup>1</sup>                      | $I_{IL}$ (DC) | —                     | —                     | —    |

. See [Table 3-22](#).

**TABLE 3-153: LPDDR-LVCMOS 1.8V MODE DC OUTPUT VOLTAGE SPECIFICATION**

| Parameter            | Symbol   | Min.             | Max. | Unit |
|----------------------|----------|------------------|------|------|
| DC output logic high | $V_{OH}$ | $V_{DDI} - 0.45$ | —    | V    |
| DC output logic low  | $V_{OL}$ | —                | 0.45 | V    |

**TABLE 3-154: LPDDR-LVCMOS 1.8V MINIMUM AND MAXIMUM AC SWITCHING SPEEDS**

| Parameter                              | Symbol           | Max. | Unit | Conditions                                           |
|----------------------------------------|------------------|------|------|------------------------------------------------------|
| Maximum data rate (for DDRIO I/O bank) | D <sub>MAX</sub> | 400  | Mbps | AC loading: 17pf load, 8 ma drive and above/all slew |

**TABLE 3-155: LPDDR-LVCMOS 1.8V CALIBRATED IMPEDANCE OPTION**

| Parameter                                                         | Symbol   | Typ.                   | Unit |
|-------------------------------------------------------------------|----------|------------------------|------|
| Supported output driver calibrated impedance (for DDRIO I/O bank) | RODT_CAL | 75, 60, 50, 33, 25, 20 | Ω    |

**TABLE 3-156: LPDDR-LVCMOS 1.8V AC TEST PARAMETER SPECIFICATIONS**

| Parameter                                                                                                   | Symbol            | Typ. | Unit |
|-------------------------------------------------------------------------------------------------------------|-------------------|------|------|
| Measuring/trip point for data path                                                                          | V <sub>TRIP</sub> | 0.9  | V    |
| Resistance for enable path (T <sub>ZH</sub> , T <sub>ZL</sub> , T <sub>HZ</sub> , T <sub>LZ</sub> )         | R <sub>ENT</sub>  | 2K   | Ω    |
| Capacitive loading for enable path (T <sub>ZH</sub> , T <sub>ZL</sub> , T <sub>HZ</sub> , T <sub>LZ</sub> ) | C <sub>ENT</sub>  | 5    | pF   |
| Capacitive loading for data path (T <sub>DP</sub> )                                                         | C <sub>LOAD</sub> | 5    | pF   |

**TABLE 3-157: LPDDR-LVCMOS 1.8V MODE TRANSMITTER DRIVE STRENGTH SPECIFICATION FOR DDRIO BANK**

| Output Drive Selection | V <sub>OH</sub> (V) Min. | V <sub>OL</sub> (V) Max. | I <sub>OH</sub> (at V <sub>OH</sub> ) mA | I <sub>OL</sub> (at V <sub>OL</sub> ) mA |
|------------------------|--------------------------|--------------------------|------------------------------------------|------------------------------------------|
| 2 mA                   | V <sub>DDI</sub> – 0.45  | 0.45                     | 2                                        | 2                                        |
| 4 mA                   | V <sub>DDI</sub> – 0.45  | 0.45                     | 4                                        | 4                                        |
| 6 mA                   | V <sub>DDI</sub> – 0.45  | 0.45                     | 6                                        | 6                                        |
| 8 mA                   | V <sub>DDI</sub> – 0.45  | 0.45                     | 8                                        | 8                                        |
| 10 mA                  | V <sub>DDI</sub> – 0.45  | 0.45                     | 10                                       | 10                                       |
| 12 mA                  | V <sub>DDI</sub> – 0.45  | 0.45                     | 12                                       | 12                                       |
| 16 mA                  | V <sub>DDI</sub> – 0.45  | 0.45                     | 16                                       | 16                                       |

. 16 mA Drive Strengths, All Slews, meet LPDDR JEDEC electrical compliance.

**TABLE 3-158: LPDDR-LVCMOS 1.8V AC SWITCHING CHARACTERISTICS FOR RECEIVER (FOR DDRIO I/O BANK WITH FIXED CODE—INPUT BUFFERS)**

| ODT (On Die Termination) | –1    | –Std  | –1    | –Std | Unit |
|--------------------------|-------|-------|-------|------|------|
| None                     | 1.968 | 2.315 | 2.099 | 2.47 | ns   |

**TABLE 3-159: LPDDR-LVCMOS 1.8V AC SWITCHING CHARACTERISTICS FOR TRANSMITTER FOR DDRIO I/O BANK (OUTPUT AND TRISTATE BUFFERS)**

| Output Drive Selection | Slew Control | T <sub>DP</sub> |       | T <sub>ZL</sub> |       | T <sub>ZH</sub> |       | T <sub>HZ</sub> |       | T <sub>LZ</sub> <sup>1</sup> |       | Unit |
|------------------------|--------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-------|------------------------------|-------|------|
|                        |              | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1              | –Std  | –1                           | –Std  |      |
| 2 mA                   | slow         | 4.234           | 4.981 | 3.646           | 4.29  | 4.245           | 4.995 | 4.908           | 5.774 | 4.434                        | 5.216 | ns   |
|                        | medium       | 3.824           | 4.498 | 3.282           | 3.861 | 3.834           | 4.511 | 4.625           | 5.441 | 4.116                        | 4.843 | ns   |
|                        | medium_fast  | 3.627           | 4.267 | 3.111           | 3.66  | 3.637           | 4.279 | 4.481           | 5.272 | 3.984                        | 4.687 | ns   |
|                        | fast         | 3.605           | 4.241 | 3.097           | 3.644 | 3.615           | 4.253 | 4.472           | 5.262 | 3.973                        | 4.674 | ns   |
| 4 mA                   | slow         | 3.923           | 4.615 | 3.314           | 3.9   | 3.918           | 4.61  | 5.403           | 6.356 | 4.894                        | 5.757 | ns   |
|                        | medium       | 3.518           | 4.138 | 2.961           | 3.484 | 3.515           | 4.135 | 5.121           | 6.025 | 4.561                        | 5.366 | ns   |
|                        | medium_fast  | 3.321           | 3.907 | 2.783           | 3.275 | 3.317           | 3.903 | 4.966           | 5.843 | 4.426                        | 5.206 | ns   |

**TABLE 3-159: LPDDR-LVCMOS 1.8V AC SWITCHING CHARACTERISTICS FOR TRANSMITTER FOR DDRI0 I/O BANK (OUTPUT AND TRISTATE BUFFERS) (CONTINUED)**

|       |             |       |       |       |       |       |       |       |       |       |       |    |
|-------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|----|
|       | fast        | 3.301 | 3.883 | 2.77  | 3.259 | 3.296 | 3.878 | 4.957 | 5.831 | 4.417 | 5.196 | ns |
| 6 mA  | slow        | 3.71  | 4.364 | 3.104 | 3.652 | 3.702 | 4.355 | 5.62  | 6.612 | 5.08  | 5.977 | ns |
|       | medium      | 3.333 | 3.921 | 2.779 | 3.27  | 3.325 | 3.913 | 5.346 | 6.289 | 4.777 | 5.62  | ns |
|       | medium_fast | 3.155 | 3.712 | 2.62  | 3.083 | 3.146 | 3.702 | 5.21  | 6.13  | 4.657 | 5.479 | ns |
|       | fast        | 3.134 | 3.688 | 2.608 | 3.068 | 3.125 | 3.677 | 5.202 | 6.12  | 4.648 | 5.468 | ns |
| 8 mA  | slow        | 3.619 | 4.258 | 3.007 | 3.538 | 3.607 | 4.244 | 5.815 | 6.841 | 5.249 | 6.175 | ns |
|       | medium      | 3.246 | 3.819 | 2.686 | 3.16  | 3.236 | 3.807 | 5.542 | 6.52  | 4.936 | 5.807 | ns |
|       | medium_fast | 3.066 | 3.607 | 2.525 | 2.971 | 3.054 | 3.593 | 5.405 | 6.359 | 4.811 | 5.66  | ns |
|       | fast        | 3.046 | 3.584 | 2.513 | 2.957 | 3.034 | 3.57  | 5.401 | 6.353 | 4.803 | 5.651 | ns |
| 10 mA | slow        | 3.498 | 4.115 | 2.878 | 3.386 | 3.481 | 4.096 | 6.046 | 7.113 | 5.444 | 6.404 | ns |
|       | medium      | 3.138 | 3.692 | 2.569 | 3.023 | 3.126 | 3.678 | 5.782 | 6.803 | 5.129 | 6.034 | ns |
|       | medium_fast | 2.966 | 3.489 | 2.414 | 2.841 | 2.951 | 3.472 | 5.666 | 6.665 | 5.013 | 5.897 | ns |
|       | fast        | 2.945 | 3.464 | 2.401 | 2.826 | 2.93  | 3.448 | 5.659 | 6.658 | 5.003 | 5.886 | ns |
| 12 mA | slow        | 3.417 | 4.02  | 2.807 | 3.303 | 3.401 | 4.002 | 6.083 | 7.156 | 5.464 | 6.428 | ns |
|       | medium      | 3.076 | 3.618 | 2.519 | 2.964 | 3.063 | 3.604 | 5.828 | 6.856 | 5.176 | 6.089 | ns |
|       | medium_fast | 2.913 | 3.427 | 2.376 | 2.795 | 2.898 | 3.41  | 5.725 | 6.736 | 5.072 | 5.966 | ns |
|       | fast        | 2.894 | 3.405 | 2.362 | 2.78  | 2.879 | 3.388 | 5.715 | 6.724 | 5.064 | 5.957 | ns |
| 16 mA | slow        | 3.366 | 3.96  | 2.751 | 3.237 | 3.348 | 3.939 | 6.226 | 7.324 | 5.576 | 6.56  | ns |
|       | medium      | 3.03  | 3.565 | 2.47  | 2.906 | 3.017 | 3.55  | 5.981 | 7.036 | 5.282 | 6.214 | ns |
|       | medium_fast | 2.87  | 3.377 | 2.328 | 2.739 | 2.854 | 3.358 | 5.895 | 6.935 | 5.18  | 6.094 | ns |
|       | fast        | 2.853 | 3.357 | 2.314 | 2.723 | 2.837 | 3.338 | 5.889 | 6.929 | 5.177 | 6.09  | ns |

. Delay increases with drive strength are inherent to built-in slew control circuitry for SSO management).

### 3.7 Differential I/O Standards

Configuration of the I/O modules as a differential pair is handled by Microchip FPGA Products Group Libero software when the user instantiates a differential I/O macro in the design. Differential I/Os can also be used in conjunction with the embedded Input Register (InReg), Output Register (OutReg), Enable Register (EnReg), and Double Data Rate (DDR) registers.

#### 3.7.1 LVDS

Low-Voltage Differential Signaling (ANSI/TIA/EIA-644) is a high-speed, differential I/O standard.

#### Minimum and Maximum Input and Output Levels

**TABLE 3-160: LVDS RECOMMENDED DC OPERATING CONDITIONS**

| Parameter      | Symbol           | Min.  | Typ. | Max.  | Unit | Conditions |
|----------------|------------------|-------|------|-------|------|------------|
| Supply voltage | V <sub>DDI</sub> | 2.375 | 2.5  | 2.625 | V    | 2.5V range |
| Supply voltage | V <sub>DDI</sub> | 3.15  | 3.3  | 3.45  | V    | 3.3V range |

**TABLE 3-161: LVDS DC INPUT VOLTAGE SPECIFICATION**

| Parameter                      | Symbol               | Min. | Max.  | Unit | Conditions |
|--------------------------------|----------------------|------|-------|------|------------|
| DC Input voltage               | V <sub>I</sub>       | 0    | 2.925 | V    | 2.5V range |
| DC input voltage               | V <sub>I</sub>       | 0    | 3.45  | V    | 3.3V range |
| Input current high             | I <sub>IH</sub> (DC) | —    | —     | —    | —          |
| Input current low <sup>1</sup> | I <sub>IL</sub> (DC) | —    | —     | —    | —          |

. See Table 3-22.

TABLE 3-162: LVDS DC OUTPUT VOLTAGE SPECIFICATION

| Parameter            | Symbol          | Min. | Typ.  | Max. | Unit |
|----------------------|-----------------|------|-------|------|------|
| DC output logic high | V <sub>OH</sub> | 1.25 | 1.425 | 1.6  | V    |
| DC output logic low  | V <sub>OL</sub> | 0.9  | 1.075 | 1.25 | V    |

TABLE 3-163: LVDS DC DIFFERENTIAL VOLTAGE SPECIFICATION

| Parameter                         | Symbol           | Min.  | Typ. | Max.  | Unit |
|-----------------------------------|------------------|-------|------|-------|------|
| Differential output voltage swing | V <sub>OD</sub>  | 250   | 350  | 450   | mV   |
| Output common mode voltage        | V <sub>OCM</sub> | 1.125 | 1.25 | 1.375 | V    |
| Input common mode voltage         | V <sub>ICM</sub> | 0.05  | 1.25 | 2.35  | V    |
| Input differential voltage        | V <sub>ID</sub>  | 100   | 350  | 600   | mV   |

. when V<sub>ID</sub> is < 300 mV, the input signal is delayed by up to an additional 450 ps for LVDS25 and 280 ps for LVDS33. This delay is not accounted in the timing model. Clock insertion delays, propagation delays, and I/O to FF delays are marginally affected. Adding a parallel termination resistor of 200Ω ±5% across the receiver pins can mitigate this additional delay when V<sub>ID</sub> is < 300 mV.

TABLE 3-164: LVDS MINIMUM AND MAXIMUM AC SWITCHING SPEED

| Parameter                                              | Symbol           | Max. | Unit | Conditions                               |
|--------------------------------------------------------|------------------|------|------|------------------------------------------|
| Maximum data rate (for MSIO I/O bank)                  | D <sub>MAX</sub> | 535  | Mbps | AC loading: 12 pF/100Ω differential load |
| Maximum data rate (for MSIOD I/O bank) no pre-emphasis | D <sub>MAX</sub> | 620  | Mbps | AC loading: 10 pF/100Ω differential load |
|                                                        |                  | 700  | Mbps | AC loading: 2 pF/100Ω differential load  |

TABLE 3-165: LVDS AC IMPEDANCE SPECIFICATIONS

| Parameter              | Symbol | Typ. | Max. | Unit |
|------------------------|--------|------|------|------|
| Termination resistance | RT     | 100  |      | Ω    |

TABLE 3-166: LVDS AC TEST PARAMETER SPECIFICATIONS

| Parameter                                                                                                   | Symbol            | Typ.        | Unit |
|-------------------------------------------------------------------------------------------------------------|-------------------|-------------|------|
| Measuring/trip point for data path                                                                          | V <sub>TRIP</sub> | Cross point | V    |
| Resistance for enable path (T <sub>ZH</sub> , T <sub>ZL</sub> , T <sub>HZ</sub> , T <sub>LZ</sub> )         | R <sub>ENT</sub>  | 2K          | Ω    |
| Capacitive loading for enable path (T <sub>ZH</sub> , T <sub>ZL</sub> , T <sub>HZ</sub> , T <sub>LZ</sub> ) | C <sub>ENT</sub>  | 5           | pF   |

LVDS25 AC Switching Characteristics

Worst commercial-case conditions: T<sub>J</sub> = 85 °C, V<sub>DD</sub> = 1.14V, and V<sub>DDI</sub> = 2.375V.

TABLE 3-167: LVDS25 RECEIVER CHARACTERISTICS FOR MSIO I/O BANK (INPUT BUFFERS)

| On-Die Termination (ODT) | T <sub>py</sub> |       | Unit |
|--------------------------|-----------------|-------|------|
|                          | –1              | –Std  |      |
| None                     | 2.774           | 3.263 | ns   |
| 100                      | 2.775           | 3.264 | ns   |

TABLE 3-168: LVDS25 RECEIVER CHARACTERISTICS FOR MSIOD I/O BANK (INPUT BUFFERS)

| On-Die Termination (ODT) | T <sub>py</sub> |       | Unit |
|--------------------------|-----------------|-------|------|
|                          | –1              | –Std  |      |
| None                     | 2.554           | 3.004 | ns   |

**TABLE 3-168: LVDS25 RECEIVER CHARACTERISTICS FOR MSIOD I/O BANK (INPUT BUFFERS)**

|     |       |       |    |
|-----|-------|-------|----|
| 100 | 2.549 | 2.999 | ns |
|-----|-------|-------|----|

**TABLE 3-169: LVDS25 TRANSMITTER CHARACTERISTICS FOR MSIO I/O BANK (OUTPUT AND TRISTATE BUFFERS)**

| $T_{DP}$ |       | $T_{ZL}$ |       | $T_{ZH}$ |       | $T_{HZ}$ |      | $T_{LZ}$ |       | Unit |
|----------|-------|----------|-------|----------|-------|----------|------|----------|-------|------|
| -1       | -Std  | -1       | -Std  | -1       | -Std  | -1       | -Std | -1       | -Std  |      |
| 2.136    | 2.513 | 2.416    | 2.842 | 2.402    | 2.825 | 2.423    | 2.85 | 2.409    | 2.833 | ns   |

**TABLE 3-170: LVDS25 TRANSMITTER CHARACTERISTICS FOR MSIOD I/O BANK (OUTPUT AND TRISTATE BUFFERS)**

|                  | $T_{DP}$ |       | $T_{ZL}$ |       | $T_{ZH}$ |       | $T_{HZ}$ |       | $T_{LZ}$ |       | Unit |
|------------------|----------|-------|----------|-------|----------|-------|----------|-------|----------|-------|------|
|                  | -1       | -Std  | -1       | -Std  | -1       | -Std  | -1       | -Std  | -1       | -Std  |      |
| No pre-emphasis  | 1.61     | 1.893 | 1.749    | 2.058 | 1.735    | 2.041 | 1.897    | 2.231 | 1.866    | 2.195 | ns   |
| Min pre-emphasis | 1.527    | 1.796 | 1.757    | 2.067 | 1.744    | 2.052 | 1.905    | 2.241 | 1.876    | 2.207 | ns   |
| Med pre-emphasis | 1.496    | 1.76  | 1.765    | 2.077 | 1.751    | 2.06  | 1.914    | 2.252 | 1.884    | 2.216 | ns   |

**LVDS33 AC Switching Characteristics****TABLE 3-171: LVDS33 RECEIVER CHARACTERISTICS FOR MSIO I/O BANK (INPUT BUFFERS)**

| On Die Termination (ODT) | $T_{PY}$ |       | Unit |
|--------------------------|----------|-------|------|
|                          | -1       | -Std  |      |
| None                     | 2.572    | 3.025 | ns   |
| 100                      | 2.569    | 3.023 | ns   |

**TABLE 3-172: LVDS33 TRANSMITTER CHARACTERISTICS FOR MSIO I/O BANK (OUTPUT AND TRISTATE BUFFERS)**

| $T_{DP}$ |       | $T_{ZL}$ |      | $T_{ZH}$ |       | $T_{HZ}$ |       | $T_{LZ}$ |       | Unit |
|----------|-------|----------|------|----------|-------|----------|-------|----------|-------|------|
| -1       | -Std  | -1       | -Std | -1       | -Std  | -1       | -Std  | -1       | -Std  |      |
| 1.942    | 2.284 | 1.98     | 2.33 | 1.97     | 2.318 | 1.953    | 2.298 | 1.96     | 2.307 | ns   |

**3.7.2 B-LVDS**

Bus LVDS (B-LVDS) specifications extend the existing LVDS standard to high-performance multipoint bus applications. Multidrop and multipoint bus configurations may contain any combination of drivers, receivers, and transceivers.

**Minimum and Maximum DC/AC Input and Output Levels Specification****TABLE 3-173: B-LVDS RECOMMENDED DC OPERATING CONDITIONS**

| Parameter      | Symbol    | Min.  | Typ. | Max.  | Unit |
|----------------|-----------|-------|------|-------|------|
| Supply voltage | $V_{DDI}$ | 2.375 | 2.5  | 2.625 | V    |

**TABLE 3-174: B-LVDS DC INPUT VOLTAGE SPECIFICATION**

| Parameter                      | Symbol        | Min. | Max.  | Unit |
|--------------------------------|---------------|------|-------|------|
| DC input voltage               | $V_I$         | 0    | 2.925 | V    |
| Input current high             | $I_{IH}$ (DC) | —    | —     | —    |
| Input current low <sup>1</sup> | $I_{IL}$ (DC) | —    | —     | —    |

. See [Table 3-22](#).

**TABLE 3-175: B-LVDS DC OUTPUT VOLTAGE SPECIFICATION (FOR MSIO I/O BANK ONLY)**

| Parameter            | Symbol          | Min. | Typ.  | Max. | Unit |
|----------------------|-----------------|------|-------|------|------|
| DC output logic high | V <sub>OH</sub> | 1.25 | 1.425 | 1.6  | V    |
| DC output logic low  | V <sub>OL</sub> | 0.9  | 1.075 | 1.25 | V    |

**TABLE 3-176: B-LVDS DC DIFFERENTIAL VOLTAGE SPECIFICATION**

| Parameter                                                  | Symbol           | Min. | Max.             | Unit |
|------------------------------------------------------------|------------------|------|------------------|------|
| Differential output voltage swing (for MSIO I/O bank only) | V <sub>OD</sub>  | 65   | 460              | mV   |
| Output common mode voltage (for MSIO I/O bank only)        | V <sub>OCM</sub> | 1.1  | 1.5              | V    |
| Input common mode voltage                                  | V <sub>ICM</sub> | 0.05 | 2.4              | V    |
| Input differential voltage                                 | V <sub>ID</sub>  | 0.1  | V <sub>DDI</sub> | V    |

**TABLE 3-177: B-LVDS MINIMUM AND MAXIMUM AC SWITCHING SPEED**

| Parameter                             | Symbol           | Max. | Unit | Conditions                              |
|---------------------------------------|------------------|------|------|-----------------------------------------|
| Maximum data rate (for MSIO I/O bank) | D <sub>MAX</sub> | 500  | Mbps | AC loading: 2 pF/100Ω differential load |

**TABLE 3-178: B-LVDS AC IMPEDANCE SPECIFICATIONS**

| Parameter              | Symbol         | Typ | Unit |
|------------------------|----------------|-----|------|
| Termination resistance | R <sub>T</sub> | 27  | Ω    |

**TABLE 3-179: B-LVDS AC TEST PARAMETER SPECIFICATIONS**

| Parameter                                                                                                   | Symbol            | Typ.        | Unit |
|-------------------------------------------------------------------------------------------------------------|-------------------|-------------|------|
| Measuring/trip point for data path                                                                          | V <sub>TRIP</sub> | Cross point | V    |
| Resistance for enable path (T <sub>ZH</sub> , T <sub>ZL</sub> , T <sub>HZ</sub> , T <sub>LZ</sub> )         | R <sub>ENT</sub>  | 2K          | Ω    |
| Capacitive loading for enable path (T <sub>ZH</sub> , T <sub>ZL</sub> , T <sub>HZ</sub> , T <sub>LZ</sub> ) | C <sub>ENT</sub>  | 5           | pF   |

**AC Switching Characteristics**

Worst commercial-case conditions: T<sub>J</sub> = 85 °C, V<sub>DD</sub> = 1.14V, and V<sub>DDI</sub> = 2.375V.

**TABLE 3-180: B-LVDS AC SWITCHING CHARACTERISTICS FOR RECEIVER FOR MSIO I/O BANK (INPUT BUFFERS)**

| On-Die Termination (ODT) | T <sub>PY</sub> |       | Unit |
|--------------------------|-----------------|-------|------|
|                          | -1              | -Std  |      |
| None                     | 2.738           | 3.221 | ns   |
| 100                      | 2.735           | 3.218 | ns   |

**TABLE 3-181: B-LVDS AC SWITCHING CHARACTERISTICS FOR RECEIVER FOR MSIOD I/O BANK (INPUT BUFFERS)**

| On-Die Termination (ODT) | T <sub>PY</sub> |       | Unit |
|--------------------------|-----------------|-------|------|
|                          | -1              | -Std  |      |
| None                     | 2.495           | 2.934 | ns   |
| 100                      | 2.495           | 2.935 | ns   |

**TABLE 3-182: B-LVDS AC SWITCHING CHARACTERISTICS FOR TRANSMITTER (FOR MSIO I/O BANK - OUTPUT AND TRISTATE BUFFERS)**

| T <sub>DP</sub> |      | T <sub>ZL</sub> |      | T <sub>ZH</sub> |      | T <sub>HZ</sub> |      | T <sub>LZ</sub> |      | Unit |
|-----------------|------|-----------------|------|-----------------|------|-----------------|------|-----------------|------|------|
| -1              | -Std | -1              | -Std | -1              | -Std | -1              | -Std | -1              | -Std |      |

**TABLE 3-182: B-LVDS AC SWITCHING CHARACTERISTICS FOR TRANSMITTER (FOR MSIO I/O BANK - OUTPUT AND TRISTATE BUFFERS)**

|       |       |       |       |       |      |      |       |       |       |    |
|-------|-------|-------|-------|-------|------|------|-------|-------|-------|----|
| 2.258 | 2.656 | 2.343 | 2.756 | 2.329 | 2.74 | 2.12 | 2.494 | 2.123 | 2.497 | ns |
|-------|-------|-------|-------|-------|------|------|-------|-------|-------|----|

### 3.7.3 M-LVDS

M-LVDS specifications extend the existing LVDS standard to high-performance multipoint bus applications. Multidrop and multipoint bus configurations may contain any combination of drivers, receivers, and transceivers.

#### Minimum and Maximum Input and Output Levels

**TABLE 3-183: M-LVDS RECOMMENDED DC OPERATING CONDITIONS**

| Parameter      | Symbol           | Min.  | Typ. | Max.  | Unit |
|----------------|------------------|-------|------|-------|------|
| Supply voltage | V <sub>DDI</sub> | 2.375 | 2.5  | 2.625 | V    |

. Only M-LVDS TYPE I is supported.

**TABLE 3-184: M-LVDS DC INPUT VOLTAGE SPECIFICATION**

| Parameter                      | Symbol               | Min. | Max.  | Unit |
|--------------------------------|----------------------|------|-------|------|
| DC input voltage               | V <sub>I</sub>       | 0    | 2.925 | V    |
| Input current high             | I <sub>IH</sub> (DC) | —    | —     | —    |
| Input current low <sup>2</sup> | I <sub>IL</sub> (DC) | —    | —     | —    |

. See [Table 3-22](#).

**TABLE 3-185: M-LVDS DC VOLTAGE SPECIFICATION OUTPUT VOLTAGE SPECIFICATION (FOR MSIO I/O BANK ONLY)**

| Parameter            | Symbol          | Min. | Typ.  | Max. | Unit |
|----------------------|-----------------|------|-------|------|------|
| DC output logic high | V <sub>OH</sub> | 1.25 | 1.425 | 1.6  | V    |
| DC output logic low  | V <sub>OL</sub> | 0.9  | 1.075 | 1.25 | V    |

**TABLE 3-186: M-LVDS DIFFERENTIAL VOLTAGE SPECIFICATION**

| Parameter                                                  | Symbol           | Min. | Max. | Unit |
|------------------------------------------------------------|------------------|------|------|------|
| Differential output voltage swing (for MSIO I/O bank only) | V <sub>OD</sub>  | 300  | 650  | mV   |
| Output common mode voltage (for MSIO I/O bank only)        | V <sub>OCM</sub> | 0.3  | 2.1  | V    |
| Input common mode voltage                                  | V <sub>ICM</sub> | 0.3  | 1.2  | V    |
| Input differential voltage                                 | V <sub>ID</sub>  | 50   | 2400 | mV   |

**TABLE 3-187: M-LVDS MINIMUM AND MAXIMUM AC SWITCHING SPEED FOR MSIO I/O BANK**

| Parameter         | Symbol           | Max. | Unit | Conditions                              |
|-------------------|------------------|------|------|-----------------------------------------|
| Maximum data rate | D <sub>MAX</sub> | 500  | Mbps | AC loading: 2 pF/100Ω differential load |

**TABLE 3-188: M-LVDS AC IMPEDANCE SPECIFICATIONS**

| Parameter              | Symbol         | Typ. | Unit |
|------------------------|----------------|------|------|
| Termination resistance | R <sub>T</sub> | 50   | Ω    |

**TABLE 3-189: M-LVDS AC TEST PARAMETER SPECIFICATIONS**

| Parameter                          | Symbol            | Typ.        | Unit |
|------------------------------------|-------------------|-------------|------|
| Measuring/trip point for data path | V <sub>TRIP</sub> | Cross point | V    |

**TABLE 3-189: M-LVDS AC TEST PARAMETER SPECIFICATIONS**

|                                                                                  |           |    |          |
|----------------------------------------------------------------------------------|-----------|----|----------|
| Resistance for enable path ( $T_{ZH}$ , $T_{ZL}$ , $T_{HZ}$ , $T_{LZ}$ )         | $R_{ENT}$ | 2K | $\Omega$ |
| Capacitive loading for enable path ( $T_{ZH}$ , $T_{ZL}$ , $T_{HZ}$ , $T_{LZ}$ ) | $C_{ENT}$ | 5  | pF       |

**AC Switching Characteristics**

Worst commercial-case conditions:  $T_J = 85^\circ\text{C}$ ,  $V_{DD} = 1.14\text{ V}$ , and  $V_{DDI} = 2.375\text{ V}$ .

**TABLE 3-190: M-LVDS AC SWITCHING CHARACTERISTICS FOR RECEIVER (FOR MSIO I/O BANK—INPUT BUFFERS)**

| On-Die Termination (ODT) | $T_{PY}$ |       | Unit |
|--------------------------|----------|-------|------|
|                          | –1       | –Std  |      |
| None                     | 2.738    | 3.221 | ns   |
| 100                      | 2.735    | 3.218 | ns   |

**TABLE 3-191: M-LVDS AC SWITCHING CHARACTERISTICS FOR RECEIVER (FOR MSIOD I/O BANK—INPUT BUFFERS)**

| On-Die Termination (ODT) | $T_{PY}$ |       | Unit |
|--------------------------|----------|-------|------|
|                          | –1       | –Std  |      |
| None                     | 2.495    | 2.934 | ns   |
| 100                      | 2.495    | 2.935 | ns   |

**TABLE 3-192: M-LVDS AC SWITCHING CHARACTERISTICS FOR TRANSMITTER (FOR MSIO I/O BANK—OUTPUT AND TRISTATE BUFFERS)**

| $T_{DP}$ |       | $T_{ZL}$ |       | $T_{ZH}$ |       | $T_{HZ}$ |       | $T_{LZ}$ |      | Unit |
|----------|-------|----------|-------|----------|-------|----------|-------|----------|------|------|
| –1       | –Std  | –1       | –Std  | –1       | –Std  | –1       | –Std  | –1       | –Std |      |
| 2.258    | 2.656 | 2.348    | 2.762 | 2.334    | 2.746 | 2.123    | 2.497 | 2.125    | 2.5  | ns   |

**3.7.4 MINI-LVDS**

Mini-LVDS is an unidirectional interface from the timing controller to the column drivers and is designed to the Texas Instruments Standard SLDA007A.

**Mini-LVDS Minimum and Maximum Input and Output Levels****TABLE 3-193: MINI-LVDS RECOMMENDED DC OPERATING CONDITIONS**

| Parameter      | Symbol    | Min.  | Typ. | Max.  | Unit |
|----------------|-----------|-------|------|-------|------|
| Supply voltage | $V_{DDI}$ | 2.375 | 2.5  | 2.625 | V    |

**TABLE 3-194: MINI-LVDS DC INPUT VOLTAGE SPECIFICATION**

| Parameter        | Symbol | Min. | Max.  | Unit |
|------------------|--------|------|-------|------|
| DC Input voltage | $V_I$  | 0    | 2.925 | V    |

**TABLE 3-195: MINI-LVDS DC OUTPUT VOLTAGE SPECIFICATION**

| Parameter            | Symbol   | Min. | Typ.  | Max. | Unit |
|----------------------|----------|------|-------|------|------|
| DC output logic high | $V_{OH}$ | 1.25 | 1.425 | 1.6  | V    |
| DC output logic low  | $V_{OL}$ | 0.9  | 1.075 | 1.25 | V    |

**TABLE 3-196: MINI-LVDS DC DIFFERENTIAL VOLTAGE SPECIFICATION**

| Parameter                         | Symbol           | Min. | Max. | Unit |
|-----------------------------------|------------------|------|------|------|
| Differential output voltage swing | V <sub>OD</sub>  | 300  | 600  | mV   |
| Output common mode voltage        | V <sub>OCM</sub> | 1    | 1.4  | V    |
| Input common mode voltage         | V <sub>ICM</sub> | 0.3  | 1.2  | V    |
| Input differential voltage        | V <sub>ID</sub>  | 100  | 600  | mV   |

**TABLE 3-197: MINI-LVDS MINIMUM AND MAXIMUM AC SWITCHING SPEED**

| Parameter                              | Symbol           | Max. | Unit | Conditions                              |
|----------------------------------------|------------------|------|------|-----------------------------------------|
| Maximum data rate (for MSIO I/O bank)  | D <sub>MAX</sub> | 520  | Mbps | AC loading: 2 pF/100Ω differential load |
| Maximum data rate (for MSIOD I/O bank) | D <sub>MAX</sub> | 700  | Mbps | AC loading: 2 pF/100Ω differential load |

**TABLE 3-198: MINI-LVDS AC IMPEDANCE SPECIFICATIONS**

| Parameter              | Symbol         | Typ. | Unit |
|------------------------|----------------|------|------|
| Termination resistance | R <sub>T</sub> | 100  | Ω    |

**TABLE 3-199: MINI-LVDS AC TEST PARAMETER SPECIFICATIONS**

| Parameter                                                                                                   | Symbol            | Typ.        | Unit |
|-------------------------------------------------------------------------------------------------------------|-------------------|-------------|------|
| Measuring/trip point for data path                                                                          | V <sub>TRIP</sub> | Cross point | V    |
| Resistance for enable path (T <sub>ZH</sub> , T <sub>ZL</sub> , T <sub>HZ</sub> , T <sub>LZ</sub> )         | R <sub>ENT</sub>  | 2K          | Ω    |
| Capacitive loading for enable path (T <sub>ZH</sub> , T <sub>ZL</sub> , T <sub>HZ</sub> , T <sub>LZ</sub> ) | C <sub>ENT</sub>  | 5           | pF   |

**AC Switching Characteristics**

Worst commercial-case conditions: T<sub>J</sub> = 85 °C, V<sub>DD</sub> = 1.14V, and V<sub>DDI</sub> = 2.375V.

**TABLE 3-200: MINI-LVDS AC SWITCHING CHARACTERISTICS FOR RECEIVER (FOR MSIO I/O BANK—INPUT BUFFERS)**

| On-Die Termination (ODT) | T <sub>py</sub> |       | Unit |
|--------------------------|-----------------|-------|------|
|                          | –1              | –Std  |      |
| None                     | 2.855           | 3.359 | ns   |
| 100                      | 2.85            | 3.353 | ns   |
| None                     | 2.602           | 3.061 | ns   |
| 100                      | 2.597           | 3.055 | ns   |

**TABLE 3-201: MINI-LVDS AC SWITCHING CHARACTERISTICS FOR TRANSMITTER FOR MSIO I/O BANK (OUTPUT AND TRISTATE BUFFERS)**

| T <sub>DP</sub> |       | T <sub>ZL</sub> |       | T <sub>ZH</sub> |       | T <sub>HZ</sub> |      | T <sub>LZ</sub> |       | Unit |
|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|------|-----------------|-------|------|
| –1              | –Std  | –1              | –Std  | –1              | –Std  | –1              | –Std | –1              | –Std  |      |
| 2.097           | 2.467 | 2.308           | 2.715 | 2.296           | 2.701 | 1.964           | 2.31 | 1.949           | 2.293 | ns   |

**TABLE 3-202: MINI-LVDS AC SWITCHING CHARACTERISTICS FOR TRANSMITTER (FOR MSIOD I/O BANK—OUTPUT AND TRISTATE BUFFERS)**

| T <sub>DP</sub> |      | T <sub>ZL</sub> |      | T <sub>ZH</sub> |      | T <sub>HZ</sub> |      | T <sub>LZ</sub> |      | Unit |
|-----------------|------|-----------------|------|-----------------|------|-----------------|------|-----------------|------|------|
| –1              | –Std | –1              | –Std | –1              | –Std | –1              | –Std | –1              | –Std |      |

**TABLE 3-202: MINI-LVDS AC SWITCHING CHARACTERISTICS FOR TRANSMITTER (FOR MSIOD I/O BANK—OUTPUT AND TRISTATE BUFFERS)**

|                  |       |       |       |       |       |       |       |       |       |       |    |
|------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|----|
| No pre-emphasis  | 1.614 | 1.899 | 1.562 | 1.837 | 1.553 | 1.826 | 1.593 | 1.874 | 1.578 | 1.856 | ns |
| Min pre-emphasis | 1.604 | 1.887 | 1.745 | 2.053 | 1.731 | 2.036 | 1.892 | 2.225 | 1.861 | 2.189 | ns |
| Med pre-emphasis | 1.521 | 1.79  | 1.753 | 2.062 | 1.737 | 2.043 | 1.9   | 2.235 | 1.868 | 2.197 | ns |
| Max pre-emphasis | 1.492 | 1.754 | 1.762 | 2.073 | 1.745 | 2.052 | 1.91  | 2.247 | 1.876 | 2.206 | ns |

### 3.7.5 RSDS

Reduced Swing Differential Signaling (RSDS) is similar to an LVDS high-speed interface using differential signaling. RSDS has a similar implementation to LVDS devices and is only intended for point-to-point applications.

#### Minimum and Maximum Input and Output Levels

**TABLE 3-203: RSDS RECOMMENDED DC OPERATING CONDITIONS**

| Parameter      | Symbol           | Min.  | Typ. | Max.  | Unit |
|----------------|------------------|-------|------|-------|------|
| Supply voltage | V <sub>DDI</sub> | 2.375 | 2.5  | 2.625 | V    |

**TABLE 3-204: RSDS DC INPUT VOLTAGE SPECIFICATION**

| Parameter        | Symbol         | Min. | Max.  | Unit |
|------------------|----------------|------|-------|------|
| DC input voltage | V <sub>I</sub> | 0    | 2.925 | V    |

**TABLE 3-205: RSDS DC OUTPUT VOLTAGE SPECIFICATION**

| Parameter            | Symbol          | Min. | Typ.  | Max. | Unit |
|----------------------|-----------------|------|-------|------|------|
| DC output logic high | V <sub>OH</sub> | 1.25 | 1.425 | 1.6  | V    |
| DC output logic low  | V <sub>OL</sub> | 0.9  | 1.075 | 1.25 | V    |

**TABLE 3-206: RSDS DIFFERENTIAL VOLTAGE SPECIFICATION**

| Parameter                         | Symbol           | Min. | Max. | Unit |
|-----------------------------------|------------------|------|------|------|
| Differential output voltage swing | V <sub>OD</sub>  | 100  | 600  | mV   |
| Output common mode voltage        | V <sub>OCM</sub> | 0.5  | 1.5  | V    |
| Input common mode voltage         | V <sub>ICM</sub> | 0.3  | 1.5  | V    |
| Input differential voltage        | V <sub>ID</sub>  | 100  | 600  | mV   |

**TABLE 3-207: RSDS MINIMUM AND MAXIMUM AC SWITCHING SPEED**

| Parameter                              | Symbol           | Max. | Unit | Conditions                              |
|----------------------------------------|------------------|------|------|-----------------------------------------|
| Maximum data rate (for MSIO I/O bank)  | D <sub>MAX</sub> | 520  | Mbps | AC loading: 2 pF/100Ω differential load |
| Maximum data rate (for MSIOD I/O bank) | D <sub>MAX</sub> | 700  | Mbps | AC loading: 2 pF/100Ω differential load |

**TABLE 3-208: RSDS AC IMPEDANCE SPECIFICATIONS**

| Parameter              | Symbol         | Typ. | Unit |
|------------------------|----------------|------|------|
| Termination resistance | R <sub>T</sub> | 100  | Ω    |

**TABLE 3-209: RSDS AC TEST PARAMETER SPECIFICATIONS**

| Parameter                                                                                                   | Symbol            | Typ.        | Unit |
|-------------------------------------------------------------------------------------------------------------|-------------------|-------------|------|
| Measuring/trip point for data path                                                                          | V <sub>TRIP</sub> | Cross point | V    |
| Resistance for enable path (T <sub>ZH</sub> , T <sub>ZL</sub> , T <sub>HZ</sub> , T <sub>LZ</sub> )         | R <sub>ENT</sub>  | 2K          | Ω    |
| Capacitive loading for enable path (T <sub>ZH</sub> , T <sub>ZL</sub> , T <sub>HZ</sub> , T <sub>LZ</sub> ) | C <sub>ENT</sub>  | 5           | pF   |

## AC Switching Characteristics

Worst commercial-case conditions:  $T_J = 85\text{ }^{\circ}\text{C}$ ,  $V_{DD} = 1.14\text{V}$ , and  $V_{DDI} = 2.375\text{V}$ .

**TABLE 3-210: RSDS AC SWITCHING CHARACTERISTICS FOR RECEIVER (FOR MSIO I/O BANK—INPUT BUFFERS)**

| On-Die Termination (ODT) | $T_{PY}$ |       | Unit |
|--------------------------|----------|-------|------|
|                          | –1       | –Std  |      |
| None                     | 2.855    | 3.359 | ns   |
| 100                      | 2.85     | 3.353 | ns   |

**TABLE 3-211: RSDS AC SWITCHING CHARACTERISTICS FOR RECEIVER (FOR MSIOD I/O BANK—INPUT BUFFERS)**

| On-Die Termination (ODT) | $T_{PY}$ |       | Unit |
|--------------------------|----------|-------|------|
|                          | –1       | –Std  |      |
| None                     | 2.602    | 3.061 | ns   |
| 100                      | 2.597    | 3.055 | ns   |

**TABLE 3-212: RSDS AC SWITCHING CHARACTERISTICS FOR TRANSMITTER (FOR MSIO I/O BANK—OUTPUT AND TRISTATE BUFFERS)**

| $T_{DP}$ |       | $T_{ZL}$ |       | $T_{ZH}$ |       | $T_{HZ}$ |       | $T_{LZ}$ |      | Unit |
|----------|-------|----------|-------|----------|-------|----------|-------|----------|------|------|
| –1       | –Std  | –1       | –Std  | –1       | –Std  | –1       | –Std  | –1       | –Std |      |
| 2.097    | 2.467 | 2.303    | 2.709 | 2.291    | 2.695 | 1.961    | 2.307 | 1.947    | 2.29 | ns   |

**TABLE 3-213: RSDS AC SWITCHING CHARACTERISTICS FOR TRANSMITTER (FOR MSIOD I/O BANK—OUTPUT AND TRISTATE BUFFERS)**

|                  | $T_{DP}$ |       | $T_{ZL}$ |       | $T_{ZH}$ |       | $T_{HZ}$ |       | $T_{LZ}$ |       | Unit |
|------------------|----------|-------|----------|-------|----------|-------|----------|-------|----------|-------|------|
|                  | –1       | –Std  | –1       | –Std  | –1       | –Std  | –1       | –Std  | –1       | –Std  |      |
| No pre-emphasis  | 1.614    | 1.899 | 1.559    | 1.834 | 1.55     | 1.823 | 1.59     | 1.87  | 1.575    | 1.852 | ns   |
| Min pre-emphasis | 1.604    | 1.887 | 1.742    | 2.05  | 1.728    | 2.032 | 1.889    | 2.222 | 1.858    | 2.185 | ns   |
| Med pre-emphasis | 1.521    | 1.79  | 1.753    | 2.062 | 1.737    | 2.043 | 1.9      | 2.235 | 1.868    | 2.197 | ns   |
| Max pre-emphasis | 1.492    | 1.754 | 1.762    | 2.073 | 1.745    | 2.052 | 1.91     | 2.247 | 1.876    | 2.206 | ns   |

### 3.7.6 LVPECL

Low-Voltage Positive Emitter-Coupled Logic (LVPECL) is another differential I/O standard. It requires that one data bit be carried through two signal lines. Similar to LVDS, two pins are needed. It also requires external resistor termination. IGLOO 2 and SmartFusion 2 SoC FPGAs support only LVPECL receivers and do not support LVPECL transmitters.

#### Minimum and Maximum Input and Output Levels (Applicable to MSIO I/O Bank Only)

**TABLE 3-214: LVPECL RECOMMENDED DC OPERATING CONDITIONS**

| Parameter      | Symbol    | Min. | Typ. | Max. | Unit |
|----------------|-----------|------|------|------|------|
| Supply voltage | $V_{DDI}$ | 3.15 | 3.3  | 3.45 | V    |

**TABLE 3-215: LVPECL DC INPUT VOLTAGE SPECIFICATION**

| Parameter        | Symbol | Min. | Max. | Unit |
|------------------|--------|------|------|------|
| DC input voltage | $V_I$  | 0    | 3.45 | V    |

**TABLE 3-216: LVPECL DC DIFFERENTIAL VOLTAGE SPECIFICATION**

| Parameter                  | Symbol      | Min. | Typ. | Max.  | Unit |
|----------------------------|-------------|------|------|-------|------|
| Input common mode voltage  | $V_{ICM}$   | 0.3  |      | 2.8   | V    |
| Input differential voltage | $V_{IDIFF}$ | 100  | 300  | 1,000 | mV   |

**TABLE 3-217: LVPECL MINIMUM AND MAXIMUM AC SWITCHING SPEEDS**

| Parameter         | Symbol    | Max. | Unit |
|-------------------|-----------|------|------|
| Maximum data rate | $D_{MAX}$ | 900  | Mbps |

### AC Switching Characteristics

Worst commercial-case conditions:  $T_J = 85^\circ\text{C}$ ,  $V_{DD} = 1.14\text{V}$ , and  $V_{DDI} = 2.375\text{V}$ .

**TABLE 3-218: LVPECL RECEIVER CHARACTERISTICS FOR MSIO I/O BANK**


| On-Die Termination (ODT) | $T_{PY}$ |       | Unit |
|--------------------------|----------|-------|------|
|                          | -1       | -Std  |      |
| None                     | 2.572    | 3.025 | ns   |
| 100                      | 2.569    | 3.023 | ns   |

## 3.8 I/O Register Specifications


This section describes input and output register specifications.

### 3.8.1 INPUT REGISTER

**FIGURE 3-6: TIMING MODEL FOR INPUT REGISTER**

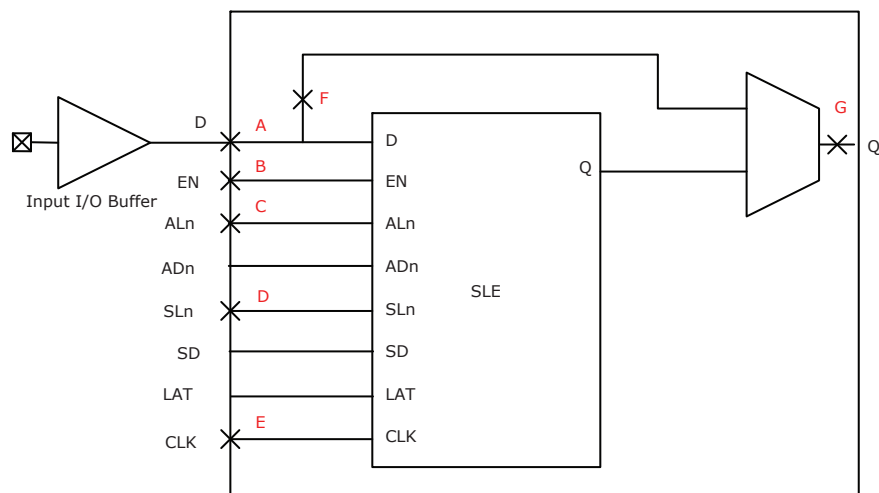

**FIGURE 3-7: I/O REGISTER INPUT TIMING DIAGRAM**

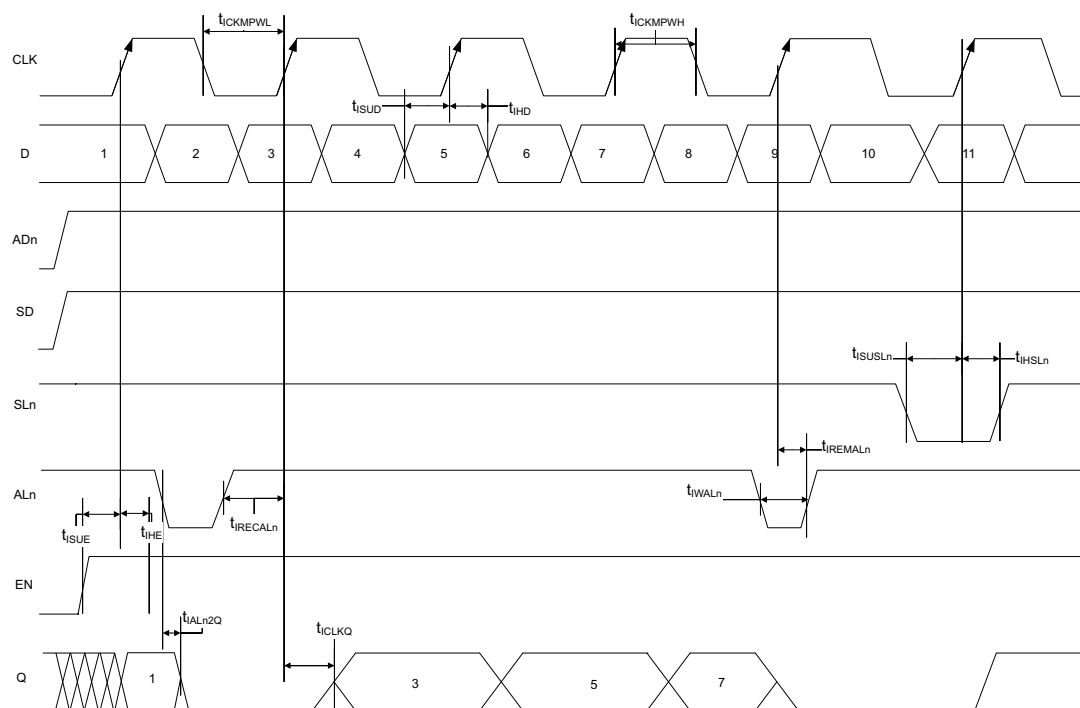

The following table lists the input data register propagation delays in worst commercial-case conditions when  $T_J = 85^\circ\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .


**TABLE 3-219: INPUT DATA REGISTER PROPAGATION DELAYS**

| Parameter                                                    | Symbol        | Measuring Nodes (from, to) | -1    | -Std  | Unit |
|--------------------------------------------------------------|---------------|----------------------------|-------|-------|------|
| Bypass delay of the input register                           | $T_{IBYP}$    | F, G                       | 0.353 | 0.415 | ns   |
| Clock-to-Q of the input register                             | $T_{ICLKQ}$   | E, G                       | 0.16  | 0.188 | ns   |
| Data setup time for the input register                       | $T_{ISUD}$    | A, E                       | 0.357 | 0.421 | ns   |
| Data hold time for the input register                        | $T_{IHD}$     | A, E                       | 0     | 0     | ns   |
| Enable setup time for the input register                     | $T_{ISUE}$    | B, E                       | 0.46  | 0.542 | ns   |
| Enable hold time for the input register                      | $T_{IHE}$     | B, E                       | 0     | 0     | ns   |
| Synchronous load setup time for the input register           | $T_{ISUSL}$   | D, E                       | 0.46  | 0.542 | ns   |
| Synchronous load hold time for the input register            | $T_{IHSL}$    | D, E                       | 0     | 0     | ns   |
| Asynchronous clear-to-Q of the input register ( $ADn=1$ )    | $T_{IALN2Q}$  | C, G                       | 0.625 | 0.735 | ns   |
| Asynchronous preset-to-Q of the input register ( $ADn=0$ )   |               | C, G                       | 0.587 | 0.69  | ns   |
| Asynchronous load removal time for the input register        | $T_{IREMALN}$ | C, E                       | 0     | 0     | ns   |
| Asynchronous load recovery time for the input register       | $T_{IRECALN}$ | C, E                       | 0.074 | 0.087 | ns   |
| Asynchronous load minimum pulse width for the input register | $T_{IWALN}$   | C, C                       | 0.304 | 0.357 | ns   |
| Clock minimum pulse width high for the input register        | $T_{ICKMPWH}$ | E, E                       | 0.075 | 0.088 | ns   |
| Clock minimum pulse width low for the input register         | $T_{ICKMPWL}$ | E, E                       | 0.159 | 0.187 | ns   |


For the derating values at specific junction temperature and voltage supply levels, see [Table 3-14](#) for derating values.

### 3.8.2 OUTPUT/ENABLE REGISTER

**FIGURE 3-8: TIMING MODEL FOR OUTPUT/ENABLE REGISTER**

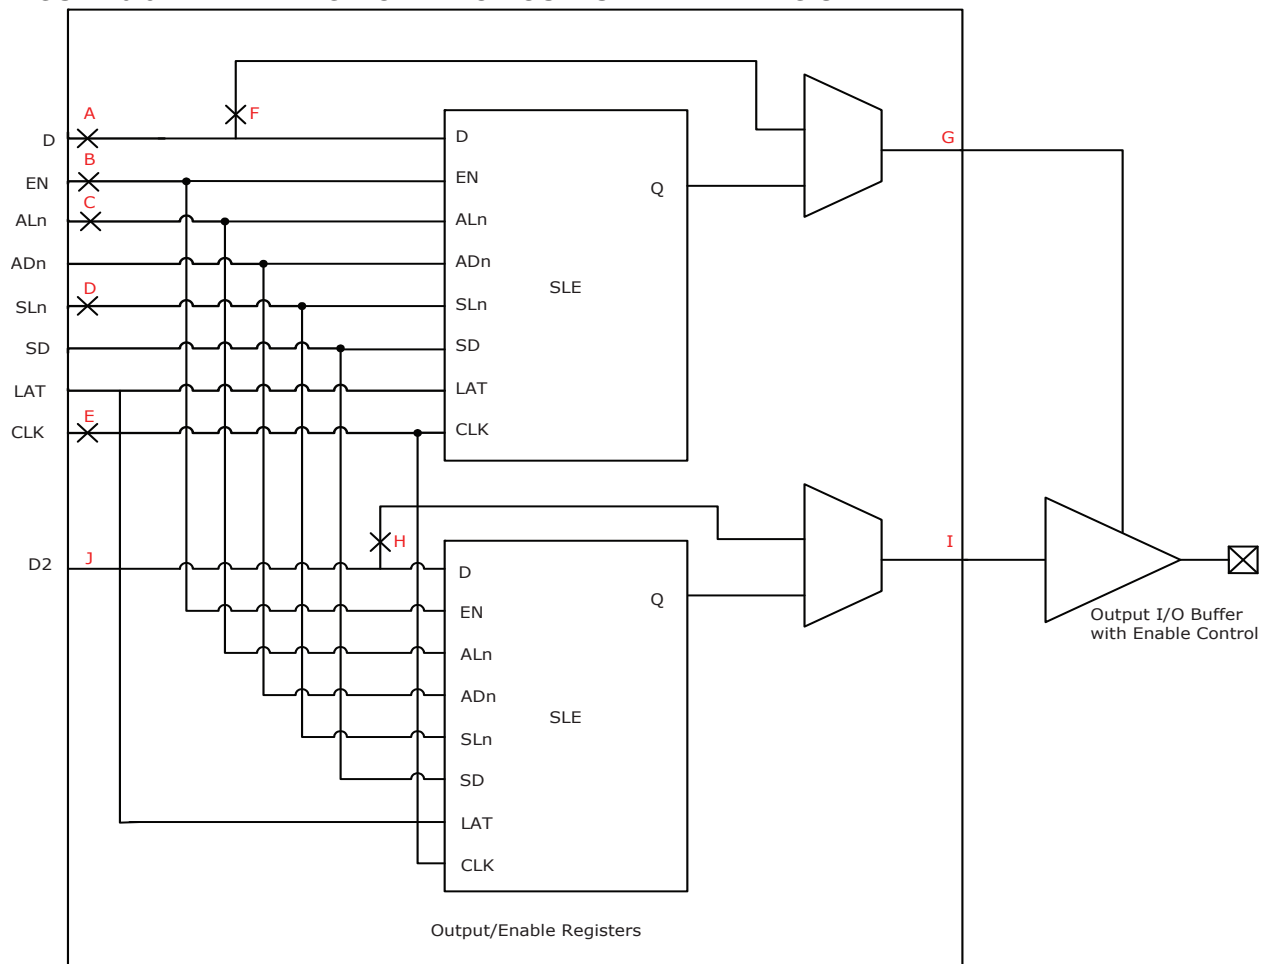

**FIGURE 3-9: I/O REGISTER OUTPUT TIMING DIAGRAM**

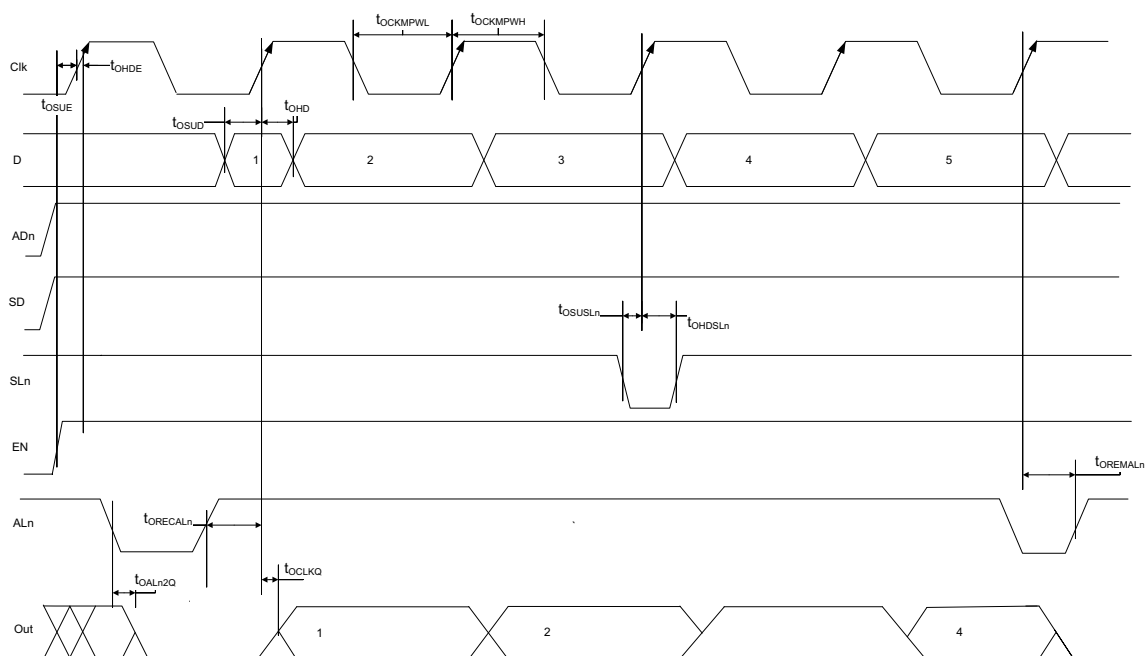

The following table lists the output/enable propagation delays in worst commercial-case conditions when  $T_J = 85^\circ\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-220: OUTPUT/ENABLE DATA REGISTER PROPAGATION DELAYS**

| Parameter                                                            | Symbol         | Measuring Nodes (from, to) | -1    | -Std  | Unit |
|----------------------------------------------------------------------|----------------|----------------------------|-------|-------|------|
| Bypass delay of the output/enable register                           | $T_{OBYP}$     | F, G or H, I               | 0.353 | 0.415 | ns   |
| Clock-to-Q of the output/enable register                             | $T_{OCLKQ}$    | E, G or E, I               | 0.263 | 0.309 | ns   |
| Data setup time for the output/enable register                       | $T_{OSUD}$     | A, E or J, E               | 0.19  | 0.223 | ns   |
| Data hold time for the output/enable register                        | $T_{OHD}$      | A, E or J, E               | 0     | 0     | ns   |
| Enable setup time for the output/enable register                     | $T_{OSUE}$     | B, E                       | 0.419 | 0.493 | ns   |
| Enable hold time for the output/enable register                      | $T_{OHE}$      | B, E                       | 0     | 0     | ns   |
| Synchronous load setup time for the output/enable register           | $T_{OSUSL}$    | D, E                       | 0.196 | 0.231 | ns   |
| Synchronous load hold time for the output/enable register            | $T_{OHSL}$     | D, E                       | 0     | 0     | ns   |
| Asynchronous clear-to-q of the output/enable register ( $ADn = 1$ )  | $T_{OALN2Q}$   | C, G or C, I               | 0.505 | 0.594 | ns   |
| Asynchronous preset-to-q of the output/enable register ( $ADn = 0$ ) |                | C, G or C, I               | 0.528 | 0.621 | ns   |
| Asynchronous load removal time for the output/enable register        | $T_{OREMALN}$  | C, E                       | 0     | 0     | ns   |
| Asynchronous load recovery time for the output/enable register       | $T_{ORECALN}$  | C, E                       | 0.034 | 0.04  | ns   |
| Asynchronous load minimum pulse width for the output/enable register | $T_{OWALN}$    | C, C                       | 0.304 | 0.357 | ns   |
| Clock minimum pulse width high for the output/enable register        | $T_{OACKMPWH}$ | E, E                       | 0.075 | 0.088 | ns   |
| Clock minimum pulse width low for the output/enable register         | $T_{OACKMPWL}$ | E, E                       | 0.159 | 0.187 | ns   |


For the derating values at specific junction temperature and voltage supply levels, see [Table 3-14](#) for derating values.

### 3.9 DDR Module Specification

This section describes input and output DDR module and timing specifications.


#### 3.9.1 INPUT DDR MODULE

**FIGURE 3-10: INPUT DDR MODULE**

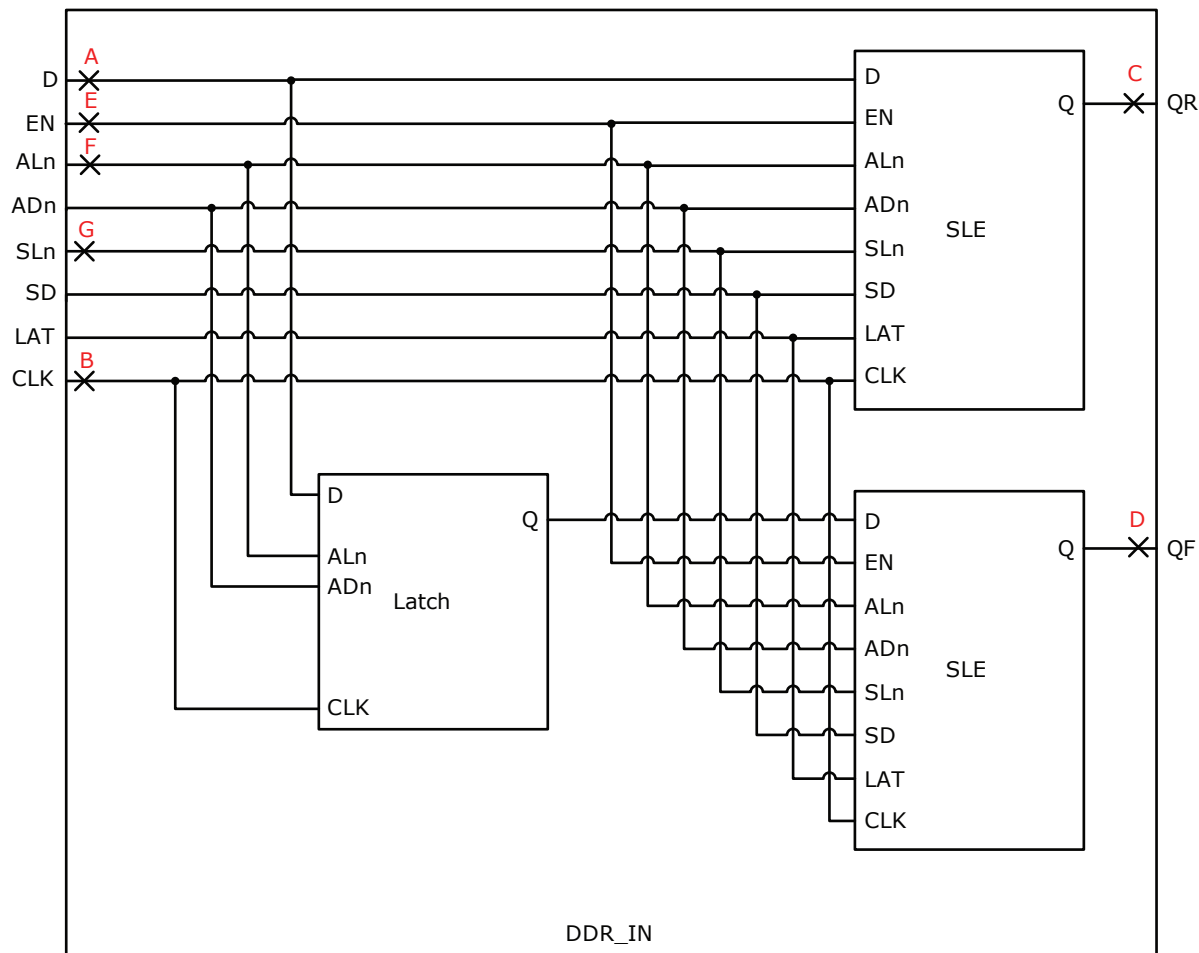

#### 3.9.2 INPUT DDR TIMING DIAGRAM

**FIGURE 3-11: INPUT DDR TIMING DIAGRAM**

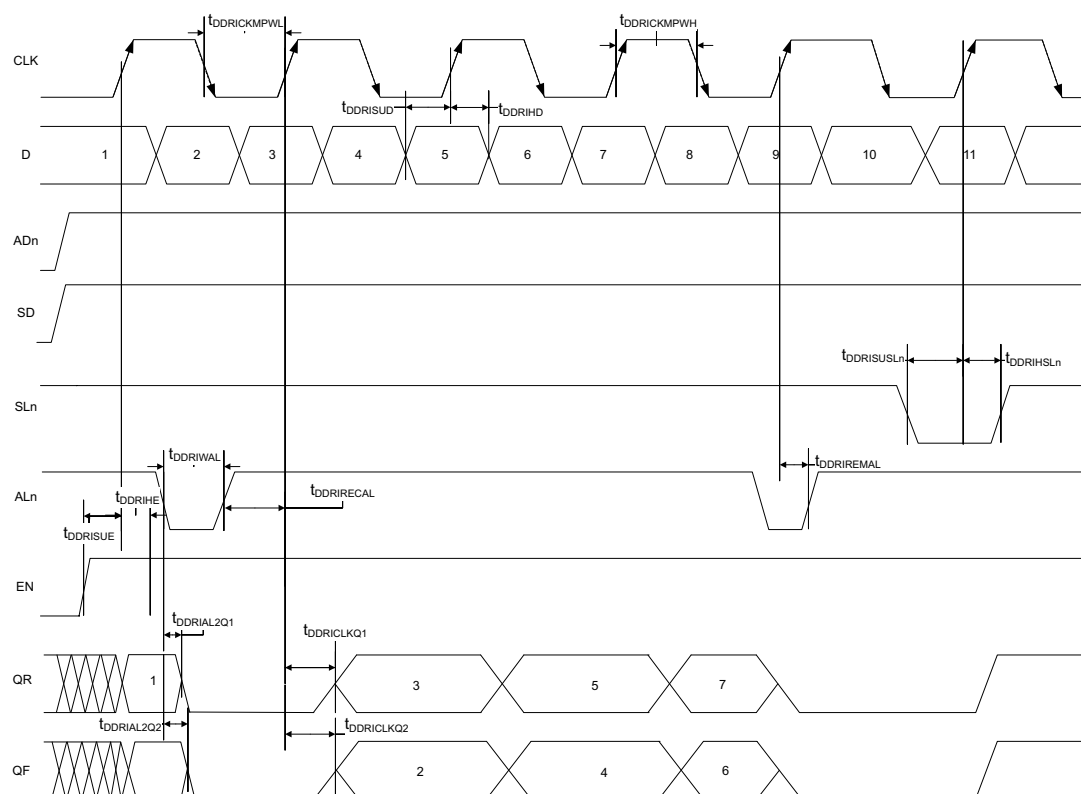

### 3.9.3 TIMING CHARACTERISTICS

The following table lists the input DDR propagation delays in worst commercial-case conditions when  $T_J = 85^\circ\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-221: INPUT DDR PROPAGATION DELAYS**


| Symbol           | Description                                         | Measuring Nodes<br>(from, to) | -1    | -Std  | Unit |
|------------------|-----------------------------------------------------|-------------------------------|-------|-------|------|
| $T_{DDRICKQ1}$   | Clock-to-Out Out_QR for input DDR                   | B, C                          | 0.16  | 0.188 | ns   |
| $T_{DDRICKQ2}$   | Clock-to-Out Out_QF for input DDR                   | B, D                          | 0.166 | 0.195 | ns   |
| $T_{DDRISUD}$    | Data setup for input DDR                            | A, B                          | 0.357 | 0.421 | ns   |
| $T_{DDRHD}$      | Data hold for input DDR                             | A, B                          | 0     | 0     | ns   |
| $T_{DDRISUE}$    | Enable setup for input DDR                          | E, B                          | 0.46  | 0.542 | ns   |
| $T_{DDRIHE}$     | Enable hold for input DDR                           | E, B                          | 0     | 0     | ns   |
| $T_{DDRISUSLn}$  | Synchronous load setup for input DDR                | G, B                          | 0.46  | 0.542 | ns   |
| $T_{DDRHSLn}$    | Synchronous load hold for input DDR                 | G, B                          | 0     | 0     | ns   |
| $T_{DDRIAL2Q1}$  | Asynchronous load-to-out QR for input DDR           | F, C                          | 0.587 | 0.69  | ns   |
| $T_{DDRIAL2Q2}$  | Asynchronous load-to-out QF for input DDR           | F, D                          | 0.541 | 0.636 | ns   |
| $T_{DDRIREMAL}$  | Asynchronous load removal time for input DDR        | F, B                          | 0     | 0     | ns   |
| $T_{DDRIRECAL}$  | Asynchronous load recovery time for input DDR       | F, B                          | 0.074 | 0.087 | ns   |
| $T_{DDRIWAL}$    | Asynchronous load minimum pulse width for input DDR | F, F                          | 0.304 | 0.357 | ns   |
| $T_{DDRICKMPWH}$ | Clock minimum pulse width high for input DDR        | B, B                          | 0.075 | 0.088 | ns   |

**TABLE 3-221: INPUT DDR PROPAGATION DELAYS (CONTINUED)**


| Symbol                  | Description                                 | Measuring Nodes<br>(from, to) | -1    | -Std  | Unit |
|-------------------------|---------------------------------------------|-------------------------------|-------|-------|------|
| T <sub>DDRICKMPWL</sub> | Clock minimum pulse width low for input DDR | B, B                          | 0.159 | 0.187 | ns   |

### 3.9.4 OUTPUT DDR MODULE

**FIGURE 3-12: OUTPUT DDR MODULE**

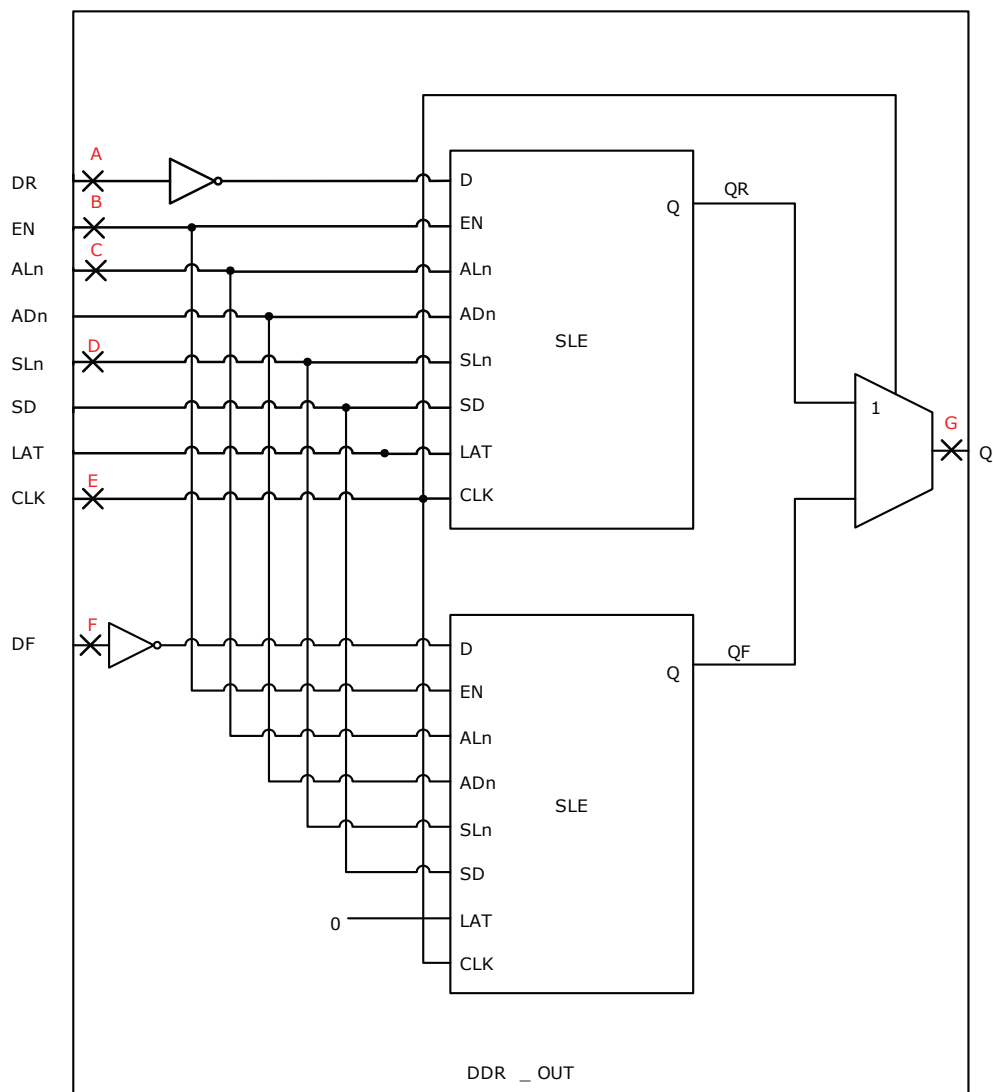

**FIGURE 3-13: OUTPUT DDR TIMING DIAGRAM**

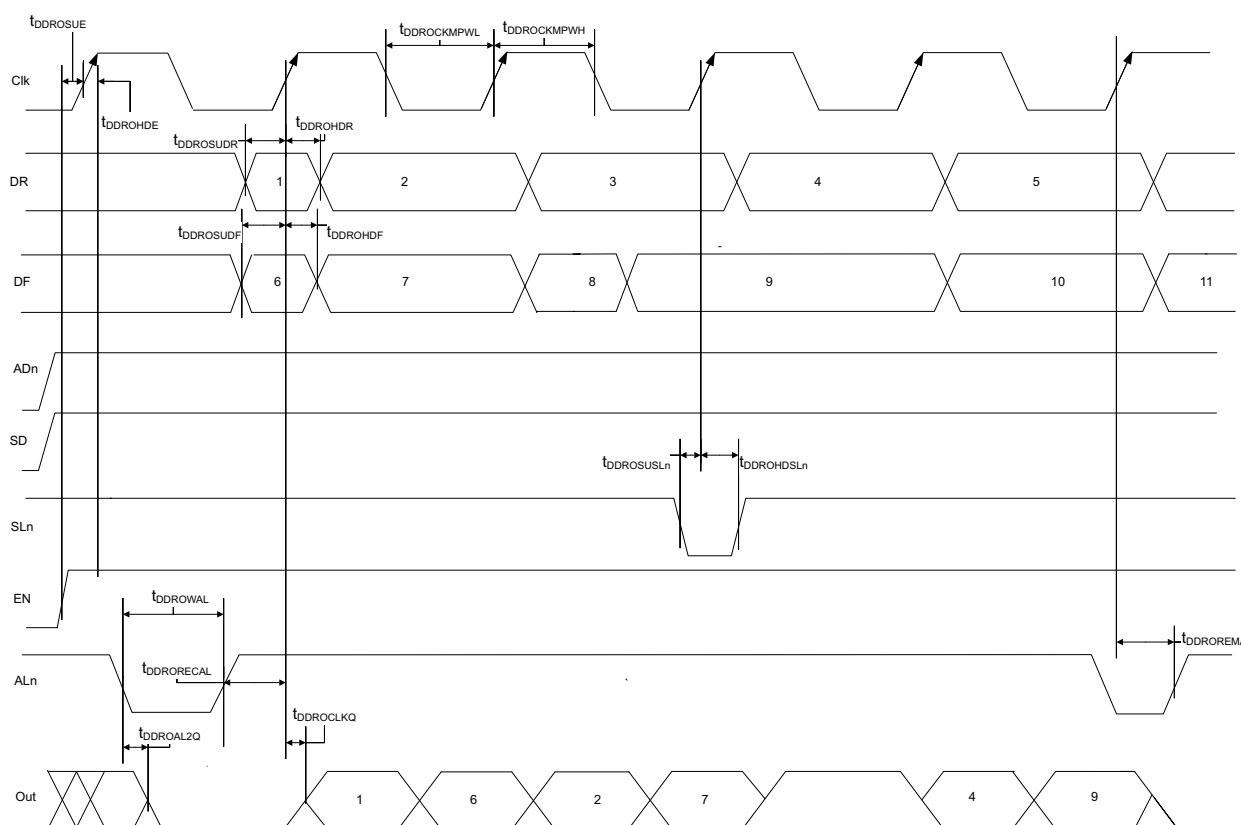

### 3.9.5 TIMING CHARACTERISTICS

The following table lists the output DDR propagation delays in worst commercial-case conditions when  $T_J = 85^\circ\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-222: OUTPUT DDR PROPAGATION DELAYS**

| Symbol           | Description                                          | Measuring Nodes<br>(from, to) | -1    | -Std  | Unit |
|------------------|------------------------------------------------------|-------------------------------|-------|-------|------|
| $T_{DDROCLKQ}$   | Clock-to-out of DDR for output DDR                   | E, G                          | 0.263 | 0.309 | ns   |
| $T_{DDROSUDF}$   | Data_F data setup for output DDR                     | F, E                          | 0.143 | 0.168 | ns   |
| $T_{DDROSUDR}$   | Data_R data setup for output DDR                     | A, E                          | 0.19  | 0.223 | ns   |
| $T_{DDROHDF}$    | Data_F data hold for output DDR                      | F, E                          | 0     | 0     | ns   |
| $T_{DDROHDR}$    | Data_R data hold for output DDR                      | A, E                          | 0     | 0     | ns   |
| $T_{DDROSUE}$    | Enable setup for input DDR                           | B, E                          | 0.419 | 0.493 | ns   |
| $T_{DDROHE}$     | Enable hold for input DDR                            | B, E                          | 0     | 0     | ns   |
| $T_{DDROSUSLn}$  | Synchronous load setup for input DDR                 | D, E                          | 0.196 | 0.231 | ns   |
| $T_{DDROHSLn}$   | Synchronous load hold for input DDR                  | D, E                          | 0     | 0     | ns   |
| $T_{DDROAL2Q}$   | Asynchronous load-to-out for output DDR              | C, G                          | 0.528 | 0.621 | ns   |
| $T_{DDROREMA}$   | Asynchronous load removal time for output DDR        | C, E                          | 0     | 0     | ns   |
| $T_{DDRORECAL}$  | Asynchronous load recovery time for output DDR       | C, E                          | 0.034 | 0.04  | ns   |
| $T_{DDROWAL}$    | Asynchronous load minimum pulse width for output DDR | C, C                          | 0.304 | 0.357 | ns   |
| $T_{DDROCKMPWH}$ | Clock minimum pulse width high for the output DDR    | E, E                          | 0.075 | 0.088 | ns   |

**TABLE 3-222: OUTPUT DDR PROPAGATION DELAYS (CONTINUED)**


| Symbol           | Description                                      | Measuring Nodes (from, to) | -1    | -Std  | Unit |
|------------------|--------------------------------------------------|----------------------------|-------|-------|------|
| $T_{DDROCKMPWL}$ | Clock minimum pulse width low for the output DDR | E, E                       | 0.159 | 0.187 | ns   |

### 3.10 Logic Element Specifications

#### 3.10.1 4-INPUT LUT (LUT-4)

The IGLOO 2 and SmartFusion 2 SoC FPGAs offer a fully permutable 4-input LUT. In this section, timing characteristics are presented for a sample of the library. For more details, see [SmartFusion2 and IGLOO2 Macro Library Guide](#).

**FIGURE 3-14: LUT-4**

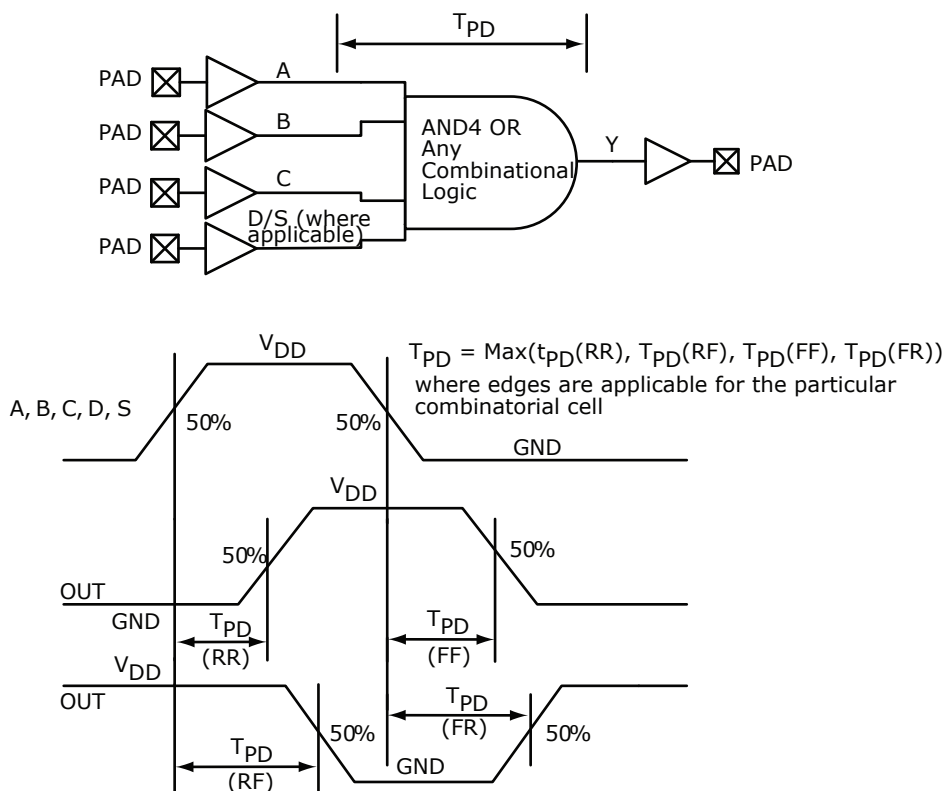

#### 3.10.2 TIMING CHARACTERISTICS

The following table lists the combinational cell propagation delays in worst commercial-case conditions when  $T_J = 85^\circ\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-223: COMBINATORIAL CELL PROPAGATION DELAYS**

| Combinatorial Cell | Equation           | Symbol   | -1    | -Std  | Unit |
|--------------------|--------------------|----------|-------|-------|------|
| INV                | $Y = !A$           | $T_{PD}$ | 0.1   | 0.118 | ns   |
| AND2               | $Y = A \cdot B$    | $T_{PD}$ | 0.164 | 0.193 | ns   |
| NAND2              | $Y = !(A \cdot B)$ | $T_{PD}$ | 0.147 | 0.173 | ns   |
| OR2                | $Y = A + B$        | $T_{PD}$ | 0.164 | 0.193 | ns   |
| NOR2               | $Y = !(A + B)$     | $T_{PD}$ | 0.147 | 0.173 | ns   |
| XOR2               | $Y = A \oplus B$   | $T_{PD}$ | 0.164 | 0.193 | ns   |


|      |                                 |          |       |       |    |
|------|---------------------------------|----------|-------|-------|----|
| XOR3 | $Y = A \oplus B \oplus C$       | $T_{PD}$ | 0.225 | 0.265 | ns |
| AND3 | $Y = A \cdot B \cdot C$         | $T_{PD}$ | 0.209 | 0.246 | ns |
| AND4 | $Y = A \cdot B \cdot C \cdot D$ | $T_{PD}$ | 0.287 | 0.338 | ns |

IGLOO 2 and SmartFusion 2 SoC FPGAs offer a separate flip-flop which can be used independently from the LUT. The flip-flop can be configured as a register or a latch and has a data input and optional enable, synchronous load (clear or preset), and asynchronous load (clear or preset).



The diagram shows a rectangular block representing the SLE register. On the left side, there are eight input lines labeled from top to bottom: D, EN, ALn, ADn, SLn, SD, LAT, and CLK. On the right side, there is a single output line labeled Q. The label 'SLE' is placed inside the block, centered vertically between the SLn and SD inputs.

**FIGURE 3-16: SEQUENTIAL MODULE TIMING DIAGRAM**

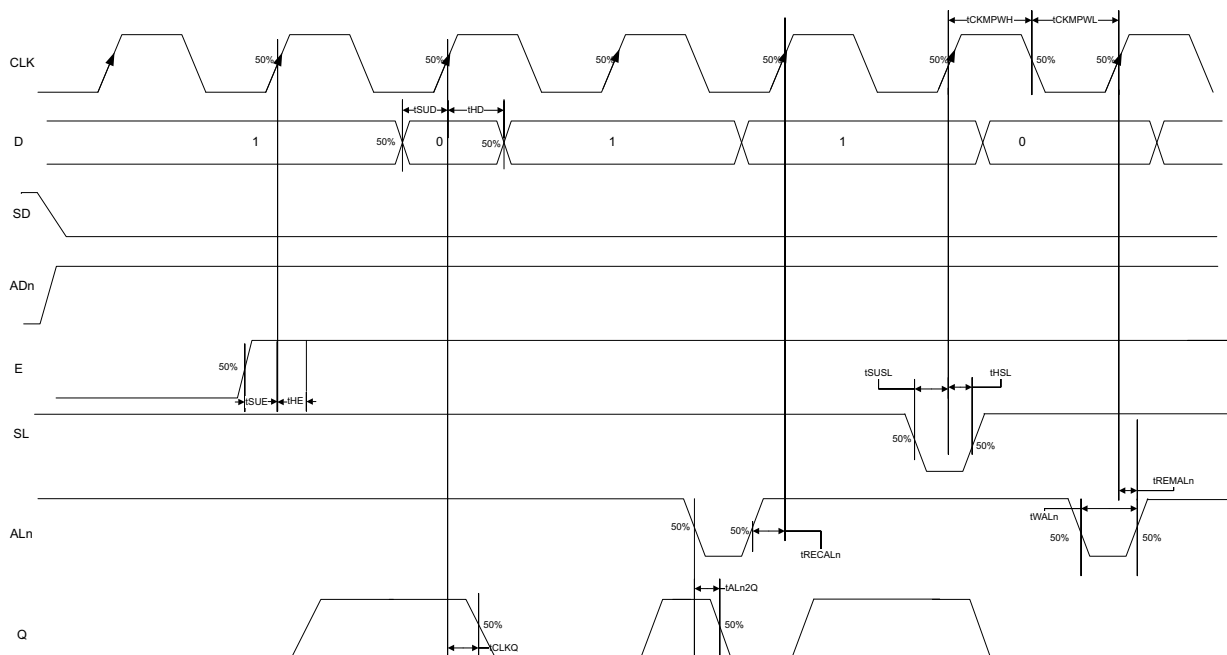

### 3.10.3.1 Timing Characteristics

The following table lists the register delays in worst commercial-case conditions when  $T_J = 85\text{ }^{\circ}\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-224: REGISTER DELAYS**

| Parameter                                                   | Symbol       | –1    | –Std  | Unit |
|-------------------------------------------------------------|--------------|-------|-------|------|
| Clock-to-Q of the core register                             | $T_{CLKQ}$   | 0.108 | 0.127 | ns   |
| Data setup time for the core register                       | $T_{SUD}$    | 0.254 | 0.298 | ns   |
| Data hold time for the core register                        | $T_{HD}$     | 0     | 0     | ns   |
| Enable setup time for the core register                     | $T_{SUE}$    | 0.335 | 0.394 | ns   |
| Enable hold time for the core register                      | $T_{HE}$     | 0     | 0     | ns   |
| Synchronous load setup time for the core register           | $T_{SUSL}$   | 0.335 | 0.394 | ns   |
| Synchronous load hold time for the core register            | $T_{HSL}$    | 0     | 0     | ns   |
| Asynchronous Clear-to-Q of the core register ( $ADn = 1$ )  | $T_{ALN2Q}$  | 0.473 | 0.556 | ns   |
| Asynchronous preset-to-Q of the core register ( $ADn = 0$ ) |              | 0.451 | 0.531 | ns   |
| Asynchronous load removal time for the core register        | $T_{REMLN}$  | 0     | 0     | ns   |
| Asynchronous load recovery time for the core register       | $T_{RECALN}$ | 0.353 | 0.415 | ns   |
| Asynchronous load minimum pulse width for the core register | $T_{WALN}$   | 0.266 | 0.313 | ns   |
| Clock minimum pulse width high for the core register        | $T_{CKMPWH}$ | 0.065 | 0.077 | ns   |
| Clock minimum pulse width low for the core register         | $T_{CKMPWL}$ | 0.139 | 0.164 | ns   |

## 3.11 Global Resource Characteristics

The IGLOO 2 and SmartFusion 2 SoC FPGA devices offer a powerful, low skew global routing network which provides an effective clock distribution throughout the FPGA fabric. See [UG0445: IGLOO2 FPGA and SmartFusion2 SoC FPGA Fabric User Guide](#) for the positions of various global routing resources.

The following table lists the 150 device global resources in worst commercial-case conditions when  $T_J = 85\text{ }^{\circ}\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-225: 150 DEVICE GLOBAL RESOURCE**

| Parameter                         | Symbol      | –1    |       | –Std  |       | Unit |
|-----------------------------------|-------------|-------|-------|-------|-------|------|
|                                   |             | Min.  | Max.  | Min.  | Max.  |      |
| Input low delay for global clock  | $T_{RCKL}$  | 0.83  | 0.911 | 0.831 | 0.913 | ns   |
| Input high delay for global clock | $T_{RCKH}$  | 1.457 | 1.588 | 1.715 | 1.869 | ns   |
| Maximum skew for global clock     | $T_{RCKSW}$ | —     | 0.131 | —     | 0.154 | ns   |

The following table lists the 090 device global resources in worst commercial-case conditions when  $T_J = 85\text{ }^{\circ}\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-226: 090 DEVICE GLOBAL RESOURCE**

| Parameter                         | Symbol      | –1    |       | –Std  |       | Unit |
|-----------------------------------|-------------|-------|-------|-------|-------|------|
|                                   |             | Min.  | Max.  | Min.  | Max.  |      |
| Input low delay for global clock  | $T_{RCKL}$  | 0.835 | 0.888 | 0.833 | 0.886 | ns   |
| Input high delay for global clock | $T_{RCKH}$  | 1.405 | 1.489 | 1.654 | 1.752 | ns   |
| Maximum skew for global clock     | $T_{RCKSW}$ | —     | 0.084 | —     | 0.098 | ns   |

The following table lists the 050 device global resources in worst commercial-case conditions when  $T_J = 85\text{ }^{\circ}\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-227: 050 DEVICE GLOBAL RESOURCE**

| Parameter                         | Symbol             | –1    |       | –Std  |       | Unit |
|-----------------------------------|--------------------|-------|-------|-------|-------|------|
|                                   |                    | Min.  | Max.  | Min.  | Max.  |      |
| Input low delay for global clock  | T <sub>RCKL</sub>  | 0.827 | 0.897 | 0.826 | 0.896 | ns   |
| Input high delay for global clock | T <sub>RCKH</sub>  | 1.419 | 1.53  | 1.671 | 1.8   | ns   |
| Maximum skew for global clock     | T <sub>RCKSW</sub> | —     | 0.111 | —     | 0.129 | ns   |

The following table lists the 025 device global resources in worst commercial-case conditions when T<sub>J</sub> = 85 °C, V<sub>DD</sub> = 1.14V.

**TABLE 3-228: 025 DEVICE GLOBAL RESOURCE**

| Parameter                         | Symbol             | –1    |       | –Std  |       | Unit |
|-----------------------------------|--------------------|-------|-------|-------|-------|------|
|                                   |                    | Min.  | Max.  | Min.  | Max.  |      |
| Input low delay for global clock  | T <sub>RCKL</sub>  | 0.747 | 0.799 | 0.745 | 0.797 | ns   |
| Input high delay for global clock | T <sub>RCKH</sub>  | 1.294 | 1.378 | 1.522 | 1.621 | ns   |
| Maximum skew for global clock     | T <sub>RCKSW</sub> | —     | 0.084 | —     | 0.099 | ns   |

The following table lists the 010 device global resources in worst commercial-case conditions when T<sub>J</sub> = 85 °C, V<sub>DD</sub> = 1.14V.

**TABLE 3-229: 010 DEVICE GLOBAL RESOURCE**

| Parameter                         | Symbol             | –1    |       | –Std  |       | Unit |
|-----------------------------------|--------------------|-------|-------|-------|-------|------|
|                                   |                    | Min.  | Max.  | Min.  | Max.  |      |
| Input low delay for global clock  | T <sub>RCKL</sub>  | 0.626 | 0.669 | 0.627 | 0.668 | ns   |
| Input high delay for global clock | T <sub>RCKH</sub>  | 1.112 | 1.182 | 1.308 | 1.393 | ns   |
| Maximum skew for global clock     | T <sub>RCKSW</sub> | —     | 0.07  | —     | 0.085 | ns   |

The following table lists the 005 device global resources in worst commercial-case conditions when T<sub>J</sub> = 85 °C, V<sub>DD</sub> = 1.14V.

**TABLE 3-230: 005 DEVICE GLOBAL RESOURCE**

| Parameter                         | Symbol             | –1    |       | –Std  |       | Unit |
|-----------------------------------|--------------------|-------|-------|-------|-------|------|
|                                   |                    | Min.  | Max.  | Min.  | Max.  |      |
| Input low delay for global clock  | T <sub>RCKL</sub>  | 0.625 | 0.66  | 0.628 | 0.66  | ns   |
| Input high delay for global clock | T <sub>RCKH</sub>  | 1.126 | 1.187 | 1.325 | 1.397 | ns   |
| Maximum skew for global clock     | T <sub>RCKSW</sub> | —     | 0.061 | —     | 0.072 | ns   |

## 3.12 FPGA Fabric SRAM

See [UG0445: IGLOO2 FPGA and SmartFusion2 SoC FPGA Fabric User Guide](#) for more information.

### 3.12.1 FPGA FABRIC LARGE SRAM (LSRAM)

The following table lists the RAM1K18—dual-port mode for depth × width configuration 1K × 18 in worst commercial-case conditions when T<sub>J</sub> = 85 °C, V<sub>DD</sub> = 1.14V.

**TABLE 3-231: RAM1K18—DUAL-PORT MODE FOR DEPTH × WIDTH CONFIGURATION 1K × 18**

| Parameter                                                              | Symbol                 | –1     |       | –Std  |       | Unit |
|------------------------------------------------------------------------|------------------------|--------|-------|-------|-------|------|
|                                                                        |                        | Min.   | Max.  | Min.  | Max.  |      |
| Clock period                                                           | T <sub>CY</sub>        | 2.5    | —     | 2.941 | —     | ns   |
| Clock minimum pulse width high                                         | T <sub>CLKMPWH</sub>   | 1.125  | —     | 1.323 | —     | ns   |
| Clock minimum pulse width low                                          | T <sub>CLKMPWL</sub>   | 1.125  | —     | 1.323 | —     | ns   |
| Pipelined clock period                                                 | T <sub>PLCY</sub>      | 2.5    | —     | 2.941 | —     | ns   |
| Pipelined clock minimum pulse width high                               | T <sub>PLCLKMPWH</sub> | 1.125  | —     | 1.323 | —     | ns   |
| Pipelined clock minimum pulse width low                                | T <sub>PLCLKMPWL</sub> | 1.125  | —     | 1.323 | —     | ns   |
| Read access time with pipeline register                                | T <sub>CLK2Q</sub>     | —      | 0.334 | —     | 0.393 | ns   |
| Read access time without pipeline register                             |                        | —      | 2.273 | —     | 2.674 | ns   |
| Access time with feed-through write timing                             |                        | —      | 2.273 | —     | 2.674 | ns   |
| Address setup time                                                     | T <sub>ADDRSU</sub>    | 0.441  | —     | 0.519 | —     | ns   |
| Address hold time                                                      | T <sub>ADDRHD</sub>    | 0.274  | —     | 0.322 | —     | ns   |
| Data setup time                                                        | T <sub>DSU</sub>       | 0.341  | —     | 0.401 | —     | ns   |
| Data hold time                                                         | T <sub>DHD</sub>       | 0.107  | —     | 0.126 | —     | ns   |
| Block select setup time                                                | T <sub>BLKSU</sub>     | 0.207  | —     | 0.244 | —     | ns   |
| Block select hold time                                                 | T <sub>BLKHD</sub>     | 0.216  | —     | 0.254 | —     | ns   |
| Block select to out disable time (when pipelined register is disabled) | T <sub>BLK2Q</sub>     | —      | 1.529 | —     | 1.799 | ns   |
| Block select minimum pulse width                                       | T <sub>BLKMPW</sub>    | 0.186  | —     | 0.219 | —     | ns   |
| Read enable setup time                                                 | T <sub>RDESU</sub>     | 0.449  | —     | 0.528 | —     | ns   |
| Read enable hold time                                                  | T <sub>RDEHD</sub>     | 0.167  | —     | 0.197 | —     | ns   |
| Pipelined read enable setup time (A_DOUT_EN, B_D-OUT_EN)               | T <sub>RDPLESU</sub>   | 0.248  | —     | 0.291 | —     | ns   |
| Pipelined read enable hold time (A_DOUT_EN, B_D-OUT_EN)                | T <sub>RDPLEHD</sub>   | 0.102  | —     | 0.12  | —     | ns   |
| Asynchronous reset to output propagation delay                         | T <sub>R2Q</sub>       | —      | 1.506 | —     | 1.772 | ns   |
| Asynchronous reset removal time                                        | T <sub>RSTREM</sub>    | 0.506  | —     | 0.595 | —     | ns   |
| Asynchronous reset recovery time                                       | T <sub>RSTREC</sub>    | 0.004  | —     | 0.005 | —     | ns   |
| Asynchronous reset minimum pulse width                                 | T <sub>RSTMPW</sub>    | 0.301  | —     | 0.354 | —     | ns   |
| Pipelined register asynchronous reset removal time                     | T <sub>PLRSTREM</sub>  | –0.279 | —     | —     | 0.328 | ns   |
| Pipelined register asynchronous reset recovery time                    | T <sub>PLRSTREC</sub>  | 0.327  | —     | 0.385 | —     | ns   |
| Pipelined register asynchronous reset minimum pulse width              | T <sub>PLRSTMPW</sub>  | 0.282  | —     | 0.332 | —     | ns   |
| Synchronous reset setup time                                           | T <sub>SRSTSU</sub>    | 0.226  | —     | 0.265 | —     | ns   |
| Synchronous reset hold time                                            | T <sub>SRSTHD</sub>    | 0.036  | —     | 0.043 | —     | ns   |
| Write enable setup time                                                | T <sub>WESU</sub>      | 0.39   | —     | 0.458 | —     | ns   |
| Write enable hold time                                                 | T <sub>WEHD</sub>      | 0.242  | —     | 0.285 | —     | ns   |
| Maximum frequency                                                      | F <sub>MAX</sub>       | —      | 400   | —     | 340   | MHz  |

The following table lists the RAM1K18 – dual-port mode for depth × width configuration 2K × 9 in worst commercial-case conditions when  $T_J = 85\text{ }^{\circ}\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-232: RAM1K18—DUAL-PORT MODE FOR DEPTH × WIDTH CONFIGURATION 2K × 9**

| Parameter                                                              | Symbol          | –1     |       | –Std  |       | Unit |
|------------------------------------------------------------------------|-----------------|--------|-------|-------|-------|------|
|                                                                        |                 | Min.   | Max.  | Min.  | Max.  |      |
| Clock period                                                           | $T_{CY}$        | 2.5    | —     | 2.941 | —     | ns   |
| Clock minimum pulse width high                                         | $T_{CLKMPWH}$   | 1.125  | —     | 1.323 | —     | ns   |
| Clock minimum pulse width low                                          | $T_{CLKMPWL}$   | 1.125  | —     | 1.323 | —     | ns   |
| Pipelined clock period                                                 | $T_{PLCY}$      | 2.5    | —     | 2.941 | —     | ns   |
| Pipelined clock minimum pulse width high                               | $T_{PLCLKMPWH}$ | 1.125  | —     | 1.323 | —     | ns   |
| Pipelined clock minimum pulse width low                                | $T_{PLCLKMPWL}$ | 1.125  | —     | 1.323 | —     | ns   |
| Read access time with pipeline register                                | $T_{CLK2Q}$     | —      | 0.334 | —     | 0.393 | ns   |
| Read access time without pipeline register                             |                 | —      | 2.273 | —     | 2.674 | ns   |
| Access time with feed-through write timing                             |                 | —      | 2.273 | —     | 2.674 | ns   |
| Address setup time                                                     | $T_{ADDRSU}$    | 0.475  | —     | 0.559 | —     | ns   |
| Address hold time                                                      | $T_{ADDRHD}$    | 0.274  | —     | 0.322 | —     | ns   |
| Data setup time                                                        | $T_{DSU}$       | 0.336  | —     | 0.395 | —     | ns   |
| Data hold time                                                         | $T_{DHD}$       | 0.082  | —     | 0.096 | —     | ns   |
| Block select setup time                                                | $T_{BLKSU}$     | 0.207  | —     | 0.244 | —     | ns   |
| Block select hold time                                                 | $T_{BLKHD}$     | 0.216  | —     | 0.254 | —     | ns   |
| Block select to out disable time (when pipelined register is disabled) | $T_{BLK2Q}$     | —      | 1.529 | —     | 1.799 | ns   |
| Block select minimum pulse width                                       | $T_{BLKMPW}$    | 0.186  | —     | 0.219 | —     | ns   |
| Read enable setup time                                                 | $T_{RDESU}$     | 0.485  | —     | 0.57  | —     | ns   |
| Read enable hold time                                                  | $T_{RDEHD}$     | 0.071  | —     | 0.083 | —     | ns   |
| Pipelined read enable setup time (A_DOUT_EN, B_D-OUT_EN)               | $T_{RDPLESU}$   | 0.248  | —     | 0.291 | —     | ns   |
| Pipelined read enable hold time (A_DOUT_EN, B_D-OUT_EN)                | $T_{RDPLEHD}$   | 0.102  | —     | 0.12  | —     | ns   |
| Asynchronous reset to output propagation delay                         | $T_{R2Q}$       | —      | 1.514 | —     | 1.781 | ns   |
| Asynchronous reset removal time                                        | $T_{RSTREM}$    | 0.506  | —     | 0.595 | —     | ns   |
| Asynchronous reset recovery time                                       | $T_{RSTREC}$    | 0.004  | —     | 0.005 | —     | ns   |
| Asynchronous reset minimum pulse width                                 | $T_{RSTMPW}$    | 0.301  | —     | 0.354 | —     | ns   |
| Pipelined register asynchronous reset removal time                     | $T_{PLRSTREM}$  | –0.279 | —     | —     | 0.328 | ns   |
| Pipelined register asynchronous reset recovery time                    | $T_{PLRSTREC}$  | 0.327  | —     | 0.385 | —     | ns   |
| Pipelined register asynchronous reset minimum pulse width              | $T_{PLRSTMPW}$  | 0.282  | —     | 0.332 | —     | ns   |
| Synchronous reset setup time                                           | $T_{SRSTSU}$    | 0.226  | —     | 0.265 | —     | ns   |
| Synchronous reset hold time                                            | $T_{SRSTHD}$    | 0.036  | —     | 0.043 | —     | ns   |
| Write enable setup time                                                | $T_{WESU}$      | 0.415  | —     | 0.488 | —     | ns   |
| Write enable hold time                                                 | $T_{WEHD}$      | 0.048  | —     | 0.057 | —     | ns   |
| Maximum frequency                                                      | $F_{MAX}$       | —      | 400   | —     | 340   | MHz  |

The following table lists the RAM1K18—dual-port mode for depth × width configuration 4K × 4 in worst commercial-case conditions when  $T_J = 85\text{ }^{\circ}\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-233: RAM1K18—DUAL-PORT MODE FOR DEPTH × WIDTH CONFIGURATION 4K × 4**

| Parameter                                                              | Symbol          | –1     |       | –Std   |       | Unit |
|------------------------------------------------------------------------|-----------------|--------|-------|--------|-------|------|
|                                                                        |                 | Min.   | Max.  | Min.   | Max.  |      |
| Clock period                                                           | $T_{CY}$        | 2.5    | —     | 2.941  | —     | ns   |
| Clock minimum pulse width high                                         | $T_{CLKMPWH}$   | 1.125  | —     | 1.323  | —     | ns   |
| Clock minimum pulse width low                                          | $T_{CLKMPWL}$   | 1.125  | —     | 1.323  | —     | ns   |
| Pipelined clock period                                                 | $T_{PLCY}$      | 2.5    | —     | 2.941  | —     | ns   |
| Pipelined clock minimum pulse width high                               | $T_{PLCLKMPWH}$ | 1.125  | —     | 1.323  | —     | ns   |
| Pipelined clock minimum pulse width low                                | $T_{PLCLKMPWL}$ | 1.125  | —     | 1.323  | —     | ns   |
| Read access time with pipeline register                                | $T_{CLK2Q}$     | —      | 0.323 |        | 0.38  | ns   |
| Read access time without pipeline register                             |                 | —      | 2.273 |        | 2.673 | ns   |
| Access time with feed-through write timing                             |                 | —      | 2.273 |        | 2.673 | ns   |
| Address setup time                                                     | $T_{ADDRSU}$    | 0.543  | —     | 0.638  | —     | ns   |
| Address hold time                                                      | $T_{ADDRHD}$    | 0.274  | —     | 0.322  | —     | ns   |
| Data setup time                                                        | $T_{DSU}$       | 0.334  | —     | 0.393  | —     | ns   |
| Data hold time                                                         | $T_{DHD}$       | 0.082  | —     | 0.096  | —     | ns   |
| Block select setup time                                                | $T_{BLKSU}$     | 0.207  | —     | 0.244  | —     | ns   |
| Block select hold time                                                 | $T_{BLKHD}$     | 0.216  | —     | 0.254  | —     | ns   |
| Block select to out disable time (when pipelined register is disabled) | $T_{BLK2Q}$     | —      | 1.511 | —      | 1.778 | ns   |
| Block select minimum pulse width                                       | $T_{BLKMPW}$    | 0.186  | —     | 0.219  | —     | ns   |
| Read enable setup time                                                 | $T_{RDESU}$     | 0.516  | —     | 0.607  | —     | ns   |
| Read enable hold time                                                  | $T_{RDEHD}$     | 0.071  | —     | 0.083  | —     | ns   |
| Pipelined read enable setup time (A_DOUT_EN, B_DOUT_EN)                | $T_{RDPLESU}$   | 0.248  | —     | 0.291  | —     | ns   |
| Pipelined read enable hold time (A_DOUT_EN, B_DOUT_EN)                 | $T_{RDPLEHD}$   | 0.102  | —     | 0.12   | —     | ns   |
| Asynchronous reset to output propagation delay                         | $T_{R2Q}$       | —      | 1.507 |        | 1.773 | ns   |
| Asynchronous reset removal time                                        | $T_{RSTREM}$    | 0.506  | —     | 0.595  | —     | ns   |
| Asynchronous reset recovery time                                       | $T_{RSTREC}$    | 0.004  | —     | 0.005  | —     | ns   |
| Asynchronous reset minimum pulse width                                 | $T_{RSTMPW}$    | 0.301  | —     | 0.354  | —     | ns   |
| Pipelined register asynchronous reset removal time                     | $T_{PLRSTREM}$  | –0.279 | —     | –0.328 | —     | ns   |
| Pipelined register asynchronous reset recovery time                    | $T_{PLRSTREC}$  | 0.327  | —     | 0.385  | —     | ns   |
| Pipelined register asynchronous reset minimum pulse width              | $T_{PLRSTMPW}$  | 0.282  | —     | 0.332  | —     | ns   |
| Synchronous reset setup time                                           | $T_{SRSTSU}$    | 0.226  | —     | 0.265  | —     | ns   |
| Synchronous reset hold time                                            | $T_{SRSTHD}$    | 0.036  | —     | 0.043  | —     | ns   |
| Write enable setup time                                                | $T_{WESU}$      | 0.458  | —     | 0.539  | —     | ns   |
| Write enable hold time                                                 | $T_{WEHD}$      | 0.048  | —     | 0.057  | —     | ns   |
| Maximum frequency                                                      | $F_{MAX}$       | —      | 400   | —      | 340   | MHz  |

The following table lists the RAM1K18—dual-port mode for depth × width configuration 8K × 2 in worst commercial-case conditions when  $T_J = 85\text{ }^{\circ}\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-234: RAM1K18—DUAL-PORT MODE FOR DEPTH × WIDTH CONFIGURATION 8K × 2**

| Parameter                                                              | Symbol          | –1     |       | –Std   |       | Unit |
|------------------------------------------------------------------------|-----------------|--------|-------|--------|-------|------|
|                                                                        |                 | Min.   | Max.  | Min.   | Max.  |      |
| Clock period                                                           | $T_{CY}$        | 2.5    | —     | 2.941  | —     | ns   |
| Clock minimum pulse width high                                         | $T_{CLKMPWH}$   | 1.125  | —     | 1.323  | —     | ns   |
| Clock minimum pulse width low                                          | $T_{CLKMPWL}$   | 1.125  | —     | 1.323  | —     | ns   |
| Pipelined clock period                                                 | $T_{PLCY}$      | 2.5    | —     | 2.941  | —     | ns   |
| Pipelined clock minimum pulse width high                               | $T_{PLCLKMPWH}$ | 1.125  | —     | 1.323  | —     | ns   |
| Pipelined clock minimum pulse width low                                | $T_{PLCLKMPWL}$ | 1.125  | —     | 1.323  | —     | ns   |
| Read access time with pipeline register                                | $T_{CLK2Q}$     | —      | 0.32  | —      | 0.377 | ns   |
| Read access time without pipeline register                             |                 | —      | 2.272 | —      | 2.673 | ns   |
| Access time with feed-through write timing                             |                 | —      | 2.272 | —      | 2.673 | ns   |
| Address setup time                                                     | $T_{ADDRSU}$    | 0.612  | —     | 0.72   | —     | ns   |
| Address hold time                                                      | $T_{ADDRHD}$    | 0.274  | —     | 0.322  | —     | ns   |
| Data setup time                                                        | $T_{DSU}$       | 0.33   | —     | 0.388  | —     | ns   |
| Data hold time                                                         | $T_{DHD}$       | 0.082  | —     | 0.096  | —     | ns   |
| Block select setup time                                                | $T_{BLKSU}$     | 0.207  | —     | 0.244  | —     | ns   |
| Block select hold time                                                 | $T_{BLKHD}$     | 0.216  | —     | 0.254  | —     | ns   |
| Block select to out disable time (when pipelined register is disabled) | $T_{BLK2Q}$     | —      | 1.511 | —      | 1.778 | ns   |
| Block select minimum pulse width                                       | $T_{BLKMPW}$    | 0.186  | —     | 0.219  | —     | ns   |
| Read enable setup time                                                 | $T_{RDESU}$     | 0.529  | —     | 0.622  | —     | ns   |
| Read enable hold time                                                  | $T_{RDEHD}$     | 0.071  | —     | 0.083  | —     | ns   |
| Pipelined read enable setup time (A_DOUT_EN, B_D-OUT_EN)               | $T_{RDPLESU}$   | 0.248  | —     | 0.291  | —     | ns   |
| Pipelined read enable hold time (A_DOUT_EN, B_D-OUT_EN)                | $T_{RDPLEHD}$   | 0.102  | —     | 0.12   | —     | ns   |
| Asynchronous reset to output propagation delay                         | $T_{R2Q}$       | —      | 1.528 | —      | 1.797 | ns   |
| Asynchronous reset removal time                                        | $T_{RSTREM}$    | 0.506  | —     | 0.595  | —     | ns   |
| Asynchronous reset recovery time                                       | $T_{RSTREC}$    | 0.004  | —     | 0.005  | —     | ns   |
| Asynchronous reset minimum pulse width                                 | $T_{RSTMPW}$    | 0.301  | —     | 0.354  | —     | ns   |
| Pipelined register asynchronous reset removal time                     | $T_{PLRSTREM}$  | –0.279 | —     | –0.328 | —     | ns   |
| Pipelined register asynchronous reset recovery time                    | $T_{PLRSTREC}$  | 0.327  | —     | 0.385  | —     | ns   |
| Pipelined register asynchronous reset minimum pulse width              | $T_{PLRSTMPW}$  | 0.282  | —     | 0.332  | —     | ns   |
| Synchronous reset setup time                                           | $T_{SRSTSU}$    | 0.226  | —     | 0.265  | —     | ns   |
| Synchronous reset hold time                                            | $T_{SRSTHD}$    | 0.036  | —     | 0.043  | —     | ns   |
| Write enable setup time                                                | $T_{WESU}$      | 0.488  | —     | 0.574  | —     | ns   |
| Write enable hold time                                                 | $T_{WEHD}$      | 0.048  | —     | 0.057  | —     | ns   |
| Maximum frequency                                                      | $F_{MAX}$       | —      | 400   | —      | 340   | MHz  |

The following table lists the RAM1K18—dual-port mode for depth × width configuration 16K × 1 in worst commercial-case conditions when  $T_J = 85\text{ }^{\circ}\text{C}$ ,  $V_{DD} = 1.14\text{ V}$ .

**TABLE 3-235: RAM1K18—DUAL-PORT MODE FOR DEPTH × WIDTH CONFIGURATION 16K × 1**

| Parameter                                                              | Symbol           | –1     |       | –Std   |       | Unit |
|------------------------------------------------------------------------|------------------|--------|-------|--------|-------|------|
|                                                                        |                  | Min.   | Max.  | Min.   | Max.  |      |
| Clock period                                                           | $T_{CY}$         | 2.5    | —     | 2.941  | —     | ns   |
| Clock minimum pulse width high                                         | $T_{CLKMPWH}$    | 1.125  | —     | 1.323  | —     | ns   |
| Clock minimum pulse width low                                          | $T_{CLKMPWL}$    | 1.125  | —     | 1.323  | —     | ns   |
| Pipelined clock period                                                 | $T_{PLCY}$       | 2.5    | —     | 2.941  | —     | ns   |
| Pipelined clock minimum pulse width high                               | $T_{PLCLK-MPWH}$ | 1.125  | —     | 1.323  | —     | ns   |
| Pipelined clock minimum pulse width low                                | $T_{PLCLK-MPWL}$ | 1.125  | —     | 1.323  | —     | ns   |
| Read access time with pipeline register                                | $T_{CLK2Q}$      | —      | 0.32  | —      | 0.377 | ns   |
| Read access time without pipeline register                             |                  | —      | 2.269 | —      | 2.669 | ns   |
| Access time with feed-through write timing                             |                  | —      | 2.269 | —      | 2.669 | ns   |
| Address setup time                                                     | $T_{ADDRSU}$     | 0.626  | —     | 0.737  | —     | ns   |
| Address hold time                                                      | $T_{ADDRHD}$     | 0.274  | —     | 0.322  | —     | ns   |
| Data setup time                                                        | $T_{DSU}$        | 0.322  | —     | 0.378  | —     | ns   |
| Data hold time                                                         | $T_{DHD}$        | 0.082  | —     | 0.096  | —     | ns   |
| Block select setup time                                                | $T_{BLKSU}$      | 0.207  | —     | 0.244  | —     | ns   |
| Block select hold time                                                 | $T_{BLKHD}$      | 0.216  | —     | 0.254  | —     | ns   |
| Block select to out disable time (when pipelined register is disabled) | $T_{BLK2Q}$      |        | 1.51  |        | 1.777 | ns   |
| Block select minimum pulse width                                       | $T_{BLKMPW}$     | 0.186  | —     | 0.219  | —     | ns   |
| Read enable setup time                                                 | $T_{RDESU}$      | 0.53   | —     | 0.624  | —     | ns   |
| Read enable hold time                                                  | $T_{RDEHD}$      | 0.071  | —     | 0.083  | —     | ns   |
| Pipelined read enable setup time (A_DOUT_EN, B_DOUT_EN)                | $T_{RDPLESU}$    | 0.248  | —     | 0.291  | —     | ns   |
| Pipelined read enable hold time (A_DOUT_EN, B_DOUT_EN)                 | $T_{RDPLEHD}$    | 0.102  | —     | 0.12   | —     | ns   |
| Asynchronous reset to output propagation delay                         | $T_{R2Q}$        |        | 1.547 |        | 1.82  | ns   |
| Asynchronous reset removal time                                        | $T_{RSTREM}$     | 0.506  | —     | 0.595  |       | ns   |
| Asynchronous reset recovery time                                       | $T_{RSTREC}$     | 0.004  | —     | 0.005  |       | ns   |
| Asynchronous reset minimum pulse width                                 | $T_{RSTMPW}$     | 0.301  | —     | 0.354  |       | ns   |
| Pipelined register asynchronous reset removal time                     | $T_{PLRSTREM}$   | –0.279 | —     | –0.328 |       | ns   |
| Pipelined register asynchronous reset recovery time                    | $T_{PLRSTREC}$   | 0.327  | —     | 0.385  |       | ns   |
| Pipelined register asynchronous reset minimum pulse width              | $T_{PLRSTMPW}$   | 0.282  | —     | 0.332  | —     | ns   |
| Synchronous reset setup time                                           | $T_{SRSTSU}$     | 0.226  | —     | 0.265  | —     | ns   |
| Synchronous reset hold time                                            | $T_{SRSTHD}$     | 0.036  | —     | 0.043  | —     | ns   |
| Write enable setup time                                                | $T_{WESU}$       | 0.454  | —     | 0.534  | —     | ns   |
| Write enable hold time                                                 | $T_{WEHD}$       | 0.048  | —     | 0.057  | —     | ns   |
| Maximum frequency                                                      | $F_{MAX}$        | —      | 400   | —      | 340   | MHz  |

The following table lists the RAM1K18—two-port mode for depth × width configuration 512 × 36 in worst commercial-case conditions when  $T_J = 85\text{ }^{\circ}\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-236: RAM1K18—TWO-PORT MODE FOR DEPTH × WIDTH CONFIGURATION 512 × 36**

| Parameter                                                              | Symbol           | –1     |       | –Std   |       | Unit |
|------------------------------------------------------------------------|------------------|--------|-------|--------|-------|------|
|                                                                        |                  | Min.   | Max.  | Min.   | Max.  |      |
| Clock period                                                           | $T_{CY}$         | 2.5    | —     | 2.941  | —     | ns   |
| Clock minimum pulse width high                                         | $T_{CLKMPWH}$    | 1.125  | —     | 1.323  | —     | ns   |
| Clock minimum pulse width low                                          | $T_{CLKMPWL}$    | 1.125  | —     | 1.323  | —     | ns   |
| Pipelined clock period                                                 | $T_{PLCY}$       | 2.5    | —     | 2.941  | —     | ns   |
| Pipelined clock minimum pulse width high                               | $T_{PLCLK-MPWH}$ | 1.125  | —     | 1.323  | —     | ns   |
| Pipelined clock minimum pulse width low                                | $T_{PLCLK-MPWL}$ | 1.125  | —     | 1.323  | —     | ns   |
| Read access time with pipeline register                                | $T_{CLK2Q}$      | —      | 0.334 | —      | 0.393 | ns   |
| Read access time without pipeline register                             |                  | —      | 2.25  | —      | 2.647 | ns   |
| Address setup time                                                     | $T_{ADDRSU}$     | 0.313  | —     | 0.368  | —     | ns   |
| Address hold time                                                      | $T_{ADDRHD}$     | 0.274  | —     | 0.322  | —     | ns   |
| Data setup time                                                        | $T_{DSU}$        | 0.337  | —     | 0.396  | —     | ns   |
| Data hold time                                                         | $T_{DHD}$        | 0.111  | —     | 0.13   | —     | ns   |
| Block select setup time                                                | $T_{BLKSU}$      | 0.207  | —     | 0.244  | —     | ns   |
| Block select hold time                                                 | $T_{BLKHD}$      | 0.201  | —     | 0.237  | —     | ns   |
| Block select to out disable time (when pipelined register is disabled) | $T_{BLK2Q}$      | —      | 2.25  | —      | 2.647 | ns   |
| Block select minimum pulse width                                       | $T_{BLKMPW}$     | 0.186  | —     | 0.219  | —     | ns   |
| Read enable setup time                                                 | $T_{RDESU}$      | 0.449  | —     | 0.528  | —     | ns   |
| Read enable hold time                                                  | $T_{RDEHD}$      | 0.167  | —     | 0.197  | —     | ns   |
| Pipelined read enable setup time (A_DOUT_EN, B_D-OUT_EN)               | $T_{RDPLESU}$    | 0.248  | —     | 0.291  | —     | ns   |
| Pipelined read enable hold time (A_DOUT_EN, B_DOUT_EN)                 | $T_{RDPLEHD}$    | 0.102  | —     | 0.12   | —     | ns   |
| Asynchronous reset to output propagation delay                         | $T_{R2Q}$        | —      | 1.506 | —      | 1.772 | ns   |
| Asynchronous reset removal time                                        | $T_{RSTREM}$     | 0.506  | —     | 0.595  | —     | ns   |
| Asynchronous reset recovery time                                       | $T_{RSTREC}$     | 0.004  | —     | 0.005  | —     | ns   |
| Asynchronous reset minimum pulse width                                 | $T_{RSTMPW}$     | 0.301  | —     | 0.354  | —     | ns   |
| Pipelined register asynchronous reset removal time                     | $T_{PLRSTREM}$   | –0.279 | —     | –0.328 | —     | ns   |
| Pipelined register asynchronous reset recovery time                    | $T_{PLRSTREC}$   | 0.327  | —     | 0.385  | —     | ns   |
| Pipelined register asynchronous reset minimum pulse width              | $T_{PLRSTMPW}$   | 0.282  | —     | 0.332  | —     | ns   |
| Synchronous reset setup time                                           | $T_{SRSTSU}$     | 0.226  | —     | 0.265  | —     | ns   |
| Synchronous reset hold time                                            | $T_{SRSTHD}$     | 0.036  | —     | 0.043  | —     | ns   |
| Write enable setup time                                                | $T_{WESU}$       | 0.39   | —     | 0.458  | —     | ns   |
| Write enable hold time                                                 | $T_{WEHD}$       | 0.242  | —     | 0.285  | —     | ns   |
| Maximum frequency                                                      | $F_{MAX}$        | —      | 400   | —      | 340   | MHz  |

### 3.12.2 FPGA FABRIC MICRO SRAM (MSRAM)

The following table lists the  $\mu$ SRAM in  $64 \times 18$  mode in worst commercial-case conditions when  $T_J = 85^\circ\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-237: MSRAM (RAM64X18) IN  $64 \times 18$  MODE**

| Parameter                                                                             | Symbol          | -1     |       | -Std   |       | Unit |
|---------------------------------------------------------------------------------------|-----------------|--------|-------|--------|-------|------|
|                                                                                       |                 | Min.   | Max.  | Min.   | Max.  |      |
| Read clock period                                                                     | $T_{CY}$        | 4      | —     | 4      | —     | ns   |
| Read clock minimum pulse width high                                                   | $T_{CLKMPWH}$   | 1.8    | —     | 1.8    | —     | ns   |
| Read clock minimum pulse width low                                                    | $T_{CLKMPWL}$   | 1.8    | —     | 1.8    | —     | ns   |
| Read pipeline clock period                                                            | $T_{PLCY}$      | 4      | —     | 4      | —     | ns   |
| Read pipeline clock minimum pulse width high                                          | $T_{PLCLKMPWH}$ | 1.8    | —     | 1.8    | —     | ns   |
| Read pipeline clock minimum pulse width low                                           | $T_{PLCLKMPWL}$ | 1.8    | —     | 1.8    | —     | ns   |
| Read access time with pipeline register                                               | $T_{CLK2Q}$     |        | 0.266 |        | 0.313 | ns   |
| Read access time without pipeline register                                            |                 |        | 1.677 |        | 1.973 | ns   |
| Read address setup time in synchronous mode                                           | $T_{ADDRSU}$    | 0.301  | —     | 0.354  | —     | ns   |
| Read address setup time in asynchronous mode                                          |                 | 1.856  | —     | 2.184  | —     | ns   |
| Read address hold time in synchronous mode                                            | $T_{ADDRHD}$    | 0.091  | —     | 0.107  | —     | ns   |
| Read address hold time in asynchronous mode                                           |                 | -0.778 | —     | -0.915 | —     | ns   |
| Read enable setup time                                                                | $T_{RDENSU}$    | 0.278  | —     | 0.327  | —     | ns   |
| Read enable hold time                                                                 | $T_{RDENHD}$    | 0.057  | —     | 0.067  | —     | ns   |
| Read block select setup time                                                          | $T_{BLKSU}$     | 1.839  | —     | 2.163  | —     | ns   |
| Read block select hold time                                                           | $T_{BLKHD}$     | -0.65  | —     | -0.765 | —     | ns   |
| Read block select to out disable time (when pipelined register is disabled)           | $T_{BLK2Q}$     | —      | 2.036 | —      | 2.396 | ns   |
| Read asynchronous reset removal time (pipelined clock)                                | $T_{RSTREM}$    | -0.023 | —     | -0.027 | —     | ns   |
| Read asynchronous reset removal time (non-pipelined clock)                            |                 | 0.046  | —     | 0.054  | —     | ns   |
| Read asynchronous reset recovery time (pipelined clock)                               | $T_{RSTREC}$    | 0.507  | —     | 0.597  | —     | ns   |
| Read asynchronous reset recovery time (non-pipelined clock)                           |                 | 0.236  | —     | 0.278  | —     | ns   |
| Read asynchronous reset to output propagation delay (with pipelined register enabled) | $T_{R2Q}$       | —      | 0.839 | —      | 0.987 | ns   |
| Read synchronous reset setup time                                                     | $T_{SRSTSU}$    | 0.271  | —     | 0.319  | —     | ns   |
| Read synchronous reset hold time                                                      | $T_{SRSTHD}$    | 0.061  | —     | 0.071  | —     | ns   |
| Write clock period                                                                    | $T_{CCY}$       | 4      | —     | 4      | —     | ns   |
| Write clock minimum pulse width high                                                  | $T_{CCLKMPWH}$  | 1.8    | —     | 1.8    | —     | ns   |
| Write clock minimum pulse width low                                                   | $T_{CCLKMPWL}$  | 1.8    | —     | 1.8    | —     | ns   |
| Write block setup time                                                                | $T_{BLKCSU}$    | 0.404  | —     | 0.476  | —     | ns   |
| Write block hold time                                                                 | $T_{BLKCHD}$    | 0.007  | —     | 0.008  | —     | ns   |
| Write input data setup time                                                           | $T_{DINCSU}$    | 0.115  | —     | 0.135  | —     | ns   |
| Write input data hold time                                                            | $T_{DINCHD}$    | 0.15   | —     | 0.177  | —     | ns   |
| Write address setup time                                                              | $T_{ADDRCSU}$   | 0.088  | —     | 0.104  | —     | ns   |
| Write address hold time                                                               | $T_{ADDRCHD}$   | 0.128  | —     | 0.15   | —     | ns   |
| Write enable setup time                                                               | $T_{WECSU}$     | 0.397  | —     | 0.467  | —     | ns   |
| Write enable hold time                                                                | $T_{WECHD}$     | -0.026 | —     | -0.03  | —     | ns   |
| Maximum frequency                                                                     | $F_{MAX}$       | —      | 250   | —      | 250   | MHz  |

The following table lists the  $\mu$ SRAM in  $64 \times 16$  mode in worst commercial-case conditions when  $T_J = 85^\circ\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-238: MSRAM (RAM64X16) IN  $64 \times 16$  MODE**

| Parameter                                                                             | Symbol          | -1     |       | -Std   |       | Unit |
|---------------------------------------------------------------------------------------|-----------------|--------|-------|--------|-------|------|
|                                                                                       |                 | Min.   | Max.  | Min.   | Max.  |      |
| Read clock period                                                                     | $T_{CY}$        | 4      | —     | 4      | —     | ns   |
| Read clock minimum pulse width high                                                   | $T_{CLKMPWH}$   | 1.8    | —     | 1.8    | —     | ns   |
| Read clock minimum pulse width low                                                    | $T_{CLKMPWL}$   | 1.8    | —     | 1.8    | —     | ns   |
| Read pipeline clock period                                                            | $T_{PLCY}$      | 4      | —     | 4      | —     | ns   |
| Read pipeline clock minimum pulse width high                                          | $T_{PLCLKMPWH}$ | 1.8    | —     | 1.8    | —     | ns   |
| Read pipeline clock minimum pulse width low                                           | $T_{PLCLKMPWL}$ | 1.8    | —     | 1.8    | —     | ns   |
| Read access time with pipeline register                                               | $T_{CLK2Q}$     | —      | 0.266 | —      | 0.313 | ns   |
| Read access time without pipeline register                                            |                 | —      | 1.677 | —      | 1.973 | ns   |
| Read address setup time in synchronous mode                                           | $T_{ADDRSU}$    | 0.301  | —     | 0.354  | —     | ns   |
| Read address setup time in asynchronous mode                                          |                 | 1.856  | —     | 2.184  | —     | ns   |
| Read address hold time in synchronous mode                                            | $T_{ADDRHD}$    | 0.091  | —     | 0.107  | —     | ns   |
| Read address hold time in asynchronous mode                                           |                 | -0.778 | —     | -0.915 | —     | ns   |
| Read enable setup time                                                                | $T_{RDENSU}$    | 0.278  | —     | 0.327  | —     | ns   |
| Read enable hold time                                                                 | $T_{RDENHD}$    | 0.057  | —     | 0.067  | —     | ns   |
| Read block select setup time                                                          | $T_{BLKSU}$     | 1.839  | —     | 2.163  | —     | ns   |
| Read block select hold time                                                           | $T_{BLKHD}$     | -0.65  | —     | -0.765 | —     | ns   |
| Read block select to out disable time (when pipelined register is disabled)           | $T_{BLK2Q}$     |        | 2.036 |        | 2.396 | ns   |
| Read asynchronous reset removal time (pipelined clock)                                | $T_{RSTREM}$    | -0.023 | —     | -0.027 | —     | ns   |
| Read asynchronous reset removal time (non-pipelined clock)                            |                 | 0.046  | —     | 0.054  | —     | ns   |
| Read asynchronous reset recovery time (pipelined clock)                               | $T_{RSTREC}$    | 0.507  | —     | 0.597  | —     | ns   |
| Read asynchronous reset recovery time (non-pipelined clock)                           |                 | 0.236  | —     | 0.278  | —     | ns   |
| Read asynchronous reset to output propagation delay (with pipelined register enabled) | $T_{R2Q}$       | —      | 0.835 |        | 0.983 | ns   |
| Read synchronous reset setup time                                                     | $T_{SRSTSU}$    | 0.271  | —     | 0.319  | —     | ns   |
| Read synchronous reset hold time                                                      | $T_{SRSTHD}$    | 0.061  | —     | 0.071  | —     | ns   |
| Write clock period                                                                    | $T_{CCY}$       | 4      | —     | 4      | —     | ns   |
| Write clock minimum pulse width high                                                  | $T_{CCLKMPWH}$  | 1.8    | —     | 1.8    | —     | ns   |
| Write clock minimum pulse width low                                                   | $T_{CCLKMPWL}$  | 1.8    | —     | 1.8    | —     | ns   |
| Write block setup time                                                                | $T_{BLKCSU}$    | 0.404  | —     | 0.476  | —     | ns   |
| Write block hold time                                                                 | $T_{BLKCHD}$    | 0.007  | —     | 0.008  | —     | ns   |
| Write input data setup time                                                           | $T_{DINCSU}$    | 0.115  | —     | 0.135  | —     | ns   |
| Write input data hold time                                                            | $T_{DINCHD}$    | 0.15   | —     | 0.177  | —     | ns   |
| Write address setup time                                                              | $T_{ADDRCSU}$   | 0.088  | —     | 0.104  | —     | ns   |
| Write address hold time                                                               | $T_{ADDRCHD}$   | 0.128  | —     | 0.15   | —     | ns   |
| Write enable setup time                                                               | $T_{WECSU}$     | 0.397  | —     | 0.467  | —     | ns   |
| Write enable hold time                                                                | $T_{WECHD}$     | -0.026 | —     | -0.03  | —     | ns   |
| Maximum frequency                                                                     | $F_{MAX}$       |        | 250   | —      | 250   | MHz  |

The following table lists the  $\mu$ SRAM in 128 × 9 mode in worst commercial-case conditions when  $T_J = 85\text{ }^{\circ}\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-239: MSRAM (RAM128X9) IN 128 × 9 MODE**

| Parameter                                                                             | Symbol          | –1     |       | –Std   |       | Unit |
|---------------------------------------------------------------------------------------|-----------------|--------|-------|--------|-------|------|
|                                                                                       |                 | Min.   | Max.  | Min.   | Max.  |      |
| Read clock period                                                                     | $T_{CY}$        | 4      | —     | 4      | —     | ns   |
| Read clock minimum pulse width high                                                   | $T_{CLKMPWH}$   | 1.8    | —     | 1.8    | —     | ns   |
| Read clock minimum pulse width low                                                    | $T_{CLKMPWL}$   | 1.8    | —     | 1.8    | —     | ns   |
| Read pipeline clock period                                                            | $T_{PLCY}$      | 4      | —     | 4      | —     | ns   |
| Read pipeline clock minimum pulse width high                                          | $T_{PLCLKMPWH}$ | 1.8    | —     | 1.8    | —     | ns   |
| Read pipeline clock minimum pulse width low                                           | $T_{PLCLKMPWL}$ | 1.8    | —     | 1.8    | —     | ns   |
| Read access time with pipeline register                                               | $T_{CLK2Q}$     |        | 0.266 |        | 0.313 | ns   |
| Read access time without pipeline register                                            |                 |        | 1.677 |        | 1.973 | ns   |
| Read address setup time in synchronous mode                                           | $T_{ADDRSU}$    | 0.301  | —     | 0.354  | —     | ns   |
| Read address setup time in asynchronous mode                                          |                 | 1.856  | —     | 2.184  | —     | ns   |
| Read address hold time in synchronous mode                                            | $T_{ADDRHD}$    | 0.091  | —     | 0.107  | —     | ns   |
| Read address hold time in asynchronous mode                                           |                 | –0.778 | —     | –0.915 | —     | ns   |
| Read enable setup time                                                                | $T_{RDENSU}$    | 0.278  | —     | 0.327  | —     | ns   |
| Read enable hold time                                                                 | $T_{RDENHD}$    | 0.057  | —     | 0.067  | —     | ns   |
| Read block select setup time                                                          | $T_{BLKSU}$     | 1.839  | —     | 2.163  | —     | ns   |
| Read block select hold time                                                           | $T_{BLKHD}$     | –0.65  | —     | –0.765 | —     | ns   |
| Read block select to out disable time (when pipelined register is disabled)           | $T_{BLK2Q}$     | —      | 2.036 | —      | 2.396 | ns   |
| Read asynchronous reset removal time (pipelined clock)                                | $T_{RSTREM}$    | –0.023 | —     | –0.027 | —     | ns   |
| Read asynchronous reset removal time (non-pipelined clock)                            |                 | 0.046  | —     | 0.054  | —     | ns   |
| Read asynchronous reset recovery time (pipelined clock)                               | $T_{RSTREC}$    | 0.507  | —     | 0.597  | —     | ns   |
| Read asynchronous reset recovery time (non-pipelined clock)                           |                 | 0.236  | —     | 0.278  | —     | ns   |
| Read asynchronous reset to output propagation delay (with pipelined register enabled) | $T_{R2Q}$       | —      | 0.835 | —      | 0.982 | ns   |
| Read synchronous reset setup time                                                     | $T_{SRSTSU}$    | 0.271  | —     | 0.319  | —     | ns   |
| Read synchronous reset hold time                                                      | $T_{SRSTHD}$    | 0.061  | —     | 0.071  | —     | ns   |
| Write clock period                                                                    | $T_{CCY}$       | 4      | —     | 4      | —     | ns   |
| Write clock minimum pulse width high                                                  | $T_{CCLKMPWH}$  | 1.8    | —     | 1.8    | —     | ns   |
| Write clock minimum pulse width low                                                   | $T_{CCLKMPWL}$  | 1.8    | —     | 1.8    | —     | ns   |
| Write block setup time                                                                | $T_{BLKCSU}$    | 0.404  | —     | 0.476  | —     | ns   |
| Write block hold time                                                                 | $T_{BLKCHD}$    | 0.007  | —     | 0.008  | —     | ns   |
| Write input data setup time                                                           | $T_{DINCSU}$    | 0.115  | —     | 0.135  | —     | ns   |
| Write input data hold time                                                            | $T_{DINCHD}$    | 0.15   | —     | 0.177  | —     | ns   |
| Write address setup time                                                              | $T_{ADDRCSU}$   | 0.088  | —     | 0.104  | —     | ns   |
| Write address hold time                                                               | $T_{ADDRCHD}$   | 0.128  | —     | 0.15   | —     | ns   |
| Write enable setup time                                                               | $T_{WECSU}$     | 0.397  | —     | 0.467  | —     | ns   |
| Write enable hold time                                                                | $T_{WECHD}$     | –0.026 | —     | –0.03  | —     | ns   |
| Maximum frequency                                                                     | $F_{MAX}$       | —      | 250   | —      | 250   | MHz  |

The following table lists the  $\mu$ SRAM in 128  $\times$  8 mode in worst commercial-case conditions when  $T_J = 85^\circ\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-240: MSRAM (RAM128X8) IN 128  $\times$  8 MODE**

| Parameter                                                                             | Symbol          | -1     |       | -Std   |       | Unit |
|---------------------------------------------------------------------------------------|-----------------|--------|-------|--------|-------|------|
|                                                                                       |                 | Min.   | Max.  | Min.   | Max.  |      |
| Read clock period                                                                     | $T_{CY}$        | 4      | —     | 4      | —     | ns   |
| Read clock minimum pulse width high                                                   | $T_{CLKMPWH}$   | 1.8    | —     | 1.8    | —     | ns   |
| Read clock minimum pulse width low                                                    | $T_{CLKMPWL}$   | 1.8    | —     | 1.8    | —     | ns   |
| Read pipeline clock period                                                            | $T_{PLCY}$      | 4      | —     | 4      | —     | ns   |
| Read pipeline clock minimum pulse width high                                          | $T_{PLCLKMPWH}$ | 1.8    | —     | 1.8    | —     | ns   |
| Read pipeline clock minimum pulse width low                                           | $T_{PLCLKMPWL}$ | 1.8    | —     | 1.8    | —     | ns   |
| Read access time with pipeline register                                               | $T_{CLK2Q}$     | —      | 0.266 | —      | 0.313 | ns   |
| Read access time without pipeline register                                            |                 | —      | 1.677 | —      | 1.973 | ns   |
| Read address setup time in synchronous mode                                           | $T_{ADDRSU}$    | 0.301  | —     | 0.354  | —     | ns   |
| Read address setup time in asynchronous mode                                          |                 | 1.856  | —     | 2.184  | —     | ns   |
| Read address hold time in synchronous mode                                            | $T_{ADDRHD}$    | 0.091  | —     | 0.107  | —     | ns   |
| Read address hold time in asynchronous mode                                           |                 | -0.778 | —     | -0.915 | —     | ns   |
| Read enable setup time                                                                | $T_{RDENSU}$    | 0.278  | —     | 0.327  | —     | ns   |
| Read enable hold time                                                                 | $T_{RDENHD}$    | 0.057  | —     | 0.067  | —     | ns   |
| Read block select setup time                                                          | $T_{BLKSU}$     | 1.839  | —     | 2.163  | —     | ns   |
| Read block select hold time                                                           | $T_{BLKHD}$     | -0.65  | —     | -0.765 | —     | ns   |
| Read block select to out disable time (when pipelined register is disabled)           | $T_{BLK2Q}$     | —      | 2.036 | —      | 2.396 | ns   |
| Read asynchronous reset removal time (pipelined clock)                                | $T_{RSTREM}$    | -0.023 | —     | -0.027 | —     | ns   |
| Read asynchronous reset removal time (non-pipelined clock)                            |                 | 0.046  | —     | 0.054  | —     | ns   |
| Read asynchronous reset recovery time (pipelined clock)                               | $T_{RSTREC}$    | 0.507  | —     | 0.597  | —     | ns   |
| Read asynchronous reset recovery time (non-pipelined clock)                           |                 | 0.236  | —     | 0.278  | —     | ns   |
| Read asynchronous reset to output propagation delay (with pipelined register enabled) | $T_{R2Q}$       | —      | 0.835 | —      | 0.982 | ns   |
| Read synchronous reset setup time                                                     | $T_{SRSTSU}$    | 0.271  | —     | 0.319  | —     | ns   |
| Read synchronous reset hold time                                                      | $T_{SRSTHD}$    | 0.061  | —     | 0.071  | —     | ns   |
| Write clock period                                                                    | $T_{CCY}$       | 4      | —     | 4      | —     | ns   |
| Write clock minimum pulse width high                                                  | $T_{CCLKMPWH}$  | 1.8    | —     | 1.8    | —     | ns   |
| Write clock minimum pulse width low                                                   | $T_{CCLKMPWL}$  | 1.8    | —     | 1.8    | —     | ns   |
| Write block setup time                                                                | $T_{BLKCSU}$    | 0.404  | —     | 0.476  | —     | ns   |
| Write block hold time                                                                 | $T_{BLKCHD}$    | 0.007  | —     | 0.008  | —     | ns   |
| Write input data setup time                                                           | $T_{DINCSU}$    | 0.115  | —     | 0.135  | —     | ns   |
| Write input data hold time                                                            | $T_{DINCHD}$    | 0.15   | —     | 0.177  | —     | ns   |
| Write address setup time                                                              | $T_{ADDRCSU}$   | 0.088  | —     | 0.104  | —     | ns   |
| Write address hold time                                                               | $T_{ADDRCHD}$   | 0.128  | —     | 0.15   | —     | ns   |
| Write enable setup time                                                               | $T_{WECSU}$     | 0.397  | —     | 0.467  | —     | ns   |
| Write enable hold time                                                                | $T_{WECHD}$     | -0.026 | —     | -0.03  | —     | ns   |
| Maximum frequency                                                                     | $F_{MAX}$       | —      | 250   | —      | 250   | MHz  |

The following table lists the  $\mu$ SRAM in  $256 \times 4$  mode in worst commercial-case conditions when  $T_J = 85^\circ\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-241: MSRAM (RAM256X4) IN  $256 \times 4$  MODE**

| Parameter                                                                             | Symbol          | -1    |      | -Std  |      | Unit |
|---------------------------------------------------------------------------------------|-----------------|-------|------|-------|------|------|
|                                                                                       |                 | Min.  | Max. | Min.  | Max. |      |
| Read clock period                                                                     | $T_{CY}$        | 4     | —    | 4     | —    | ns   |
| Read clock minimum pulse width high                                                   | $T_{CLKMPWH}$   | 1.8   | —    | 1.8   | —    | ns   |
| Read clock minimum pulse width low                                                    | $T_{CLKMPWL}$   | 1.8   | —    | 1.8   | —    | ns   |
| Read pipeline clock period                                                            | $T_{PLCY}$      | 4     | —    | 4     | —    | ns   |
| Read pipeline clock minimum pulse width high                                          | $T_{PLCLKMPWH}$ | 1.8   | —    | 1.8   | —    | ns   |
| Read pipeline clock minimum pulse width low                                           | $T_{PLCLKMPWL}$ | 1.8   | —    | 1.8   | —    | ns   |
| Read access time with pipeline register                                               | $T_{CLK2Q}$     | —     | 0.27 | —     | 0.31 | ns   |
| Read access time without pipeline register                                            |                 | —     | 1.75 | —     | 2.06 | ns   |
| Read address setup time in synchronous mode                                           | $T_{ADDRSU}$    | 0.301 | —    | 0.354 | —    | ns   |
| Read address setup time in asynchronous mode                                          |                 | 1.931 | —    | 2.272 | —    | ns   |
| Read address hold time in synchronous mode                                            | $T_{ADDRHD}$    | 0.121 | —    | 0.142 | —    | ns   |
| Read address hold time in asynchronous mode                                           |                 | -0.65 | —    | -0.76 | —    | ns   |
| Read enable setup time                                                                | $T_{RDENSU}$    | 0.278 | —    | 0.327 | —    | ns   |
| Read enable hold time                                                                 | $T_{RDENHD}$    | 0.057 | —    | 0.067 | —    | ns   |
| Read block select setup time                                                          | $T_{BLKSU}$     | 1.839 | —    | 2.163 | —    | ns   |
| Read block select hold time                                                           | $T_{BLKHD}$     | -0.65 | —    | -0.77 | —    | ns   |
| Read block select to out disable time (when pipelined register is disabled)           | $T_{BLK2Q}$     | —     | 2.09 | —     | 2.46 | ns   |
| Read asynchronous reset removal time (pipelined clock)                                | $T_{RSTREM}$    | -0.02 | —    | -0.03 | —    | ns   |
| Read asynchronous reset removal time (non-pipelined clock)                            |                 | 0.046 | —    | 0.054 | —    | ns   |
| Read asynchronous reset recovery time (pipelined clock)                               | $T_{RSTREC}$    | 0.507 | —    | 0.597 | —    | ns   |
| Read asynchronous reset recovery time (non-pipelined clock)                           |                 | 0.236 | —    | 0.278 | —    | ns   |
| Read asynchronous reset to output propagation delay (with pipelined register enabled) | $T_{R2Q}$       | —     | 0.83 |       | 0.98 | ns   |
| Read synchronous reset setup time                                                     | $T_{SRSTSU}$    | 0.271 | —    | 0.319 | —    | ns   |
| Read synchronous reset hold time                                                      | $T_{SRSTHD}$    | 0.061 | —    | 0.071 | —    | ns   |
| Write clock period                                                                    | $T_{CCY}$       | 4     | —    | 4     | —    | ns   |
| Write clock minimum pulse width high                                                  | $T_{CCLKMPWH}$  | 1.8   | —    | 1.8   | —    | ns   |
| Write clock minimum pulse width low                                                   | $T_{CCLKMPWL}$  | 1.8   | —    | 1.8   | —    | ns   |
| Write block setup time                                                                | $T_{BLKCSU}$    | 0.404 | —    | 0.476 | —    | ns   |
| Write block hold time                                                                 | $T_{BLKCHD}$    | 0.007 | —    | 0.008 | —    | ns   |
| Write input data setup time                                                           | $T_{DINCSU}$    | 0.101 | —    | 0.118 | —    | ns   |
| Write input data hold time                                                            | $T_{DINCHD}$    | 0.137 | —    | 0.161 | —    | ns   |
| Write address setup time                                                              | $T_{ADDRCSU}$   | 0.088 | —    | 0.104 | —    | ns   |
| Write address hold time                                                               | $T_{ADDRCHD}$   | 0.245 | —    | 0.288 | —    | ns   |
| Write enable setup time                                                               | $T_{WECSU}$     | 0.397 | —    | 0.467 | —    | ns   |
| Write enable hold time                                                                | $T_{WECHD}$     | -0.03 | —    | -0.03 | —    | ns   |
| Maximum frequency                                                                     | $F_{MAX}$       | —     | 250  | —     | 250  | MHz  |

The following table lists the  $\mu$ SRAM in  $512 \times 2$  mode in worst commercial-case conditions when  $T_J = 85^\circ\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-242: MSRAM (RAM512X2) IN  $512 \times 2$  MODE**

| Parameter                                                                             | Symbol          | -1    |      | -Std  |      | Unit |
|---------------------------------------------------------------------------------------|-----------------|-------|------|-------|------|------|
|                                                                                       |                 | Min.  | Max. | Min.  | Max. |      |
| Read clock period                                                                     | $T_{CY}$        | 4     | —    | 4     | —    | ns   |
| Read clock minimum pulse width high                                                   | $T_{CLKMPWH}$   | 1.8   | —    | 1.8   | —    | ns   |
| Read clock minimum pulse width low                                                    | $T_{CLKMPWL}$   | 1.8   | —    | 1.8   | —    | ns   |
| Read pipeline clock period                                                            | $T_{PLCY}$      | 4     | —    | 4     | —    | ns   |
| Read pipeline clock minimum pulse width high                                          | $T_{PLCLKMPWH}$ | 1.8   | —    | 1.8   | —    | ns   |
| Read pipeline clock minimum pulse width low                                           | $T_{PLCLKMPWL}$ | 1.8   | —    | 1.8   | —    | ns   |
| Read access time with pipeline register                                               | $T_{CLK2Q}$     | —     | 0.27 | —     | 0.31 | ns   |
| Read access time without pipeline register                                            |                 | —     | 1.76 | —     | 2.08 | ns   |
| Read address setup time in synchronous mode                                           | $T_{ADDRSU}$    | 0.301 | —    | 0.354 | —    | ns   |
| Read address setup time in asynchronous mode                                          |                 | 1.96  | —    | 2.306 | —    | ns   |
| Read address hold time in synchronous mode                                            | $T_{ADDRHD}$    | 0.137 | —    | 0.161 | —    | ns   |
| Read address hold time in asynchronous mode                                           |                 | -0.58 | —    | -0.68 | —    | ns   |
| Read enable setup time                                                                | $T_{RDENSU}$    | 0.278 | —    | 0.327 | —    | ns   |
| Read enable hold time                                                                 | $T_{RDENHD}$    | 0.057 | —    | 0.067 | —    | ns   |
| Read block select setup time                                                          | $T_{BLKSU}$     | 1.839 | —    | 2.163 | —    | ns   |
| Read block select hold time                                                           | $T_{BLKHD}$     | -0.65 | —    | -0.77 | —    | ns   |
| Read block select to out disable time (when pipelined register is disabled)           | $T_{BLK2Q}$     | —     | 2.14 | —     | 2.52 | ns   |
| Read asynchronous reset removal time (pipelined clock)                                | $T_{RSTREM}$    | -0.02 | —    | -0.03 | —    | ns   |
| Read asynchronous reset removal time (non-pipelined clock)                            |                 | 0.046 | —    | 0.054 | —    | ns   |
| Read asynchronous reset recovery time (pipelined clock)                               | $T_{RSTREC}$    | 0.507 | —    | 0.597 | —    | ns   |
| Read asynchronous reset recovery time (non-pipelined clock)                           |                 | 0.236 | —    | 0.278 | —    | ns   |
| Read asynchronous reset to output propagation delay (with pipelined register enabled) | $T_{R2Q}$       | —     | 0.83 | —     | 0.98 | ns   |
| Read synchronous reset setup time                                                     | $T_{SRSTSU}$    | 0.271 | —    | 0.319 | —    | ns   |
| Read synchronous reset hold time                                                      | $T_{SRSTHD}$    | 0.061 | —    | 0.071 | —    | ns   |
| Write clock period                                                                    | $T_{CCY}$       | 4     | —    | 4     | —    | ns   |
| Write clock minimum pulse width high                                                  | $T_{CCLKMPWH}$  | 1.8   | —    | 1.8   | —    | ns   |
| Write clock minimum pulse width low                                                   | $T_{CCLKMPWL}$  | 1.8   | —    | 1.8   | —    | ns   |
| Write block setup time                                                                | $T_{BLKCSU}$    | 0.404 | —    | 0.476 | —    | ns   |
| Write block hold time                                                                 | $T_{BLKCHD}$    | 0.007 | —    | 0.008 | —    | ns   |
| Write input data setup time                                                           | $T_{DINCSU}$    | 0.101 | —    | 0.118 | —    | ns   |
| Write input data hold time                                                            | $T_{DINCHD}$    | 0.137 | —    | 0.161 | —    | ns   |
| Write address setup time                                                              | $T_{ADDRCSU}$   | 0.088 | —    | 0.104 | —    | ns   |
| Write address hold time                                                               | $T_{ADDRCHD}$   | 0.247 | —    | 0.29  | —    | ns   |
| Write enable setup time                                                               | $T_{WECSU}$     | 0.397 | —    | 0.467 | —    | ns   |
| Write enable hold time                                                                | $T_{WECHD}$     | -0.03 | —    | -0.03 | —    | ns   |
| Maximum frequency                                                                     | $F_{MAX}$       | —     | 250  | —     | 250  | MHz  |

The following table lists the  $\mu$ SRAM in 1024  $\times$  1 mode in worst commercial-case conditions when  $T_J = 85^\circ\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-243: MSRAM (RAM1024X1) IN 1024  $\times$  1 MODE**

| Parameter                                                                             | Symbol          | –1    |      | –Std  |      | Unit |
|---------------------------------------------------------------------------------------|-----------------|-------|------|-------|------|------|
|                                                                                       |                 | Min.  | Max. | Min.  | Max. |      |
| Read clock period                                                                     | $T_{CY}$        | 4     | —    | 4     | —    | ns   |
| Read clock minimum pulse width high                                                   | $T_{CLKMPWH}$   | 1.8   | —    | 1.8   | —    | ns   |
| Read clock minimum pulse width low                                                    | $T_{CLKMPWL}$   | 1.8   | —    | 1.8   | —    | ns   |
| Read pipeline clock period                                                            | $T_{PLCY}$      | 4     | —    | 4     | —    | ns   |
| Read pipeline clock minimum pulse width high                                          | $T_{PLCLKMPWH}$ | 1.8   | —    | 1.8   | —    | ns   |
| Read pipeline clock minimum pulse width low                                           | $T_{PLCLKMPWL}$ | 1.8   | —    | 1.8   | —    | ns   |
| Read access time with pipeline register                                               | $T_{CLK2Q}$     | —     | 0.27 | —     | 0.31 | ns   |
| Read access time without pipeline register                                            |                 | —     | 1.78 | —     | 2.1  | ns   |
| Read address setup time in synchronous mode                                           | $T_{ADDRSU}$    | 0.301 | —    | 0.354 | —    | ns   |
| Read address setup time in asynchronous mode                                          |                 | 1.978 | —    | 2.327 | —    | ns   |
| Read address hold time in synchronous mode                                            | $T_{ADDRHD}$    | 0.137 | —    | 0.161 | —    | ns   |
| Read address hold time in asynchronous mode                                           |                 | –0.6  | —    | –0.71 | —    | ns   |
| Read enable setup time                                                                | $T_{RDENSU}$    | 0.278 | —    | 0.327 | —    | ns   |
| Read enable hold time                                                                 | $T_{RDENHD}$    | 0.057 | —    | 0.067 | —    | ns   |
| Read block select setup time                                                          | $T_{BLKSU}$     | 1.839 | —    | 2.163 | —    | ns   |
| Read block select hold time                                                           | $T_{BLKHD}$     | –0.65 | —    | –0.77 | —    | ns   |
| Read block select to out disable time (when pipelined register is disabled)           | $T_{BLK2Q}$     | —     | 2.16 | —     | 2.54 | ns   |
| Read asynchronous reset removal time (pipelined clock)                                | $T_{RSTREM}$    | –0.02 | —    | –0.03 | —    | ns   |
| Read asynchronous reset removal time (non-pipelined clock)                            |                 | 0.046 | —    | 0.054 | —    | ns   |
| Read asynchronous reset recovery time (pipelined clock)                               | $T_{RSTREC}$    | 0.507 | —    | 0.597 | —    | ns   |
| Read asynchronous reset recovery time (non-pipelined clock)                           |                 | 0.236 | —    | 0.278 | —    | ns   |
| Read asynchronous reset to output propagation delay (with pipelined register enabled) | $T_{R2Q}$       | —     | 0.83 | —     | 0.98 | ns   |
| Read synchronous reset setup time                                                     | $T_{SRSTSU}$    | 0.271 | —    | 0.319 | —    | ns   |
| Read synchronous reset hold time                                                      | $T_{SRSTHD}$    | 0.061 | —    | 0.071 | —    | ns   |
| Write clock period                                                                    | $T_{CCY}$       | 4     | —    | 4     | —    | ns   |
| Write clock minimum pulse width high                                                  | $T_{CCLKMPWH}$  | 1.8   | —    | 1.8   | —    | ns   |
| Write clock minimum pulse width low                                                   | $T_{CCLKMPWL}$  | 1.8   | —    | 1.8   | —    | ns   |
| Write block setup time                                                                | $T_{BLKCSU}$    | 0.404 | —    | 0.476 | —    | ns   |
| Write block hold time                                                                 | $T_{BLKCHD}$    | 0.007 | —    | 0.008 | —    | ns   |
| Write input data setup time                                                           | $T_{DINCSU}$    | 0.003 | —    | 0.004 | —    | ns   |
| Write input data hold time                                                            | $T_{DINCHD}$    | 0.137 | —    | 0.161 | —    | ns   |
| Write address setup time                                                              | $T_{ADDRCSU}$   | 0.088 | —    | 0.104 | —    | ns   |
| Write address hold time                                                               | $T_{ADDRCHD}$   | 0.247 | —    | 0.29  | —    | ns   |
| Write enable setup time                                                               | $T_{WECSU}$     | 0.397 | —    | 0.467 | —    | ns   |
| Write enable hold time                                                                | $T_{WECHD}$     | –0.03 | —    | –0.03 | —    | ns   |
| Maximum frequency                                                                     | $F_{MAX}$       | —     | 250  | —     | 250  | MHz  |

### 3.13 Programming Times

The following table lists the programming times in typical conditions when  $T_J = 25\text{ }^{\circ}\text{C}$ ,  $V_{DD} = 1.2\text{V}$ . External SPI flash part# AT25DF641-s3H is used during this measurement.

**TABLE 3-244: PROGRAMMING TIMES (TYPICAL CONDITIONS)**

|                 |        |                  |                  |        |                        |         |        |                                                    |         |        | Auto Programming  | Auto Update        | Programming Recovery |       |
|-----------------|--------|------------------|------------------|--------|------------------------|---------|--------|----------------------------------------------------|---------|--------|-------------------|--------------------|----------------------|-------|
|                 |        |                  | JTAG Programming |        | 2 Step IAP Programming |         |        | MSS/Cortex-M3 ISP Programming (SmartFusion 2 Only) |         |        | SPI CLK = 100 KHz | SPI CLK = 12.5 MHz | SPI CLK = 12.5 MHz   |       |
|                 | Device | Image Size Bytes | Program          | Verify | Authenticate           | Program | Verify | Authenticate                                       | Program | Verify | Program           | Program            | Program              | Units |
| Fabric Only     | 005    | 302,672          | 22               | 10     | 4                      | 17      | 6      | 6                                                  | 19      | 8      | 47                | 28                 | 28                   | Sec   |
|                 | 010    | 568,784          | 28               | 18     | 7                      | 23      | 12     | 10                                                 | 26      | 14     | 77                | 35                 | 35                   | Sec   |
|                 | 025    | 1,223,504        | 51               | 26     | 14                     | 33      | 23     | 21                                                 | 39      | 29     | 150               | 41                 | 41                   | Sec   |
|                 | 050    | 2,424,832        | 66               | 54     | 29                     | 52      | 40     | 39                                                 | 60      | 50     | 33                | Not Supported      |                      | Sec   |
|                 | 060    | 2,418,896        | 77               | 54     | 39                     | 61      | 50     | 44                                                 | 65      | 54     | 291               | 82                 | 82                   | Sec   |
|                 | 090    | 3,645,968        | 113              | 126    | 60                     | 84      | 73     | 66                                                 | 90      | 79     | 427               | 108                | 108                  | Sec   |
|                 | 150    | 6,139,184        | 155              | 193    | 100                    | 132     | 120    | 108                                                | 140     | 128    | 708               | 160                | 160                  | Sec   |
| eNVM Only       | 005    | 137,536          | 39               | 4      | 2                      | 37      | 5      | 3                                                  | 42      | 4      | 41                | 49                 | 49                   | Sec   |
|                 | 010    | 274,816          | 78               | 9      | 4                      | 76      | 11     | 4                                                  | 82      | 7      | 86                | 87                 | 87                   | Sec   |
|                 | 025    | 274,816          | 78               | 9      | 4                      | 78      | 10     | 4                                                  | 82      | 8      | 87                | 86                 | 86                   | Sec   |
|                 | 050    | 278,528          | 84               | 8      | 3                      | 85      | 9      | 4                                                  | 80      | 8      | 85                | Not Supported      |                      | Sec   |
|                 | 060    | 268,480          | 76               | 8      | 5                      | 76      | 22     | 6                                                  | 80      | 8      | 78                | 86                 | 86                   | Sec   |
|                 | 090    | 544,496          | 154              | 15     | 10                     | 152     | 43     | 10                                                 | 157     | 15     | 154               | 162                | 162                  | Sec   |
|                 | 150    | 544,496          | 155              | 15     | 10                     | 153     | 44     | 10                                                 | 158     | 15     | 161               | 161                | 161                  | Sec   |
|                 |        |                  |                  |        |                        |         |        |                                                    |         |        |                   |                    |                      |       |
| Fabric and eNVM | 005    | 439,296          | 59               | 11     | 6                      | 56      | 11     | 9                                                  | 61      | 11     | 87                | 66                 | 66                   | Sec   |
|                 | 010    | 842,688          | 107              | 20     | 11                     | 100     | 21     | 15                                                 | 107     | 21     | 161               | 113                | 113                  | Sec   |
|                 | 025    | 1,497,408        | 120              | 35     | 19                     | 113     | 32     | 26                                                 | 121     | 35     | 229               | 121                | 121                  | Sec   |
|                 | 050    | 2,695,168        | 162              | 59     | 32                     | 136     | 48     | 43                                                 | 141     | 55     | 112               | Not Supported      |                      | Sec   |
|                 | 060    | 2,686,464        | 158              | 70     | 43                     | 137     | 70     | 48                                                 | 143     | 60     | 368               | 158                | 158                  | Sec   |
|                 | 090    | 4,190,208        | 266              | 147    | 68                     | 236     | 115    | 75                                                 | 244     | 91     | 582               | 260                | 260                  | Sec   |
|                 | 150    | 6,682,768        | 316              | 231    | 109                    | 286     | 162    | 117                                                | 296     | 141    | 867               | 310                | 310                  | Sec   |

. Auto Programming in 050 device is done through SC\_SPI, and SPI CLK is set to 6.25 MHz.

2: These programming methods only support programming action.

The following table lists the programming times in worst-case conditions when T<sub>J</sub> = 100 °C, V<sub>DD</sub> = 1.14V. External SPIflash part# AT25DF641-s3H is used during this measurement.

**TABLE 3-245: JTAG PROGRAMMING (FABRIC ONLY)**

| M2S/M2GL Device | Image size Bytes | Program | Verify | Unit |
|-----------------|------------------|---------|--------|------|
| 005             | 302672           | 44      | 10     | Sec  |
| 010             | 568784           | 50      | 18     | Sec  |
| 025             | 1223504          | 73      | 26     | Sec  |
| 050             | 2424832          | 88      | 54     | Sec  |
| 060             | 2418896          | 99      | 54     | Sec  |
| 090             | 3645968          | 135     | 126    | Sec  |
| 150             | 6139184          | 177     | 193    | Sec  |

**TABLE 3-246: JTAG PROGRAMMING (ENVM ONLY)**

| M2S/M2GL Device | Image size Bytes | Program | Verify | Unit |
|-----------------|------------------|---------|--------|------|
| 005             | 137536           | 61      | 4      | Sec  |
| 010             | 274816           | 100     | 9      | Sec  |
| 025             | 274816           | 100     | 9      | Sec  |
| 050             | 2,78,528         | 106     | 8      | Sec  |
| 060             | 268480           | 98      | 8      | Sec  |
| 090             | 544496           | 176     | 15     | Sec  |
| 150             | 544496           | 177     | 15     | Sec  |

**TABLE 3-247: JTAG PROGRAMMING (FABRIC AND ENVM)**

| M2S/M2GL Device | Image size Bytes | Program | Verify | Unit |
|-----------------|------------------|---------|--------|------|
| 005             | 439296           | 71      | 11     | Sec  |
| 010             | 842688           | 129     | 20     | Sec  |
| 025             | 1497408          | 142     | 35     | Sec  |
| 050             | 2695168          | 184     | 59     | Sec  |
| 060             | 2686464          | 180     | 70     | Sec  |
| 090             | 4190208          | 288     | 147    | Sec  |
| 150             | 6682768          | 338     | 231    | Sec  |

**TABLE 3-248: 2 STEP IAP PROGRAMMING (FABRIC ONLY)**

| M2S/M2GL Device | Image size Bytes | Authenticate | Program | Verify | Unit |
|-----------------|------------------|--------------|---------|--------|------|
| 005             | 302672           | 4            | 39      | 6      | Sec  |
| 010             | 568784           | 7            | 45      | 12     | Sec  |
| 025             | 1223504          | 14           | 55      | 23     | Sec  |
| 050             | 2424832          | 29           | 74      | 40     | Sec  |

**TABLE 3-248: 2 STEP IAP PROGRAMMING (FABRIC ONLY) (CONTINUED)**

| M2S/M2GL Device | Image size Bytes | Authenticate | Program | Verify | Unit |
|-----------------|------------------|--------------|---------|--------|------|
| 060             | 2418896          | 39           | 83      | 50     | Sec  |
| 090             | 3645968          | 60           | 106     | 73     | Sec  |
| 150             | 6139184          | 100          | 154     | 120    | Sec  |

**TABLE 3-249: 2 STEP IAP PROGRAMMING (ENVM ONLY)**

| M2S/M2GL Device | Image size Bytes | Authenticate | Program | Verify | Unit |
|-----------------|------------------|--------------|---------|--------|------|
| 005             | 137536           | 2            | 59      | 5      | Sec  |
| 010             | 274816           | 4            | 98      | 11     | Sec  |
| 025             | 274816           | 4            | 100     | 10     | Sec  |
| 050             | 2,78,528         | 3            | 107     | 9      | Sec  |
| 060             | 268480           | 5            | 98      | 22     | Sec  |
| 090             | 544496           | 10           | 174     | 43     | Sec  |
| 150             | 544496           | 10           | 175     | 44     | Sec  |

**TABLE 3-250: 2 STEP IAP PROGRAMMING (FABRIC AND ENVM)**

| M2S/M2GL Device | Image size Bytes | Authenticate | Program | Verify | Unit |
|-----------------|------------------|--------------|---------|--------|------|
| 005             | 439296           | 6            | 78      | 11     | Sec  |
| 010             | 842688           | 11           | 122     | 21     | Sec  |
| 025             | 1497408          | 19           | 135     | 32     | Sec  |
| 050             | 2695168          | 32           | 158     | 48     | Sec  |
| 060             | 2686464          | 43           | 159     | 70     | Sec  |
| 090             | 4190208          | 68           | 258     | 115    | Sec  |
| 150             | 6682768          | 109          | 308     | 162    | Sec  |

**TABLE 3-251: SMARTFUSION2 CORTEX-M3 ISP PROGRAMMING (FABRIC ONLY)**

| M2S/M2GL Device | Image size Bytes | Authenticate | Program | Verify | Unit |
|-----------------|------------------|--------------|---------|--------|------|
| 005             | 302672           | 6            | 41      | 8      | Sec  |
| 010             | 568784           | 10           | 48      | 14     | Sec  |
| 025             | 1223504          | 21           | 61      | 29     | Sec  |
| 050             | 2424832          | 39           | 82      | 50     | Sec  |
| 060             | 2418896          | 44           | 87      | 54     | Sec  |
| 090             | 3645968          | 66           | 112     | 79     | Sec  |
| 150             | 6139184          | 108          | 162     | 128    | Sec  |

**TABLE 3-252: SMARTFUSION2 CORTEX-M3 ISP PROGRAMMING (ENVM ONLY)**

| M2S/M2GL Device | Image size Bytes | Authenticate | Program | Verify | Unit |
|-----------------|------------------|--------------|---------|--------|------|
| 005             | 137536           | 3            | 64      | 4      | Sec  |
| 010             | 274816           | 4            | 104     | 7      | Sec  |

**TABLE 3-252: SMARTFUSION2 CORTEX-M3 ISP PROGRAMMING (ENVM ONLY) (CONTINUED)**

| M2S/M2GL Device | Image size Bytes | Authenticate | Program | Verify | Unit |
|-----------------|------------------|--------------|---------|--------|------|
| 025             | 274816           | 4            | 104     | 8      | Sec  |
| 050             | 2,78,528         | 4            | 102     | 8      | Sec  |
| 060             | 268480           | 6            | 102     | 8      | Sec  |
| 090             | 544496           | 10           | 179     | 15     | Sec  |
| 150             | 544496           | 10           | 180     | 15     | Sec  |

**TABLE 3-253: SMARTFUSION2 CORTEX-M3 ISP PROGRAMMING (FABRIC AND ENVM)**

| M2S/M2GL Device | Image size Bytes | Authenticate | Program | Verify | Unit |
|-----------------|------------------|--------------|---------|--------|------|
| 005             | 439296           | 9            | 83      | 11     | Sec  |
| 010             | 842688           | 15           | 129     | 21     | Sec  |
| 025             | 1497408          | 26           | 143     | 35     | Sec  |
| 050             | 2695168          | 43           | 163     | 55     | Sec  |
| 060             | 2686464          | 48           | 165     | 60     | Sec  |
| 090             | 4190208          | 75           | 266     | 91     | Sec  |
| 150             | 6682768          | 117          | 318     | 141    | Sec  |

**TABLE 3-254: PROGRAMMING TIMES WITH 100 KHZ, 25 MHZ. AND 12.5 MHZ SPI CLOCK RATES (ENVM ONLY)**

| M2S/M2GL Device | Auto Programming | Auto Update   | Programming Recovery | Unit |
|-----------------|------------------|---------------|----------------------|------|
|                 | 100 kHz          | 25 MHz        | 12.5 MHz             |      |
| 005             | 63               | 70            | 71                   | Sec  |
| 010             | 108              | 109           | 109                  | Sec  |
| 025             | 109              | 107           | 108                  | Sec  |
| 050             | 107              | Not supported | Not supported        | Sec  |
| 060             | 100              | 108           | 108                  | Sec  |
| 090             | 176              | 184           | 184                  | Sec  |
| 150             | 183              | 183           | 183                  | Sec  |

**TABLE 3-255: PROGRAMMING TIMES (WORST-CASE CONDITIONS)**

|                 |        |                  |                  |        |                        |         |        |                                                    |         |        | Auto Programming  | Auto Update        | Programming Recovery |       |
|-----------------|--------|------------------|------------------|--------|------------------------|---------|--------|----------------------------------------------------|---------|--------|-------------------|--------------------|----------------------|-------|
|                 |        |                  | JTAG Programming |        | 2 Step IAP Programming |         |        | MSS/Cortex-M3 ISP Programming (SmartFusion 2 Only) |         |        | SPI CLK = 100 KHz | SPI CLK = 12.5 MHz | SPI CLK = 12.5 MHz   |       |
|                 | Device | Image Size Bytes | Program          | Verify | Authenticate           | Program | Verify | Authenticate                                       | Program | Verify | Program           | Program            | Program              | Units |
| Fabric Only     | 005    | 302,672          | 44               | 10     | 4                      | 39      | 6      | 6                                                  | 41      | 8      | 69                | 50                 | 50                   | Sec   |
|                 | 010    | 568,784          | 50               | 18     | 7                      | 45      | 12     | 10                                                 | 48      | 14     | 99                | 57                 | 57                   | Sec   |
|                 | 025    | 1,223,504        | 73               | 26     | 14                     | 55      | 23     | 21                                                 | 61      | 29     | 150               | 63                 | 63                   | Sec   |
|                 | 050    | 2,424,832        | 88               | 54     | 29                     | 74      | 40     | 39                                                 | 82      | 50     | 55                | Not Supported      |                      | Sec   |
|                 | 060    | 2,418,896        | 99               | 54     | 39                     | 83      | 50     | 44                                                 | 87      | 54     | 313               | 104                | 104                  | Sec   |
|                 | 090    | 3,645,968        | 135              | 126    | 60                     | 106     | 73     | 66                                                 | 112     | 79     | 449               | 130                | 130                  | Sec   |
|                 | 150    | 6,139,184        | 177              | 193    | 100                    | 154     | 120    | 108                                                | 162     | 128    | 730               | 183                | 183                  | Sec   |
| eNVM Only       | 005    | 137,536          | 39               | 4      | 2                      | 37      | 5      | 3                                                  | 42      | 4      | 63                | 71                 | 71                   | Sec   |
|                 | 010    | 274,816          | 78               | 9      | 4                      | 76      | 11     | 4                                                  | 82      | 7      | 108               | 109                | 109                  | Sec   |
|                 | 025    | 274,816          | 78               | 9      | 4                      | 78      | 10     | 4                                                  | 82      | 8      | 109               | 108                | 108                  | Sec   |
|                 | 050    | 278,528          | 84               | 8      | 3                      | 85      | 9      | 4                                                  | 80      | 8      | 107               | Not Supported      |                      | Sec   |
|                 | 060    | 268,480          | 76               | 8      | 5                      | 76      | 22     | 6                                                  | 80      | 8      | 100               | 108                | 108                  | Sec   |
|                 | 090    | 544,496          | 154              | 15     | 10                     | 152     | 43     | 10                                                 | 157     | 15     | 176               | 184                | 184                  | Sec   |
|                 | 150    | 544,496          | 155              | 15     | 10                     | 153     | 44     | 10                                                 | 158     | 15     | 183               | 183                | 183                  | Sec   |
| Fabric and eNVM | 005    | 439,296          | 59               | 11     | 6                      | 56      | 11     | 9                                                  | 61      | 11     | 109               | 88                 | 88                   | Sec   |
|                 | 010    | 842,688          | 107              | 20     | 11                     | 100     | 21     | 15                                                 | 107     | 21     | 183               | 135                | 135                  | Sec   |
|                 | 025    | 1,497,408        | 120              | 35     | 19                     | 113     | 32     | 26                                                 | 121     | 35     | 251               | 143                | 143                  | Sec   |
|                 | 050    | 2,695,168        | 162              | 59     | 32                     | 136     | 48     | 43                                                 | 141     | 55     | 134               | Not Supported      |                      | Sec   |
|                 | 060    | 2,686,464        | 158              | 70     | 43                     | 137     | 70     | 48                                                 | 143     | 60     | 390               | 180                | 180                  | Sec   |
|                 | 090    | 4,190,208        | 266              | 147    | 68                     | 236     | 115    | 75                                                 | 244     | 91     | 604               | 282                | 282                  | Sec   |
|                 | 150    | 6,682,768        | 316              | 231    | 109                    | 286     | 162    | 117                                                | 296     | 141    | 889               | 332                | 332                  | Sec   |

. Auto Programming in 050 device is done through SC\_SPI, and SPI CLK is set to 6.25 MHz.

**2:** These programming methods only support programming action.

### 3.14 Math Block Timing Characteristics

The fundamental building block in any digital signal processing algorithm is the multiply-accumulate function. Each IGLOO 2 and SmartFusion 2 SoC math block supports 18×18 signed multiplication, dot product, and built-in addition, subtraction, and accumulation units to combine multiplication results efficiently. The following table lists the math blocks with all registers used in worst commercial-case conditions when  $T_J = 85\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-256: MATH BLOCKS WITH ALL REGISTERS USED**

| Parameter                           | Symbol          | –1     |       | –Std   |       | Unit |
|-------------------------------------|-----------------|--------|-------|--------|-------|------|
|                                     |                 | Min.   | Max.  | Min.   | Max.  |      |
| Input, control register setup time  | $T_{MISU}$      | 0.149  | —     | 0.176  | —     | ns   |
| Input, control register hold time   | $T_{MIHD}$      | 1.68   | —     | 1.976  | —     | ns   |
| CDIN input setup time               | $T_{MOCDINSU}$  | 0.185  | —     | 0.218  | —     | ns   |
| CDIN input hold time                | $T_{MOCDINH D}$ | 0.08   | —     | 0.094  | —     | ns   |
| Synchronous reset/enable setup time | $T_{MSRSTENSU}$ | –0.419 | —     | –0.493 | —     | ns   |
| Synchronous reset/enable hold time  | $T_{MSRSTENHD}$ | 0.011  | —     | 0.013  | —     | ns   |
| Asynchronous reset removal time     | $T_{MARSTREM}$  | 0      | —     | 0      | —     | ns   |
| Asynchronous reset recovery time    | $T_{MARSTREC}$  | 0.088  | —     | 0.104  | —     | ns   |
| Output register clock to out delay  | $T_{MOCQ}$      | —      | 0.232 | —      | 0.273 | ns   |
| CLK minimum period                  | $T_{MCLKMP}$    | 2.245  | —     | 2.641  | —     | ns   |

The following table lists the math blocks with input bypassed and output registers used in worst commercial-case conditions when  $T_J = 85\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-257: MATH BLOCK WITH INPUT BYPASSED AND OUTPUT REGISTERS USED**

| Parameter                           | Symbol          | –1     |       | –Std   |       | Unit |
|-------------------------------------|-----------------|--------|-------|--------|-------|------|
|                                     |                 | Min.   | Max.  | Min.   | Max.  |      |
| Output register setup time          | $T_{MOSU}$      | 2.294  | —     | 2.699  | —     | ns   |
| Output register hold time           | $T_{MOHD}$      | 1.68   | —     | 1.976  | —     | ns   |
| CDIN input setup time               | $T_{MOCDINSU}$  | 0.115  | —     | 0.136  | —     | ns   |
| CDIN input hold time                | $T_{MOCDINH D}$ | –0.444 | —     | –0.522 | —     | ns   |
| Synchronous reset/enable setup time | $T_{MSRSTENSU}$ | –0.419 | —     | –0.493 | —     | ns   |
| Synchronous reset/enable hold time  | $T_{MSRSTENHD}$ | 0.011  | —     | 0.013  | —     | ns   |
| Asynchronous reset removal time     | $T_{MARSTREM}$  | 0      | —     | 0      | —     | ns   |
| Asynchronous reset recovery time    | $T_{MARSTREC}$  | 0.014  | —     | 0.017  | —     | ns   |
| Output register clock to out delay  | $T_{MOCQ}$      | —      | 0.232 | —      | 0.273 | ns   |
| CLK minimum period                  | $T_{MCLKMP}$    | 2.179  | —     | 2.563  | —     | ns   |

The following table lists the math blocks with input register used and output in bypass mode in worst commercial-case conditions when  $T_J = 85\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-258: MATH BLOCK WITH INPUT REGISTER USED AND OUTPUT IN BYPASS MODE**

| Parameter                           | Symbol          | –1     |      | –Std   |      | Unit |
|-------------------------------------|-----------------|--------|------|--------|------|------|
|                                     |                 | Min.   | Max. | Min.   | Max. |      |
| Input register setup time           | $T_{MISU}$      | 0.149  | —    | 0.176  | —    | ns   |
| Input register hold time            | $T_{MIHD}$      | 0.185  | —    | 0.218  | —    | ns   |
| Synchronous reset/enable setup time | $T_{MSRSTENSU}$ | 0.08   | —    | 0.094  | —    | ns   |
| Synchronous reset/enable hold time  | $T_{MSRSTENHD}$ | –0.012 | —    | –0.014 | —    | ns   |
| Asynchronous reset removal time     | $T_{MARSTREM}$  | –0.005 | —    | –0.005 | —    | ns   |

**TABLE 3-258: MATH BLOCK WITH INPUT REGISTER USED AND OUTPUT IN BYPASS MODE**

|                                      |                |       |       |       |       |    |
|--------------------------------------|----------------|-------|-------|-------|-------|----|
| Asynchronous reset recovery time     | $T_{MARSTREC}$ | 0.088 | —     | 0.104 | —     | ns |
| Input register clock to output delay | $T_{MICQ}$     | —     | 2.52  | —     | 2.964 | ns |
| CDIN to output delay                 | $T_{MCDIN2Q}$  | —     | 1.951 | —     | 2.295 | ns |

The following table lists the math blocks with input and output in bypass mode in worst commercial-case conditions when  $T_J = 85\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{ V}$ .

**TABLE 3-259: MATH BLOCK WITH INPUT AND OUTPUT IN BYPASS MODE**

| Parameter             | Symbol        | –1    | –Std  | Unit |
|-----------------------|---------------|-------|-------|------|
|                       |               | Max.  | Max.  |      |
| Input to output delay | $T_{MIQ}$     | 2.568 | 3.022 | ns   |
| CDIN to output delay  | $T_{MCDIN2Q}$ | 1.951 | 2.295 | ns   |

### 3.15 Embedded NVM (eNVM) Characteristics

The following table lists the eNVM read performance in worst-case conditions, when  $V_{DD} = 1.14\text{ V}$  and  $V_{PPNVM} = V_{PP} = 2.375\text{ V}$ .

**TABLE 3-260: ENVN READ PERFORMANCE**

| Symbol        | Description                 | Operating Temperature Range |      |                  |      |               |      | Unit |
|---------------|-----------------------------|-----------------------------|------|------------------|------|---------------|------|------|
|               |                             | –1                          | –Std | –1               | –Std | –1            | –Std |      |
| $T_J$         | Junction temperature range  | –55 °C to 125 °C            |      | –40 °C to 100 °C |      | 0 °C to 85 °C |      | °C   |
| $F_{MAXREAD}$ | eNVM maximum read frequency | 25                          | 25   | 25               | 25   | 25            | 25   | MHz  |

The following table lists the eNVM page programming in worst-case conditions when  $V_{DD} = 1.14\text{ V}$  and  $V_{PPNVM} = V_{PP} = 2.375\text{ V}$ .

**TABLE 3-261: ENVN PAGE PROGRAMMING**

| Symbol        | Description                | Operating Temperature Range |      |                  |      |               |      | Unit |
|---------------|----------------------------|-----------------------------|------|------------------|------|---------------|------|------|
|               |                            | –1                          | –Std | –1               | –Std | –1            | –Std |      |
| $T_J$         | Junction temperature range | –55 °C to 125 °C            |      | –40 °C to 100 °C |      | 0 °C to 85 °C |      | °C   |
| $T_{PAGEPGM}$ | eNVM page programming time | 40                          | 40   | 40               | 40   | 40            | 40   | ms   |

### 3.16 SRAM PUF

For more details on static random-access memory (SRAM) physical unclonable functions (PUF) services, see <https://www.microchip.com/en-us/products/fpgas-and-plds/fpgas/igloo-2-fpgas#Documentation>.

The following table lists the SRAM PUF in worst-case industrial conditions when  $T_J = 100\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{ V}$ .

**TABLE 3-262: SRAM PUF**

| Service                  | PUF Off |        | PUF On |        | Unit |
|--------------------------|---------|--------|--------|--------|------|
|                          | Typ.    | Max.   | Typ.   | Max.   |      |
| Create activation code   | 709.1   | 746.4  | 754.4  | 762.5  | ms   |
| Delete activation code   | 1329.3  | 1399.3 | 1414.1 | 1429.3 | ms   |
| Create intrinsic keycode | 656.6   | 691.1  | 698.5  | 706.0  | ms   |
| Create extrinsic keycode | 656.6   | 691.1  | 698.5  | 706.0  | ms   |
| Get number of keys       | 1.3     | 1.4    | 1.4    | 1.4    | ms   |
| Export (Kc0, Kc1)        | 998.0   | 1050.5 | 1061.7 | 1073.1 | ms   |
| Export 2 keycodes        | 2020.2  | 2126.5 | 2149.2 | 2172.3 | ms   |

**TABLE 3-262: SRAM PUF (CONTINUED)**

| Service            | PUF Off |        | PUF On |        | Unit |
|--------------------|---------|--------|--------|--------|------|
|                    | Typ.    | Max.   | Typ.   | Max.   |      |
| Export 4 keycodes  | 3065.7  | 3227.0 | 3261.3 | 3296.4 | ms   |
| Export 8 keycodes  | 5101.0  | 5369.5 | 5426.6 | 5485.0 | ms   |
| Export 16 keycodes | 9212.1  | 9697.0 | 9800.1 | 9905.5 | ms   |
| Import (Kc0, Kc1)  | 39.7    | 41.8   | 42.2   | 42.7   | ms   |
| Import 2 keycodes  | 50.1    | 52.7   | 53.3   | 53.9   | ms   |
| Import 4 keycodes  | 60.6    | 63.8   | 64.5   | 65.2   | ms   |
| Import 8 keycodes  | 80.9    | 85.1   | 86.1   | 87.0   | ms   |
| Import 16 keycodes | 123.8   | 130.4  | 131.7  | 133.2  | ms   |
| Delete keycode     | 552.5   | 581.6  | 587.8  | 594.1  | ms   |
| Fetch key          | 31.4    | 33.0   | 33.4   | 33.7   | ms   |
| Fetch ecc key      | 20.0    | 21.1   | 21.3   | 21.5   | ms   |
| Get seed           | 2.0     | 2.1    | 2.2    | 2.2    | ms   |

**Note:** PUF On times are worst case because the PUF must be turned off for a minimum time before it is turned On to generate the appropriate entropy.

### 3.17 Non-Deterministic Random Bit Generator (NRBG) Characteristics

For more information about NRBG, see [AC407: Using NRBG Services in SmartFusion2 and IGL002 Devices Application Note](#). The following table lists the NRBG in worst-case industrial conditions when  $T_J = 100\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-263: NON-DETERMINISTIC RANDOM BIT GENERATOR (NRBG)**

| Service                            | Timing                                 | Unit | Conditions                |                  |
|------------------------------------|----------------------------------------|------|---------------------------|------------------|
|                                    |                                        |      | Prediction Resistance     | Additional Input |
| Instantiate                        | 85                                     | ms   | OFF                       | X                |
| Generate (after Instantiate)       | 4.5 ms + (6.25 us/byte x No. of Bytes) | —    | OFF                       | 0                |
|                                    | 6.0 ms + (6.25 us/byte x No. of Bytes) | —    | OFF                       | 64               |
|                                    | 7.0 ms + (6.25 us/byte x No. of Bytes) | —    | OFF                       | 128              |
| Generate (after Instantiate)       | 47                                     | ms   | ON                        | X                |
| Generate (subsequent) <sup>1</sup> | 0.5 ms + (6.25 us/byte x No. of Bytes) | —    | OFF                       | 0                |
|                                    | 2.0 ms + (6.25 us/byte x No. of Bytes) | —    | OFF                       | 64               |
|                                    | 3.0 ms + (6.25 us/byte x No. of Bytes) | —    | OFF                       | 128              |
| Generate (subsequent)              | 43                                     | ms   | ON                        | X                |
| Reseed                             | 40                                     | ms   | —                         |                  |
| Uninstantiate                      | 0.16                                   | ms   | —                         |                  |
| Reset                              | 0.10                                   | ms   | —                         |                  |
| Self-test                          | 20                                     | ms   | First time after power-up |                  |
|                                    | 6                                      | ms   | Subsequent                |                  |

<sup>1</sup> If PUF\_OFF, generate will incur additional PUF delay time for consecutive service calls.

### 3.18 Cryptographic Block Characteristics

For more information about cryptographic block and associated services, see [AC410: Using AES System Services in SmartFusion2 and IGLOO2 Devices Application Note](#) and [AC432: Using SHA-256 System Services in SmartFusion2 and IGLOO2 Devices Application Note](#).

The following table lists the cryptographic block characteristics in worst-case industrial conditions when  $T_J = 100\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-264: CRYPTOGRAPHIC BLOCK CHARACTERISTICS**

| Service                        | Conditions                              | Timing | Unit |
|--------------------------------|-----------------------------------------|--------|------|
| Any service                    | First certificate check penalty at boot | 11.5   | ms   |
| AES128/256 (encoding/decoding) | 100 blocks up to 64k blocks             | 700    | Kbps |
| SHA256                         | 512 bits                                | 540    | Kbps |
|                                | 1024 bits                               | 780    | Kbps |
|                                | 2048 bits                               | 950    | Kbps |
|                                | 24 kbits                                | 1140   | Kbps |
| HMAC                           | 512 bytes                               | 820    | Kbps |
|                                | 1024 bytes                              | 890    | Kbps |
|                                | 2048 bytes                              | 930    | Kbps |
|                                | 24 kbytes                               | 980    | Kbps |
| KeyTree                        |                                         | 1.8    | ms   |
| Challenge-response             | PUF = OFF                               | 25     | ms   |
|                                | PUF = ON                                | 7      | ms   |
| ECC point multiplication       | —                                       | 590    | ms   |
| ECC point addition             | —                                       | 8      | ms   |

. Using Cypher Block Chaining (CBC) mode.

### 3.19 Crystal Oscillator

The following table lists electrical characteristics of the crystal oscillator in the IGLOO 2 FPGA and SmartFusion 2 SoC FPGAs.

**TABLE 3-265: ELECTRICAL CHARACTERISTICS OF THE CRYSTAL OSCILLATOR—HIGH GAIN MODE (20 MHZ)**

| Parameter                           | Symbol     | Min. | Typ.  | Max.   | Unit | Condition                                |
|-------------------------------------|------------|------|-------|--------|------|------------------------------------------|
| Operating frequency                 | FXTAL      | —    | 20    | —      | MHz  | —                                        |
| Accuracy                            | ACCXTAL    | —    | —     | 0.0047 | %    | 005, 010, 025, 050, 060, and 090 devices |
|                                     |            | —    | —     | 0.0058 | %    | 150 devices                              |
| Output duty cycle                   | CYCXTAL    | —    | 49–51 | 47–53  | %    | —                                        |
| Output period jitter (peak to peak) | JITPERXTAL | —    | 200   | 300    | ps   | —                                        |

**TABLE 3-265: ELECTRICAL CHARACTERISTICS OF THE CRYSTAL OSCILLATOR—HIGH GAIN MODE (20 MHZ) (CONTINUED)**

| Parameter                                         | Symbol    | Min.                | Typ. | Max.                | Unit | Condition                      |
|---------------------------------------------------|-----------|---------------------|------|---------------------|------|--------------------------------|
| Output cycle to cycle jitter (peak to peak)       | JITCYXTAL | —                   | 200  | 300                 | ps   | 010, 025, 050, and 060 devices |
|                                                   |           | —                   | 250  | 410                 | ps   | 150 devices                    |
|                                                   |           | —                   | 250  | 550                 | ps   | 005 and 090 devices            |
| Operating current                                 | IDYNXTAL  | —                   | 1.5  | —                   | mA   | 010, 050, and 060 devices      |
|                                                   |           | —                   | 1.65 | —                   | mA   | 005, 025, 090, and 150 devices |
| Input logic level high                            | VIHXTAL   | 0.9 V <sub>PP</sub> | —    | —                   | V    | —                              |
| Input logic level low                             | VILXTAL   | —                   | —    | 0.1 V <sub>PP</sub> | V    | —                              |
| Startup time (regarding stable oscillator output) | SUXTAL    | —                   | —    | 0.8                 | ms   | 005, 010, 025, and 050 devices |
|                                                   |           | —                   | —    | 1.0                 | ms   | 090 and 150 devices            |

**TABLE 3-266: ELECTRICAL CHARACTERISTICS OF THE CRYSTAL OSCILLATOR—MEDIUM GAIN MODE (2 MHZ)**

| Parameter                                         | Symbol     | Min.                | Typ.  | Max.                | Unit | Condition                           |
|---------------------------------------------------|------------|---------------------|-------|---------------------|------|-------------------------------------|
| Operating frequency                               | FXTAL      | —                   | 2     | —                   | MHz  | —                                   |
| Accuracy                                          | ACCXTAL    | —                   | —     | 0.00105             | %    | 050 devices                         |
|                                                   |            | —                   | —     | 0.003               | %    | 005, 010, 025, 090, and 150 devices |
|                                                   |            | —                   | —     | 0.004               | %    | 060 devices                         |
| Output duty cycle                                 | CYXTAL     | —                   | 49–51 | 47–53               | %    | —                                   |
| Output period jitter (peak to peak)               | JITPERXTAL | —                   | 1     | 5                   | ns   | —                                   |
| Output cycle to cycle jitter (peak to peak)       | JITCYXTAL  | —                   | 1     | 5                   | ns   | —                                   |
| Operating current                                 | IDYNXTAL   | —                   | 0.3   | —                   | mA   | —                                   |
| Input logic level high                            | VIHXTAL    | 0.9 V <sub>PP</sub> | —     | —                   | V    | —                                   |
| Input logic level low                             | VILXTAL    | —                   | —     | 0.1 V <sub>PP</sub> | V    | —                                   |
| Startup time (regarding stable oscillator output) | SUXTAL     | —                   | —     | 4.5                 | ms   | 010 and 050 devices                 |
|                                                   |            | —                   | —     | 5                   | ms   | 005 and 025 devices                 |
|                                                   |            | —                   | —     | 7                   | ms   | 090 and 150 devices                 |

**TABLE 3-267: ELECTRICAL CHARACTERISTICS OF THE CRYSTAL OSCILLATOR—LOW GAIN MODE (32 KHZ)**

| Parameter                                   | Symbol     | Min. | Typ.  | Max.  | Unit | Condition                                |
|---------------------------------------------|------------|------|-------|-------|------|------------------------------------------|
| Operating frequency                         | FXTAL      | —    | 32    | —     | kHz  | —                                        |
| Accuracy                                    | ACCXTAL    | —    | —     | 0.004 | %    | 005, 010, 025, 050, 060, and 090 devices |
|                                             |            | —    | —     | 0.005 | %    | 150 devices                              |
| Output duty cycle                           | CYXTAL     | —    | 49–51 | 47–53 | %    | —                                        |
| Output period jitter (peak to peak)         | JITPERXTAL | —    | 150   | 300   | ns   | —                                        |
| Output cycle to cycle jitter (peak to peak) | JITCYXTAL  | —    | 150   | 300   | ns   | —                                        |

**TABLE 3-267: ELECTRICAL CHARACTERISTICS OF THE CRYSTAL OSCILLATOR—LOW GAIN MODE (32 KHZ)**

|                                                   |          |                     |       |                     |    |                                     |
|---------------------------------------------------|----------|---------------------|-------|---------------------|----|-------------------------------------|
| Operating current                                 | IDYNXTAL | —                   | 0.044 | —                   | mA | 010 and 050 devices                 |
|                                                   |          | —                   | 0.060 | —                   | mA | 005, 025, 060, 090, and 150 devices |
| Input logic level high                            | VIHXTAL  | 0.9 V <sub>PP</sub> | —     | —                   | V  | —                                   |
| Input logic level low                             | VILXTAL  | —                   | —     | 0.1 V <sub>PP</sub> | V  | —                                   |
| Startup time (regarding stable oscillator output) | SUXTAL   | —                   | —     | 115                 | ms | 005, 025, 050, 090, and 150 devices |
|                                                   |          | —                   | —     | 126                 | ms | 010 devices                         |

### 3.20 On-Chip Oscillator

The following tables list electrical characteristics of the available on-chip oscillators in the IGLOO 2 FPGAs and SmartFusion 2 SoC FPGAs.

**TABLE 3-268: ELECTRICAL CHARACTERISTICS OF THE 50 MHZ RC OSCILLATOR**

| Parameter                    | Symbol   | Typ.  | Max.      | Unit | Condition                      |
|------------------------------|----------|-------|-----------|------|--------------------------------|
| Operating frequency          | F50RC    | 50    | —         | MHz  | —                              |
| Accuracy                     | ACC50RC  | 1     | 4         | %    | 050 devices                    |
|                              |          | 1     | 5         | %    | 005, 025, and 060 devices      |
|                              |          | 1     | 6.3       | %    | 090 devices                    |
|                              |          | 1     | 7.1       | %    | 010 and 150 devices            |
| Output duty cycle            | CYC50RC  | 49–51 | 46.5–53.5 | %    | —                              |
| Output jitter (peak to peak) | JIT50RC  | —     | —         | —    | Period Jitter                  |
|                              |          | 200   | 300       | ps   | 005, 010, 050, and 060 devices |
|                              |          | 200   | 400       | ps   | 150 devices                    |
|                              |          | 300   | 500       | ps   | 025 and 090 devices            |
|                              |          | —     | —         | —    | Cycle-to-Cycle Jitter          |
|                              |          | 200   | 300       | ps   | 005 and 050 devices            |
|                              |          | 320   | 420       | ps   | 010, 060, and 150 devices      |
| Operating current            | IDYN50RC | 6.5   | —         | mA   | —                              |
|                              |          | —     | —         | —    | —                              |

**TABLE 3-269: ELECTRICAL CHARACTERISTICS OF THE 1 MHZ RC OSCILLATOR**

| Parameter           | Symbol | Typ.  | Max.      | Unit | Condition                               |
|---------------------|--------|-------|-----------|------|-----------------------------------------|
| Operating frequency | F1RC   | 1     | —         | MHz  | —                                       |
| Accuracy            | ACC1RC | 1     | 3         | %    | 005, 010, 025, and 050 devices          |
|                     |        | 1     | 4.5       | %    | 060, and 150 devices                    |
|                     |        | 1     | 5.6       | %    | 090 devices                             |
| Output duty cycle   | CYC1RC | 49–51 | 46.5–53.5 | %    | 005, 010, 025, 050, 090 and 150 devices |
|                     |        | 49–51 | 46.0–54.0 | %    | 060 devices                             |

**TABLE 3-269: ELECTRICAL CHARACTERISTICS OF THE 1 MHz RC OSCILLATOR (CONTINUED)**

| Parameter                    | Symbol  | Typ. | Max. | Unit | Condition                      |
|------------------------------|---------|------|------|------|--------------------------------|
| Output jitter (peak to peak) | JIT1RC  | —    | —    | —    | Period Jitter                  |
|                              |         | 10   | 20   | ns   | 005, 010, 025, and 050 devices |
|                              |         | 10   | 28   | ns   | 060, 090 and 150 devices       |
|                              |         | —    | —    | —    | Cycle-to-Cycle Jitter          |
|                              |         | 10   | 20   | ns   | 005, 010, and 050 devices      |
|                              |         | 10   | 35   | ns   | 025, 060, and 150 devices      |
|                              |         | 10   | 45   | ns   | 090 devices                    |
| Operating current            | IDYN1RC | 0.1  | —    | mA   | —                              |
| Startup time                 | SU1RC   | —    | 17   | μs   | 050, 090, and 150 devices      |
|                              |         | —    | 18   | μs   | 005, 010, and 025 devices      |

**Note:** Use of 1 MHz internal RC Oscillator as the reference clock for Fabric CCC is not recommended. The 50 MHz internal RC Oscillator must be used.

### 3.21 Clock Conditioning Circuits (CCC)

The following table lists the CCC/PLL specifications in worst-case industrial conditions when  $T_J = 100\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-270: IGLOO 2 AND SMARTFUSION 2 SOC FPGAS CCC/PLL SPECIFICATION**

| Parameter                                                      | Min   | Typ. | Max. | Unit | Conditions                                            |
|----------------------------------------------------------------|-------|------|------|------|-------------------------------------------------------|
| Clock conditioning circuitry input frequency $F_{IN\_CCC}$     | 1     | —    | 200  | MHz  | All CCC                                               |
|                                                                | 0.032 | —    | 200  | MHz  | 32 kHz capable CCC                                    |
| Clock conditioning circuitry output frequency $F_{OUT\_CCC}$   | 0.078 | —    | 400  | MHz  | —                                                     |
| PLL VCO frequency <sup>†</sup>                                 | 500   | —    | 1000 | MHz  | —                                                     |
| Delay increments in programmable delay blocks                  | —     | 75   | 100  | ps   | —                                                     |
| Number of programmable values in each programmable delay block | —     | —    | 64   |      | —                                                     |
| Acquisition time                                               | —     | 70   | 100  | μs   | $F_{IN} \geq 1\text{ MHz}$                            |
|                                                                | —     | 1    | 16   | ms   | $F_{IN} = 32\text{ kHz}$                              |
| Input duty cycle (reference clock)                             | —     | —    | —    | —    | Internal Feedback                                     |
|                                                                | 10    | —    | 90   | %    | $1\text{ MHz} \leq F_{IN\_CCC} \leq 25\text{ MHz}$    |
|                                                                | 25    | —    | 75   | %    | $25\text{ MHz} \leq F_{IN\_CCC} \leq 100\text{ MHz}$  |
|                                                                | 35    | —    | 65   | %    | $100\text{ MHz} \leq F_{IN\_CCC} \leq 150\text{ MHz}$ |
|                                                                | 45    | —    | 55   | %    | $150\text{ MHz} \leq F_{IN\_CCC} \leq 200\text{ MHz}$ |
|                                                                | —     | —    | —    | —    | External Feedback (CCC, FPGA, Off-Chip)               |
|                                                                | 25    | —    | 75   | %    | $1\text{ MHz} \leq F_{IN\_CCC} \leq 25\text{ MHz}$    |
|                                                                | 35    | —    | 65   | %    | $25\text{ MHz} \leq F_{IN\_CCC} \leq 35\text{ MHz}$   |
|                                                                | 45    | —    | 55   | %    | $35\text{ MHz} \leq F_{IN\_CCC} \leq 50\text{ MHz}$   |

**TABLE 3-270: IGLOO 2 AND SMARTFUSION 2 SOC FPGAS CCC/PLL SPECIFICATION**

| Parameter                              | Min | Typ. | Max. | Unit | Conditions                                                                       |
|----------------------------------------|-----|------|------|------|----------------------------------------------------------------------------------|
| Output duty cycle                      | 48  | —    | 52   | %    | 050 devices $F_{OUT} \leq 400$ MHz                                               |
|                                        | 48  | —    | 52   | %    | 005, 010, and 025 devices<br>$F_{OUT} < 350$ MHz                                 |
|                                        | 46  | —    | 54   | %    | 005, 010, and 025 devices<br>$350 \text{ MHz} \leq F_{out} \leq 400 \text{ MHz}$ |
|                                        | 48  | —    | 52   | %    | 060 and 090 devices<br>$F_{OUT} \leq 100$ MHz                                    |
|                                        | 44  | —    | 52   | %    | 060 and 090 devices<br>$100 \text{ MHz} \leq F_{OUT} \leq 400 \text{ MHz}$       |
|                                        | 48  | —    | 52   | %    | 150 devices<br>$F_{OUT} \leq 120$ MHz                                            |
|                                        | 45  | —    | 52   | %    | 150 devices<br>$120 \text{ MHz} \leq F_{OUT} \leq 400 \text{ MHz}$               |
| PLL_ARST_N pulse width                 | 1   | —    | —    | —    | $\mu\text{s}$                                                                    |
| <b>Spread Spectrum Characteristics</b> |     |      |      |      |                                                                                  |
| Modulation frequency range             | 25  | 35   | 50   | k    | —                                                                                |
| Modulation depth range                 | 0   |      | 1.5  | %    | —                                                                                |
| Modulation depth control               | —   | 0.5  | —    | %    | —                                                                                |

- The minimum output clock frequency is limited by the PLL. For more information, see [UG0449: SmartFusion2 and IGLOO2 Clocking Resources User Guide](#).
- †. The PLL is used in conjunction with the Clock Conditioning Circuitry. Performance is limited by the CCC output frequency.

The following table lists the CCC/PLL jitter specifications in worst-case industrial conditions when  $T_J = 100^\circ\text{C}$  and  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-271: IGLOO 2 AND SMARTFUSION 2 SOC FPGAS CCC/PLL JITTER SPECIFICATIONS**

| CCC Output Maximum Peak-to-Peak Period Jitter F <sub>OUT_CCC</sub> |                                                 |                                             |         |         |                                                |      |
|--------------------------------------------------------------------|-------------------------------------------------|---------------------------------------------|---------|---------|------------------------------------------------|------|
| Parameter                                                          | Conditions/Package Combinations                 |                                             |         |         |                                                | Unit |
| 10 FG484, 050 FG896/<br>FG484/FCS325<br>Packages <sup>1</sup>      | SSO = 0                                         | 0 < SSO ≤ 2                                 | SSO ≤ 4 | SSO ≤ 8 | SSO ≤ 16                                       |      |
| 20 MHz to 100 MHz                                                  | Max. (110, ±1% x (1/<br>F <sub>OUT_CCC</sub> )) | Max. (150, ±1% x (1/F <sub>OUT_CCC</sub> )) |         |         |                                                | ps   |
| 100 MHz to 400 MHz                                                 | Max. (120, ±1% x (1/<br>F <sub>OUT_CCC</sub> )) | Max. (150, ±1% x (1/F <sub>OUT_CCC</sub> )) |         |         | Max. (170, ±1% x<br>(1/F <sub>OUT_CCC</sub> )) | ps   |
| 025 FG484/FCS325<br>Package <sup>1</sup>                           | 0 < SSO ≤ 16                                    |                                             |         |         |                                                |      |
| 20 MHz to 74 MHz                                                   | ±1% x (1/F <sub>OUT_CCC</sub> ))                |                                             |         |         |                                                | ps   |
| 74 MHz to 400 MHz                                                  | 210                                             |                                             |         |         |                                                | ps   |
| 005 FG484 Package <sup>1</sup>                                     | 0 < SSO ≤ 16                                    |                                             |         |         |                                                |      |
| 20 MHz to 53 MHz                                                   | ±1% x (1/F <sub>OUT_CCC</sub> ))                |                                             |         |         |                                                | ps   |
| 53 MHz to 400 MHz                                                  | 270                                             |                                             |         |         |                                                | ps   |
| 090 FG676 and FC325<br>Package <sup>1</sup>                        | 0 < SSO ≤ 16                                    |                                             |         |         |                                                |      |
| 20 MHz to 100 MHz                                                  | ±1% x (1/F <sub>OUT_CCC</sub> ))                |                                             |         |         |                                                | ps   |

**TABLE 3-271: IGLOO 2 AND SMARTFUSION 2 SOC FPGAS CCC/PLL JITTER SPECIFICATIONS**

| CCC Output Maximum Peak-to-Peak Period Jitter $F_{OUT\_CCC}$ |                                   |      |
|--------------------------------------------------------------|-----------------------------------|------|
| Parameter                                                    | Conditions/Package Combinations   | Unit |
| 100 MHz to 400 MHz                                           | 150                               | ps   |
| <b>060 FG676 Package</b>                                     | $0 < SSO \leq 16$                 |      |
| 20 MHz to 100 MHz                                            | $\pm 1\% \times (1/F_{OUT\_CCC})$ | ps   |
| 100 MHz to 400 MHz                                           | 150                               |      |
| <b>150 FC1152 Package<sup>1</sup></b>                        | $0 < SSO \leq 16$                 |      |
| 20 MHz to 100 MHz                                            | $\pm 1\% \times (1/F_{OUT\_CCC})$ | ps   |
| 100 MHz to 400 MHz                                           | 120                               | ps   |

. SSO data is based on LVCMOS 2.5V MSIO and/or MSIOD bank I/Os.

### 3.22 JTAG

**TABLE 3-272: JTAG 1532 FOR 005, 010, 025, AND 050 DEVICES**

| Parameter                   | Symbol               | 005   |       | 010   |       | 025   |       | 050   |       | Unit |
|-----------------------------|----------------------|-------|-------|-------|-------|-------|-------|-------|-------|------|
|                             |                      | –1    | –Std  | –1    | –Std  | –1    | –Std  | –1    | –Std  |      |
| Clock to Q (data out)       | T <sub>TCK2Q</sub>   | 7.47  | 8.79  | 7.73  | 9.09  | 7.75  | 9.12  | 7.89  | 9.28  | ns   |
| Reset to Q (data out)       | T <sub>RSTB2Q</sub>  | 7.65  | 9     | 6.43  | 7.56  | 6.13  | 7.21  | 7.40  | 8.70  | ns   |
| Test data input setup time  | T <sub>DISU</sub>    | –1.05 | –0.89 | –0.69 | –0.59 | –0.67 | –0.57 | –0.30 | –0.25 | ns   |
| Test data input hold time   | T <sub>DIHD</sub>    | 2.38  | 2.8   | 2.38  | 2.8   | 2.42  | 2.85  | 2.09  | 2.45  | ns   |
| Test mode select setup time | T <sub>TMSSU</sub>   | –0.73 | –0.62 | –1.03 | –1.21 | –1.1  | –0.94 | 0.28  | 0.33  | ns   |
| Test mode select hold time  | T <sub>TMDHD</sub>   | 1.36  | 1.6   | 1.43  | 1.68  | 1.93  | 2.27  | 0.16  | 0.19  | ns   |
| ResetB removal time         | T <sub>TRSTREM</sub> | –0.77 | –0.65 | –1.08 | –0.92 | –1.33 | –1.13 | –0.45 | –0.38 | ns   |
| ResetB recovery time        | T <sub>TRSTREC</sub> | –0.76 | –0.65 | –1.07 | –0.91 | –1.34 | –1.14 | –0.45 | –0.38 | ns   |
| TCK maximum frequency       | F <sub>TCKMAX</sub>  | 25    | 21.25 | 25    | 21.25 | 25    | 21.25 | 25.00 | 21.25 | MHz  |

**TABLE 3-273: JTAG 1532 FOR 060, 090, AND 150 DEVICES**

| Parameter                   | Symbol               | 060   |       | 090   |       | 150   |       | Unit |
|-----------------------------|----------------------|-------|-------|-------|-------|-------|-------|------|
|                             |                      | –1    | –Std  | –1    | –Std  | –1    | –Std  |      |
| Clock to Q (data out)       | T <sub>TCK2Q</sub>   | 8.38  | 9.86  | 8.96  | 10.54 | 8.66  | 10.19 | ns   |
| Reset to Q (data out)       | T <sub>RSTB2Q</sub>  | 8.54  | 10.04 | 7.75  | 9.12  | 8.79  | 10.34 | ns   |
| Test data input setup time  | T <sub>DISU</sub>    | –1.18 | –1    | –1.31 | –1.11 | –0.96 | –0.82 | ns   |
| Test data input hold time   | T <sub>DIHD</sub>    | 2.52  | 2.97  | 2.68  | 3.15  | 2.57  | 3.02  | ns   |
| Test mode select setup time | T <sub>TMSSU</sub>   | –0.97 | –0.83 | –1.02 | –0.87 | –0.53 | –0.45 | ns   |
| Test mode select hold time  | T <sub>TMDHD</sub>   | 1.7   | 2     | 1.67  | 1.96  | 1.02  | 1.2   | ns   |
| ResetB removal time         | T <sub>TRSTREM</sub> | –1.21 | –1.03 | –0.76 | –0.65 | –1.03 | –0.88 | ns   |
| ResetB recovery time        | T <sub>TRSTREC</sub> | –1.21 | –1.03 | –0.77 | –0.65 | –1.03 | –0.88 | ns   |
| TCK maximum frequency       | F <sub>TCKMAX</sub>  | 25    | 21.25 | 25    | 21.25 | 25    | 21.25 | MHz  |

**Note:** The JTAG IOs are LVC MOS/LVTTL IOs (TMS, TRSTB, TDI, TCK, and TDO). The JTAG IOs are powered by V<sub>DDI</sub> of the Bank they are located in.

### 3.23 System Controller SPI Characteristics

The following table lists the system controller characteristics in worst-case industrial conditions when  $T_J = 100\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{V}$ . For timing parameter, see [Figure 3-22](#).

**TABLE 3-274: SYSTEM CONTROLLER SPI CHARACTERISTICS FOR ALL DEVICES**

| Symbol                                                                                            | Description                                             | Conditions                                                                                              | Min.                    | Typ.  | Max. | Unit |
|---------------------------------------------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------------------------------------------------------|-------------------------|-------|------|------|
| sp1                                                                                               | SC_SPI_SCK minimum period                               | —                                                                                                       | 20                      | —     | —    | ns   |
| sp2                                                                                               | SC_SPI_SCK minimum pulse width high                     | —                                                                                                       | 10                      | —     | —    | ns   |
| sp3                                                                                               | SC_SPI_SCK minimum pulse width low                      | —                                                                                                       | 10                      | —     | —    | ns   |
| sp4                                                                                               | SC_SPI_SCK, SC_SPI_SDO, SC_SPI_SS rise time (10%–90%) 1 | I/O configuration: LVTTTL<br>3.3V–20 mA<br>AC loading: 35 pF<br>Test conditions: Typical voltage, 25 °C | —                       | 1.239 | —    | ns   |
| sp5 <sup>1</sup>                                                                                  | SC_SPI_SCK, SC_SPI_SDO, SC_SPI_SS fall time (10%–90%) 1 | I/O configuration: LVTTTL<br>3.3V–20 mA<br>AC loading: 35 pF<br>Test conditions: Typical voltage, 25 °C | —                       | 1.245 | —    | ns   |
| sp6                                                                                               | SC_SPI_SDO setup time                                   | —                                                                                                       | (SC_SPI_LK_period/2)-14 | —     | —    | ns   |
| sp7                                                                                               | SC_SPI_SDO hold time                                    | —                                                                                                       | (SC_SPI_LK_period/2)-1  | —     | —    | ns   |
| sp8                                                                                               | SC_SPI_SDI setup time                                   | —                                                                                                       | 4                       | —     | —    | ns   |
| sp9                                                                                               | SC_SPI_SDI hold time                                    | —                                                                                                       | 6                       | —     | —    | ns   |
| Delay on SC_SPI_SDO after SC_SPI_SS is de-asserted when using SPI slave programming. <sup>2</sup> |                                                         |                                                                                                         |                         |       | 265  | ns   |

For specific Rise/Fall Times, board design considerations and detailed output buffer resistances, use the corresponding IBIS models located on the Microchip FPGA Products Group website:

For IGLOO 2: <https://www.microchip.com/en-us/products/fpgas-and-plds/fpgas/igloo-2-fpgas#Documentation>.

For SmartFusion 2: <https://www.microchip.com/en-us/products/fpgas-and-plds/system-on-chip-fpgas/smartfusion-2-fpgas#Documentation>

Use the supported I/O Configurations for the System Controller SPI in the following table.

2. SC\_SPI\_SDO becomes tri-stated after SC\_SPI\_SS is de-asserted.

**TABLE 3-275: SUPPORTED I/O CONFIGURATIONS FOR SYSTEM CONTROLLER SPI (FOR MSIO BANK ONLY)**

| Voltage Supply | I/O Drive Configuration | Unit |
|----------------|-------------------------|------|
| 3.3V           | 20                      | mA   |
| 2.5V           | 16                      | mA   |
| 1.8V           | 12                      | mA   |
| 1.5V           | 8                       | mA   |
| 1.2V           | 4                       | mA   |

### 3.24 Power-up to Functional Times


The following table lists power-up to functional times in worst-case industrial conditions when  $T_J = 100\text{ }^{\circ}\text{C}$ ,  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-276: POWER-UP TO FUNCTIONAL TIMES WHEN MSS/HPMS IS USED**

| Symbol                  | From             | To                      | Description                                       | Maximum Power-up to Functional Time ( $\mu\text{s}$ ) |      |      |      |      |      |      |
|-------------------------|------------------|-------------------------|---------------------------------------------------|-------------------------------------------------------|------|------|------|------|------|------|
|                         |                  |                         |                                                   | 005                                                   | 010  | 025  | 050  | 060  | 090  | 150  |
| $T_{\text{POR2OUT}}$    | POWER_ON_RESET_N | Output available at I/O | Fabric to output                                  | 647                                                   | 500  | 531  | 483  | 474  | 524  | 647  |
| $T_{\text{POR2MSSRST}}$ | POWER_ON_RESET_N | MSS_RESET_N_M2F         | Fabric to MSS                                     | 644                                                   | 497  | 528  | 480  | 468  | 518  | 641  |
| $T_{\text{MSSRST2OUT}}$ | MSS_RESET_N_M2F  | Output available at I/O | MSS to output                                     | 3.6                                                   | 3.6  | 3.6  | 3.4  | 4.9  | 4.8  | 4.8  |
| $T_{\text{VDD2OUT}}$    | $V_{DD}$         | Output available at I/O | $V_{DD}$ at its minimum threshold level to output | 3096                                                  | 2975 | 3012 | 2959 | 2869 | 2992 | 3225 |
| $T_{\text{VDD2POR}}$    | $V_{DD}$         | POWER_ON_RESET_N        | $V_{DD}$ at its minimum threshold level to fabric | 2476                                                  | 2487 | 2496 | 2486 | 2406 | 2563 | 2602 |
| $T_{\text{VDD2MSSRST}}$ | $V_{DD}$         | MSS_RESET_N_M2F         | $V_{DD}$ at its minimum threshold level to MSS    | 3093                                                  | 2972 | 3008 | 2956 | 2864 | 2987 | 3220 |
| $T_{\text{VDD2WPU}}$    | DEVRST_N         | DDRIO Inbuf weak pull   | DEVRST_N to Inbuf weak pull                       | 2500                                                  | 2487 | 2509 | 2475 | 2507 | 2519 | 2617 |
|                         | DEVRST_N         | MSIO Inbuf weak pull    | DEVRST_N to Inbuf weak pull                       | 2504                                                  | 2491 | 2510 | 2478 | 2517 | 2525 | 2620 |
|                         | DEVRST_N         | MSIOD Inbuf weak pull   | DEVRST_N to Inbuf weak pull                       | 2479                                                  | 2468 | 2493 | 2458 | 2486 | 2499 | 2595 |

**Note:** For more information about power-up times, see [UG0331: SmartFusion2 Microcontroller Subsystem User Guide](#) and [UG0448: IGLOO2 FPGA High Performance Memory Subsystem User Guide](#).

**FIGURE 3-17: POWER-UP TO FUNCTIONAL TIMING DIAGRAM FOR SMARTFUSION 2**

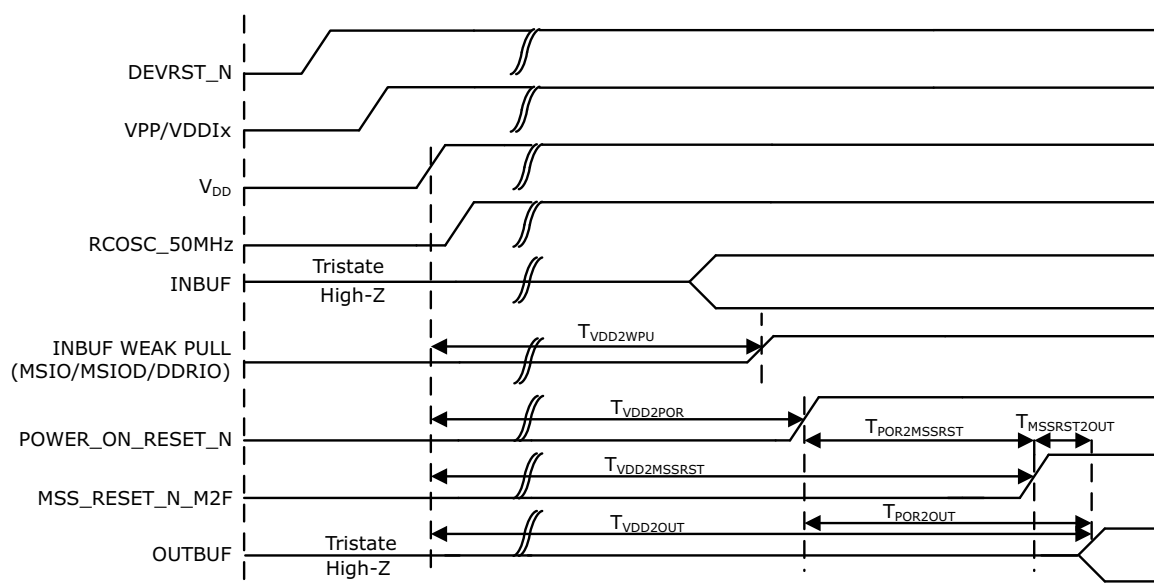


The following table lists power-up to functional times in worst-case industrial conditions when  $T_J = 100\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-277: POWER-UP TO FUNCTIONAL TIMES WHEN MSS/HPMS IS NOT USED**

| Symbol               | From             | To                      | Description                                              | Maximum Power-up to Functional Time (μS) |      |      |      |      |      |      |
|----------------------|------------------|-------------------------|----------------------------------------------------------|------------------------------------------|------|------|------|------|------|------|
|                      |                  |                         |                                                          | 005                                      | 010  | 025  | 050  | 060  | 090  | 150  |
| T <sub>POR2OUT</sub> | POWER_ON_RESET_N | Output available at I/O | Fabric to output                                         | 114                                      | 114  | 114  | 113  | 114  | 114  | 114  |
| T <sub>VDD2OUT</sub> | V <sub>DD</sub>  | Output available at I/O | V <sub>DD</sub> at its minimum threshold level to output | 2587                                     | 2600 | 2607 | 2558 | 2591 | 2600 | 2699 |
| T <sub>VDD2POR</sub> | V <sub>DD</sub>  | POWER_ON_RESET_N        | V <sub>DD</sub> at its minimum threshold level to fabric | 2474                                     | 2486 | 2493 | 2445 | 2477 | 2486 | 2585 |
| T <sub>VDD2WPU</sub> | DEVRST_N         | DDRIO Inbuf weak pull   | DEVRST_N to Inbuf weak pull                              | 2500                                     | 2487 | 2509 | 2475 | 2507 | 2519 | 2617 |
|                      | DEVRST_N         | MSIO Inbuf weak pull    | DEVRST_N to Inbuf weak pull                              | 2504                                     | 2491 | 2510 | 2478 | 2517 | 2525 | 2620 |
|                      | DEVRST_N         | MSIOD Inbuf weak pull   | DEVRST_N to Inbuf weak pull                              | 2479                                     | 2468 | 2493 | 2458 | 2486 | 2499 | 2595 |

**Note:** For more information about power-up times, see [UG0448: IGLOO2 FPGA High Performance Memory Subsystem User Guide](#) and [UG0331: SmartFusion2 Microcontroller Subsystem User Guide](#).

**FIGURE 3-18: POWER-UP TO FUNCTIONAL TIMING DIAGRAM FOR IGLOO 2**

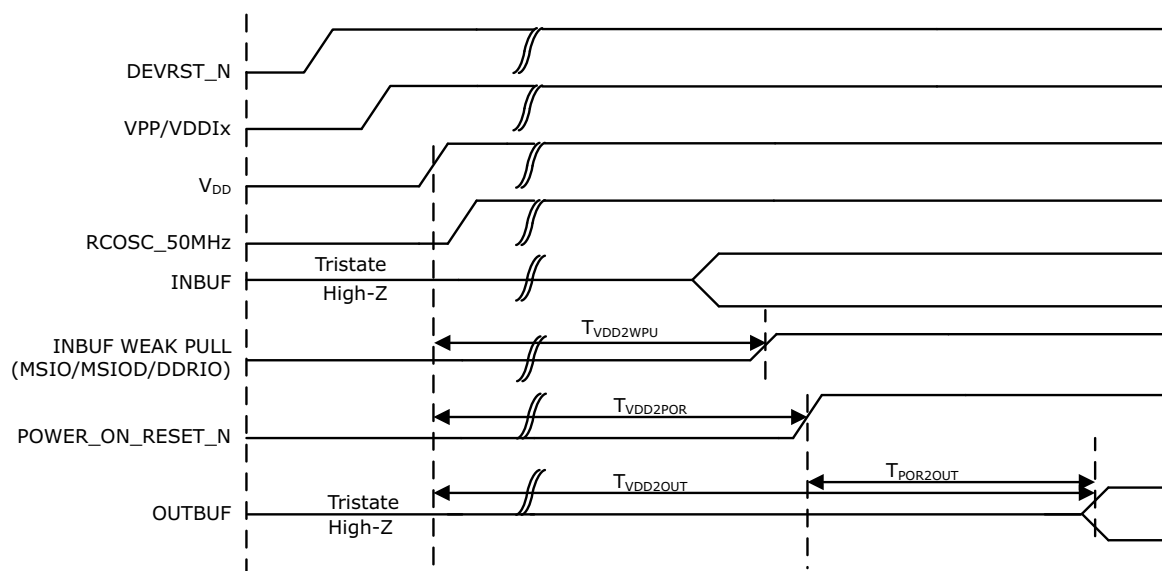

### 3.25 DEV\_RST\_N Characteristics

**TABLE 3-278: DEV\_RST\_N CHARACTERISTICS FOR ALL DEVICES**

| Parameter     | Symbol                           | Min. | Typ. | Max. | Unit |
|---------------|----------------------------------|------|------|------|------|
| TRAMPDEV_RSTN | DEV_RST_N ramp time (10% to 90%) | —    | —    | 1    | μs   |
| FMAXPDEV_RSTN | DEV_RST_N cycling rate           | —    | —    | 100  | kHz  |
| MPWDEV_RSTN   | DEV_RST_N pulse width            | 1    | —    | —    | μs   |

**TABLE 3-279: DEVICE RESET PIN TYPES AND DESCRIPTIONS**

| Pin                      | Type  | Description                                                                                                                                                                                                                                                                                                                                                                                                                             | Unused Conditions                                   |
|--------------------------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
| <b>Device Reset I/Os</b> |       |                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                     |
| DEV_RST_N                | Input | Device reset; active low and powered by V <sub>PP</sub> . It is an asynchronous signal and Schmitt trigger input with the maximum slew rate must not exceed 1 μs. When DEV_RST_N is asserted, all user I/Os are fully tri-stated. In unused condition, pull up to V <sub>PP</sub> through 10 k resistor. Use the 3.3V I/O standards specification. Any of the 3.3V I/O standards, for example, LVTTTL/LVCMOS is applicable for DEV_RST. | Pull-up to V <sub>PP</sub> through a 10 k resistor. |


### 3.26 DEVRST\_N to Functional Times

The following table lists the DEVRST\_N to functional times in worst-case industrial conditions when  $T_J = 100\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{V}$ .


**TABLE 3-280: DEVRST\_N TO FUNCTIONAL TIMES WHEN MSS/HPMS IS USED**

| Symbol              | From             | To                      | Description                                       | Maximum Power-Up to Functional Time (uS) |     |     |     |     |     |     |
|---------------------|------------------|-------------------------|---------------------------------------------------|------------------------------------------|-----|-----|-----|-----|-----|-----|
|                     |                  |                         |                                                   | 005                                      | 010 | 025 | 050 | 060 | 090 | 150 |
| $T_{POR2OUT}$       | POWER_ON_RESET_N | Output available at I/O | Fabric to output                                  | 518                                      | 501 | 527 | 521 | 422 | 419 | 694 |
| $T_{POR2MSSRST}$    | POWER_ON_RESET_N | MSS_RESET_N_M2F         | Fabric to MSS                                     | 515                                      | 497 | 524 | 518 | 417 | 414 | 689 |
| $T_{MSSRST2OUT}$    | MSS_RESET_N_M2F  | Output available at I/O | MSS to output                                     | 3.5                                      | 3.5 | 3.5 | 3.3 | 4.8 | 4.8 | 4.8 |
| $T_{DEVRST2OUT}$    | DEVRST_N         | Output available at I/O | $V_{DD}$ at its minimum threshold level to output | 706                                      | 768 | 715 | 691 | 641 | 635 | 871 |
| $T_{DEVRST2POR}$    | DEVRST_N         | POWER_ON_RESET_N        | $V_{DD}$ at its minimum threshold level to fabric | 233                                      | 289 | 216 | 213 | 237 | 234 | 219 |
| $T_{DEVRST2MSSRST}$ | DEVRST_N         | MSS_RESET_N_M2F         | $V_{DD}$ at its minimum threshold level to MSS    | 702                                      | 765 | 712 | 688 | 636 | 630 | 866 |
| $T_{DEVRST2WPU}$    | DEVRST_N         | DDRIO Inbuf weak pull   | DEVRST_N to Inbuf weak pull                       | 208                                      | 202 | 197 | 193 | 216 | 215 | 215 |
|                     | DEVRST_N         | MSIO Inbuf weak pull    | DEVRST_N to Inbuf weak pull                       | 208                                      | 202 | 197 | 193 | 216 | 215 | 215 |
|                     | DEVRST_N         | MSIOD Inbuf weak pull   | DEVRST_N to Inbuf weak pull                       | 208                                      | 202 | 197 | 193 | 216 | 215 | 215 |

**FIGURE 3-19: DEVRST\_N TO FUNCTIONAL TIMING DIAGRAM FOR SMARTFUSION 2**

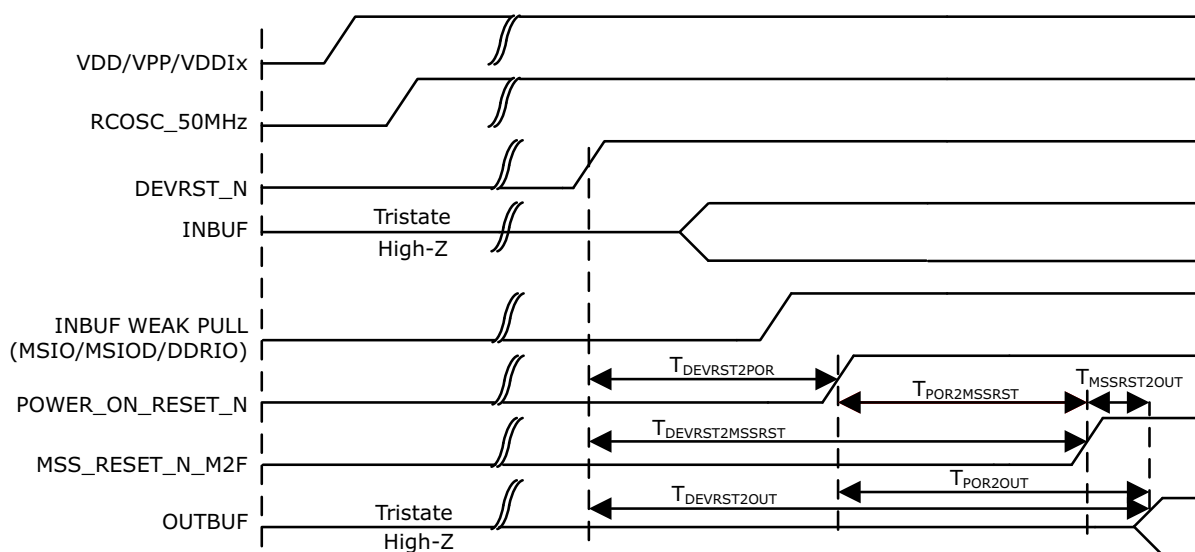

**FIGURE 3-20: DEVRST\_N TO FUNCTIONAL TIMING DIAGRAM FOR IGLOO 2**

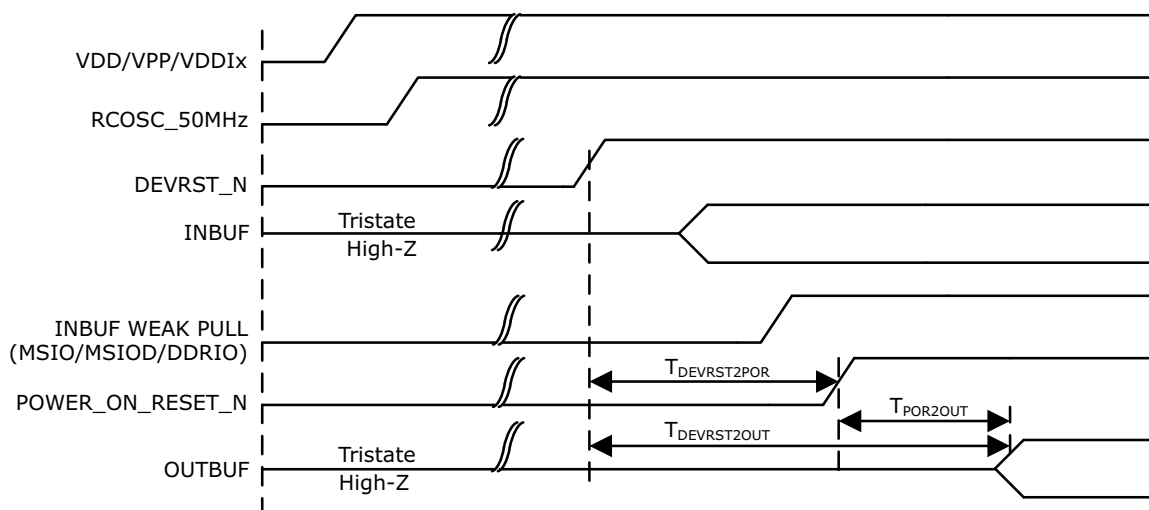

The following table lists the DEVRST\_N to functional times in worst-case industrial conditions when  $T_J = 100\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-281: DEVRST\_N TO FUNCTIONAL TIMES WHEN MSS/HPMS IS NOT USED**

| Symbol               | From            | To                      | Description      | Maximum Power-up to Functional Time (uS) |     |     |     |     |     |     |
|----------------------|-----------------|-------------------------|------------------|------------------------------------------|-----|-----|-----|-----|-----|-----|
|                      |                 |                         |                  | 005                                      | 010 | 025 | 050 | 060 | 090 | 150 |
| T <sub>POR2OUT</sub> | POWER_ON_RSET_N | Output available at I/O | Fabric to output | 114                                      | 116 | 113 | 113 | 115 | 115 | 114 |

**TABLE 3-281: DEVRST\_N TO FUNCTIONAL TIMES WHEN MSS/HPMS IS NOT USED**

|                         |          |                         |                                                          |     |     |     |     |     |     |     |
|-------------------------|----------|-------------------------|----------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|
| T <sub>DEVRST2OUT</sub> | DEVRST_N | Output available at I/O | V <sub>DD</sub> at its minimum threshold level to output | 314 | 353 | 314 | 307 | 343 | 341 | 341 |
| T <sub>DEVRST2POR</sub> | DEVRST_N | POWER_ON_R ESET_N       | V <sub>DD</sub> at its minimum threshold level to fabric | 200 | 238 | 201 | 195 | 230 | 229 | 227 |
| T <sub>DEVRST2WPU</sub> | DEVRST_N | DDRIO Inbuf weak pull   | DEVRST_N to Inbuf weak pull                              | 208 | 202 | 197 | 193 | 216 | 215 | 215 |
|                         | DEVRST_N | MSIO Inbuf weak pull    | DEVRST_N to Inbuf weak pull                              | 208 | 202 | 197 | 193 | 216 | 215 | 215 |
|                         | DEVRST_N | MSIOD Inbuf weak pull   | DEVRST_N to Inbuf weak pull                              | 208 | 202 | 197 | 193 | 216 | 215 | 215 |

### 3.27 Flash\*Freeze Timing Characteristics

The following table lists the Flash\*Freeze entry and exit times in worst-case industrial conditions when T<sub>J</sub> = 100 °C and V<sub>DD</sub> = 1.14V.

**TABLE 3-282: FLASH\*FREEZE ENTRY AND EXIT TIMES**

| Parameter                                     | Symbol    | Entry/Exit Timing<br>FCLK = 100 MHz |     | Entry/Exit Timing<br>FCLK = 3 MHz | Unit | Conditions                                                                          |
|-----------------------------------------------|-----------|-------------------------------------|-----|-----------------------------------|------|-------------------------------------------------------------------------------------|
|                                               |           | 005, 010, 025, 060, 090, and 150    | 050 | All Devices                       |      |                                                                                     |
| Entry time                                    | TFF_ENTRY | 160                                 | 150 | 320                               | μs   | eNVM and MSS/HPMS PLL = ON                                                          |
|                                               |           | 215                                 | 200 | 430                               | μs   | eNVM and MSS/HPMS PLL = OFF                                                         |
| Exit time with respect to the MSS PLL Lock    | TFF_EXIT  | 100                                 | 100 | 140                               | μs   | eNVM and MSS/HPMS PLL = ON during F*F                                               |
|                                               |           | 136                                 | 120 | 190                               | μs   | eNVM = ON and MSS/HPMS PLL = OFF during F*F and MSS/HPMS PLL turned back on at exit |
|                                               |           | 200                                 | 200 | 285                               | μs   | eNVM and MSS/HPMS PLL = OFF during F*F and both are turned back on at exit          |
|                                               |           | 200                                 | 200 | 285                               | μs   | eNVM = OFF and MSS/HPMS PLL = ON during F*F and eNVM turned back on at exit         |
| Exit time with respect to the fabric PLL lock | TFF_EXIT  | 1.5                                 | 1.5 | 1.5                               | ms   | eNVM and MSS/HPMS PLL = ON during F*F                                               |
|                                               |           | 1.5                                 | 1.5 | 1.5                               | ms   | eNVM and MSS/HPMS PLL = OFF during F*F and both are turned back on at exit          |

**TABLE 3-282: FLASH\*FREEZE ENTRY AND EXIT TIMES (CONTINUED)**

| Parameter                                          | Symbol   | Entry/Exit Timing<br>FCLK = 100 MHz    |     | Entry/Exit<br>Timing<br>FCLK = 3 MHz | Unit | Conditions                                                                 |
|----------------------------------------------------|----------|----------------------------------------|-----|--------------------------------------|------|----------------------------------------------------------------------------|
|                                                    |          | 005, 010, 025,<br>060, 090, and<br>150 | 050 | All Devices                          |      |                                                                            |
| Exit time with respect to the fabric buffer output | TFF_EXIT | 21                                     | 15  | 21                                   | μs   | eNVM and MSS/HPMS PLL = ON during F*F                                      |
|                                                    |          | 65                                     | 55  | 65                                   | μs   | eNVM and MSS/HPMS PLL = OFF during F*F and both are turned back on at exit |

. PLL Lock Delay set to 1024 cycles (default).

### 3.28 DDR Memory Interface Characteristics

The following table lists the DDR memory interface characteristics in worst-case industrial conditions when  $T_J = 100\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-283: DDR MEMORY INTERFACE CHARACTERISTICS**

| Standard | Supported Data Rate |      | Unit |
|----------|---------------------|------|------|
|          | Min.                | Max. |      |
| DDR3     | 667                 | 667  | Mbps |
| DDR2     | 667                 | 667  | Mbps |
| LPDDR    | 50                  | 400  | Mbps |

### 3.29 SFP Transceiver Characteristics

IGLOO 2 and SmartFusion 2 SerDes complies with Small Form-factor Pluggable (SFP) requirements as specified in SFP INF-80741. The following table lists the electrical characteristics.

The following table lists the SFP transceiver electrical characteristics in worst-case industrial conditions when  $T_J = 100\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-284: SFP TRANSCEIVER ELECTRICAL CHARACTERISTICS**

| Pin  | Direction | Differential Peak-Peak Voltage |      | Unit |
|------|-----------|--------------------------------|------|------|
|      |           | Min.                           | Max. |      |
| RD±  | Output    | 1600                           | 2400 | mV   |
| TD±† | Input     | 350                            | 2400 | mV   |

. Based on default SerDes transmitter settings for PCIe Gen1. Lower amplitudes are available through programming changes to TX\_AMP setting.

†. Based on Input Voltage Common-Mode (VICM) = 0 V. Requires AC Coupling.

### 3.30 SerDes Electrical and Timing AC and DC Characteristics

PCIe is a high-speed, packet-based, point-to-point, low-pin-count, serial interconnect bus. The IGLOO 2 and SmartFusion 2 SoC FPGAs has up to four hard high-speed serial interface blocks. Each SerDes block contains a PCIe system block. The PCIe system is connected to the SerDes block.

The following table lists the transmitter parameters in worst-case industrial conditions when  $T_J = 100\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-285: TRANSMITTER PARAMETERS**

| Symbol        | Description                                                      | Min.  | Max.          | Unit          |
|---------------|------------------------------------------------------------------|-------|---------------|---------------|
| VTX-DIFF-PP   | Differential swing (2.5 Gbps, 5.0 Gbps)                          | 0.8   | 1.2           | V             |
| VTX-CM-AC-P   | Output common mode voltage (2.5 Gbps)                            | —     | 20            | mV            |
| VTX-CM-AC-PP  | Output common mode voltage (5.0 Gbps)                            | —     | 100           | mV            |
| VTX-RISE-FALL | Rise and fall time (20% to 80%, 2.5 Gbps)                        | 0.125 | —             | UI            |
|               | Rise and fall time (20% to 80%, 5.0 Gbps)                        | 0.15  | —             | UI            |
| ZTX-DIFF-DC   | Output impedance—differential                                    | 80    | 120           | $\Omega$      |
| LTX-SKEW      | Lane-to-lane TX skew within a SerDes block (2.5 Gbps)            | —     | 500 ps + 2 UI | ps            |
|               | Lane-to-lane TX skew within a SerDes block (5.0 Gbps)            | —     | 500 ps + 4 UI | ps            |
| RLTX-DIFF     | Return loss differential mode (2.5 Gbps)                         | –10   | —             | dB            |
|               | Return loss differential mode (5.0 Gbps)<br>0.05 GHz to 1.25 GHz | –10   | —             | dB            |
|               | 1.25 GHz to 2.5 GHz                                              | –8    | —             | dB            |
| RLTX-CM       | Return loss common mode (2.5 Gbps, 5.0 Gbps)                     | –6    | —             | dB            |
| TX-LOCK-RST   | Transmit PLL lock time from reset                                | —     | 10            | $\mu\text{s}$ |
| VTX-AMP       | 100 mV setting                                                   | 90    | 150           | mV            |
|               | 400 mV setting                                                   | 320   | 480           | mV            |
|               | 800 mV setting                                                   | 660   | 940           | mV            |
|               | 1200 mV setting                                                  | 950   | 1400          | mV            |

The following table lists the receiver pa in worst-case industrial conditions when  $T_J = 100\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-286: RECEIVER PARAMETERS**

| Symbol       | Description                                                           | Min.  | Typ.  | Max.  | Unit          |
|--------------|-----------------------------------------------------------------------|-------|-------|-------|---------------|
| VRX-IN-PP-CC | Differential input peak-to-peak sensitivity (2.5 Gbps)                | 0.238 | —     | 1.2   | V             |
|              | Differential input peak-to-peak sensitivity (2.5 Gbps, de-emphasized) | 0.219 | —     | 1.2   | V             |
|              | Differential input peak-to-peak sensitivity (5.0 Gbps)                | 0.300 | —     | 1.2   | V             |
|              | Differential input peak-to-peak sensitivity (5.0 Gbps, de-emphasized) | 0.300 | —     | 1.2   | V             |
| VRX-CM-AC-P  | Input common mode range (AC coupled)                                  | —     | —     | 150   | mV            |
| ZRX-DIFF-DC  | Differential input termination                                        | 80    | 100   | 120   | $\Omega$      |
| REXT         | External calibration resistor                                         | 1,188 | 1,200 | 1,212 | $\Omega$      |
| CDR-LOCK-RST | CDR relock time from reset                                            | —     | —     | 15    | $\mu\text{s}$ |
| RLRX-DIFF    | Return loss differential mode (2.5 Gbps)                              | –10   | —     | —     | dB            |
|              | Return loss differential mode (5.0 Gbps)<br>0.05 GHz to 1.25 GHz      | –10   | —     | —     | dB            |
|              | 1.25 GHz to 2.5 GHz                                                   | –8    | —     | —     | dB            |
| RLRX-CM      | Return loss common mode (2.5 Gbps, 5.0 Gbps)                          | –6    | —     | —     | dB            |

**TABLE 3-286: RECEIVER PARAMETERS (CONTINUED)**

| Symbol               | Description                                            | Min. | Typ. | Max. | Unit |
|----------------------|--------------------------------------------------------|------|------|------|------|
| RX-CID               | CID limit (set by 8B/10B coding, not the receiver PLL) | —    | —    | 200  | UI   |
| VRX-IDLE-DET-DIFF-PP | Signal detect limit                                    | 65   | —    | 175  | mV   |

. AC-coupled, BER =  $e^{-12}$ .

**TABLE 3-287: SERDES PROTOCOL COMPLIANCE**

| Protocol     | Maximum Data Rate (Gbps) | –1  | –Std |
|--------------|--------------------------|-----|------|
| PCIe Gen 1   | 2.5                      | Yes | Yes  |
| PCIe Gen 2   | 5.0                      | Yes | —    |
| XAUI         | 3.125                    | Yes | —    |
| Generic EPCS | 3.2                      | Yes | —    |
| Generic EPCS | 2.5                      | Yes | Yes  |

The following table lists the SerDes reference clock AC specifications in worst-case industrial conditions when  $T_J = 100^\circ\text{C}$  and  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-288: SERDES REFERENCE CLOCK AC SPECIFICATIONS**

| Parameter                       | Symbol                    | Min. | Max. | Unit |
|---------------------------------|---------------------------|------|------|------|
| Reference clock frequency       | $F_{\text{REFCLK}}$       | 100  | 160  | MHz  |
| Reference clock rise time       | $T_{\text{RISE}}$         | 0.6  | 4    | V/ns |
| Reference clock fall time       | $T_{\text{FALL}}$         | 0.6  | 4    | V/ns |
| Reference clock duty cycle      | $T_{\text{CYC}}$          | 40   | 60   | %    |
| Reference clock mismatch        | $M_{\text{MREFCLK}}$      | –300 | 300  | ppm  |
| Reference spread spectrum clock | $\text{SSC}_{\text{ref}}$ | 0    | 5000 | ppm  |

**TABLE 3-289: HCSL MINIMUM AND MAXIMUM DC INPUT LEVELS (APPLICABLE TO SERDES REFCLK ONLY)**

| Parameter                                      | Symbol             | Min.  | Typ. | Max.  | Unit |
|------------------------------------------------|--------------------|-------|------|-------|------|
| <b>Recommended DC Operating Conditions</b>     |                    |       |      |       |      |
| Supply voltage                                 | $V_{\text{DDI}}$   | 2.375 | 2.5  | 2.625 | V    |
| <b>HCSL DC Input Voltage Specification</b>     |                    |       |      |       |      |
| DC Input voltage                               | $V_I$              | 0     | —    | 2.625 | V    |
| <b>HCSL Differential Voltage Specification</b> |                    |       |      |       |      |
| Input common mode voltage                      | $V_{\text{ICM}}$   | 0.05  | —    | 2.4   | V    |
| Input differential voltage                     | $V_{\text{IDIFF}}$ | 100   | —    | 1100  | mV   |

**TABLE 3-290: HCSL MINIMUM AND MAXIMUM AC SWITCHING SPEEDS (APPLICABLE TO SERDES REFCLK ONLY)**

| Parameter                             | Symbol           | Min. | Typ. | Max. | Unit     |
|---------------------------------------|------------------|------|------|------|----------|
| <b>HCSL AC Specifications</b>         |                  |      |      |      |          |
| Maximum data rate (for MSIO I/O bank) | $F_{\text{MAX}}$ | —    | —    | 350  | Mbps     |
| <b>HCSL Impedance Specifications</b>  |                  |      |      |      |          |
| Termination resistance                | $R_t$            | —    | 100  | —    | $\Omega$ |

### 3.31 SmartFusion 2 Specifications

#### 3.31.1 MSS CLOCK FREQUENCY

The following table lists the maximum frequency for MSS main clock in worst-case industrial conditions when  $T_J = 100^\circ\text{C}$  and  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-291: MAXIMUM FREQUENCY FOR MSS MAIN CLOCK**

| Symbol | Description                              | –1  | –Std | Unit |
|--------|------------------------------------------|-----|------|------|
| M3_CLK | Maximum frequency for the MSS main clock | 166 | 142  | MHz  |

#### 3.31.2 SMARTFUSION 2 INTER-INTEGRATED CIRCUIT (I<sup>2</sup>C) CHARACTERISTICS

This section describes the DC and switching of the I<sup>2</sup>C interface. Unless otherwise noted, all output characteristics given are for a 100 pF load on the pins. For timing parameter definitions, see [Figure 3-21](#).

The following table lists the I<sup>2</sup>C characteristics in worst-case industrial conditions when  $T_J = 100^\circ\text{C}$  and  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-292: I<sup>2</sup>C CHARACTERISTICS**

| Parameter                                                                              | Symbol                            | Min.                  | Typ.   | Max.   | Unit          | Conditions                                                                                                                                                 |
|----------------------------------------------------------------------------------------|-----------------------------------|-----------------------|--------|--------|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input low voltage                                                                      | $V_{IL}$                          | –0.3                  | —      | 0.8    | V             | See <a href="#">Section 3.5.6, "Single-Ended I/O Standards"</a> for more information. I/O standard used for illustration: MSIO bank–LVTTTL 8 mA low drive. |
| Input high voltage                                                                     | $V_{IH}$                          | 2                     | —      | 3.45   | V             | See <a href="#">Section 3.5.6, "Single-Ended I/O Standards"</a> for more information. I/O standard used for illustration: MSIO bank–LVTTTL 8 mA low drive. |
| Hysteresis of schmitt triggered inputs for $V_{DDI} > 2\text{V}$                       | $V_{HYS}$                         | $0.05 \times V_{DDI}$ | —      |        | V             | See <a href="#">Table 3-26</a> for more information.                                                                                                       |
| Input current high                                                                     | $I_{IL}$                          | —                     | —      | 10     | $\mu\text{A}$ | See <a href="#">Section 3.5.6, "Single-Ended I/O Standards"</a> for more information.                                                                      |
| Input current low                                                                      | $I_{IH}$                          | —                     | —      | 10     | $\mu\text{A}$ | See <a href="#">Section 3.5.6, "Single-Ended I/O Standards"</a> for more information.                                                                      |
| Input rise time                                                                        | $T_{ir}$                          | —                     | —      | 1000   | ns            | Standard mode                                                                                                                                              |
|                                                                                        |                                   | —                     | —      | 300    | ns            | Fast mode                                                                                                                                                  |
| Input fall time                                                                        | $T_{if}$                          | —                     | —      | 300    | ns            | Standard mode                                                                                                                                              |
|                                                                                        |                                   | —                     | —      | 300    | ns            | Fast mode                                                                                                                                                  |
| Maximum output voltage low (open drain) at 3 mA sink current for $V_{DDI} > 2\text{V}$ | $V_{OL}$                          | —                     | —      | 0.4    | V             | See <a href="#">Section 3.5.6, "Single-Ended I/O Standards"</a> for more information. I/O standard used for illustration: MSIO bank–LVTTTL 8 mA low drive. |
| Pin capacitance                                                                        | $C_{in}$                          | —                     | —      | 10     | pF            | $V_{IN} = 0$ , $f = 1.0\text{ MHz}$                                                                                                                        |
| Output fall time from $V_{IHMin}$ to $V_{ILMax}$ <sup>1</sup>                          | $t_{OF}$                          | —                     | 21.04  | —      | ns            | $V_{IHmin}$ to $V_{ILMax}$ , CLOAD = 400 pF                                                                                                                |
|                                                                                        |                                   | —                     | 5.556  | —      | ns            | $V_{IHmin}$ to $V_{ILMax}$ , CLOAD = 100 pF                                                                                                                |
| Output rise time from $V_{ILMax}$ to $V_{IHMin}$ <sup>1</sup>                          | $t_{OR}$ <sup>1</sup>             | —                     | 19.887 | —      | ns            | $V_{ILMax}$ to $V_{IHmin}$ , CLOAD = 400 pF                                                                                                                |
|                                                                                        |                                   | —                     | 5.218  | —      | ns            | $V_{ILMax}$ to $V_{IHmin}$ , CLOAD = 100 pF                                                                                                                |
| Output buffer maximum pull-down resistance <sup>2, 3</sup>                             | $R_{pull-up}^{\dagger, \ddagger}$ | —                     | —      | 50     | $\Omega$      | —                                                                                                                                                          |
| Output buffer maximum pull-up resistance <sup>2, 4</sup>                               | $R_{pull-down}^{2, *}$            | —                     | —      | 131.25 | $\Omega$      | —                                                                                                                                                          |
| Maximum data rate                                                                      | $D_{MAX}$                         | —                     | —      | 400    | Kbps          | Fast mode                                                                                                                                                  |
|                                                                                        |                                   | —                     | —      | 100    | Kbps          | Standard mode                                                                                                                                              |

**TABLE 3-292: I<sup>2</sup>C CHARACTERISTICS (CONTINUED)**


| Parameter                                                          | Symbol            | Min. | Typ. | Max. | Unit | Conditions |
|--------------------------------------------------------------------|-------------------|------|------|------|------|------------|
| Pulse width of spikes which must be suppressed by the input filter | T <sub>FILT</sub> | —    | 50   | —    | ns   | Fast mode  |

- These values are provided for MSIO Bank–LVTTTL 8 mA Low Drive at 25 °C, typical conditions. For board design considerations and detailed output buffer resistances, use the corresponding IBIS models located on the SoC Products Group website:  
For IGLOO 2: <https://www.microchip.com/en-us/products/fpgas-and-plds/fpgas/igloo-2-fpgas#Documentation>.  
For SmartFusion 2: <https://www.microchip.com/en-us/products/fpgas-and-plds/system-on-chip-fpgas/smartfusion-2-fpgas#Documentation>.
- †. These maximum values are provided for information only. Minimum output buffer resistance values depend on V<sub>DDIX</sub>, drive strength selection, temperature, and process. For board design considerations and detailed output buffer resistances, use the corresponding IBIS models located on the SoC Products Group website:  
For IGLOO 2: <https://www.microchip.com/en-us/products/fpgas-and-plds/fpgas/igloo-2-fpgas#Documentation>.  
For SmartFusion 2: <https://www.microchip.com/en-us/products/fpgas-and-plds/system-on-chip-fpgas/smartfusion-2-fpgas#Documentation>.
- ‡. R(PULL-DOWN-MAX) = (VOLspec)/IOLspec.
- \*. R(PULL-UP-MAX) = (VDDImax–VOHspec)/IOHspec.

The following table lists the I<sup>2</sup>C switching characteristics in worst-case industrial conditions when T<sub>J</sub> = 100 °C and V<sub>DD</sub> = 1.14V.

**TABLE 3-293: I<sup>2</sup>C SWITCHING CHARACTERISTICS**

| Parameter                | Symbol              | –1   | Std  | Unit        |
|--------------------------|---------------------|------|------|-------------|
|                          |                     | Min. | Min. |             |
| Low period of I2C_x_SCL  | T <sub>LOW</sub>    | 1    | 1    | PCLK cycles |
| High period of I2C_x_SCL | T <sub>HIGH</sub>   | 1    | 1    | PCLK cycles |
| START hold time          | T <sub>HD;STA</sub> | 1    | 1    | PCLK cycles |
| START setup time         | T <sub>SU;STA</sub> | 1    | 1    | PCLK cycles |
| DATA hold time           | T <sub>HD;DAT</sub> | 1    | 1    | PCLK cycles |
| DATA setup time          | T <sub>SU;DAT</sub> | 1    | 1    | PCLK cycles |
| STOP setup time          | T <sub>SU;STO</sub> | 1    | 1    | PCLK cycles |

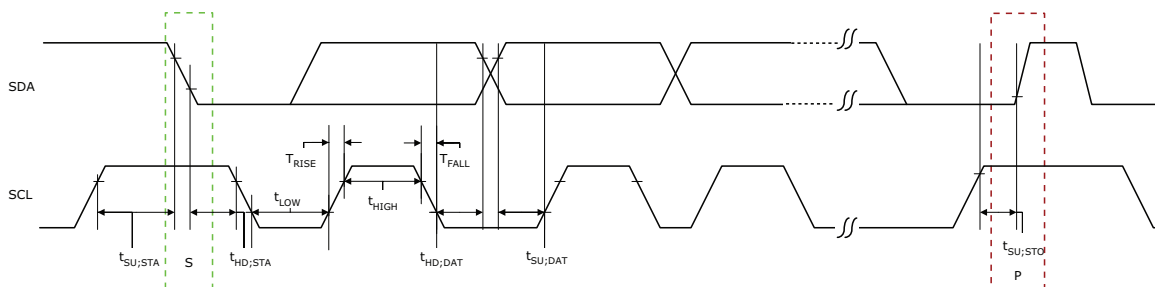**FIGURE 3-21: I<sup>2</sup>C TIMING PARAMETER DEFINITION**

### 3.31.3 SERIAL PERIPHERAL INTERFACE (SPI) CHARACTERISTICS

This section describes the DC and switching of the SPI interface. Unless otherwise noted, all output characteristics given are for a 35 pF load on the pins and all sequential timing characteristics are related to SPI\_x\_CLK. For timing parameter definitions, see [Figure 3-22](#).

The following table lists the SPI characteristics in worst-case industrial conditions when  $T_J = 100\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{V}$

**TABLE 3-294: SPI CHARACTERISTICS FOR ALL DEVICES**

| Symbol                                                                   | Description                                                                | Min.                       | Typ.  | Max. | Unit | Conditions                                                                                            |
|--------------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------|-------|------|------|-------------------------------------------------------------------------------------------------------|
| SPIFMAX                                                                  | Maximum operating frequency of SPI interface                               | —                          | —     | 20   | MHz  | —                                                                                                     |
| sp1                                                                      | SPI_[0 1]_CLK minimum period                                               |                            |       |      |      |                                                                                                       |
|                                                                          | SPI_[0 1]_CLK = PCLK/2                                                     | 12                         | —     | —    | ns   | —                                                                                                     |
|                                                                          | SPI_[0 1]_CLK = PCLK/4                                                     | 24.1                       | —     | —    | ns   | —                                                                                                     |
|                                                                          | SPI_[0 1]_CLK = PCLK/8                                                     | 48.2                       | —     | —    | ns   | —                                                                                                     |
|                                                                          | SPI_[0 1]_CLK = PCLK/16                                                    | 0.1                        | —     | —    | μs   | —                                                                                                     |
|                                                                          | SPI_[0 1]_CLK = PCLK/32                                                    | 0.19                       | —     | —    | μs   | —                                                                                                     |
|                                                                          | SPI_[0 1]_CLK = PCLK/64                                                    | 0.39                       | —     | —    | μs   | —                                                                                                     |
|                                                                          | SPI_[0 1]_CLK = PCLK/128                                                   | 0.77                       | —     | —    | μs   | —                                                                                                     |
| sp2                                                                      | SPI_[0 1]_CLK minimum pulse width high                                     |                            |       |      |      |                                                                                                       |
|                                                                          | SPI_[0 1]_CLK = PCLK/2                                                     | 6                          | —     | —    | ns   | —                                                                                                     |
|                                                                          | SPI_[0 1]_CLK = PCLK/4                                                     | 12.05                      | —     | —    | ns   | —                                                                                                     |
|                                                                          | SPI_[0 1]_CLK = PCLK/8                                                     | 24.1                       | —     | —    | ns   | —                                                                                                     |
|                                                                          | SPI_[0 1]_CLK = PCLK/16                                                    | 0.05                       | —     | —    | μs   | —                                                                                                     |
|                                                                          | SPI_[0 1]_CLK = PCLK/32                                                    | 0.095                      | —     | —    | μs   | —                                                                                                     |
|                                                                          | SPI_[0 1]_CLK = PCLK/64                                                    | 0.195                      | —     | —    | μs   | —                                                                                                     |
|                                                                          | SPI_[0 1]_CLK = PCLK/128                                                   | 0.385                      | —     | —    | μs   | —                                                                                                     |
| sp3                                                                      | SPI_[0 1]_CLK minimum pulse width low                                      |                            |       |      |      |                                                                                                       |
|                                                                          | SPI_[0 1]_CLK = PCLK/2                                                     | 6                          | —     | —    | ns   | —                                                                                                     |
|                                                                          | SPI_[0 1]_CLK = PCLK/4                                                     | 12.05                      | —     | —    | ns   | —                                                                                                     |
|                                                                          | SPI_[0 1]_CLK = PCLK/8                                                     | 24.1                       | —     | —    | ns   | —                                                                                                     |
|                                                                          | SPI_[0 1]_CLK = PCLK/16                                                    | 0.05                       | —     | —    | μs   | —                                                                                                     |
|                                                                          | SPI_[0 1]_CLK = PCLK/32                                                    | 0.095                      | —     | —    | μs   | —                                                                                                     |
|                                                                          | SPI_[0 1]_CLK = PCLK/64                                                    | 0.195                      | —     | —    | μs   | —                                                                                                     |
|                                                                          | SPI_[0 1]_CLK = PCLK/128                                                   | 0.385                      | —     | —    | μs   | —                                                                                                     |
| sp4                                                                      | SPI_[0 1]_CLK, SPI_[0 1]_DO, SPI_[0 1]_SS rise time (10%–90%) <sup>1</sup> | —                          | 2.77  | —    | ns   | I/O Configuration: LVCMOS 2.5V–8 mA.<br>AC loading: 35 pF<br>Test conditions: Typical voltage, 25 °C. |
| sp5                                                                      | SPI_[0 1]_CLK, SPI_[0 1]_DO, SPI_[0 1]_SS fall time (10%–90%)              | —                          | 2.906 | —    | ns   | IO Configuration: LVCMOS 2.5 V–8 mA.<br>AC Loading: 35 pF<br>Test Conditions: Typical Voltage, 25 °C. |
| SPI master configuration (applicable for 005, 010, 025, and 050 devices) |                                                                            |                            |       |      |      |                                                                                                       |
| sp6m                                                                     | SPI_[0 1]_DO setup time <sup>†</sup>                                       | (SPI_x_CLK_period/2) – 8.0 | —     | —    | ns   | —                                                                                                     |
| sp7m                                                                     | SPI_[0 1]_DO hold time <sup>2</sup>                                        | (SPI_x_CLK_period/2) – 2.5 | —     | —    | ns   | —                                                                                                     |
| sp8m                                                                     | SPI_[0 1]_DI setup time <sup>2</sup>                                       | 12                         | —     | —    | ns   | —                                                                                                     |
| sp9m                                                                     | SPI_[0 1]_DI hold time <sup>2</sup>                                        | 2.5                        | —     | —    | ns   | —                                                                                                     |

**TABLE 3-294: SPI CHARACTERISTICS FOR ALL DEVICES (CONTINUED)**


| Symbol                                                                  | Description                          | Min.                                    | Typ. | Max. | Unit | Conditions |
|-------------------------------------------------------------------------|--------------------------------------|-----------------------------------------|------|------|------|------------|
| SPI slave configuration (applicable for 005, 010, 025, and 050 devices) |                                      |                                         |      |      |      |            |
| sp6s                                                                    | SPI_[0 1]_DO setup time <sup>2</sup> | $(\text{SPI\_x\_CLK\_period}/2) - 17.0$ | —    | —    | ns   | —          |
| sp7s                                                                    | SPI_[0 1]_DO hold time <sup>2</sup>  | $(\text{SPI\_x\_CLK\_period}/2) + 3.0$  | —    | —    | ns   | —          |
| sp8s                                                                    | SPI_[0 1]_DI setup time <sup>2</sup> | 2                                       | —    | —    | ns   | —          |
| sp9s                                                                    | SPI_[0 1]_DI hold time <sup>2</sup>  | 7                                       | —    | —    | ns   | —          |
| SPI master configuration (applicable for 060, 090, and 150 devices)     |                                      |                                         |      |      |      |            |
| sp6m                                                                    | SPI_[0 1]_DO setup time <sup>2</sup> | $(\text{SPI\_x\_CLK\_period}/2) - 7.0$  | —    | —    | ns   | —          |
| sp7m                                                                    | SPI_[0 1]_DO hold time <sup>2</sup>  | $(\text{SPI\_x\_CLK\_period}/2) - 9.5$  | —    | —    | ns   | —          |
| sp8m                                                                    | SPI_[0 1]_DI setup time <sup>2</sup> | 15                                      | —    | —    | ns   | —          |
| sp9m                                                                    | SPI_[0 1]_DI hold time <sup>2</sup>  | -2.5                                    | —    | —    | ns   | —          |
| SPI slave configuration (applicable for 060, 090, and 150 devices)      |                                      |                                         |      |      |      |            |
| sp6s                                                                    | SPI_[0 1]_DO setup time <sup>2</sup> | $(\text{SPI\_x\_CLK\_period}/2) - 16.0$ | —    | —    | ns   | —          |
| sp7s                                                                    | SPI_[0 1]_DO hold time <sup>2</sup>  | $(\text{SPI\_x\_CLK\_period}/2) - 3.5$  | —    | —    | ns   | —          |
| sp8s                                                                    | SPI_[0 1]_DI setup time <sup>2</sup> | 3                                       | —    | —    | ns   | —          |
| sp9s                                                                    | SPI_[0 1]_DI hold time <sup>2</sup>  | 2.5                                     | —    | —    | ns   | —          |

For specific Rise/Fall Times board design considerations and detailed output buffer resistances, use the corresponding IBIS models located on the Microchip FPGA Products Group website:

For IGLOO 2: <https://www.microchip.com/en-us/products/fpgas-and-plds/fpgas/igloo-2-fpgas#Documentation>.

For SmartFusion 2: <https://www.microchip.com/en-us/products/fpgas-and-plds/system-on-chip-fpgas/smartfusion-2-fpgas#Documentation>.

†. For allowable pclk configurations, see Serial Peripheral Interface Controller section in the *UG0331: SmartFusion2 Microcontroller Subsystem User Guide*.

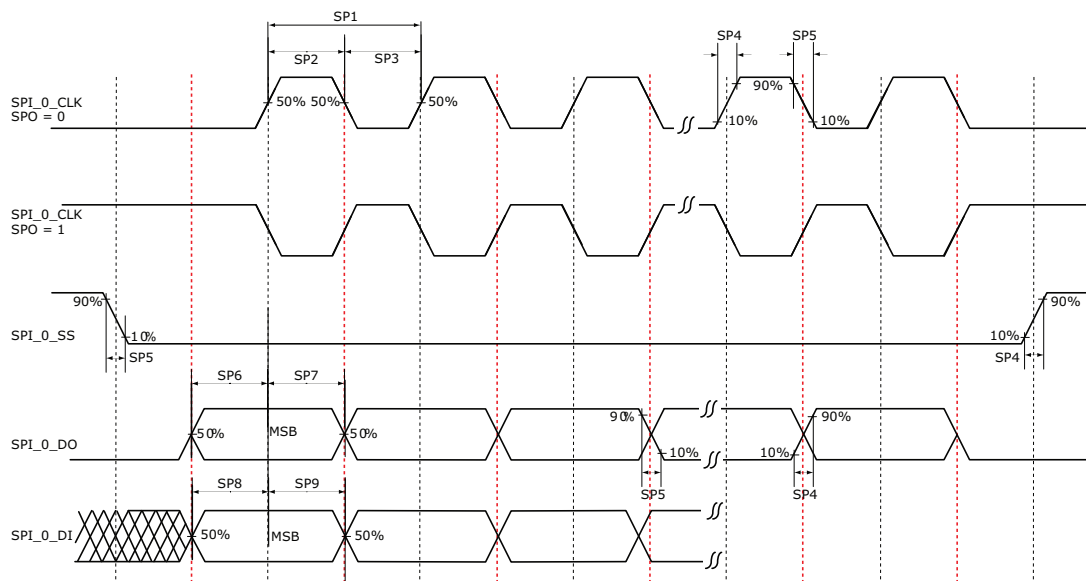**FIGURE 3-22: SPI TIMING FOR A SINGLE FRAME TRANSFER IN MOTOROLA MODE (SPH = 1)**


### 3.32 CAN Controller Characteristics

The following table lists the CAN controller characteristics in worst-case industrial conditions, when  $T_J = 100\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-295: CAN CONTROLLER CHARACTERISTICS**

| Parameter  | Description                                      | –1   | –Std | Unit |
|------------|--------------------------------------------------|------|------|------|
| FCANREFCLK | Internally sourced CAN reference clock frequency | 160  | 136  | MHz  |
| BAUDCANMAX | Maximum CAN performance baud rate                | 1    | 1    | Mbps |
| BAUDCANMIN | Minimum CAN performance baud rate                | 0.05 | 0.05 | Mbps |

. PCLK to CAN controller must be a multiple of 8 MHz.

### 3.33 USB Characteristics

The following table lists the USB characteristics in worst-case industrial conditions, when  $T_J = 100\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-296: USB CHARACTERISTICS**

| Parameter  | Description                                      | –1    | –Std  | Unit |
|------------|--------------------------------------------------|-------|-------|------|
| FUSBREFCLK | Internally sourced USB reference clock frequency | 166   | 142   | MHz  |
| TUSBCLK    | USB clock period                                 | 16.66 | 16.66 | ns   |
| TUSBPD     | Clock to USB data propagation delay              | 9.0   | 9.0   | ns   |
| TUSBSU     | Setup time for USB data                          | 6.0   | 6.0   | ns   |
| TUSBHD     | Hold time for USB data                           | 0     | 0     | ns   |

### 3.34 MMUART Characteristics

The following table lists the MMUART characteristics in worst-case industrial conditions, when  $T_J = 100\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-297: MMUART CHARACTERISTICS**

| Parameter       | Description                                          | –1     | –Std  | Unit |
|-----------------|------------------------------------------------------|--------|-------|------|
| FMMUART_REF_CLK | Internally sourced MMUART reference clock frequency. | 166    | 142   | MHz  |
| BAUDMMUARTTx    | Maximum transmit baud rate                           | 10.375 | 8.875 | Mbps |
| BAUDMMUARTRx    | Maximum receive baud rate                            | 10.375 | 8.875 | Mbps |

### 3.35 IGLOO 2 Specifications

#### 3.35.1 HPMS CLOCK FREQUENCY

The following table lists the maximum frequency for HPMS main clock in worst-case industrial conditions, when  $T_J = 100\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-298: MAXIMUM FREQUENCY FOR HPMS MAIN CLOCK**

| Symbol   | Description                               | –1  | –Std | Unit |
|----------|-------------------------------------------|-----|------|------|
| HPMS_CLK | Maximum frequency for the HPMS main clock | 166 | 142  | MHz  |

#### 3.35.2 IGLOO 2 SERIAL PERIPHERAL INTERFACE (SPI) CHARACTERISTICS

This section describes the DC and switching of the SPI interface. Unless otherwise noted, all output characteristics given are for a 35 pF load on the pins and all sequential timing characteristics are related to SPI\_0\_CLK. For timing parameter definitions, see [Figure 3-23](#).

The following table lists the SPI characteristics in worst-case industrial conditions, when  $T_J = 100\text{ }^{\circ}\text{C}$  and  $V_{DD} = 1.14\text{V}$ .

**TABLE 3-299: SPI CHARACTERISTICS FOR ALL DEVICES**

| Symbol                                                                   | Description                                                                      | Min.                       | Typ.  | Max. | Unit          | Conditions                                                                                               |
|--------------------------------------------------------------------------|----------------------------------------------------------------------------------|----------------------------|-------|------|---------------|----------------------------------------------------------------------------------------------------------|
| SPIFMAX                                                                  | Maximum operating frequency of SPI interface                                     | —                          | —     | 20   | MHz           | —                                                                                                        |
| sp1                                                                      | SPI_[0 1]_CLK minimum period                                                     |                            |       |      |               |                                                                                                          |
|                                                                          | SPI_[0 1]_CLK = PCLK/2                                                           | 12                         | —     | —    | ns            | —                                                                                                        |
|                                                                          | SPI_[0 1]_CLK = PCLK/4                                                           | 24.1                       | —     | —    | ns            | —                                                                                                        |
|                                                                          | SPI_[0 1]_CLK = PCLK/8                                                           | 48.2                       | —     | —    | ns            | —                                                                                                        |
|                                                                          | SPI_[0 1]_CLK = PCLK/16                                                          | 0.1                        | —     | —    | $\mu\text{s}$ | —                                                                                                        |
|                                                                          | SPI_[0 1]_CLK = PCLK/32                                                          | 0.19                       | —     | —    | $\mu\text{s}$ | —                                                                                                        |
|                                                                          | SPI_[0 1]_CLK = PCLK/64                                                          | 0.39                       | —     | —    | $\mu\text{s}$ | —                                                                                                        |
|                                                                          | SPI_[0 1]_CLK = PCLK/128                                                         | 0.77                       | —     | —    | $\mu\text{s}$ | —                                                                                                        |
| sp2                                                                      | SPI_[0 1]_CLK minimum pulse width high                                           |                            |       |      |               |                                                                                                          |
|                                                                          | SPI_[0 1]_CLK = PCLK/2                                                           | 6                          | —     | —    | ns            | —                                                                                                        |
|                                                                          | SPI_[0 1]_CLK = PCLK/4                                                           | 12.05                      | —     | —    | ns            | —                                                                                                        |
|                                                                          | SPI_[0 1]_CLK = PCLK/8                                                           | 24.1                       | —     | —    | ns            | —                                                                                                        |
|                                                                          | SPI_[0 1]_CLK = PCLK/16                                                          | 0.05                       | —     | —    | $\mu\text{s}$ | —                                                                                                        |
|                                                                          | SPI_[0 1]_CLK = PCLK/32                                                          | 0.095                      | —     | —    | $\mu\text{s}$ | —                                                                                                        |
|                                                                          | SPI_[0 1]_CLK = PCLK/64                                                          | 0.195                      | —     | —    | $\mu\text{s}$ | —                                                                                                        |
|                                                                          | SPI_[0 1]_CLK = PCLK/128                                                         | 0.385                      | —     | —    | $\mu\text{s}$ | —                                                                                                        |
| sp3                                                                      | SPI_[0 1]_CLK minimum pulse width low                                            |                            |       |      |               |                                                                                                          |
|                                                                          | SPI_[0 1]_CLK = PCLK/2                                                           | 6                          | —     | —    | ns            | —                                                                                                        |
|                                                                          | SPI_[0 1]_CLK = PCLK/4                                                           | 12.05                      | —     | —    | ns            | —                                                                                                        |
|                                                                          | SPI_[0 1]_CLK = PCLK/8                                                           | 24.1                       | —     | —    | ns            | —                                                                                                        |
|                                                                          | SPI_[0 1]_CLK = PCLK/16                                                          | 0.05                       | —     | —    | $\mu\text{s}$ | —                                                                                                        |
|                                                                          | SPI_[0 1]_CLK = PCLK/32                                                          | 0.095                      | —     | —    | $\mu\text{s}$ | —                                                                                                        |
|                                                                          | SPI_[0 1]_CLK = PCLK/64                                                          | 0.195                      | —     | —    | $\mu\text{s}$ | —                                                                                                        |
|                                                                          | SPI_[0 1]_CLK = PCLK/128                                                         | 0.385                      | —     | —    | $\mu\text{s}$ | —                                                                                                        |
| sp4                                                                      | SPI_[0 1]_CLK,<br>SPI_[0 1]_DO, SPI_[0 1]_SS<br>rise time (10%–90%) <sup>1</sup> | —                          | 2.77  |      | ns            | I/O Configuration: LVCMOS 2.5V - 8 mA.<br>AC loading: 35 pF.<br>test conditions: Typical voltage, 25 °C. |
| sp5                                                                      | SPI_[0 1]_CLK,<br>SPI_[0 1]_DO, SPI_[0 1]_SS<br>fall time (10%–90%)              | —                          | 2.906 |      | ns            | I/O Configuration: LVCMOS 2.5V - 8 mA.<br>AC loading: 35 pF.<br>test conditions: Typical voltage, 25 °C. |
| SPI master configuration (applicable for 005, 010, 025, and 050 devices) |                                                                                  |                            |       |      |               |                                                                                                          |
| sp6m                                                                     | SPI_[0 1]_DO setup time <sup>†</sup>                                             | (SPI_x_CLK_period/2) – 8.0 | —     | —    | ns            | —                                                                                                        |
| sp7m                                                                     | SPI_[0 1]_DO hold time <sup>2</sup>                                              | (SPI_x_CLK_period/2) – 2.5 | —     | —    | ns            | —                                                                                                        |

**TABLE 3-299: SPI CHARACTERISTICS FOR ALL DEVICES (CONTINUED)**


| Symbol                                                                  | Description                          | Min.                                    | Typ. | Max. | Unit | Conditions |
|-------------------------------------------------------------------------|--------------------------------------|-----------------------------------------|------|------|------|------------|
| sp8m                                                                    | SPI_[0 1]_DI setup time <sup>2</sup> | 12                                      | —    | —    | ns   | —          |
| sp9m                                                                    | SPI_[0 1]_DI hold time <sup>2</sup>  | 2.5                                     | —    | —    | ns   | —          |
| SPI slave configuration (applicable for 005, 010, 025, and 050 devices) |                                      |                                         |      |      |      |            |
| sp6s                                                                    | SPI_[0 1]_DO setup time <sup>2</sup> | $(\text{SPI\_x\_CLK\_period}/2) - 17.0$ | —    | —    | ns   | —          |
| sp7s                                                                    | SPI_[0 1]_DO hold time <sup>2</sup>  | $(\text{SPI\_x\_CLK\_period}/2) + 3.0$  | —    | —    | ns   | —          |
| sp8s                                                                    | SPI_[0 1]_DI setup time <sup>2</sup> | 2                                       | —    | —    | ns   | —          |
| sp9s                                                                    | SPI_[0 1]_DI hold time <sup>2</sup>  | 7                                       | —    | —    | ns   | —          |
| SPI master configuration (applicable for 060, 090, and 150 devices)     |                                      |                                         |      |      |      |            |
| sp6m                                                                    | SPI_[0 1]_DO setup time <sup>2</sup> | $(\text{SPI\_x\_CLK\_period}/2) - 7.0$  | —    | —    | ns   | —          |
| sp7m                                                                    | SPI_[0 1]_DO hold time <sup>2</sup>  | $(\text{SPI\_x\_CLK\_period}/2) - 9.5$  | —    | —    | ns   | —          |
| sp8m                                                                    | SPI_[0 1]_DI setup time <sup>2</sup> | 15                                      | —    | —    | ns   | —          |
| sp9m                                                                    | SPI_[0 1]_DI hold time <sup>2</sup>  | -2.5                                    | —    | —    | ns   | —          |
| SPI slave configuration (applicable for 060, 090, and 150 devices)      |                                      |                                         |      |      |      |            |
| sp6s                                                                    | SPI_[0 1]_DO setup time <sup>2</sup> | $(\text{SPI\_x\_CLK\_period}/2) - 16.0$ | —    | —    | ns   | —          |
| sp7s                                                                    | SPI_[0 1]_DO hold time <sup>2</sup>  | $(\text{SPI\_x\_CLK\_period}/2) - 3.5$  | —    | —    | ns   | —          |
| sp8s                                                                    | SPI_[0 1]_DI setup time <sup>2</sup> | 3                                       | —    | —    | ns   | —          |
| sp9s                                                                    | SPI_[0 1]_DI hold time <sup>2</sup>  | 2.5                                     | —    | —    | ns   | —          |

For specific Rise/Fall Times board design considerations and detailed output buffer resistances, use the corresponding IBIS models located on the Microchip SoC Products Group website:

For IGLOO 2: <https://www.microchip.com/en-us/products/fpgas-and-plds/fpgas/igloo-2-fpgas#Documentation>.

For SmartFusion 2: <https://www.microchip.com/en-us/products/fpgas-and-plds/system-on-chip-fpgas/smartfusion-2-fpgas#Documentation>.

†. For allowable pclk configurations, see the Serial Peripheral Interface Controller section in the *SmartFusion2 Micro-Controller Subsystem User Guide*.

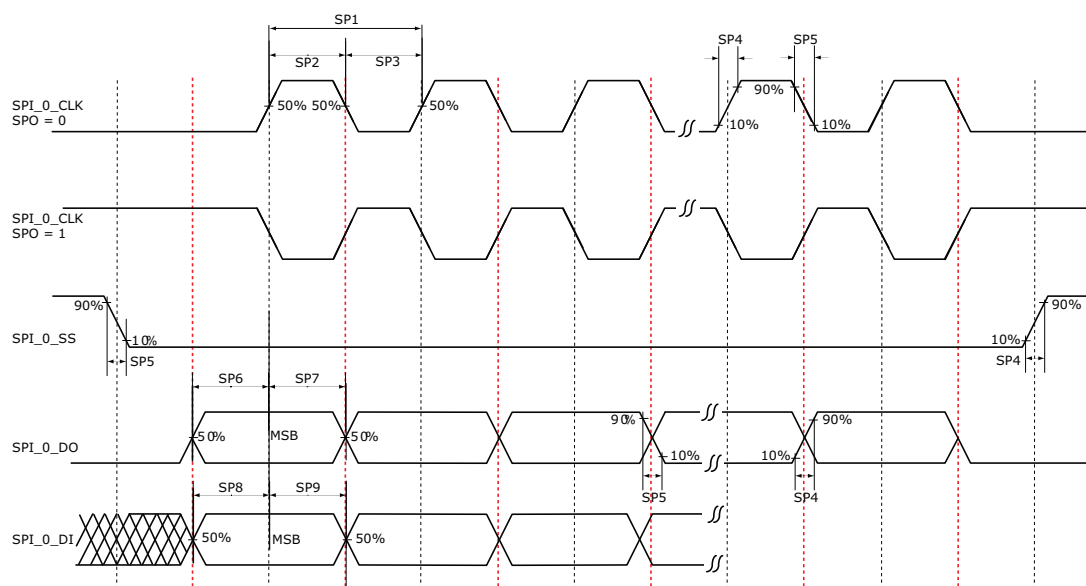**FIGURE 3-23: SPI TIMING FOR A SINGLE FRAME TRANSFER IN MOTOROLA MODE (SPH = 1)**


---

## APPENDIX A: REVISION HISTORY

The revision history describes the changes that were implemented in the document. The changes are listed by revision, starting with the current publication.

### A.1 Revision D—12/2023

In the revision D of this document, the "INTRODUCTION" section was updated by adding part numbers with prefixes for IGLOO 2 and SmartFusion 2.

### A.2 Revision C—11/2023

The following is a summary of the changes in revision C of this document.

- Updated the minimum timing values of SP6-SP9 in [Table 3-274](#).
- Added "DEVRST\_N pulse width" details to DEVRST\_N Characteristics in [Table 3-278](#).
- Removed bank numbers for FDDR and MDDR Reference voltage supply in [Table 3-2](#).

### A.3 Revision B

The following is a summary of the changes in revision B of this document.

- Updated [Table 3-7](#) by adding FCS158 related information (FD-292).
- Updated the information against Access time with feed-through write timing in [Table 3-231](#) to [Table 3-235](#) (FD-276).

### A.4 Revision A

The following is a summary of the changes in revision A of this document.

- Updated the Data Sheet as per the latest Microchip publishing standards.
- Changed DS number from DS0128 to DS00004750A.
- Updated notes 2 and 3 of [Table 3-3](#) (FD-123).
- Updated Flash\*Freeze modes and configurations statuses in [Table 3-8](#) (SAR 108889).
- Corrected note 2 (FD-102) and added note 3 to [Table 3-22](#) (SAR 122944).
- Updated Microchip links for information regarding IGLOO 2 and SmartFusion 2 products in [Section 2.0](#), "References", [Section 3.16](#), "SRAM PUF", [Table 3-35](#), [Table 3-44](#), [Table 3-66](#), [Table 3-79](#), [Table 3-274](#), [Table 3-292](#), [Table 3-294](#), and [Table 3-299](#).
- Added Microchip Tech Support web link in [Section 3.1.3](#), "ESD Performance".
- Updated note of [Table 3-244](#) (SAR 108865).
- Added note to [Table 3-262](#) (SAR 110329).
- Added PLL\_ARST\_N value in [Table 3-270](#) (SAR 110325).
- Modified 50 MHz and 1 MHz enable/disable details in [Table 3-8](#) (SAR 108889).
- Merged and modified tables in [Section 3.13](#), "Programming Times" ([Table 3-244](#) addresses SAR 105131 and SAR 103074).
- Corrected [Table 3-255](#) (SAR 105131 and SAR 103074).
- Added note 2 to [Table 3-269](#) (SAR 121745).
- Added note to [Table 3-273](#) (SAR 106250).
- Added [Table 3-279](#) (SAR 106250).
- Provided value for delay on SC\_SPI\_SDO after SC\_SPI\_SS is de-asserted and added note 2 to [Table 3-274](#) (based on SAR 117152).
- Added reference to [Figure 3-22](#) (FD-91) in [Section 3.23](#), "System Controller SPI Characteristics".

### A.5 Revision 12.0

The following is a summary of the changes in revision 12.0 of this document.

- A note about SERDES\_[01]\_VDD supply was added to recommended operating conditions table. See [Table 3-2](#).
- A note about V<sub>ID</sub> was added to LVDS DC differential voltage specification. See [Table 3-163](#).

- 
- Updated [Table 3-274](#), [Table 3-276](#), [Table 3-277](#), [Table 3-278](#), [Table 3-280](#), and [Table 3-281](#).
  - Updated [Table 3-286](#) with RX-CID details.

## A.6 Revision 11.0

The following is a summary of the changes in revision 11.0 of this document.

- Updated [Table 3-22](#) with minimum and maximum values for input current low and high (SAR 73114 and 80314).
- Added [Section](#) , "The following table lists the SRAM PUF in worst-case industrial conditions when TJ = 100 °C and VDD = 1.14V." (SAR 73114 and 79517).
- Added 060 device in [Table 3-270](#) (SAR 79860).
- Added [Section](#) , "" (SAR 73114).
- Added [Section 3.18](#), "Cryptographic Block Characteristics" (SAR 73114 and 79516).
- Updated [Table 3-285](#) with VTX-AMP details (SAR 81756).
- Updated note in [Table 3-286](#) SAR 74570 and 80677).
- Updated [Table 3-287](#) with generic EPCS details (SAR 75307).
- Added [Table 3-297](#) (SAR 50424).

## A.7 Revision 10.0

The following is a summary of the changes in revision 10.0 of this document.

- The Surge Current on VDD during DEVRST\_B Assertion and Surge Current on VDD during Digest Check using System Services tables were deleted and added reference to [AC393: Board Design Guidelines for SmartFusion2 SoC and IGLOO2 FPGAs Application Note](#). (SAR 76865 and 76623).
- Added 060 device in [Table 3-2](#) (SAR 76383).
- Updated [Table 3-22](#) for ramp time input (SAR 72103).
- Added 060 device details in [Table 3-272](#) (SAR 74927).
- Updated [Table 3-278](#) for name change (SAR 74925).
- Updated [Table 3-271](#) for 060 FG676 Package details (SAR 78849).
- Updated [Table 3-294](#) for SmartFusion2 and [Table 3-299](#) for IGLOO2 for SPI timing and Fmax (SAR 56645, 75331).
- Updated [Table 3-282](#) for Flash\*Freeze entry and exit times (SAR 75329, 75330).
- Updated [Table 3-286](#) or RX-CID information (SAR 78271).
- Added [Table 3-6](#) and [Figure 3-1](#) (SAR 78932).
- Updated [Table 3-223](#) or timing characteristics and [Table 3-224](#) (SAR 75998).
- Added [Section 3.16](#), "SRAM PUF" (SAR 64406).
- Added a footnote on digest cycle in [Table 3-3](#) (SAR 79812).

## A.8 Revision 9.0

The following is a summary of the changes in revision 9.0 of this document.

- Added a note in [Table 3-3](#) (SAR 71506).
- Added a note in [Table 3-4](#) (SAR 74616).
- Added a note in [Figure 3-3](#) (SAR 71506).
- Updated Quiescent Supply Current for 060 in [Table 3-9](#) and [Table 3-10](#) (SAR 74483).
- Updated programming currents for 060 in [Table 3-11](#), [Table 3-12](#), and [Table 3-13](#).
- Added DEVRST\_B assertion tables (SAR 74708).
- Updated I/O speeds for LVDS 3.3 V in [Table 3-16](#) and [Table 3-19](#) (SAR 69829).
- Updated [Table 3-22](#) (SAR 69418).
- Updated [Table 3-23](#), [Table 3-24](#), and [Table 3-25](#) (SAR 74570).
- Updated all AC/DC table to link to the [Table 3-22](#) for reference (SAR 69418).
- Added [Tables 3-244](#) and [3-245](#) (SAR 73971).
- Updated [Section 3.30](#), "SerDes Electrical and Timing AC and DC Characteristics" (SAR 71171).
- Added [Section 3.25](#), "DEVRST\_N Characteristics" (SAR 64100, 72103).

- 
- Added [Table 3-287](#) (SAR 71897).
  - Added 060 devices in [Table 3-265](#), [Table 3-266](#), and [Table 3-267](#) (SAR 57898).
  - Updated duty cycle parameter of crystal in [Table 3-268](#) and [Table 3-269](#) (SAR 57898).
  - Added 32 KHz mode PLL acquisition time in [Table 3-270](#) (SAR 68281).
  - Updated [Table 3-282](#) for 060 devices (SAR 57828).
  - Updated [Table 3-286](#) for CID value (SAR 70878).

## **A.9 Revision 8.0**

The following is a summary of the changes in revision 8.0 of this document.

- Updated [Table 3-9](#) (SAR 69218).
- Updated [Table 3-10](#) (SAR 69218).
- Updated [Table 3-271](#) (SAR 69000).

## **A.10 Revision 7.0**

The following is a summary of the changes in revision 7.0 of this document.

- Updated [Table 1-1](#) (SAR 68620).

## **A.11 Revision 6.0**

The following is a summary of the changes in revision 6.0 of this document.

- Updated [Table 3-3](#) (SAR 65949).
- Updated [Table 3-7](#) (SAR 62995).
- Updated [Table 3-123](#) and [Table 3-133](#) (SAR 67210).
- Added [Section 3.15, "Embedded NVM \(eNVM\) Characteristics"](#) (SAR 52509).
- Updated [Table 3-265](#) (SAR 64855).
- Updated [Table 3-270](#) (SAR 65958 and SAR 56666).
- Added [Section 3.28, "DDR Memory Interface Characteristics"](#) (SAR 66223).
- Added [Section 3.29, "SFP Transceiver Characteristics"](#) (SAR 63105).
- Updated [Table 3-291](#) and [Table 3-298](#) (SAR 66314).

## **A.12 Revision 5.0**

The following is a summary of the changes in revision 5.0 of this document.

- Updated [Table 1-1](#).
- Updated [Table 3-2](#) for  $T_J$  symbol information.
- Updated [Table 3-3](#) (SAR 63109).
- Updated [Table 3-7](#).
- Updated [Table 3-270](#) (SAR 62012).
- Added [Table 3-280](#) (SAR 64100).
- Added [Table 3-295](#) and [Table 3-296](#) (SAR 50424).

## **A.13 Revision 4.0**

The following is a summary of the changes in revision 4.0 of this document.

- Updated [Table 1-1](#). Changed the Status of 090 devices to "Production" (SAR 62750).
- Updated [Figure 3-10](#). Removed inverter bubble from DDR\_IN latch (SAR 61418).
- Updated [Section 3.30, "SerDes Electrical and Timing AC and DC Characteristics"](#) (SAR 62836).

## **A.14 Revision 3.0**

In revision 3.0 of this document, the Theta B/C columns and FCS325 package was updated. For more information, see [Table 3-7](#) (SAR 62002).

---

## A.15 Revision 2.0

The following is a summary of the changes in revision 2.0 of this document.

- [Table 1-1](#) was updated (SAR 59056).
- [Table 3-5](#) temperature and data retention information was updated SAR (61363).
- Storage Operating Table was updated and split into three tables—[Table 3-3](#) and [Table 3-5](#) (SAR 58725).
- Updated Theta B/C columns and FCS325 package in [Table 3-7](#) (SAR 62002).
- Added 090-FCS325 thermal resistance to [Table 3-7](#) (SAR 59384).
- TQ144 package was added to [Table 3-7](#) (SAR 57708).
- Added PLL jitter data for the VF400 package (SAR 53162).
- Added Additional Worst Case IDD to [Table 3-9](#) and [Table 3-10](#) (SAR 59077).
- [Table 3-11](#), [Table 3-12](#), and [Table 3-13](#) were added to verify Inrush currents (SAR 56348).
- [Table 3-16](#) and [Table 3-19](#)—I/O speeds were replaced.
- Max speed was changed in [Table 3-41](#) (SAR 57221) and in [Table 3-52](#) (SAR 57113).
- [Table 3-49](#)–[Table 3-57](#) were added.
- Added Cload to [Table 3-89](#) (SAR 56238).
- Removed "Rs" information in DDR Timing Measurement [Table 3-123](#), [Table 3-133](#), and [Table 3-144](#).
- Updated drive programming for M/B-LVDS outputs (SAR 58154).
- Added an inverter bubble to DDR\_IN latch in [Figure 3-10](#) (SAR 61418).
- QF waveform in [Figure 3-11](#) was updated (SAR 59816).
- uSRAM Write Clock minimum values were updated in [Table 3-237](#)–[Table 3-243](#) (SAR 55236).
- Fixed typo in the 32 kHz Crystal (XTAL) oscillator accuracy data section (SAR 59669).
- The [Section 3.20, "On-Chip Oscillator"](#) was split, and [Section 3.15, "Embedded NVM \(eNVM\) Characteristics"](#) was added.
- [Table 3-265](#)–[Table 3-269](#) were revised.(SARs 57898 and 59669).
- PLL VCP Frequency and conditions were added to [Table 3-270](#) (SAR 57416).
- Fixed typo for PLL jitter data in the 100 MHz-400 MHz range (SAR 60727).
- Updated FCCC information in [Table 3-270](#) and [Table 3-271](#) (SAR 60799).
- Device 025 specifications were added to [Table 3-271](#) (SAR 51625).
- JTAG [Table 3-272](#) was replaced (SAR 51188).
- Flash\*Freeze [Table 3-282](#) was replaced (SAR 57828).
- Added support for HCSL I/O Standard for SERDES reference clocks in [Table 3-289](#) and [Table 3-290](#) (SAR 50748).
- Tir and Tif parameters were added to [Table 3-292](#) (SAR 52203).
- Speed grade consistency was fixed in tables throughout the datasheet (SAR 50722).
- Added jitter attenuation information (SAR 59405).

## A.16 Revision 1.0

The following is a summary of the changes in revision 1.0 of this document.

- The IGLOO2 v2 and the SmartFusion2 v5 datasheets are combined into this single product family datasheet.

---

## THE MICROCHIP WEBSITE

Microchip provides online support via our WWW site at [www.microchip.com](http://www.microchip.com). This website is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the website contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQ), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

## CUSTOMER CHANGE NOTIFICATION SERVICE

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip website at [www.microchip.com](http://www.microchip.com). Under "Support", click on "Customer Change Notification" and follow the registration instructions.

## CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or Field Application Engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

Technical support is available through the website at: [www.microchip.com/support](http://www.microchip.com/support)

---

**Note the following details of the code protection feature on Microchip products:**

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
  - Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
  - Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
  - Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable" Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.
- 

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at <https://www.microchip.com/en-us/support/design-help/client-support-services>.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

AMBA, Arm, Arm7, Arm7TDMI, Arm9, Arm11, Artisan, big.LITTLE, Cordio, CoreLink, CoreSight, Cortex, DesignStart, DynamiQ, Jazelle, Keil, Mali, Mbed, Mbed Enabled, NEON, POP, RealView, SecurCore, Socrates, Thumb, TrustZone, ULINK, ULINK2, ULINK-ME, ULINK-PLUS, ULINKpro, µVision, Versatile are trademarks or registered trademarks of Arm Limited (or its subsidiaries) in the US and/or elsewhere.

For information regarding Microchip's Quality Management Systems, please visit [www.microchip.com/quality](http://www.microchip.com/quality).

**Trademarks**

The Microchip name and logo, the Microchip logo, Adaptec, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, CryptoMemory, CryptoRF, dsPIC, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Klear, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricon, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, ClockWorks, The Embedded Control Solutions Company, EtherSynch, Flashtec, Hyper Speed Control, HyperLight Load, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, TimeCesium, TimeHub, TimePictra, TimeProvider, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, Clockstudio, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, EyeOpen, GridTime, IdealBridge, IGaT, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Parallelizing, IntelliMOS, Inter-Chip Connectivity, JitterBlocker, Knob-on-Display, MarginLink, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, mSIC, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, Power MOS IV, Power MOS 7, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SmartHLS, SMART-I.S., storClad, SQL, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, Trusted Time, TSHARC, Turing, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2023, Microchip Technology Incorporated and its subsidiaries.

All Rights Reserved.

ISBN: 978-1-6683-3721-9

## Worldwide Sales and Service

### AMERICAS

**Corporate Office**  
2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://www.microchip.com/support>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

**Atlanta**  
Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

**Austin, TX**  
Tel: 512-257-3370

**Boston**  
Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

**Chicago**  
Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

**Dallas**  
Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

**Detroit**  
Novi, MI  
Tel: 248-848-4000

**Houston, TX**  
Tel: 281-894-5983

**Indianapolis**  
Noblesville, IN  
Tel: 317-773-8323  
Fax: 317-773-5453  
Tel: 317-536-2380

**Los Angeles**  
Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608  
Tel: 951-273-7800

**Raleigh, NC**  
Tel: 919-844-7510

**New York, NY**  
Tel: 631-435-6000

**San Jose, CA**  
Tel: 408-735-9110  
Tel: 408-436-4270

**Canada - Toronto**  
Tel: 905-695-1980  
Fax: 905-695-2078

### ASIA/PACIFIC

**Australia - Sydney**  
Tel: 61-2-9868-6733

**China - Beijing**  
Tel: 86-10-8569-7000

**China - Chengdu**  
Tel: 86-28-8665-5511

**China - Chongqing**  
Tel: 86-23-8980-9588

**China - Dongguan**  
Tel: 86-769-8702-9880

**China - Guangzhou**  
Tel: 86-20-8755-8029

**China - Hangzhou**  
Tel: 86-571-8792-8115

**China - Hong Kong SAR**  
Tel: 852-2943-5100

**China - Nanjing**  
Tel: 86-25-8473-2460

**China - Qingdao**  
Tel: 86-532-8502-7355

**China - Shanghai**  
Tel: 86-21-3326-8000

**China - Shenyang**  
Tel: 86-24-2334-2829

**China - Shenzhen**  
Tel: 86-755-8864-2200

**China - Suzhou**  
Tel: 86-186-6233-1526

**China - Wuhan**  
Tel: 86-27-5980-5300

**China - Xian**  
Tel: 86-29-8833-7252

**China - Xiamen**  
Tel: 86-592-2388138

**China - Zhuhai**  
Tel: 86-756-3210040

### ASIA/PACIFIC

**India - Bangalore**  
Tel: 91-80-3090-4444

**India - New Delhi**  
Tel: 91-11-4160-8631

**India - Pune**  
Tel: 91-20-4121-0141

**Japan - Osaka**  
Tel: 81-6-6152-7160

**Japan - Tokyo**  
Tel: 81-3-6880-3770

**Korea - Daegu**  
Tel: 82-53-744-4301

**Korea - Seoul**  
Tel: 82-2-554-7200

**Malaysia - Kuala Lumpur**  
Tel: 60-3-7651-7906

**Malaysia - Penang**  
Tel: 60-4-227-8870

**Philippines - Manila**  
Tel: 63-2-634-9065

**Singapore**  
Tel: 65-6334-8870

**Taiwan - Hsin Chu**  
Tel: 886-3-577-8366

**Taiwan - Kaohsiung**  
Tel: 886-7-213-7830

**Taiwan - Taipei**  
Tel: 886-2-2508-8600

**Thailand - Bangkok**  
Tel: 66-2-694-1351

**Vietnam - Ho Chi Minh**  
Tel: 84-28-5448-2100

### EUROPE

**Austria - Wels**  
Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393

**Denmark - Copenhagen**  
Tel: 45-4485-5910  
Fax: 45-4485-2829

**Finland - Espoo**  
Tel: 358-9-4520-820

**France - Paris**  
Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

**Germany - Garching**  
Tel: 49-8931-9700

**Germany - Haan**  
Tel: 49-2129-3766400

**Germany - Heilbronn**  
Tel: 49-7131-72400

**Germany - Karlsruhe**  
Tel: 49-721-625370

**Germany - Munich**  
Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

**Germany - Rosenheim**  
Tel: 49-8031-354-560

**Israel - Ra'anana**  
Tel: 972-9-744-7705

**Italy - Milan**  
Tel: 39-0331-742611  
Fax: 39-0331-466781

**Italy - Padova**  
Tel: 39-049-7625286

**Netherlands - Drunen**  
Tel: 31-416-690399  
Fax: 31-416-690340

**Norway - Trondheim**  
Tel: 47-7288-4388

**Poland - Warsaw**  
Tel: 48-22-3325737

**Romania - Bucharest**  
Tel: 40-21-407-87-50

**Spain - Madrid**  
Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

**Sweden - Gothenberg**  
Tel: 46-31-704-60-40

**Sweden - Stockholm**  
Tel: 46-8-5090-4654

**UK - Wokingham**  
Tel: 44-118-921-5800  
Fax: 44-118-921-5820