



12-Outlet Vertical Power Strip, 120V, 15A, 6 ft. (1.83 m) Cord, 5-15P, 36 in.

MODEL NUMBER: PS361206

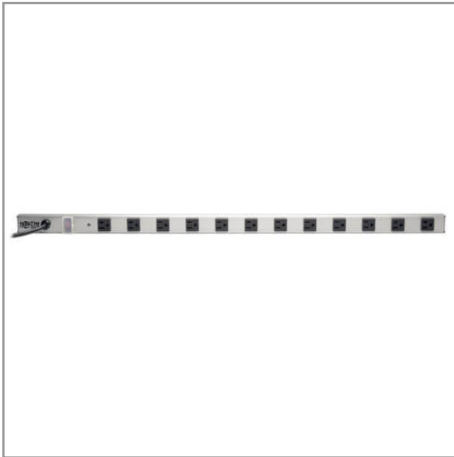

Highlights

- Ideal for applications needing multiple convenience outlets for powering a variety of electronic equipment
- 36-in. mountable housing with 12 standard NEMA 5-15R outlets and a 6-ft. power cord
- Lighted, covered On/Off switch and 15-amp circuit breaker
- Sturdy construction and heavy-duty, all-metal housing

Package Includes

- PS361206
- Mounting hardware
- Instruction manual

The PS361206 power strip provides horizontal or vertical power distribution for rackmount, raceway and workbench applications in a convenient 36-in. mountable housing.

Features

Multi-Outlet Power Distribution

Vertical or Horizontal Moun

Premium Safety Features

Heavy-Duty Housing

Specifications

| OVERVIEW | |
|------------------------------------|---------------|
| UPC Code | 037332186621 |
| INPUT | |
| Nominal Input Voltage(s) Supported | 120V AC |
| Recommended Electrical Service | 15A 120V |
| Input Cord Gauge Type | 14 gauge; SJT |
| Voltage Compatibility (VAC) | 120 |
| Input Plug Type | NEMA 5-15P |
| Input Cord Length (ft.) | 6 |
| Right-Angle Plug | No |



Powering Business Worldwide



| | |
|--|---|
| Input Cord Length (m) | 1.83 |
| Integrated Cord Clip | No |
| OUTPUT | |
| Frequency Compatibility | 60 Hz |
| Output (Watts) | 1800 |
| Output Receptacles | (12) 5-15R |
| Circuit Breaker (amps) | 15 |
| Transformer Accommodation | (6) Yes |
| Right-Angle Outlets | No |
| Outlet Spacing | 2.64 in. |
| USER INTERFACE, ALERTS & CONTROLS | |
| Switches | Lighted 2 position switch controls power to all outlets |
| Locking Switch Cover | Transparent on/off switch cover prevents accidental turn-off |
| PHYSICAL | |
| Color | Silver |
| Material of Construction | Aluminum |
| Power Cord Color | Black |
| Form Factors Supported | Supports vertical or horizontal mounting in rack enclosures, raceways and a variety of other applications |
| Housing Color | Silver |
| Included Mounting Accessories | Includes mounting clips |
| Mounting Holes or Slots | No |
| Outlets Measurement (Center to Center) | 2.65 in. |
| Receptacle Color | Black |
| Shipping Dimensions (hwd / in.) | 2.40 x 3.50 x 39.90 |
| Shipping Dimensions (hwd / cm) | 6.10 x 8.89 x 101.35 |
| Shipping Weight (lbs.) | 2.90 |
| Shipping Weight (kg) | 1.32 |
| Unit Dimensions (hwd / in.) | 1.250 x 1.500 x 36.000 |
| Unit Dimensions (hwd / cm) | 3.18 x 3.81 x 91.4 |
| Unit Weight (lbs.) | 2.27 |
| Unit Weight (kg) | 1.03 |
| Outlet Spacing | 2.64 in. |
| FEATURES & SPECIFICATIONS | |



Powering Business Worldwide



| | |
|-------------------------------------|--------------------------------|
| Antimicrobial | No |
| Built-In Circuit Breaker | Yes |
| STANDARDS & COMPLIANCE | |
| Product Certifications | cUL Listed; UL 1363; UL Listed |
| Product Compliance | RoHS |
| WARRANTY & SUPPORT | |
| Product Warranty Period (Worldwide) | Lifetime limited warranty |

1000 Eaton Boulevard
Cleveland, OH 44122
United States
<https://tripplite.eaton.com>

© 2025 Eaton. All Rights Reserved.
Eaton is a registered trademark. All other trademarks
are the property of their respective owners.