


SEAL- TRIM

Our Seal-Trims are also built around the Thin-Trim capacitors. These capacitors are encased in a high performance polymer housing that is wave solderable and protects the trimmer from contamination.

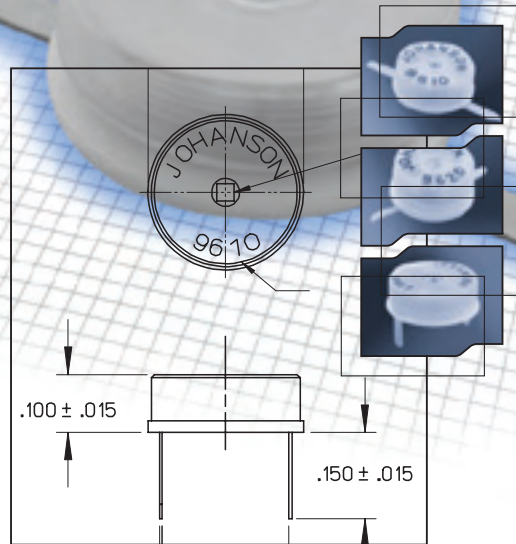

APPLICATIONS

- RF amplifier
- LC Filters and Networks
- Broadband Wireless LAN
- Medical Devices
- Cordless and Cellular phones
- DR/Crystal Oscillator
- Microstrip line filters


CHARACTERISTICS

- Working Voltage: 250 VDC (500 VDC Test)
- Long Rotational life
- Insulation Resistance: $> 10^4 \text{ M}\Omega$
- Temperature Range: -55°C to $+125^\circ\text{C}$
- RoHS Compliant parts available

SERIES	DISK SIZE	CAPACITANCE AVAILABLE	TUNING RESOLUTION
9610/9810	.270" (6.86 mm)	1 to 50 pF	180°
9620/9820	.180" (4.57 mm)	.5 to 25 pF	180°


9610 SERIES

TUNING TOOL: 4193

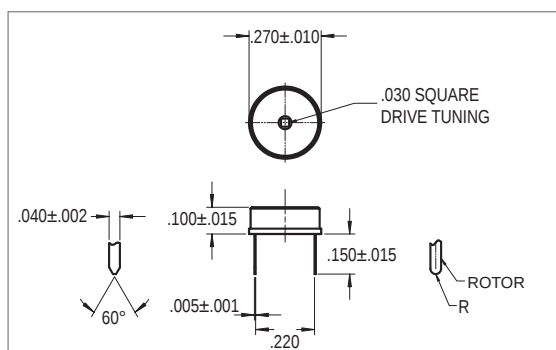

JMC P/N	RANGE PF	MIN Q @100MHZ
9610	9610SL	1.5 TO 4.5
9611	9611SL	2.5 TO 10.0
9612	9612SL	4.0 TO 18.0
9613	9613SL	6.0 TO 35.0
9614	9614SL	7.0 TO 40.0
9615	9615SL	5.0 TO 25.0
9616	9616SL	8.0 TO 50.0


SL

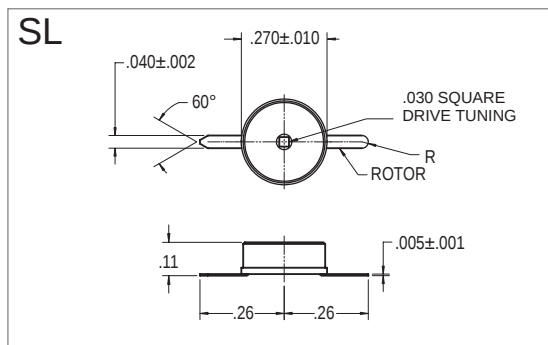

JMC P/N	RANGE PF	MIN Q @100MHZ
9610	9610SL	1.5 TO 4.5
9611	9611SL	2.5 TO 10.0
9612	9612SL	4.0 TO 18.0
9613	9613SL	6.0 TO 35.0
9614	9614SL	7.0 TO 40.0
9615	9615SL	5.0 TO 25.0
9616	9616SL	8.0 TO 50.0


9620 SERIES

TUNING TOOL: 4192

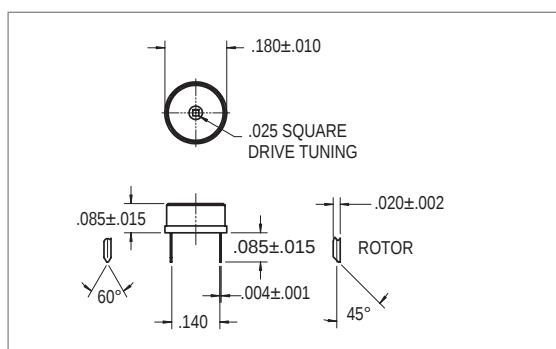

JMC P/N	RANGE PF	MIN Q @100MHZ
9620	9620SL	0.5 TO 2.5
9621	9621SL	1.0 TO 5.0
9622	9622SL	2.5 TO 10.0
9626	9626SL	8.5 TO 25.0
9628	9628SL	5.0 TO 15.0
9629	9629SL	7.5 TO 18.0

SL

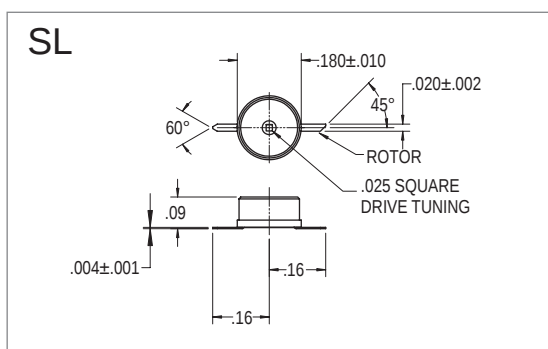

JMC P/N	RANGE PF	MIN Q @100MHZ
9620	9620SL	0.5 TO 2.5
9621	9621SL	1.0 TO 5.0
9622	9622SL	2.5 TO 10.0
9626	9626SL	8.5 TO 25.0
9628	9628SL	5.0 TO 15.0
9629	9629SL	7.5 TO 18.0

