

RF Line NPN Silicon Power Transistor


150 W (PEP), 30 MHz, 50 V

**MRF428**

Rev. V2

Features

- Specified 50 V, 30 MHz Characteristics:
 - Output Power = 150 W (PEP)
 - Minimum Gain = 13 DB
 - Efficiency = 45%
- Intermodulation Distortion @ 150 W (PEP):
 - IMD = -30 dB (max.)
- 100% Tested for Load Mismatch at all Phase Angles with 30:1 VSWR @ 150 W CW

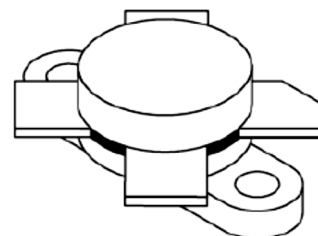

CASE 211-11, STYLE 1

Applications

- Marine & Base Station Equipment

Description

Designed primarily for high-voltage applications as a high-power linear amplifier from 2 to 30 MHz.

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	55	Vdc
Collector-Base Voltage	V_{CBO}	110	Vdc
Emitter-Base Voltage	V_{EBO}	4.0	Vdc
Collector Current — Continuous	I_C	20	Adc
Withstand Current — 10 s	—	30	Adc
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	320 1.83	Watts W/ $^\circ\text{C}$
Storage Temperature Range	T_{stg}	-65 to +150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.5	$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage ($I_C = 200\text{ mAdc}$, $I_B = 0$)	$V_{(BR)CEO}$	55	—	—	Vdc
Collector-Emitter Breakdown Voltage ($I_C = 100\text{ mAdc}$, $V_{BE} = 0$)	$V_{(BR)CES}$	110	—	—	Vdc
Collector-Base Breakdown Voltage ($I_C = 100\text{ mAdc}$, $I_E = 0$)	$V_{(BR)CBO}$	110	—	—	Vdc
Emitter-Base Breakdown Voltage ($I_E = 10\text{ mAdc}$, $I_C = 0$)	$V_{(BR)EBO}$	4.0	—	—	Vdc

(continued)

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
<https://www.macom.com/support>

DC-0007587

RF Line NPN Silicon Power Transistor

150 W (PEP), 30 MHz, 50 V



MRF428

Rev. V2

ELECTRICAL CHARACTERISTICS — continued ($T_C = 25^\circ\text{C}$ unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

ON CHARACTERISTICS

DC Current Gain ($I_C = 5.0\text{ A dc}$, $V_{CE} = 5.0\text{ V dc}$)	h_{FE}	10	30	—	—
---	----------	----	----	---	---

DYNAMIC CHARACTERISTICS

Output Capacitance ($V_{CB} = 50\text{ V dc}$, $I_E = 0$, $f = 1.0\text{ MHz}$)	C_{OB}	—	220	250	pF
--	----------	---	-----	-----	----

FUNCTIONAL TESTS

Common-Emitter Amplifier Gain ($V_{CC} = 50\text{ V dc}$, $P_{OUT} = 150\text{ W (PEP)}$, $I_C(\text{max}) = 3.32\text{ A dc}$, $f = 30\text{ MHz}$)	G_{PE}	13	15	—	dB
Output Power ($V_{CE} = 50\text{ V dc}$, $f = 30\text{ MHz}$)	P_{OUT}	150	—	—	W (PEP)
Collector Efficiency ($V_{CC} = 50\text{ V dc}$, $P_{OUT} = 150\text{ W (PEP)}$, $I_C(\text{max}) = 3.32\text{ A dc}$, $f = 30\text{ MHz}$)	η	45	—	—	%
Intermodulation Distortion (1) ($V_{CE} = 50\text{ V dc}$, $P_{OUT} = 150\text{ W (PEP)}$, $I_C = 3.32\text{ A dc}$)	IMD	—	-33	-30	dB
Electrical Ruggedness ($V_{CC} = 50\text{ V dc}$, $P_{OUT} = 150\text{ W (PEP)}$, $I_C(\text{max}) = 3.32\text{ A dc}$, VSWR 30:1 at all Phase Angles)	Ψ	No Degradation in Output Power			

NOTE:


1. To Mil-Std-1311 Version A, Test Method 2204B, Two Tone, Reference each Tone.

RF Line NPN Silicon Power Transistor 150 W (PEP), 30 MHz, 50 V



MRF428

Rev. V2

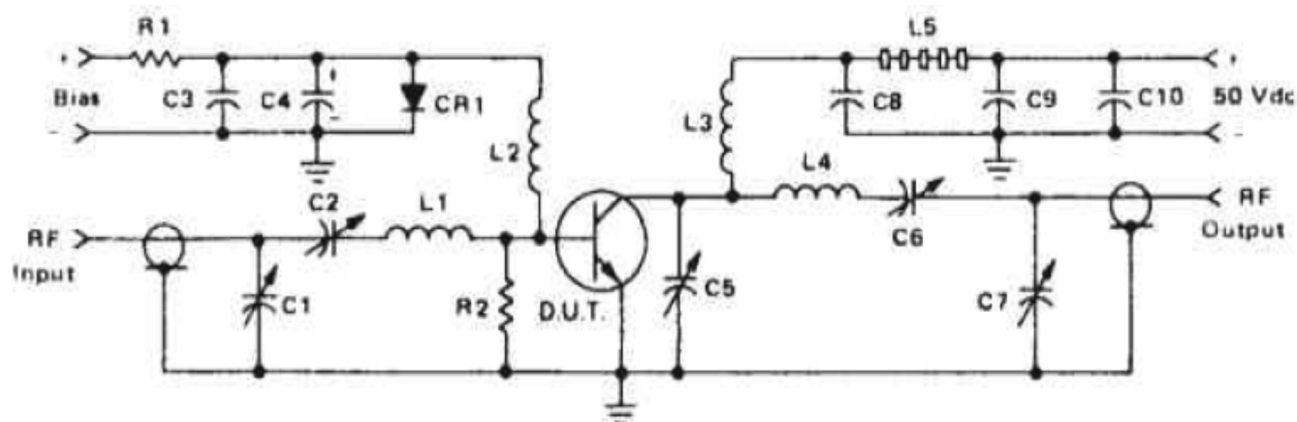

C1, C2, C7 — 170-780 pF, Arco 469
C3, C8, C9 — 0.1 μ F, 100 V Erie
C4 — 500 μ F @ 6.0 V
C5 — 9.0-180 pF, Arco 463
C6 — 80-480 pF, Arco 466
C10 — 30 μ F, 100 V
R1 — 10 Ω , 10 Watt

R2 — 10 Ω , 1.0 Watt
CR1 — 1N4997
L1 — 3 Turns, #16 Wire, 5/16" I.D., 5/16" Long
L2 — 10 μ H Molded Choke
L3 — 12 Turns, #16 Enameled Wire Closewound, 1/4" I.D.
L4 — 5 Turns, 1/8" Copper Tubing, 9/16" I.D., 3/4" Long
L5 — 10 Ferrite Beads — Ferroxcube #56-590-65/3B

Figure 1. 30 MHz Test Circuit Schematic

FIGURE 2 — OUTPUT POWER versus INPUT POWER


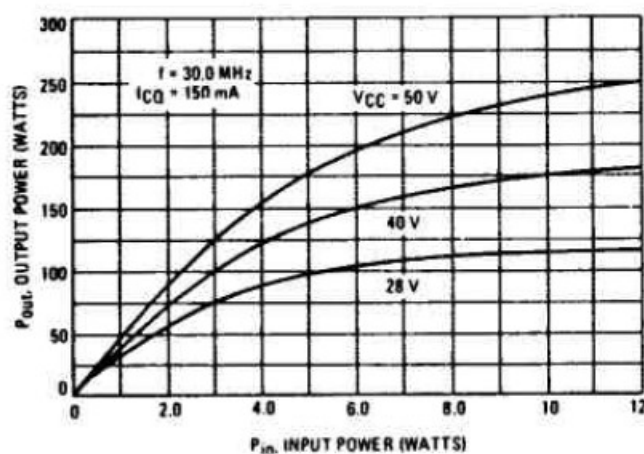


FIGURE 3 — OUTPUT POWER versus SUPPLY VOLTAGE



RF Line NPN Silicon Power Transistor 150 W (PEP), 30 MHz, 50 V

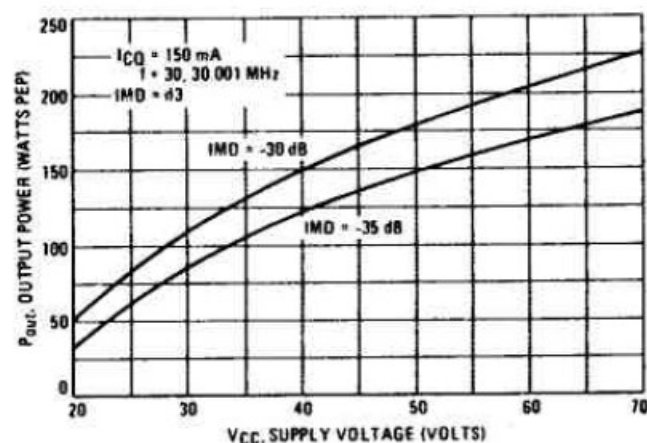

MRF428

Rev. V2

FIGURE 4 – POWER GAIN versus FREQUENCY


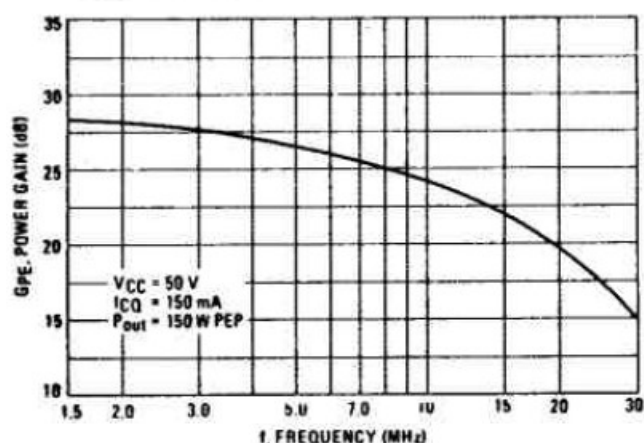


FIGURE 5 – DC SAFE OPERATING AREA

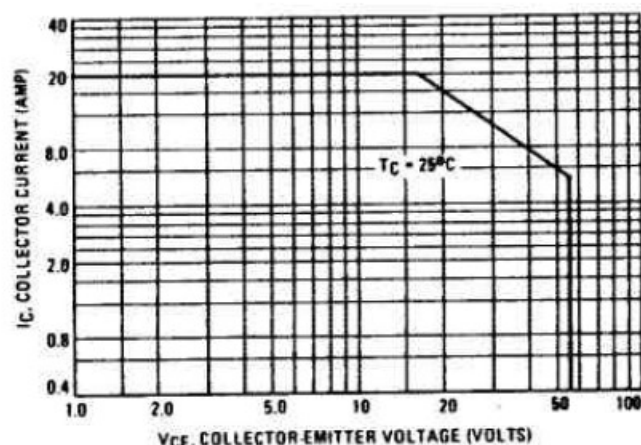

INTERMODULATION DISTORTION versus OUTPUT POWER

FIGURE 6 – $V_{CC} = 40 \text{ Vdc}$


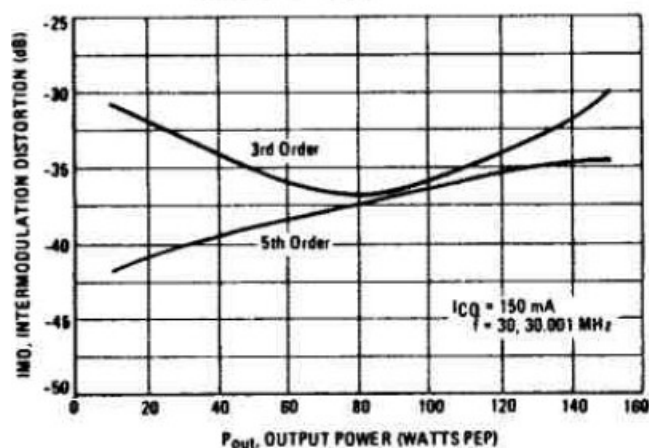


FIGURE 7 – $V_{CC} = 50 \text{ Vdc}$

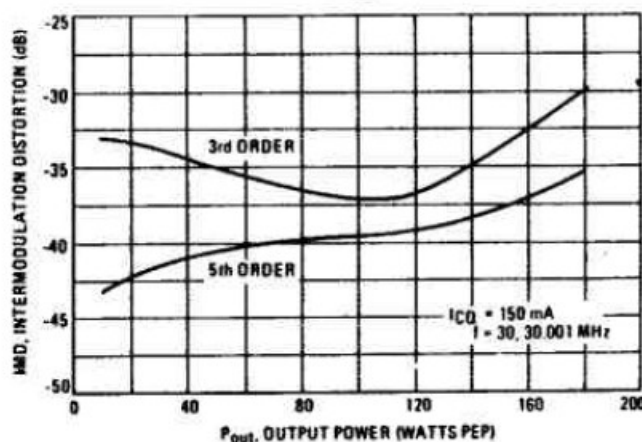

RF Line NPN Silicon Power Transistor 150 W (PEP), 30 MHz, 50 V

MACOM®

MRF428

Rev. V2

FIGURE 8 – OUTPUT CAPACITANCE versus FREQUENCY



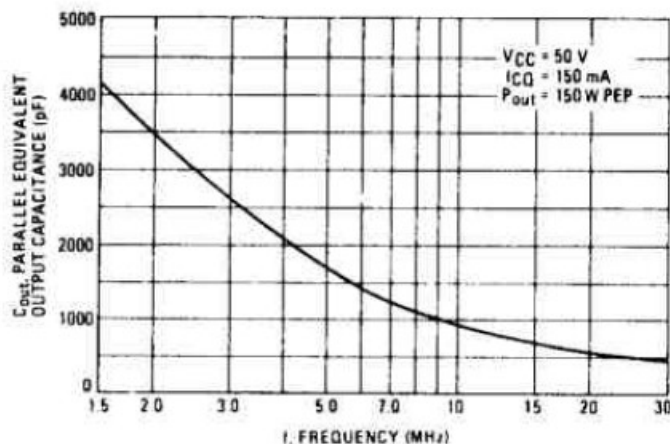


FIGURE 9 – OUTPUT RESISTANCE versus FREQUENCY

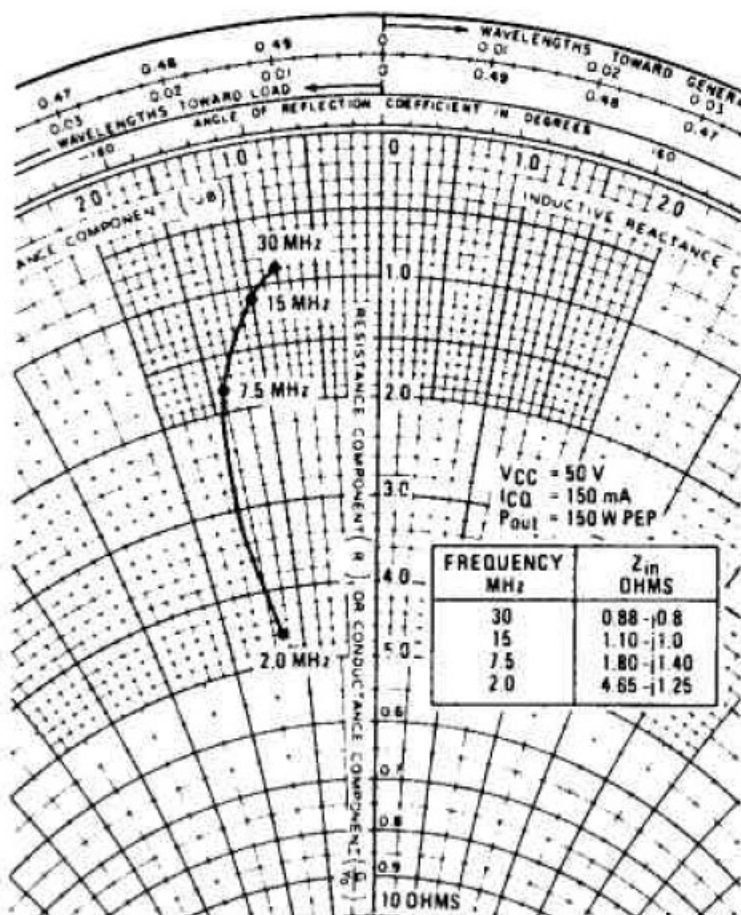


RF Line NPN Silicon Power Transistor

150 W (PEP), 30 MHz, 50 V

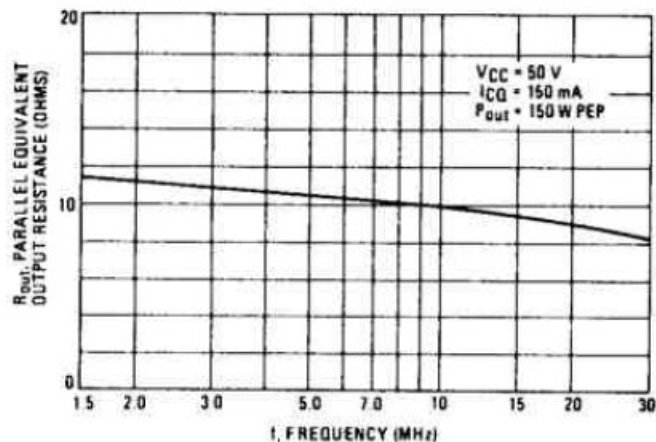

MRF428

Rev. V2

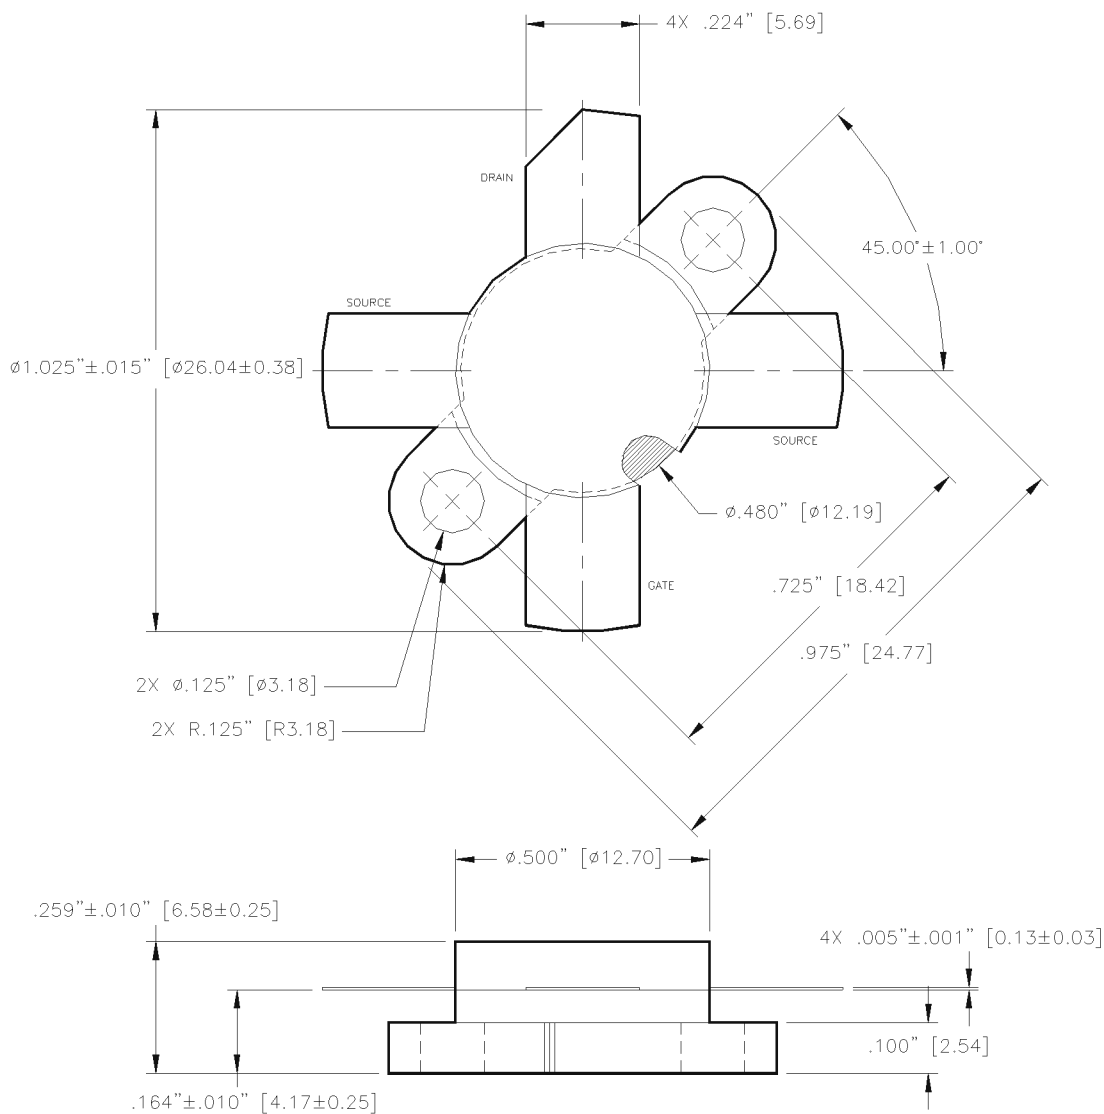

Unless otherwise noted, tolerances are inches $\pm .005''$ [millimeters $\pm 0.13\text{mm}$]

RF Line NPN Silicon Power Transistor

150 W (PEP), 30 MHz, 50 V



MRF428

Rev. V2

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.