


## 2kW 100-127V Single-Phase Basic PDU - 36 NEMA 5-15/20R Outlets, L5-20P Input (5-20P Adapter), 15 ft. Cord, 72 in. 0U Rack

MODEL NUMBER: PDUV20-72

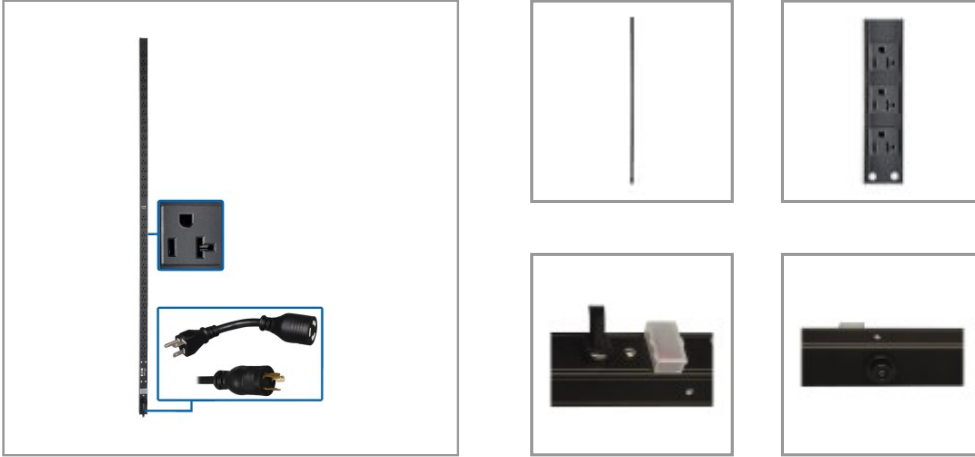

Delivers 120V single-phase AC power to multiple loads from a utility outlet, generator or UPS system in a data center or network closet.

### Features

#### Single-Phase 100-127V rack PDU (rPDU) Distributes Network-Grade Power to Multiple Loads

This basic PDU is an ideal no-frills unit for networking, telecom, security, audio/video and sound reinforcement applications. Recommended for small to mid-sized data centers, computer rooms and network closets, the PDUV20-72 features 36 NEMA 5-15/20R outlets for connecting equipment. A 15-foot cord with L5-20P input plug (and included 5-20P adapter) connects to your facility's AC power source, generator or protected UPS system to distribute power to connected loads.

#### Up-to-Date Safety Features Protect Your Vital Equipment

A lighted on/off switch is protected by a transparent plastic cover to help prevent an accidental shutdown that could lead to costly downtime. A 20A circuit breaker protects connected components from dangerous overloads.

#### Versatile Installation Options Give You Plenty of Choices

The 72-inch 0U PDU mounts vertically in an EIA-standard 19-inch rack using the included toolless mounting buttons or the included mounting clips and hardware. You may also use the clips to secure the PDU to a wall, counter or other flat, secure surface. Bolt-down retention brackets keep power cords organized and your rack free of clutter.

## Specifications

OVERVIEW	
UPC Code	037332255822
PDU Type	Basic
INPUT	
Input Phase	Single-Phase

### Highlights

- Ideal no-frills PDU for telecom, security, audio/video and other network applications
- 36 NEMA 5-15/20R outlets distribute AC power to connected equipment
- Lighted power switch with protective cover helps prevent accidental shutdowns
- 15 ft. cord with L5-20P input (and 5-20P adapter) connects to AC power source
- 72 in. 0U PDU with included mounting brackets installs in rack or under counter

### Applications

Deliver network-grade power to high-density equipment in networking, telecom, security, audio/video and sound reinforcement applications

### Package Includes

- PDUV20-72 1.9kW 100-127V Single-Phase Basic PDU
- L5-20P to 5-20P input plug adapter
- Plug retention brackets with installation hardware
- Rack-mounting hardware
- Owner's manual



Powering Business Worldwide

TRIPP LITE  
SERIES

PDU Input Voltage	100; 120; 125; 127
Recommended Electrical Service	Single-phase 20A 120V service
Maximum Input Amps	16
Maximum Input Amps Details	Agency de-rated to 16A continuous
PDU Plug Type	NEMA 5-20P; NEMA L5-20P
Input Cord Length (ft.)	15
Input Cord Length (m)	4.57
<b>OUTPUT</b>	
Output Capacity Details	2.03kW (127V), 1.92kW (120V), 1.6kW (100V) / 16A total capacity; 16A max per outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(36) 5-15/20R
Output Nominal Voltage	100-127V
Overload Protection	20A circuit breaker
<b>USER INTERFACE, ALERTS &amp; CONTROLS</b>	
Switches	Lighted on/off switch with integrated transparent safety cover
<b>SURGE / NOISE SUPPRESSION</b>	
Automatic Shut-Off	No
<b>PHYSICAL</b>	
Material of Construction	Aluminum
Rack Height	0U
Form Factors Supported	Vertical
PDU Form Factor	Vertical (0U)
Shipping Dimensions (hwd / in.)	2.40 x 6.65 x 75.79
Shipping Weight (kg)	3.48
Unit Dimensions (hwd / in.)	72.470 x 1.500 x 1.640
Unit Dimensions (hwd / cm)	184.1 x 4.2 x 3.81
Unit Weight (lbs.)	6.14
Unit Weight (kg)	2.79
<b>ENVIRONMENTAL</b>	
Operating Temperature Range	32° to 104°F (0° to 40°C)
Storage Temperature Range	-22° to 122°F (-30° to 50°C)
Relative Humidity	5% to 95% non-condensing
Operating Elevation	0-10000 ft. (0-3000 m)



Powering Business Worldwide

TRIPP LITE  
SERIES

STANDARDS & COMPLIANCE	
Product Certifications	CSA (Canada); NOM (Mexico); UL 60950-1
Product Compliance	RoHS
WARRANTY & SUPPORT	
Product Warranty Period (Worldwide)	2-year limited warranty

1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
<https://tripplite.eaton.com>

© 2025 Eaton. All Rights Reserved.  
Eaton is a registered trademark. All other trademarks  
are the property of their respective owners.