


# 11.5kW 3-Phase Local Metered PDU, 208-240V Outlets (36 C13 & 9 C19), L22-20P 360-415V Input, 6 ft. (1.83 m) Cord, 0U Vertical, TAA

MODEL NUMBER: PDU3XMV6L2220

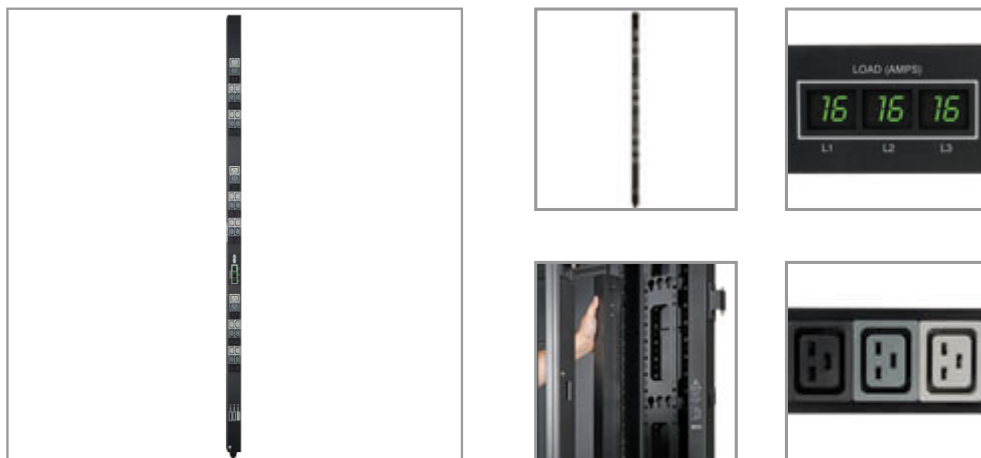

## Features

- 11.5 kW Local Metered Power Distribution Unit (PDU)
- 360-415V input with NEMA L22-20P 3-phase input connection
- 208-240V output with 36 C13 & 9 C19 single phase output receptacles
- 0U / 1778mm vertical rackmount installation supported
- Outlets are arranged in 3 local metered 15 outlet load banks
- Included cord retention brackets keep vital network equipment plugged in and continuously powered
- Toolless mounting supported in button-mount compatible racks, plus nut-and-bolt mounting brackets for other mounting applications (set of 2 9mm buttons pre-installed, 2 9mm and 4 6mm spare buttons included)
- Federal Trade Agreements Act / TAA Compliant for GSA Schedule purchases

## Highlights

- Local metered 11.5kW 3-Phase 360-415V input / 208-240V output PDU
- Set of 3 digital meters report output load level per phase in amps
- 70in / 1778mm 0U vertical format, toolless button-mount installation
- NEMA L22-20P 3 phase input; 6ft 1.8m line cord
- 36 C13 and 9 C19 single phase outlets; Included cord retention brackets
- TAA Compliant

## Package Includes

- Local Metered rackmount PDU with pre-installed mounting buttons
- Cord retention brackets
- Spare installation buttons (2 9mm / 4 6mm)
- Rack mounting brackets
- Owner's manual

## Specifications

| OVERVIEW                       |                                  |
|--------------------------------|----------------------------------|
| UPC Code                       | 037332171955                     |
| PDU Type                       | Local Metered                    |
| INPUT                          |                                  |
| Input Phase                    | 3-Phase                          |
| PDU Input Voltage              | 360-415V                         |
| Recommended Electrical Service | Three-phase 20A 360-415V service |
| Maximum Input Amps             | 16                               |



Powering Business Worldwide

**TRIPP-LITE**  
by **EAT•N**

|                                              |                                                                                                                                                                                                                                                                                         |
|----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum Input Amps Details                   | Agency de-rated to 16A continuous                                                                                                                                                                                                                                                       |
| PDU Plug Type                                | NEMA L22-20P                                                                                                                                                                                                                                                                            |
| Input Cord Length (ft.)                      | 6                                                                                                                                                                                                                                                                                       |
| Input Cord Length (m)                        | 1.83                                                                                                                                                                                                                                                                                    |
| <b>OUTPUT</b>                                |                                                                                                                                                                                                                                                                                         |
| Output Capacity Details                      | 11.5kW (415/240V), 11kW (400/230V), 10.6kW (380/220V), 10kW (360/208V) total capacity; 16A max per output phase (L1-L2, L2-L3, L3-L1); 16A max per C19 outlet; 12A max per C13 outlet                                                                                                   |
| Frequency Compatibility                      | 50 / 60 Hz                                                                                                                                                                                                                                                                              |
| Output Receptacles                           | (36) C13; (9) C19                                                                                                                                                                                                                                                                       |
| Output Nominal Voltage                       | 208-240V                                                                                                                                                                                                                                                                                |
| <b>USER INTERFACE, ALERTS &amp; CONTROLS</b> |                                                                                                                                                                                                                                                                                         |
| Reported Load Segments                       | Supports local monitoring of current for each output phase (16A balanced max per output load banks L1, L2 & L3); Outlets are color-coded and labeled for easy phase and load bank identification; L1-N feeds black outlets; L2-N feeds dark-gray outlets; L3-N feeds light-gray outlets |
| Front Panel LCD Display                      | Set of 3 digital meters report per-phase output current in amps (L1, L2, L3)                                                                                                                                                                                                            |
| <b>SURGE / NOISE SUPPRESSION</b>             |                                                                                                                                                                                                                                                                                         |
| Automatic Shut-Off                           | No                                                                                                                                                                                                                                                                                      |
| <b>PHYSICAL</b>                              |                                                                                                                                                                                                                                                                                         |
| Material of Construction                     | Metal                                                                                                                                                                                                                                                                                   |
| Form Factors Supported                       | Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks                                                                                                                                                  |
| PDU Form Factor                              | Vertical (0U)                                                                                                                                                                                                                                                                           |
| Shipping Dimensions (hwd / in.)              | 5.10 x 6.70 x 76.00                                                                                                                                                                                                                                                                     |
| Shipping Dimensions (hwd / cm)               | 12.95 x 17.02 x 193.04                                                                                                                                                                                                                                                                  |
| Shipping Weight (lbs.)                       | 11.50                                                                                                                                                                                                                                                                                   |
| Shipping Weight (kg)                         | 5.22                                                                                                                                                                                                                                                                                    |
| Unit Dimensions (hwd / in.)                  | 70.000 x 2.200 x 1.930                                                                                                                                                                                                                                                                  |
| Unit Dimensions (hwd / cm)                   | 177.8 x 5.6 x 4.9                                                                                                                                                                                                                                                                       |
| Unit Weight (lbs.)                           | 8.00                                                                                                                                                                                                                                                                                    |
| Unit Weight (kg)                             | 3.63                                                                                                                                                                                                                                                                                    |
| <b>ENVIRONMENTAL</b>                         |                                                                                                                                                                                                                                                                                         |
| Operating Temperature Range                  | 0C ~ 40C (32F ~ 104F)                                                                                                                                                                                                                                                                   |
| Storage Temperature Range                    | -30°C to +50°C (-22°F to +122°F)                                                                                                                                                                                                                                                        |
| Relative Humidity                            | 5-95% non-condensing                                                                                                                                                                                                                                                                    |
| Operating Elevation                          | 0-10,000                                                                                                                                                                                                                                                                                |

WARRANTY & SUPPORT

|                                        |                         |
|----------------------------------------|-------------------------|
| Product Warranty Period<br>(Worldwide) | 2-year limited warranty |
|----------------------------------------|-------------------------|

1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
<https://tripplite.eaton.com>

© 2025 Eaton. All Rights Reserved.  
Eaton is a registered trademark. All other trademarks  
are the property of their respective owners.