



# Industrial USB 2.0 Flash Module Specification

(FxAlp Series, SLC)

Version 1.5

Address: 28 Genting Lane, #09-03/4/5 Platinum 28, Singapore 349585

Tel : +65-6493 5035

Fax : +65-6493 5037

Website: <http://www.flexxon.com>

Email: [flexxon@flexxon.com](mailto:flexxon@flexxon.com)

ALL RIGHTS ARE STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSLATED TO ANY OTHER FORMS WITHOUT PERMISSION FROM FLEXXON.

## TABLE OF CONTENTS

<b>1.</b>	<b>GENERAL DESCRIPTION .....</b>	<b>1</b>
1.1.	Introduction.....	1
1.2.	Product Overview .....	2
<b>2.</b>	<b>PRODUCT SPECIFICATIONS.....</b>	<b>3</b>
2.1.	Performance.....	3
2.2.	Power.....	3
2.3.	MTBF .....	4
2.4.	Data Retention .....	4
<b>3.</b>	<b>ENVIRONMENTAL SPECIFICATIONS.....</b>	<b>5</b>
<b>4.</b>	<b>PIN ASSIGNMENT .....</b>	<b>6</b>
<b>5.</b>	<b>PHYSICAL DIMENSION .....</b>	<b>8</b>
<b>6.</b>	<b>ORDERING INFORMATION .....</b>	<b>9</b>

**1.1. Introduction**

FLEXXON's Industrial USB Flash Module (FxAlp series) is fully compatible with USB specification (USB1.1 / USB 2.0). It offers super performance & fast data transfer especially in 4K random write. Moreover, it also offers wide compatibility and high reliability, suitable for different type of applications and built-in systems in any rigorous environment.

FLEXXON CONFIDENTIAL

## 1.2. Product Overview

- ❖ **Flash**
  - SLC
- ❖ **Capacity**
  - 1GB up to 32GB
- ❖ **High IOPS**
- ❖ **AES 128 & 256 bits encryption engine.**
- ❖ **Conformal Coating (Anti-Dust & Anti-Moisture).**
- ❖ **Compatible with USB specification revision 1.1 and 2.0.**
- ❖ **Support Windows 2000 SP4 and Windows XP without device driver.**
- ❖ **Support Windows Vista and Windows 7 without device driver.**
- ❖ **Support MAC OS X and later without device driver (USB 1.1 speed).**
- ❖ **Support MAC OS 10.2.8 and later without device driver (USB 2.0 speed).**
- ❖ **Support Linux Kernel ver2.4.0 or above without device driver (USB 1.1 speed).**
- ❖ **Support Linux Kernel ver2.4.10 or above without device driver (USB 2.0 speed).**
- ❖ **ECC Scheme**
  - BCH ECC Engine correct up to 96 bits error in 1K Byte Data
- ❖ **No external power is required—DC 4.5V-5.5V from USB port.**
- ❖ **Transfer rate for USB interface:**
  - High speed up to 480Mbits/sec for USB 2.0
  - Full speed up to 12Mbits/sec for USB 1.1
- ❖ **Low Power Consumption**
- ❖ **Sudden Power Loss Management**
- ❖ **Dynamic, Static & Global Wear Leveling Algorithm**
- ❖ **Temperature Range**
  - Operation: -40°C ~ 85°C
  - Storage: -40°C ~ 85°C
- ❖ **RoHS Compliant**

## 2. PRODUCT SPECIFICATIONS

### 2.1. Performance

Table 2-1 Performance of FxAlp UFM

Sequential		Random	
Max. Read (MB/s)	Max. Write (MB/s)	Max. Read (IOPS)	Max. Write (IOPS)
31	23	2000	1000

**NOTES:**

1. The performance was measured using CrystalDiskMark.
2. Performance may differ according to flash configuration and platform.

### 2.2. Power

Table 2-2 Supply Voltage of FxAlp UFM

Parameter	Rating
Operating Voltage	5V +/-5%

Table 2-3 Power Consumption of FxAlp UFM

Capacity	Item	Power Consumption (mA)
1GB ~ 32GB	Active	<160
	Idle	<60

Unit: mA

**NOTES:**

1. Power Consumption may differ according to flash configuration and platform.

## 2.3. MTBF

MTBF, an acronym for Mean Time Between Failures, is a measure of a device's reliability. Its value represents the average time between a repair and the next failure. The predicted result of FLEXON's FxAlp industrial UFM (USB Flash Module) is more than 2 million hours.

## 2.4. Data Retention

- 10 years if > 90% life remaining (@25C)
- 1 year if < 10% life remaining (@25C)

FLEXION CONFIDENTIAL

### 3. ENVIRONMENTAL SPECIFICATIONS





Test Items	Test Conditions
Storage Temperature	-40°C ~ 85°C
Operating Temperature	-40°C ~ 85°C
Storage Humidity	55°C, 95% RH
Operating Humidity	55°C, 95% RH
Shock	1500G, Half Sin Pulse Duration 0.5ms
Vibration	80Hz ~ 2000Hz/20G, 20Hz ~ 80Hz/1.52mm, 3 axis/30min

FLEXXON CONFIDENTIAL



## 4. PIN ASSIGNMENT



### USB Pin Header Size & Defines – 10 pins

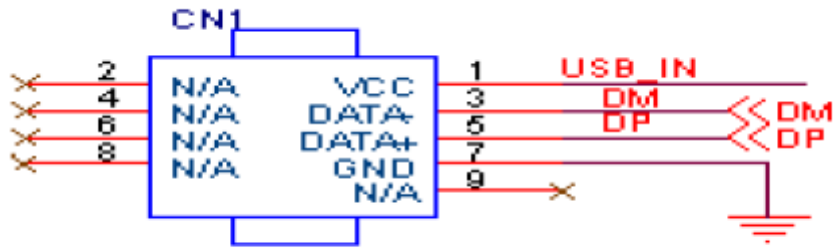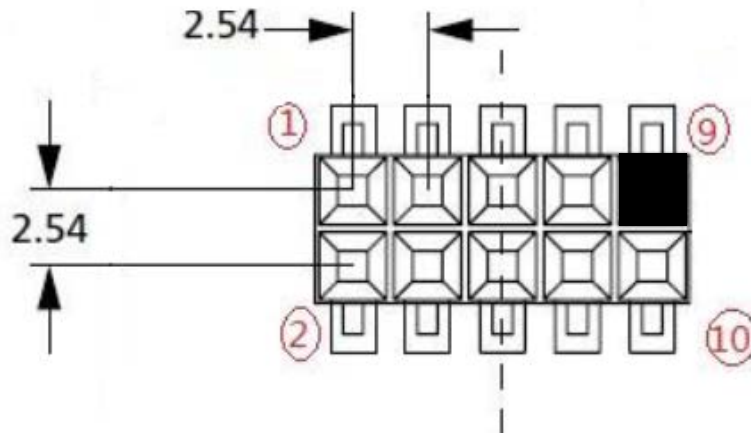

2X5 PEN HEAD CONNECTOR SMD

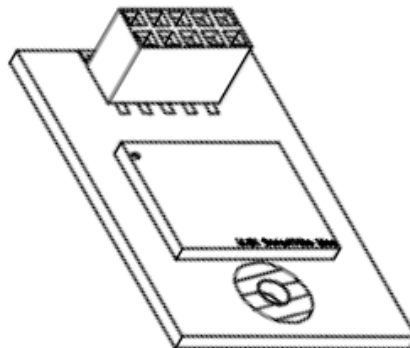

**Table 4-1 FxAlp UFM Pin Header Description (Type D)**


Pin	Pin Name	Pin Description
1	VCC	5.0V USB Bus Power Input
2	NC	Not Connection
3	DM	USB2.0 data in negative pin terminal
4	NC	Not Connection
5	DP	USB2.0 data in positive pin terminal
6	NC	Not Connection
7	GND	0V regulator ground reference input
8	NC	Not Connection
9	Key	Key
10	NC	Not Connection

FLEXOXON CONFIDENTIAL

## 5. PHYSICAL DIMENSION



Dimension: 36.9 (L) x 26.6 (W) x 9.6 (H) mm

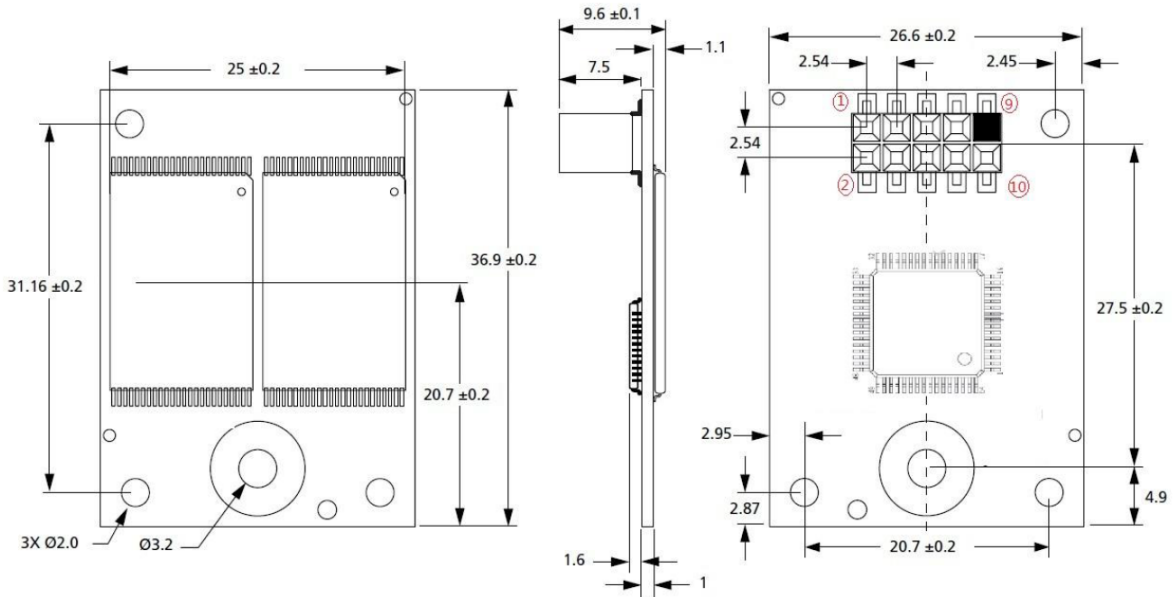

FLEXXON CONFIDENTIAL

## 6. ORDERING INFORMATION



Capacity	MPN (Diamond Grade)
1GB	FUUD001GSE-H600
2GB	FUUD002GSE-H600
4GB	FUUD004GSE-H600
8GB	FUUD008GSE-H600
16GB	FUUD016GSE-H600
32GB	FUUD032GSE-H600

FLEXIXON CONFIDENTIAL

## Revision History

Revision	Release Date	History
1.0	2019/07	First release
1.1	2019/08	Add AES & Conformal Coating. Add 1GB.
1.2	2019/09	Change Pin 9 from NC to Key
1.3	2020/04	Change Series Name from FxUH to FxAlp
1.4	2020/04	Update template
1.5	2020/05	Update spec

FLEXION CONFIDENTIAL