

USB-C® to USB-C Cable 5Gbit/sec High Speed USB3.2Gen1 right Angle Connector




Features

- Compliant with USB 3.2 Gen1 and Backward compatible with USB 2.0 and USB 3.1 Gen1
- Data rate up to 5 Gbit/sec
- 3A/5V/20W charging

Applications

- Industrial PC
- Cameras + Vision Systems
- Desktop, Tablets, and Mobile Phones

Physical Drawing

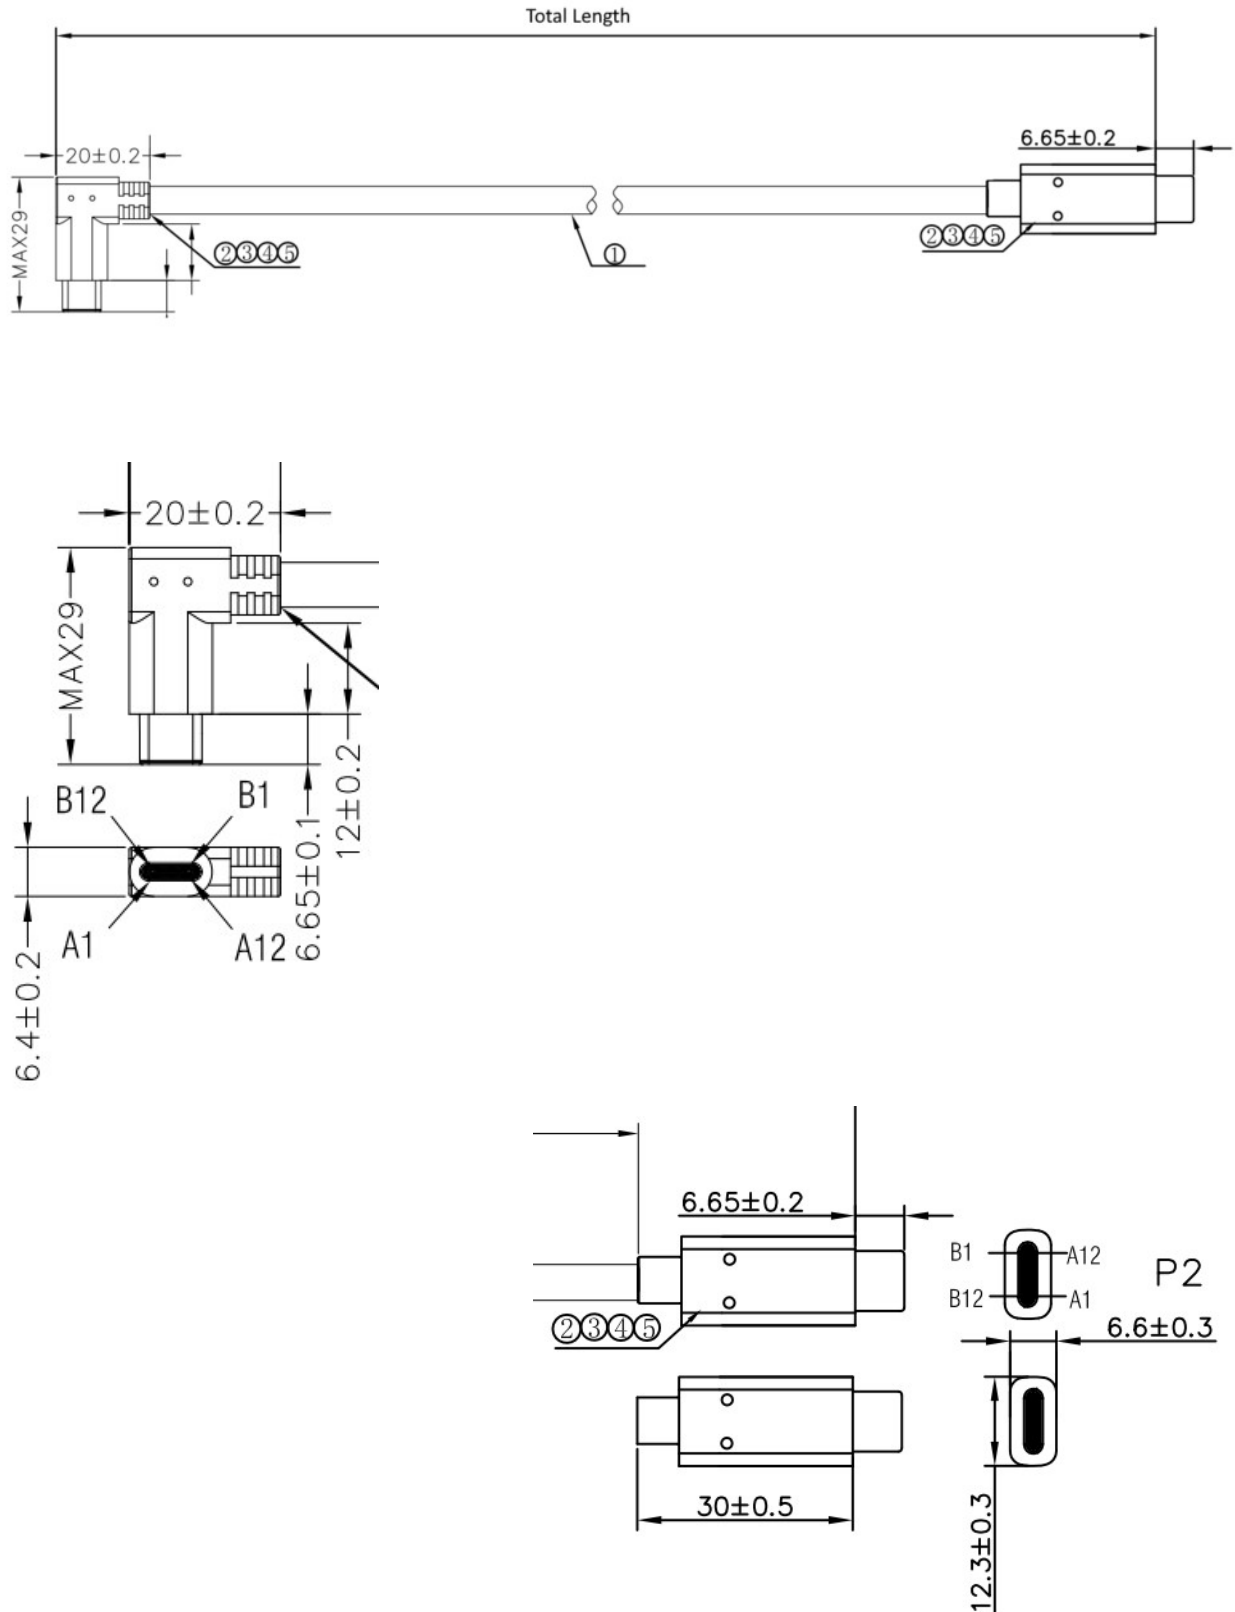

Specifications

Supported USB	USB2.0 + USB3.1 Gen1 + USB3.2 Gen1	
Supported DisplayPort™	No	
Maximum Data Transfer Rate	5Gb/sec	
Output Current and Voltage	3A/15V/15W	
Conductor Resistance	Max. 3Ω	
E-Mark	Option	
Supported Cable Length	1m	
O.D.	4,5mm	
Cable Type	USB3.1	
Cable Jacket	PVC	
Cable Color	Black	
Plugs	A: USB-C Male, Nickel Plated	B: USB-C Male , Nickel Plated
Housings	A: PVC Overmould	B: PVC Overmould
Compliance	RoHS/ Reach/ CE/ FCC	
Certifications	UL Production	
Flameability		
Standard Package	Bulk	
Production Standard	ISO14001 ISO9001 QC080000 IATF16949	

How to order

TCC172-xxxxx <-> xxxxx = total Length in mm

TCC172-xxxxx	xxxxx = Total Length in mm
TCC172-01000	Total Length = 1000 mm
TCC172-00500	Total Length = 500 mm

Please contact us for customization

Available Options

- Custom Length
- Custom Connector
- Custom Label on Cable
- Custom Label on Packing
- Other raw cable
- Colour

DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

USB Type-C® and USB-C® are registered trademarks of USB Implementers Forum.