



Since 1959


Product Information Sheet

888 12V 50W

888

2022. 10. 27 NEW

2017. 03. 21 OLD

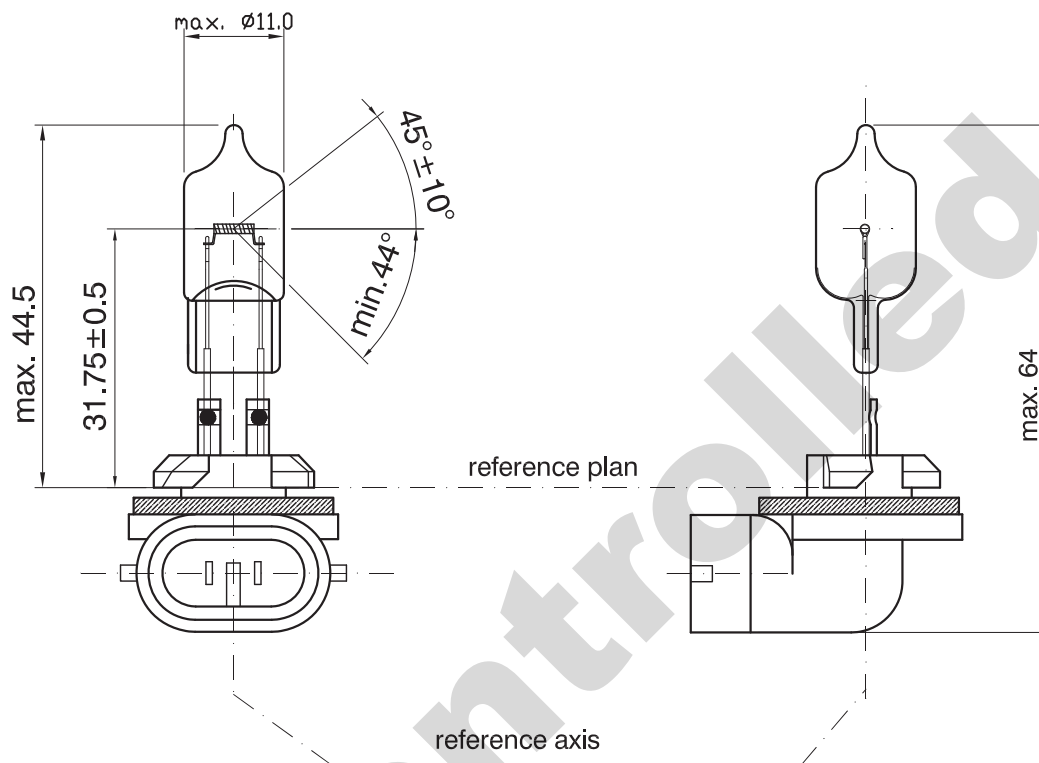

* all dimensions in mm

Halogen bulb

888 12V 50W

Cap: ¹⁾ PGJ13

Type: 888

ECE R37 none

FMVSS108 none

Bulb mat.: UV-cut Hardglass

1) According to IEC 60061-1 sheet 7004-107-4

2) According to SAE J 1383 Annex 5.20

3) Switching cycle according to SAE J 1383 5.20.2

4) According to IEC 60810 Annex A

5) Switching cycle according to IEC 60810 Annex A; 4.1.1

6) Switching cycle according to IEC 60810 Annex A; 4.1.2

7) Switching cycle according to IEC 60810 Annex A; 4.2

Technical data	
Test voltage	12.8V
Power	56W max.
Luminous flux	1190lm±15%
Lumen maintenance after 140hr	85 % min
Rated life:	^{2) 3)} at 14.0V B70: 450 hr B50: 400 hr B10: 250 hr
Maximum operating temperature:	1: bulb 650°C max 2: pinch 400°C max
Vibration resistance acc. to IEC 60810 Annex B; table B.2	> 20h