

GABRIELLA-MIDI-M

~25° spot beam with holder and installation tape

SPECIFICATION:


Dimensions	Ø 37.8
Height	24.1 mm
Fastening	tape, pin
ROHS compliant	yes ⓘ



MATERIALS:



Component	Type	Material	Colour	Finish	Length (mm)
GABRIELLA-MIDI-M	Single lens	PMMA	clear		
GABRIELLA-MIDI-HLD	Assembly	PC	black		

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
CA16203_GABRIELLA-MIDI-M » Box size: 476 x 273 x 292 mm	500	100	50	11.5

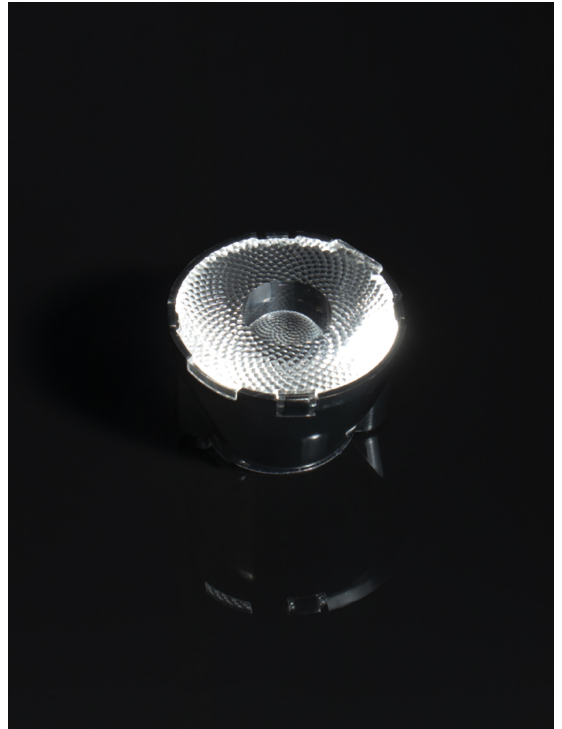

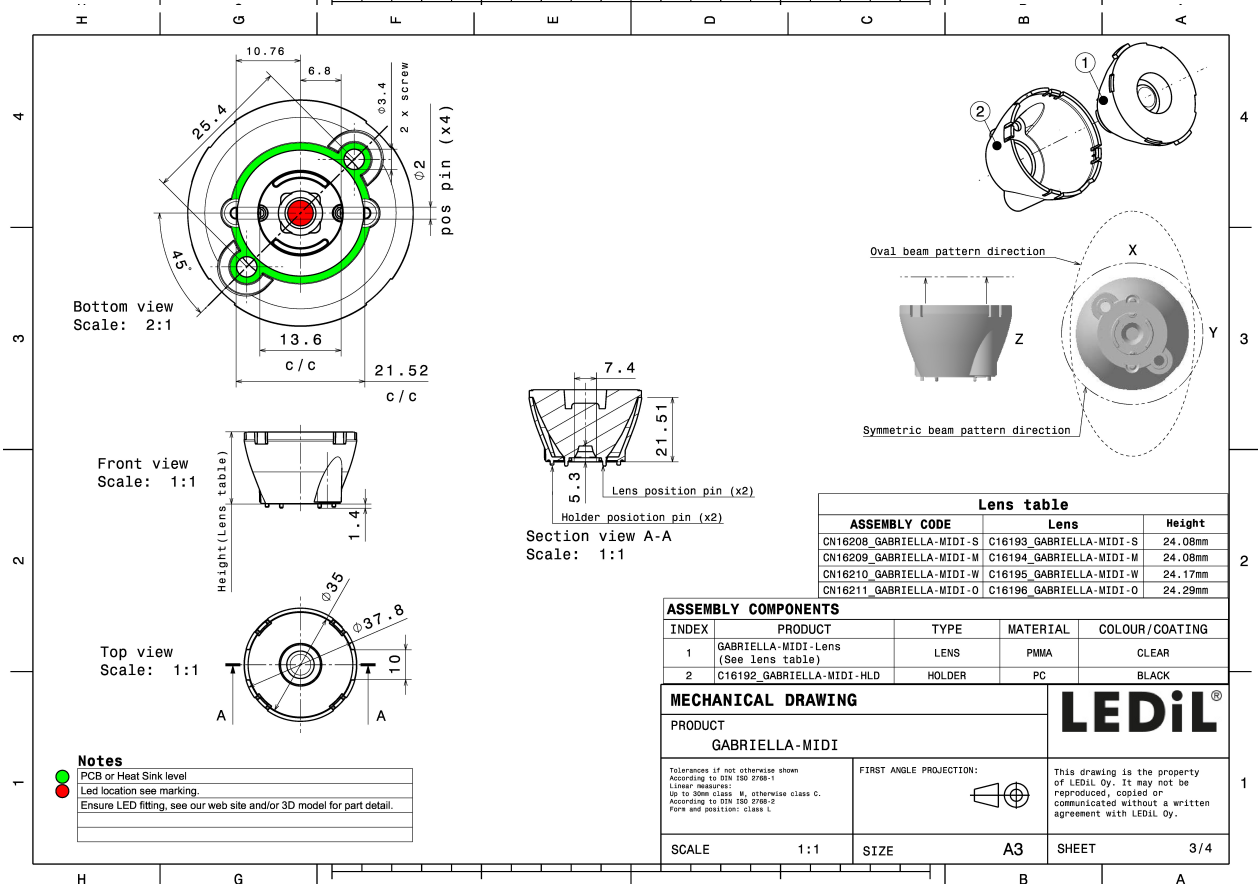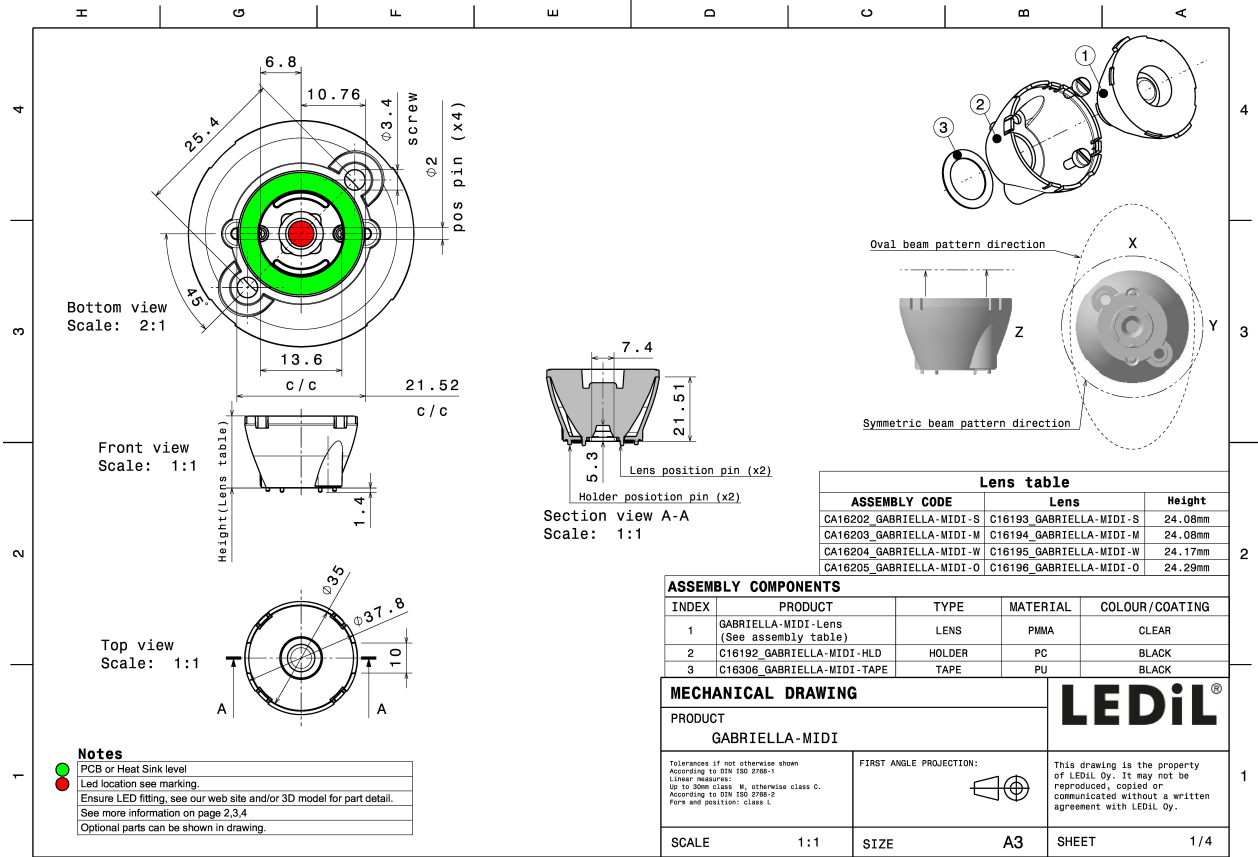

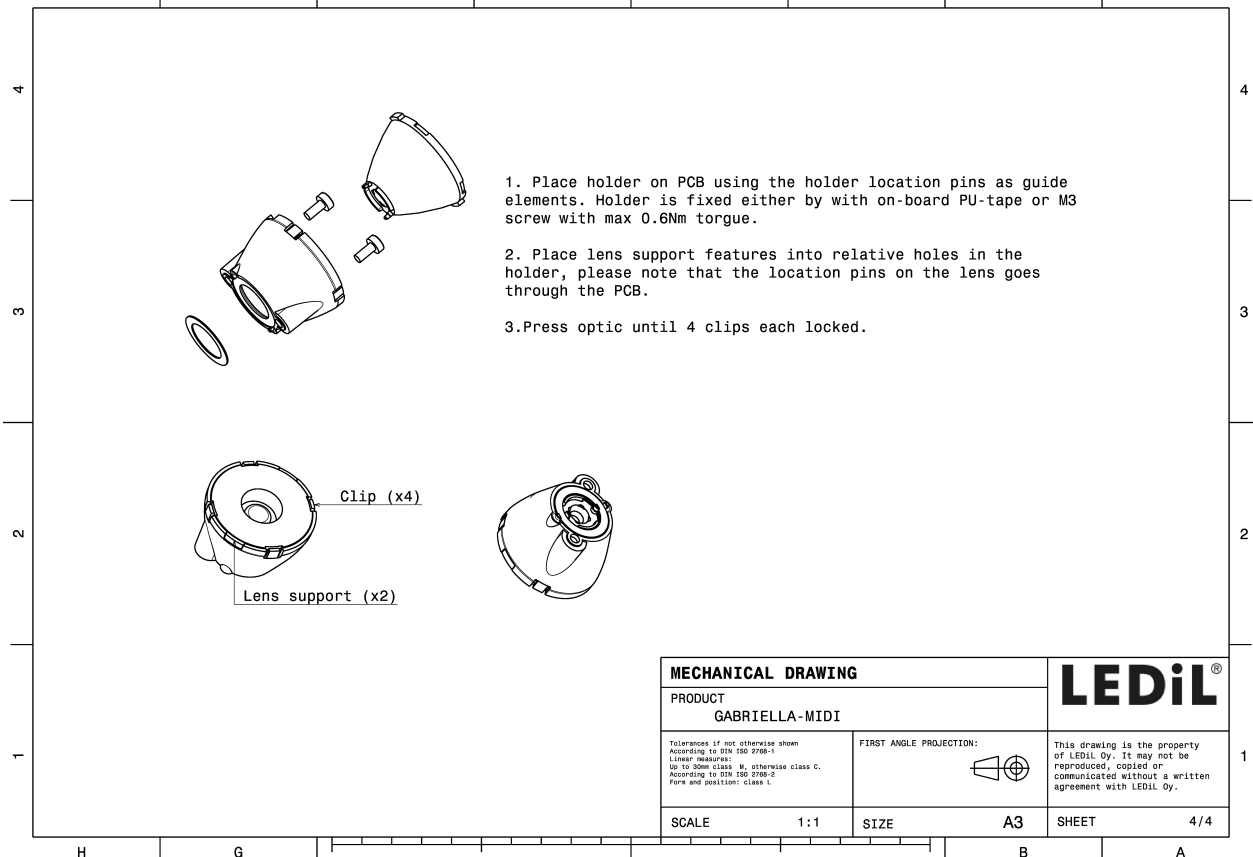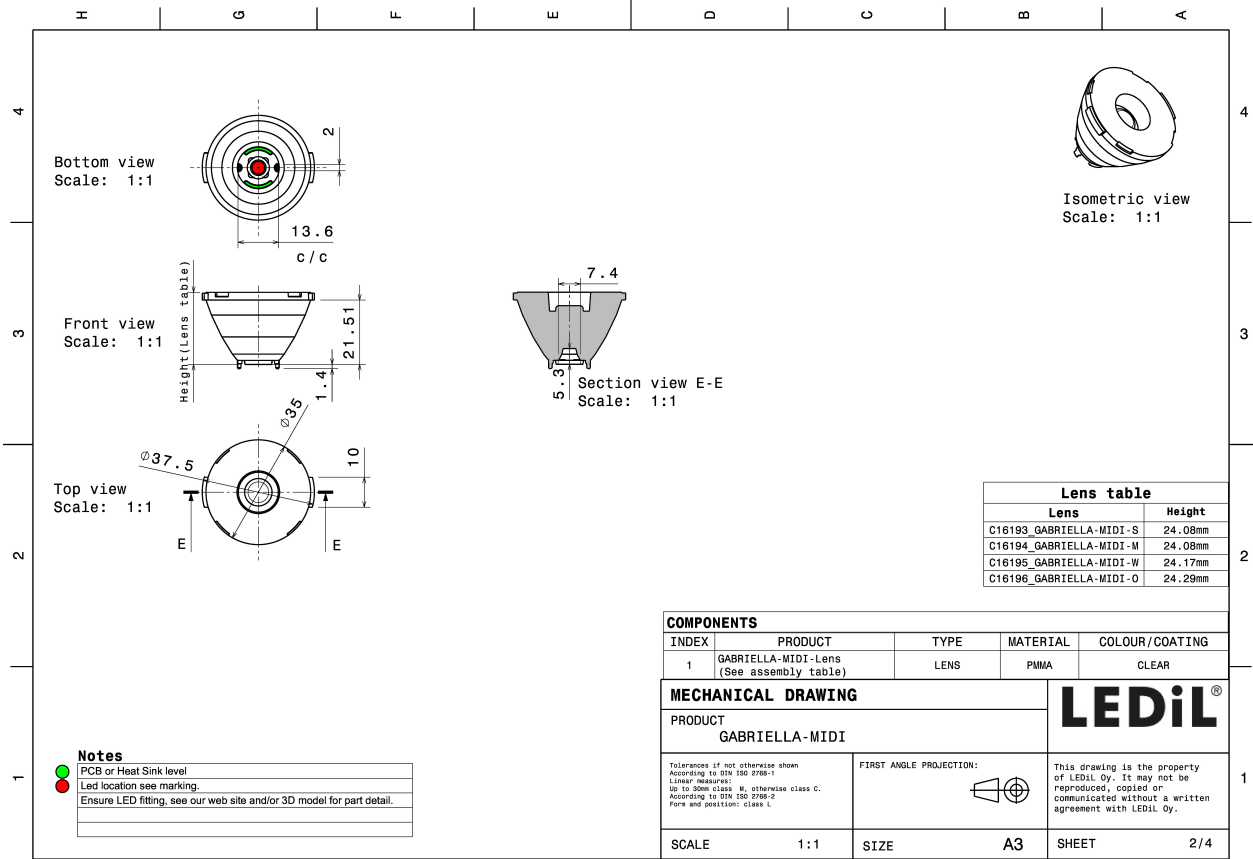


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):





LED XHP35 HI
FWHM / FWTM 25.0° / 41.0°
Efficiency 89 %
Peak intensity 4.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

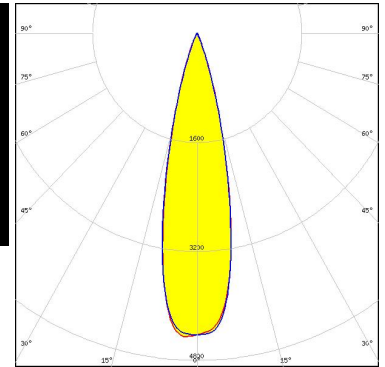

Light distribution files





LED XHP50.2
FWHM / FWTM 25.0° / 45.0°
Efficiency 85 %
Peak intensity 3.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

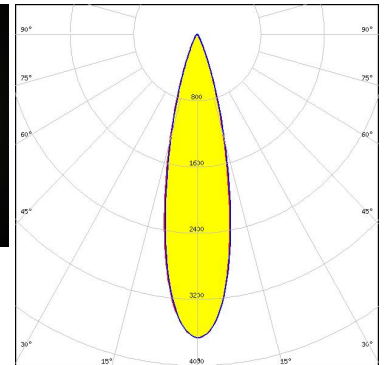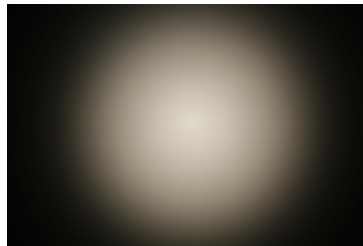

Light distribution files



LED XM-L RGBW (XMLDCL HI)
FWHM / FWTM 25.0° / 42.0°
Efficiency 87 %
Peak intensity 4.1 cd/lm
LEDs/each optic 1
Light colour/type RGBW
Required components:

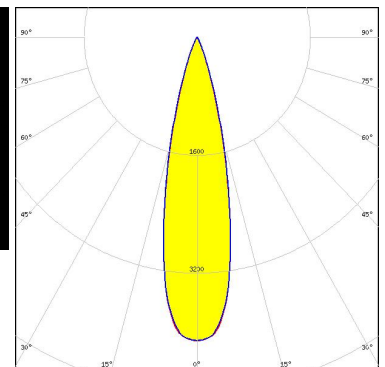
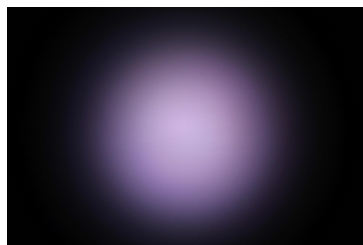


Light distribution files

OPTICAL RESULTS (MEASURED):





LED XP-L RGBW HD
 FWHM / FWTM 26.0° / 42.0°
 Efficiency 87 %
 Peak intensity 4 cd/lm
 LEDs/each optic 1
 Light colour/type RGBW
 Required components:

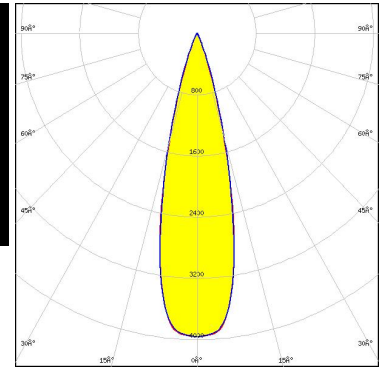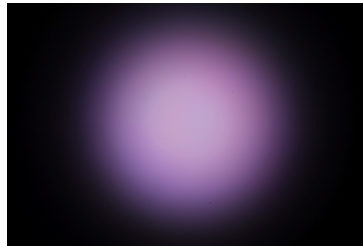

Light distribution files





LED XP-L RGBW HI
 FWHM / FWTM 27.0° / 43.0°
 Efficiency 88 %
 Peak intensity 3.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

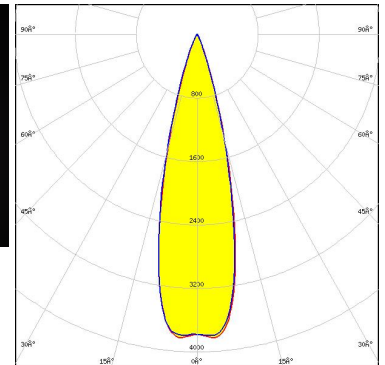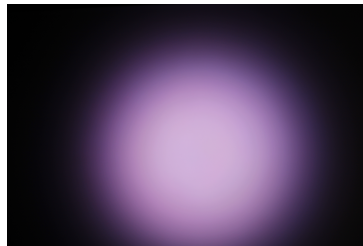

Light distribution files



LED OSLO Pure 1414
 FWHM / FWTM 25.0° / 48.0°
 Efficiency 85 %
 Peak intensity 3.4 cd/lm
 LEDs/each optic 1
 Light colour/type RGBW
 Required components:

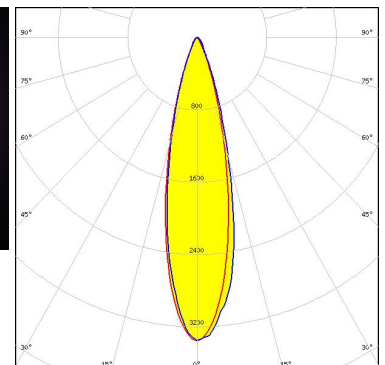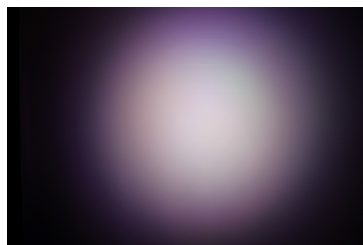


Light distribution files

OPTICAL RESULTS (MEASURED):

OSRAM
Opto Semiconductors



LED OSTAR Stage (S2WP)
 FWHM / FWTM 25.0° / 42.0°
 Efficiency 88 %
 Peak intensity 4.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

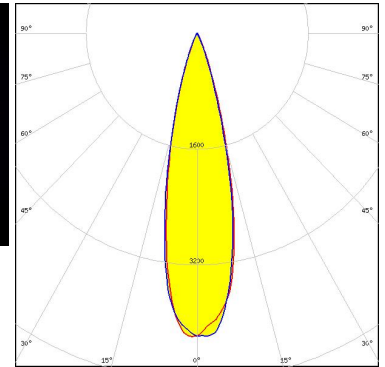

Light distribution files

SEOL
SEOUL SEMICONDUCTOR



LED SPF05FOA
 FWHM / FWTM 25.0° / 41.0°
 Efficiency 88 %
 Peak intensity 4.4 cd/lm
 LEDs/each optic 1
 Light colour/type RGBW
 Required components:

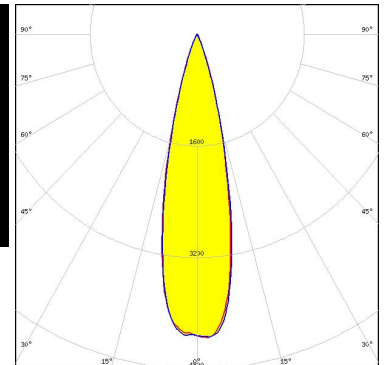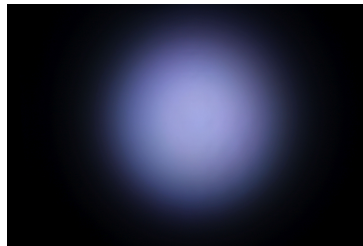

Light distribution files


SEOL
SEOUL SEMICONDUCTOR

LED SPF05FOB
 FWHM / FWTM 25.0° / 42.0°
 Efficiency 88 %
 Peak intensity 4.4 cd/lm
 LEDs/each optic 1
 Light colour/type RGBW
 Required components:

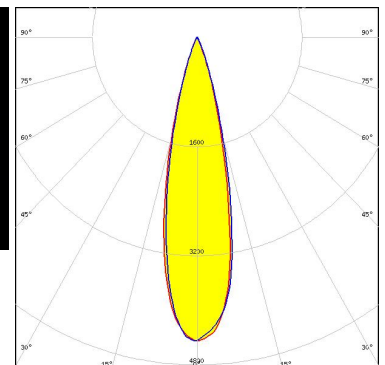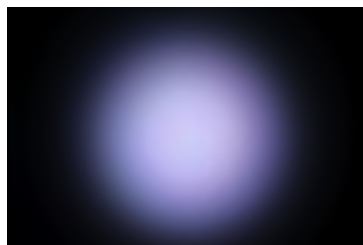

Light distribution files

OPTICAL RESULTS (MEASURED):


 SEOUL SEMICONDUCTOR		
LED	SPF05F0C	
FWHM / FWTM	24.0° / 42.0°	
Efficiency	87 %	
Peak intensity	4.3 cd/lm	
LEDs/each optic	1	
Light colour/type	RGBW	
Required components:		

Light distribution files

OPTICAL RESULTS (SIMULATED):




LED J Series 5050 Round LES
FWHM / FWTM 26.0° / 44.0°
Efficiency 88 %
Peak intensity 3.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

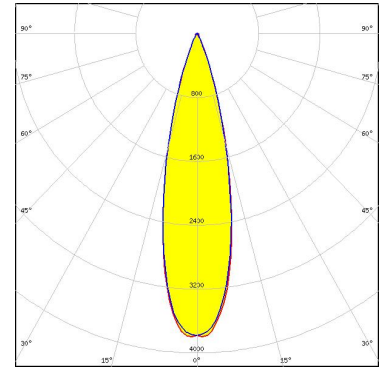

Light distribution files




LED XHP35.2 HD
FWHM / FWTM 26.0° / 44.0°
Efficiency 85 %
Peak intensity 3.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

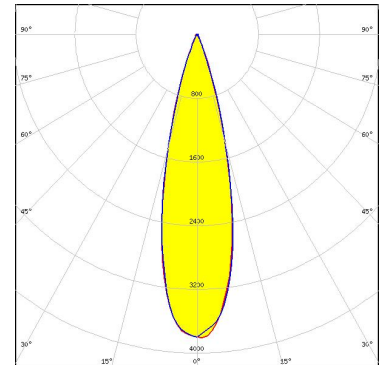

Light distribution files



LED XHP50
FWHM / FWTM 26.0° / 44.0°
Efficiency 87 %
Peak intensity 4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

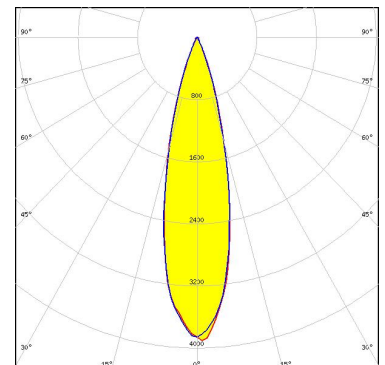


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XHP70.3 HI
 FWHM / FWTM 26.0° / 46.0°
 Efficiency 87 %
 Peak intensity 3.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

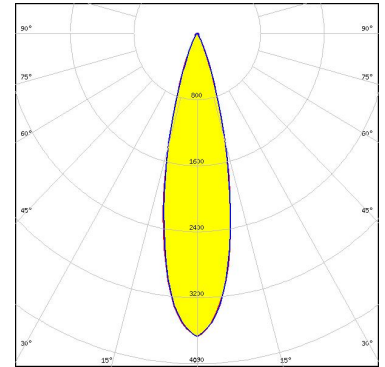

Light distribution files




LED XM-L RGBW (XMLCTW)
 FWHM / FWTM 26.0° / 44.0°
 Efficiency 88 %
 Peak intensity 4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

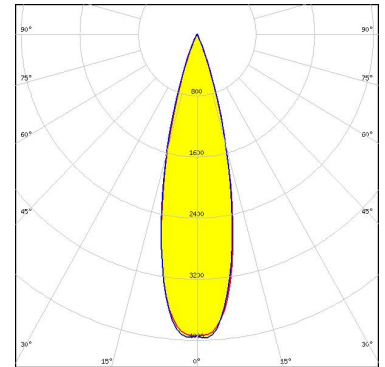

Light distribution files



LED XM-L2
 FWHM / FWTM 27.0° / 43.0°
 Efficiency 88 %
 Peak intensity 4.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

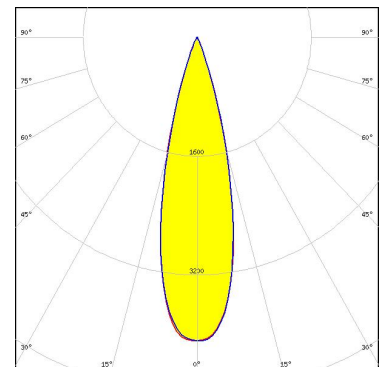


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XP-E2
FWHM / FWTM 26.0° / 41.0°
Efficiency 90 %
Peak intensity 4.6 cd/lm
LEDs/each optic 1
Light colour/type Amber
Required components:

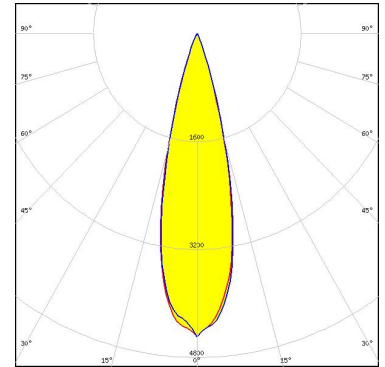

Light distribution files




LED XP-G2
FWHM / FWTM 26.0° / 42.0°
Efficiency 89 %
Peak intensity 4.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

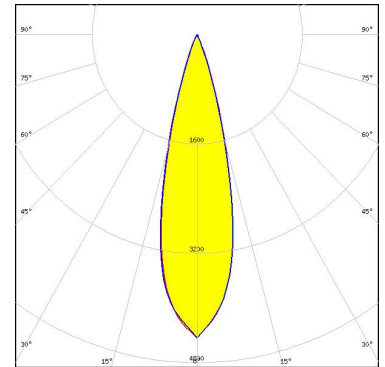

Light distribution files



LED XP-G2 HE
FWHM / FWTM 26.0° / 42.0°
Efficiency 88 %
Peak intensity 4.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

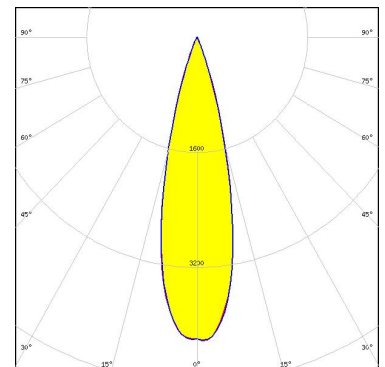


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED LZ7 Plus (LZ7-04M2PD)
 FWHM / FWTM 25.0° / 42.0°
 Efficiency 90 %
 Peak intensity 4.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

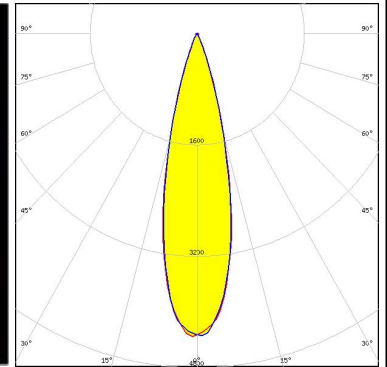

Light distribution files





LED LUXEON 5050 Round LES
 FWHM / FWTM 26.0° / 44.0°
 Efficiency 89 %
 Peak intensity 4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

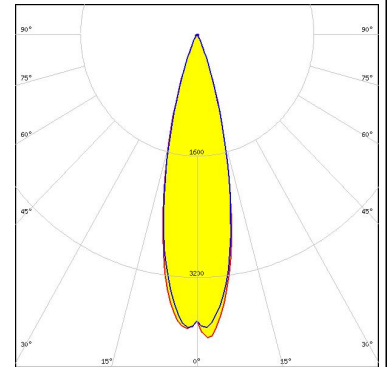

Light distribution files



LED LUXEON C
 FWHM / FWTM 24.0 + °
 Efficiency 83 %
 Peak intensity 3.5 cd/lm
 LEDs/each optic 4
 Light colour/type RGBW
 Required components:

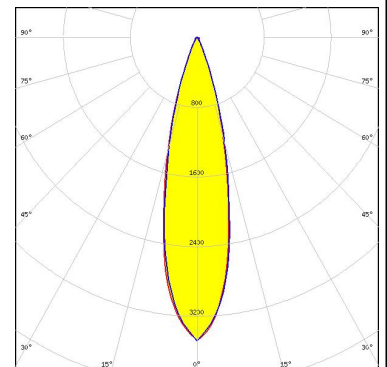


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED LUXEON M/MX
 FWHM / FWTM 25.0° / 46.0°
 Efficiency 86 %
 Peak intensity 3.6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

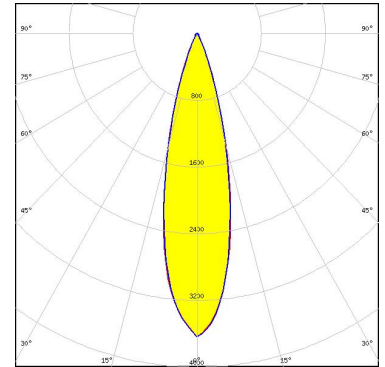

Light distribution files




LED LUXEON MZ
 FWHM / FWTM 26.0° / 43.0°
 Efficiency 88 %
 Peak intensity 4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

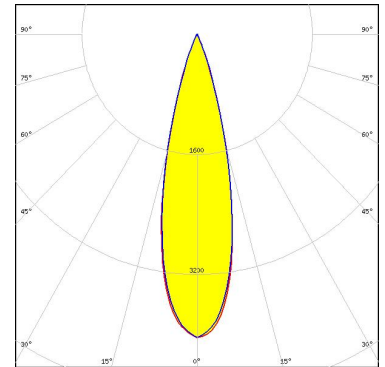

Light distribution files



LED LUXEON Rubix
 FWHM / FWTM 26.0° / 42.0°
 Efficiency 89 %
 Peak intensity 4.3 cd/lm
 LEDs/each optic 4
 Light colour/type RGBW
 Required components:

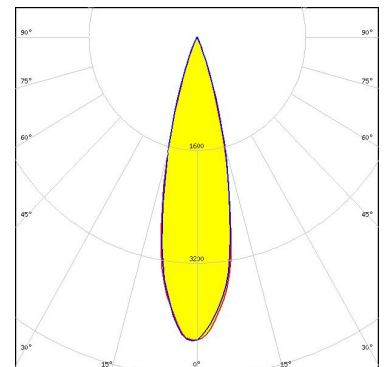


Light distribution files

OPTICAL RESULTS (SIMULATED):



LED NV4x144A
FWHM / FWTM 26.0° / 44.0°
Efficiency 86 %
Peak intensity 3.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

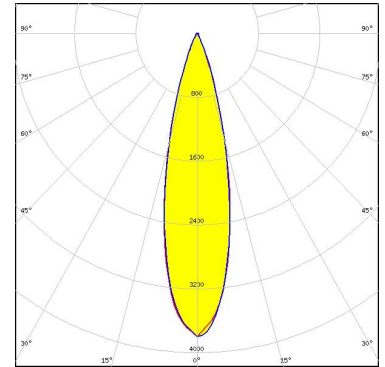


Light distribution files



Osram Opto Semiconductors

LED Duris S8
FWHM / FWTM 27.0° / 45.0°
Efficiency 87 %
Peak intensity 3.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

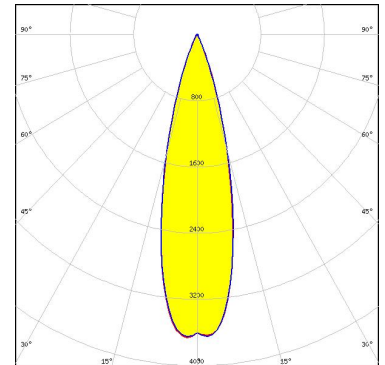


Light distribution files



Osram Opto Semiconductors

LED OSLOM Square EC
FWHM / FWTM 26.0° / 41.0°
Efficiency 89 %
Peak intensity 4.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

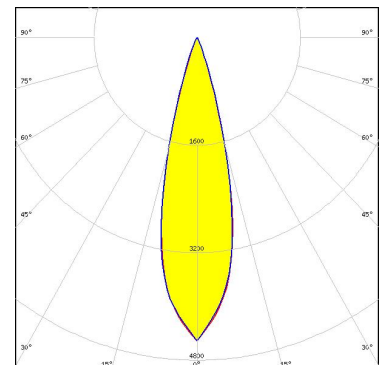


Light distribution files

OPTICAL RESULTS (SIMULATED):

SAMSUNG


LED LH502D
FWHM / FWTM 25.0° / 44.0°
Efficiency 88 %
Peak intensity 4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

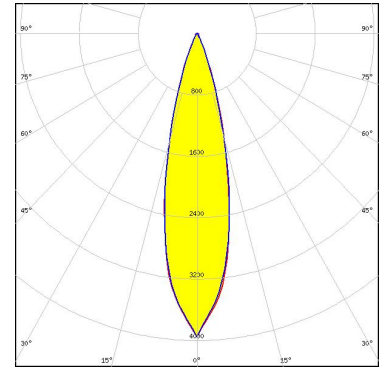

Light distribution files

SAMSUNG

LED LM28xB Series
FWHM / FWTM 26.0° / 42.0°
Efficiency 90 %
Peak intensity 4.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

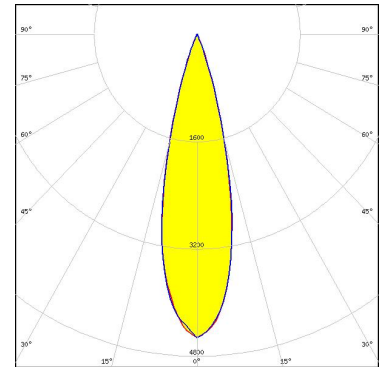

Light distribution files

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 7
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)