

**CUI INC**


a bel group

date 11/05/2024

page 1 of 9


**SERIES: PCN1-S | DESCRIPTION: DC-DC CONVERTER****FEATURES**

- up to 1 W isolated output
- industry standard SIP package
- nominal input voltages: 5, 12, 24 Vdc
- single/dual unregulated output
- 1,500 Vdc isolation voltage
- low ripple and noise
- -40 to 100°C
- efficiency up to 83%

**MODEL**

| MODEL          | input voltage |                | output voltage<br>(Vdc) | output current |             | output power<br>max<br>(W) | ripple & noise <sup>1</sup><br>max<br>(mVp-p) | efficiency<br>typ (%) |
|----------------|---------------|----------------|-------------------------|----------------|-------------|----------------------------|-----------------------------------------------|-----------------------|
|                | typ<br>(Vdc)  | range<br>(Vdc) |                         | min<br>(mA)    | max<br>(mA) |                            |                                               |                       |
| PCN1-S5-S5-S   | 5             | 4.5~5.5        | 5                       | 0              | 200         | 1                          | 75                                            | 79                    |
| PCN1-S5-S12-S  | 5             | 4.5~5.5        | 12                      | 0              | 84          | 1                          | 75                                            | 79                    |
| PCN1-S5-S15-S  | 5             | 4.5~5.5        | 15                      | 0              | 67          | 1                          | 75                                            | 79                    |
| PCN1-S5-D5-S   | 5             | 4.5~5.5        | ±5                      | 0              | ±100        | 1                          | 75                                            | 74                    |
| PCN1-S5-D12-S  | 5             | 4.5~5.5        | ±12                     | 0              | ±42         | 1                          | 75                                            | 78                    |
| PCN1-S5-D15-S  | 5             | 4.5~5.5        | ±15                     | 0              | ±33         | 1                          | 75                                            | 78                    |
| PCN1-S12-S5-S  | 12            | 10.8~13.2      | 5                       | 0              | 200         | 1                          | 75                                            | 80                    |
| PCN1-S12-S12-S | 12            | 10.8~13.2      | 12                      | 0              | 84          | 1                          | 75                                            | 81                    |
| PCN1-S12-S15-S | 12            | 10.8~13.2      | 15                      | 0              | 67          | 1                          | 75                                            | 81                    |
| PCN1-S12-D5-S  | 12            | 10.8~13.2      | ±5                      | 0              | ±100        | 1                          | 75                                            | 77                    |
| PCN1-S12-D12-S | 12            | 10.8~13.2      | ±12                     | 0              | ±42         | 1                          | 75                                            | 80                    |
| PCN1-S12-D15-S | 12            | 10.8~13.2      | ±15                     | 0              | ±33         | 1                          | 75                                            | 81                    |
| PCN1-S24-S5-S  | 24            | 21.6~26.4      | 5                       | 0              | 200         | 1                          | 75                                            | 80                    |
| PCN1-S24-S12-S | 24            | 21.6~26.4      | 12                      | 0              | 84          | 1                          | 75                                            | 83                    |
| PCN1-S24-S15-S | 24            | 21.6~26.4      | 15                      | 0              | 67          | 1                          | 75                                            | 81                    |
| PCN1-S24-D5-S  | 24            | 21.6~26.4      | ±5                      | 0              | ±100        | 1                          | 75                                            | 79                    |
| PCN1-S24-D12-S | 24            | 21.6~26.4      | ±12                     | 0              | ±42         | 1                          | 75                                            | 81                    |
| PCN1-S24-D15-S | 24            | 21.6~26.4      | ±15                     | 0              | ±33         | 1                          | 75                                            | 82                    |

Notes: 1. At full load, nominal input, 20 MHz bandwidth oscilloscope, with a 0.33  $\mu$ F ceramic capacitor on the output.  
 2. Required to add a 2.2  $\mu$ F (5 & 12 Vdc input models) or 4.7  $\mu$ F (24 Vdc input models) ceramic capacitor to the input to reduce input voltage stress.  
 3. All specifications are measured at  $T_a=25^\circ\text{C}$ , nominal input voltage, and rated output load unless otherwise specified.

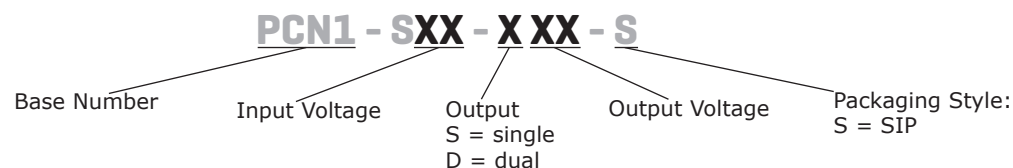**PART NUMBER KEY**

## INPUT

| parameter                         | conditions/description                             | min  | typ | max  | units |
|-----------------------------------|----------------------------------------------------|------|-----|------|-------|
| operating input voltage           | 5 Vdc input models                                 | 4.5  | 5   | 5.5  | Vdc   |
|                                   | 12 Vdc input models                                | 10.8 | 12  | 13.2 | Vdc   |
|                                   | 24 Vdc input models                                | 21.6 | 24  | 26.4 | Vdc   |
| surge voltage                     | for maximum of 100 ms                              |      |     |      |       |
|                                   | 5 Vdc input models                                 |      |     | 9    | Vdc   |
|                                   | 12 Vdc input models                                |      |     | 18   | Vdc   |
|                                   | 24 Vdc input models                                |      |     | 30   | Vdc   |
| current                           | 5 Vdc input models                                 |      | 250 |      | mA    |
|                                   | 12 Vdc input models                                |      | 110 |      | mA    |
|                                   | 24 Vdc input models                                |      | 50  |      | mA    |
| filter                            | capacitive                                         |      |     |      |       |
| input reverse polarity protection | no                                                 |      |     |      |       |
| input fuse                        | 0.5 A time delay fuse for all models (recommended) |      |     |      |       |

Notes: 1. Required to add a 2.2  $\mu$ F (5 & 12 Vdc input models) or 4.7  $\mu$ F (24 Vdc input models) ceramic capacitor to the input to reduce input voltage stress.

## OUTPUT

| parameter               | conditions/description       | min | typ | max        | units           |
|-------------------------|------------------------------|-----|-----|------------|-----------------|
| maximum capacitive load | single output models         |     |     | 220        | $\mu$ F         |
|                         | dual output models           |     |     | 100        | $\mu$ F         |
| voltage accuracy        |                              |     |     | $\pm 3.0$  | %               |
| line regulation         | 1.0% change in input voltage |     |     | $\pm 1.2$  | %               |
| load regulation         | from 20% load to full load   |     |     | $\pm 10$   | %               |
| switching frequency     | at nominal Vin, full load    |     |     |            |                 |
|                         | 24 Vdc input models          |     | 75  |            | kHz             |
|                         | all other models             |     | 100 |            | kHz             |
| temperature coefficient |                              |     |     | $\pm 0.05$ | %/ $^{\circ}$ C |

## PROTECTIONS

| parameter                | conditions/description | min | typ | max | units |
|--------------------------|------------------------|-----|-----|-----|-------|
| short circuit protection | momentary              |     |     | 1   | s     |

## SAFETY AND COMPLIANCE

| parameter             | conditions/description                                     | min   | typ       | max | units      |
|-----------------------|------------------------------------------------------------|-------|-----------|-----|------------|
| isolation voltage     | input to output for 1 minute                               | 1,500 |           |     | Vdc        |
| isolation resistance  | input to output                                            | 1,000 |           |     | M $\Omega$ |
| isolation capacitance | input to output                                            |       | 10        |     | pF         |
| conducted emissions   | EN 55022 Class B (external circuit required, see Figure 4) |       |           |     |            |
| MTBF                  | as per MIL-HDBK-217F, full load, GB, 25 $^{\circ}$ C       |       | 1,500,000 |     | hours      |
| RoHS                  | 2011/65/EU                                                 |       |           |     |            |

## ENVIRONMENTAL


| parameter             | conditions/description | min | typ | max | units        |
|-----------------------|------------------------|-----|-----|-----|--------------|
| operating temperature | see derating curve     | -40 |     | 100 | $^{\circ}$ C |
| storage temperature   |                        | -55 |     | 125 | $^{\circ}$ C |
| operating humidity    | non-condensing         |     |     | 95  | %            |

## SOLDERABILITY

| parameter      | conditions/description     | min | typ | max | units |
|----------------|----------------------------|-----|-----|-----|-------|
| wave soldering | see wave soldering profile |     |     | 260 | °C    |

Notes:

1. Soldering materials: Sn/Cu/Ni
2. Ramp up rate during preheat: 1.4°C/s (from 50°C to 100°C)
3. Soaking temperature: 0.5°C/s (from 100°C to 130°C), 60±20 seconds
4. Peak temperature: 260°C, above 250°C for 3~6 seconds
5. Ramp down rate during cooling: -10°C/s (from 260°C to 150°C)

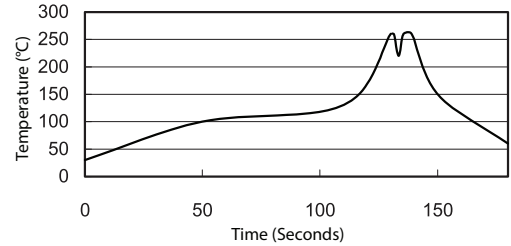

## MECHANICAL


| parameter     | conditions/description                                                                                                              | min | typ        | max | units            |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------|-----|------------|-----|------------------|
| dimensions    | 5, 12 Vdc input models: 0.77 x 0.24 x 0.40 [19.5 x 6.1 x 10.2 mm]<br>24 Vdc input models: 0.77 x 0.28 x 0.40 [19.5 x 7.2 x 10.2 mm] |     |            |     | inches<br>inches |
| case material | non-conductive black plastic                                                                                                        |     |            |     |                  |
| weight        | 24 Vdc input models<br>all other models                                                                                             |     | 2.7<br>1.8 |     | g<br>g           |

## MECHANICAL DRAWING



units: inches [mm]  
tolerance: X.XX ±0.01 [±0.25]  
X.XXX ±0.005 [±0.13]  
pin section tolerance: ±0.002[±0.05]

| PIN CONNECTIONS |          |        |
|-----------------|----------|--------|
| PIN             | Function |        |
|                 | Single   | Dual   |
| 1               | +Vin     | +Vin   |
| 2               | -Vin     | -Vin   |
| 4               | -Vout    | -Vout  |
| 5               | No pin   | Common |
| 6               | +Vout    | +Vout  |


### 5, 12 Vdc input models

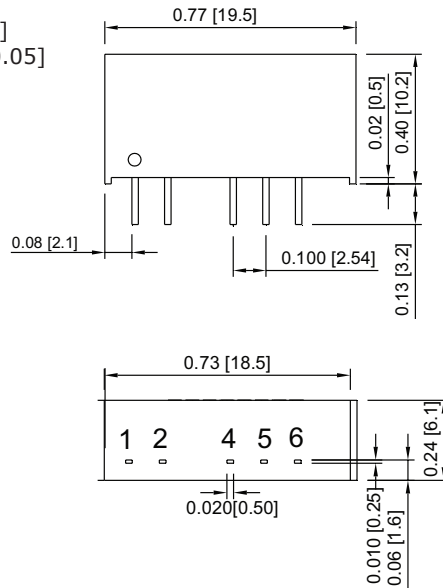

### 24 Vdc input models

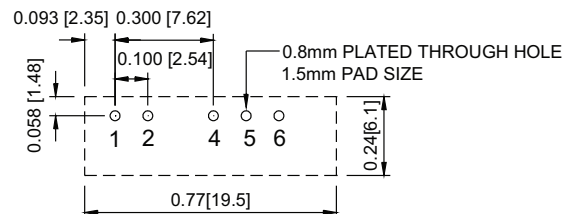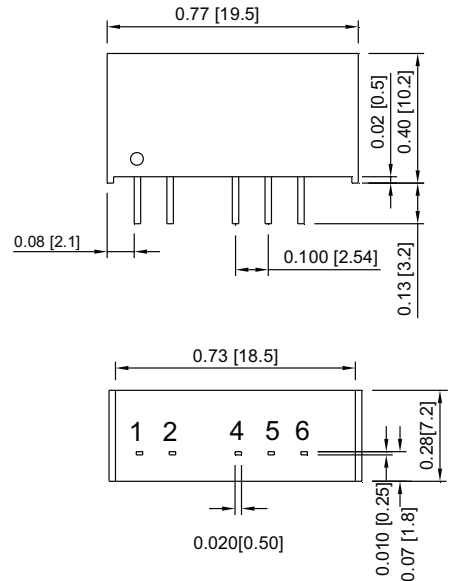


Recommended PCB Layout  
Top View

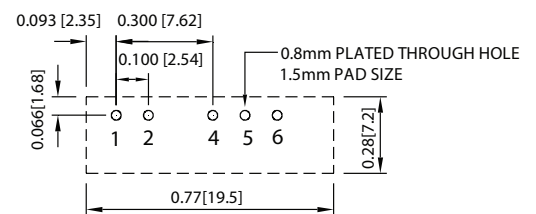

Recommended PCB Layout  
Top View


## DERATING CURVE

### TEMPERATURE DERATING CURVE

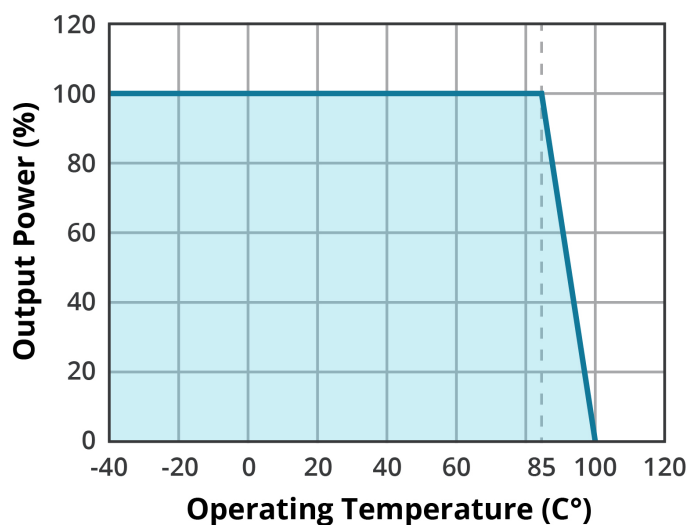


## EFFICIENCY CURVES


### EFFICIENCY VS OUTPUT LOAD PCN1-S5-S5-S

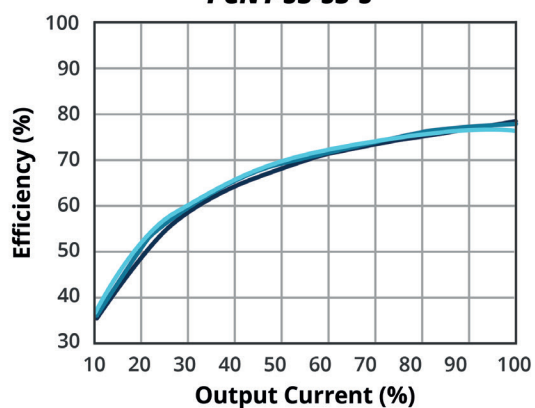


### EFFICIENCY VS OUTPUT LOAD PCN1-S5-S12-S

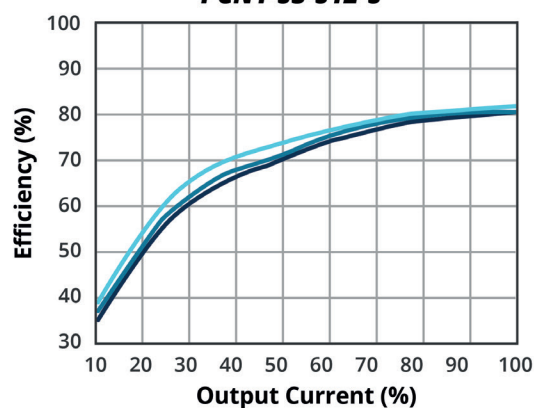

### EFFICIENCY VS OUTPUT LOAD PCN1-S5-S15-S

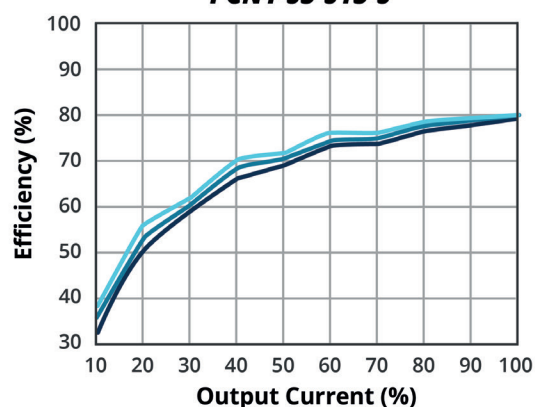


### EFFICIENCY VS OUTPUT LOAD PCN1-S5-D5-S

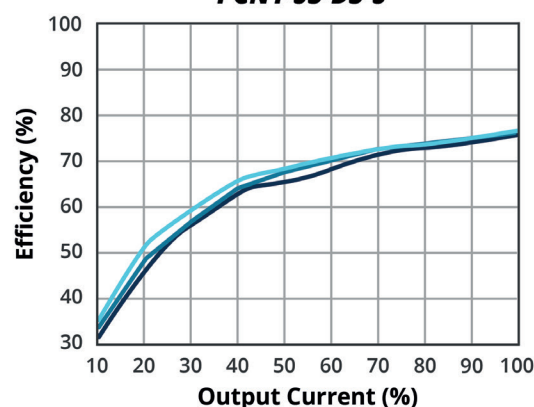

## EFFICIENCY CURVES (CONTINUED)


**EFFICIENCY VS OUTPUT LOAD**  
**PCN1-S5-D12-S**

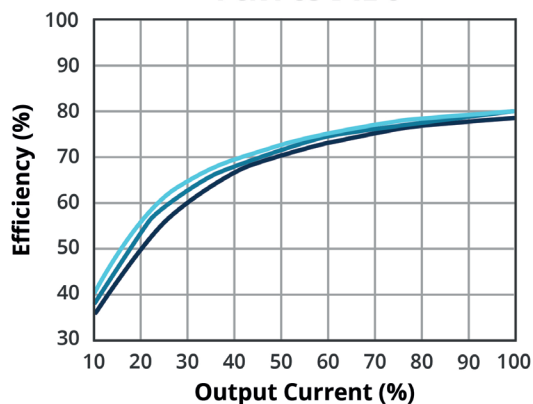

Key

4.5 Vdc  
5 Vdc  
5.5 Vdc


**EFFICIENCY VS OUTPUT LOAD**  
**PCN1-S5-D15-S**

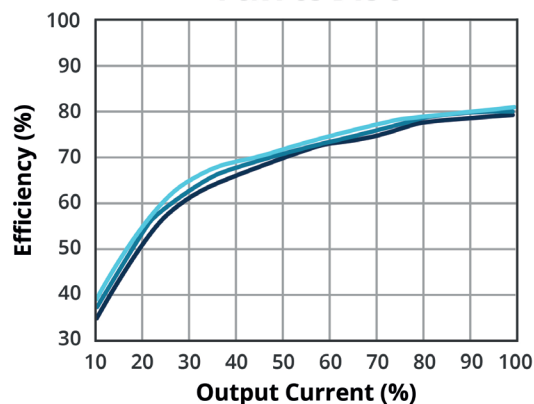

Key

4.5 Vdc  
5 Vdc  
5.5 Vdc


**EFFICIENCY VS OUTPUT LOAD**  
**PCN1-S12-S5-S**

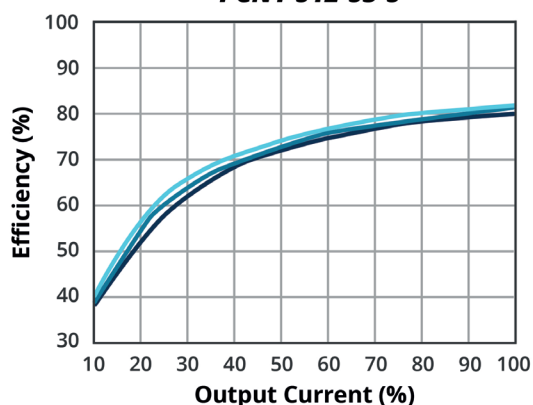

Key

10.8 Vdc  
12 Vdc  
13.2 Vdc


**EFFICIENCY VS OUTPUT LOAD**  
**PCN1-S12-S12-S**

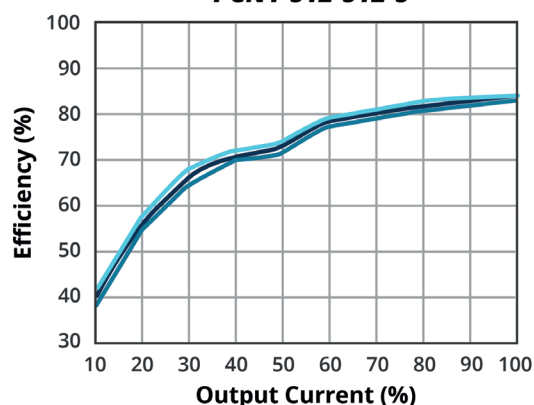

Key

10.8 Vdc  
12 Vdc  
13.2 Vdc


**EFFICIENCY VS OUTPUT LOAD**  
**PCN1-S12-S15-S**

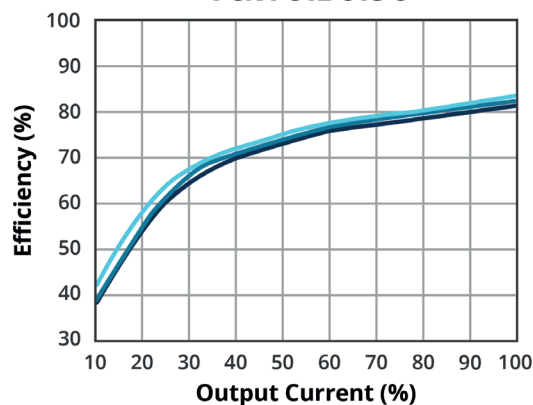

Key

10.8 Vdc  
12 Vdc  
13.2 Vdc







**EFFICIENCY VS OUTPUT LOAD**  
**PCN1-S12-D5-S**

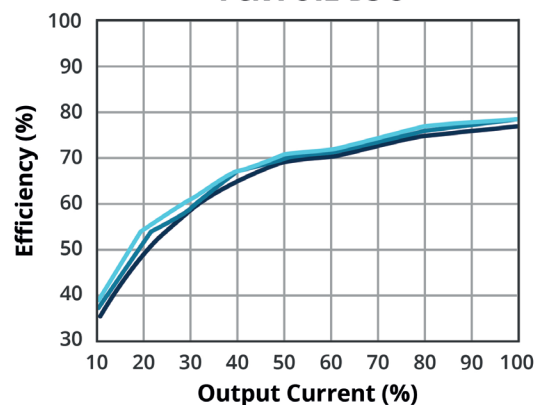

Key


10.8 Vdc  
12 Vdc  
13.2 Vdc

## EFFICIENCY CURVES (CONTINUED)

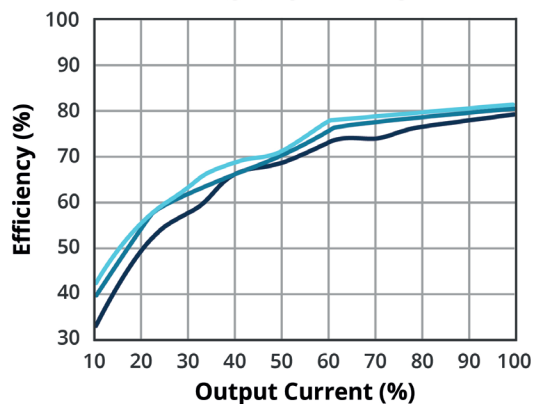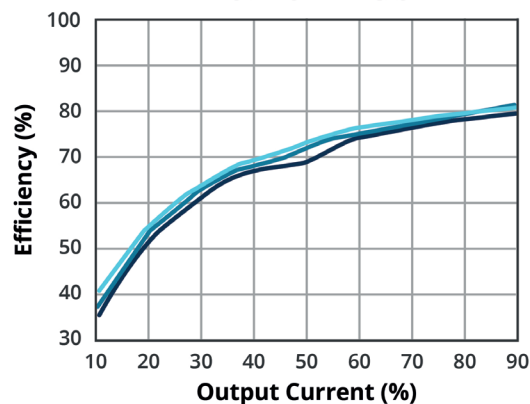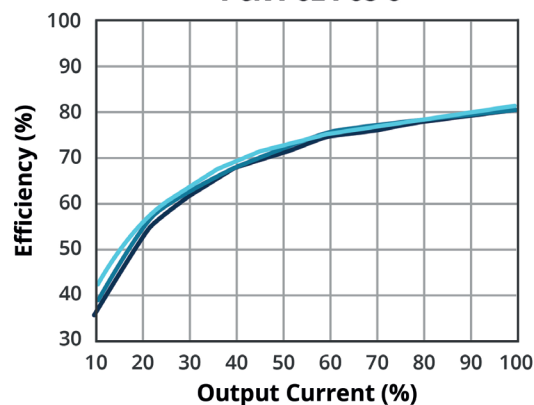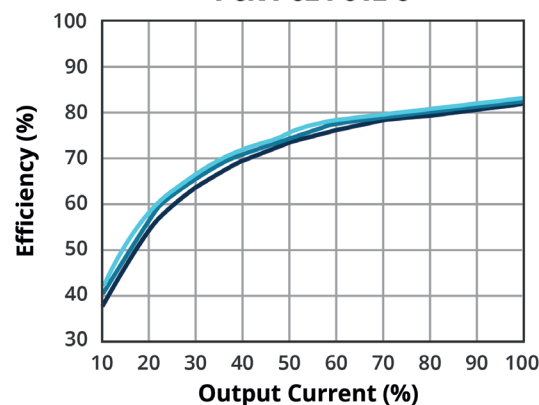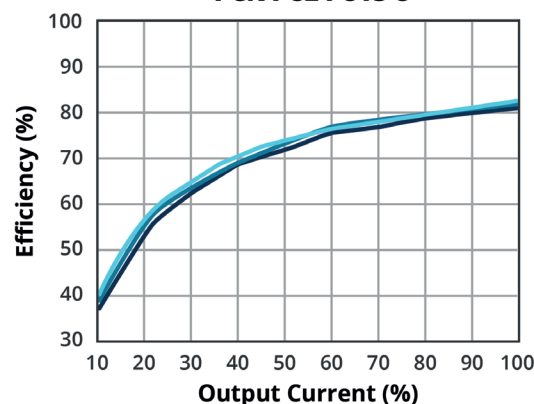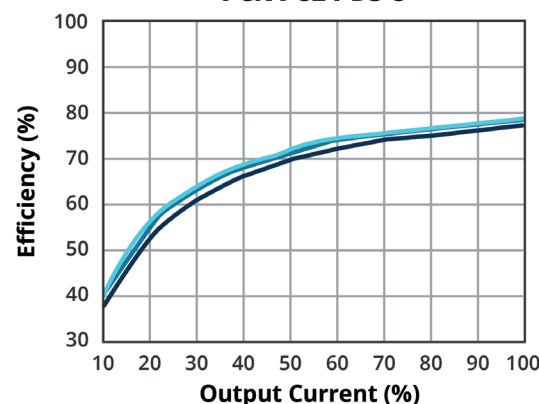**EFFICIENCY VS OUTPUT LOAD  
PCN1-S12-D12-S****Key**10.8 Vdc  
12 Vdc  
13.2 Vdc**EFFICIENCY VS OUTPUT LOAD  
PCN1-S12-D15-S****Key**10.8 Vdc  
12 Vdc  
13.2 Vdc**EFFICIENCY VS OUTPUT LOAD  
PCN1-S24-S5-S****Key**21.6 Vdc  
24 Vdc  
26.4 Vdc**EFFICIENCY VS OUTPUT LOAD  
PCN1-S24-S12-S****Key**21.6 Vdc  
24 Vdc  
26.4 Vdc**EFFICIENCY VS OUTPUT LOAD  
PCN1-S24-S15-S****Key**21.6 Vdc  
24 Vdc  
26.4 Vdc**EFFICIENCY VS OUTPUT LOAD  
PCN1-S24-D5-S****Key**21.6 Vdc  
24 Vdc  
26.4 Vdc

## EFFICIENCY CURVES (CONTINUED)


**EFFICIENCY VS OUTPUT LOAD**  
**PCN1-S24-D12-S**

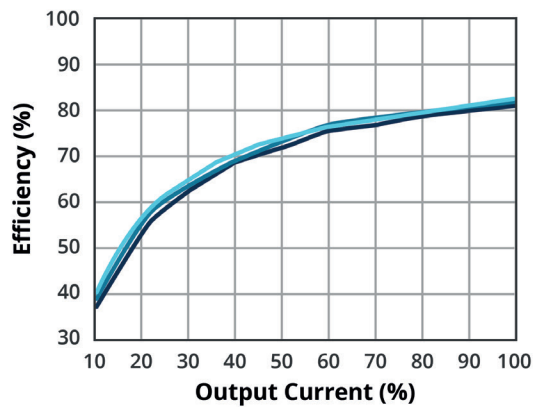

**Key**

21.6 Vdc  
24 Vdc  
26.4 Vdc

**EFFICIENCY VS OUTPUT LOAD**  
**PCN1-S24-D15-S**

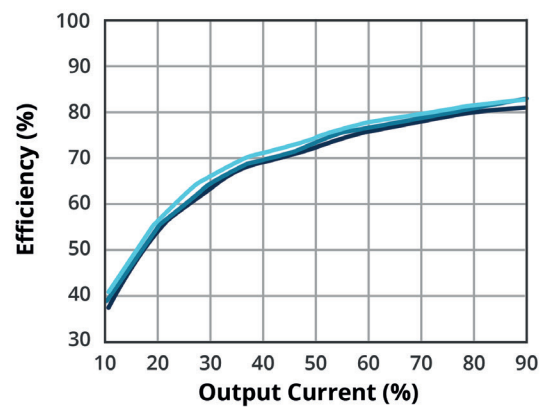

**Key**

21.6 Vdc  
24 Vdc  
26.4 Vdc


## PACKAGING

### 5, 12 Vdc input models

units: mm

Tube size: 17.2 x 9 x 340 mm

QTY: 16 pcs

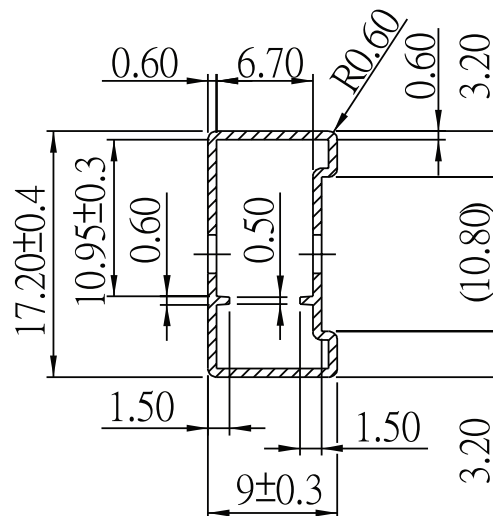


### 24 Vdc input models

units: mm

Tube size: 20 x 11 x 340 mm


QTY: 14 pcs

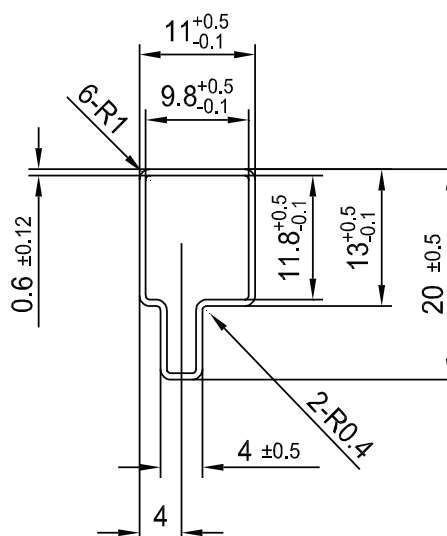


## TEST CONFIGURATIONS

### Input Ripple Current & Output Noise


**Figure 1**  
Measuring Input Ripple Current

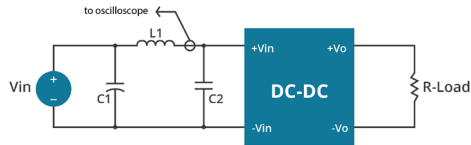

**Figure 2**  
Measuring Output Ripple & Noise for Single Output Models

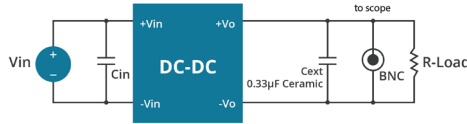

**Figure 3**  
Measuring Output Ripple & Noise for Dual Output Models

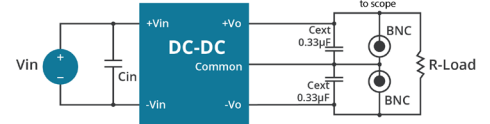

**Table 1**

|    |                                     |
|----|-------------------------------------|
| L1 | 12 µH                               |
| C1 | 2.2 µF or 4.7 µF tantalum capacitor |
| C2 | NC                                  |

**Table 2**

| Input Voltage (Vdc) | Cin                      |
|---------------------|--------------------------|
| 5                   | 2.2 µF ceramic capacitor |
| 12                  | 2.2 µF ceramic capacitor |
| 24                  | 4.7 µF ceramic capacitor |


## EMC RECOMMENDED CIRCUIT

### Test Condition

Input Voltage: Nominal

Output Load: Full Load

**Figure 4**  
Conducted Emissions Test Circuit

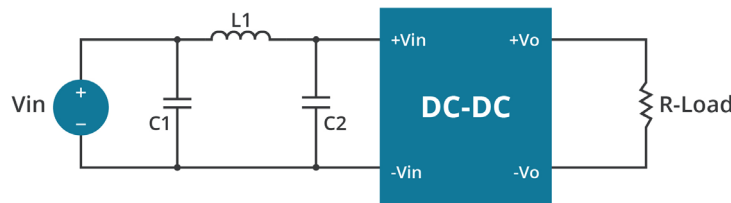

**Table 3**

| EN55022 Class B<br>Recommended External Circuit Components |                 |                 |        |
|------------------------------------------------------------|-----------------|-----------------|--------|
| Input Voltage (Vdc)                                        | C1 <sup>1</sup> | C2 <sup>1</sup> | L1     |
| 5                                                          | 4.7 µF / 25 V   | 4.7 µF / 25 V   | 10 µH  |
| 12                                                         | 4.7 µF / 25 V   | 4.7 µF / 25 V   | 10 µH  |
| 24                                                         | 10 µF / 50 V    | 10 µF / 50 V    | 7.5 µH |

Notes: 1. Ceramic Capacitor



## REVISION HISTORY

| rev. | description                                                   | date       |
|------|---------------------------------------------------------------|------------|
| 1.0  | initial release                                               | 07/26/2016 |
| 1.01 | company logo updated                                          | 04/12/2021 |
| 1.02 | derating curve, efficiency curves and circuit figures updated | 07/01/2021 |
| 1.03 | company address updated                                       | 11/05/2024 |

The revision history provided is for informational purposes only and is believed to be accurate.



**CUI INC**  
a bel group

**Headquarters**

15575 SW Sequoia Pkwy #100  
Portland, OR 97224  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.