


product type designation

product description

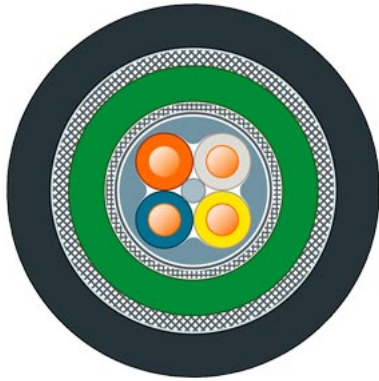

IE TP Robust Ground Cable 2x2 (Type C)

Standard bus cable (4-core), for laying underground with metal rodent protection, sold by the meter, unassembled

IE robust ground cable 2x2; Cat5e; PROFINET Type C; underground cable; 4-core shielded, with rodent protection; sold by the meter; delivery unit max. 1000 m; minimum order quantity 20 m.

suitability for use

Standard cable with rigid cores for fast installation

cable designation

2YH(ST)CY(Z)2Y 2X2X0.64/1.45-100 BK

electrical data

attenuation factor per length

- at 10 MHz / maximum
- at 100 MHz / maximum

0.065 dB/m
0.22 dB/m

impedance

- at 1 MHz ... 100 MHz

100 Ω

relative symmetrical tolerance

- of the characteristic impedance at 1 MHz ... 100 MHz

15 %

near-end crosstalk per length

- at 1 MHz ... 100 MHz

0.5 dB/m

coupling loss / at 30 MHz ... 100 MHz / minimum

80 dB

transfer impedance per length / at 10 MHz

10 mΩ/m

loop resistance per length / maximum

115 mΩ/m

operating voltage

- RMS value

80 V

NVP value in percent

66 %

mechanical data

number of electrical cores

4

design of the shield

Overlapped aluminum-clad foil, sheathed in a braided screen of tin-plated copper wires

type of electrical connection / FastConnect

Yes

core diameter

- of AWG22 insulated conductor

0.64 mm

outer diameter

- of inner conductor
- of the wire insulation
- of the inner sheath of the cable
- of cable sheath
- of cable sheath / note

0.64 mm
1.5 mm
3.9 mm
9.4 mm

Cable diameter > 6.5 mm due to additional PE protective sheath and metal rodent protection. Cable can only be connected in the IE FC RJ45 Plug / IE FC M12 Plug PRO connector after stripping the protective sheath and the rodent protection.

symmetrical tolerance of the outer diameter / of cable sheath

0.4 mm

material

<ul style="list-style-type: none"> • of the wire insulation • of the inner sheath of the cable • of cable sheath 	<p>polyethylene (PE) PVC PE/PVC</p>
<p>color</p> <ul style="list-style-type: none"> • of the insulation of data wires • of cable sheath 	<p>white/yellow/blue/orange Black</p>
<p>bending radius</p> <ul style="list-style-type: none"> • with single bend / minimum permissible • with multiple bends / minimum permissible 	<p>94 mm 141 mm</p>
tensile load / maximum	3000 N
weight per length	129 kg/km

ambient conditions

<p>ambient temperature</p> <ul style="list-style-type: none"> • during operation • during storage • during transport • during installation • note 	<p>-40 ... +80 °C -40 ... +80 °C -40 ... +80 °C -30 ... +70 °C Electrical properties measured at 20 °C, tests according to EN50288-2-1</p>
fire behavior	inflammable
class of burning behaviour / according to EN 13501-6	Fca
<p>chemical resistance</p> <ul style="list-style-type: none"> • to mineral oil • to grease • to water 	<p>conditional resistance Conditional resistance Resistant</p>
radiological resistance / to UV radiation	resistant

product features, product functions, product components / general

<p>product feature</p> <ul style="list-style-type: none"> • halogen-free • silicon-free 	<p>No Yes</p>
<p>wire length / for Industrial Ethernet</p> <ul style="list-style-type: none"> • with 100BaseTX 	100 m

standards, specifications, approvals

UL/ETL listing / 300 V Rating	No
UL/ETL style / 600 V Rating	No
<p>certificate of suitability</p> <ul style="list-style-type: none"> • EAC approval • CE marking • RoHS conformity 	<p>Yes Yes Yes</p>
standard for structured cabling	Cat5e
<p>Marine classification association</p> <ul style="list-style-type: none"> • American Bureau of Shipping Europe Ltd. (ABS) • French marine classification society (BV) • Det Norske Veritas (DNV) • Germanische Lloyd (GL) • Lloyds Register of Shipping (LRS) • Nippon Kaiji Kyokai (NK) • Polski Rejestr Statkow (PRS) 	<p>No No No No No No No</p>
<p>reference code</p> <ul style="list-style-type: none"> • according to IEC 81346-2 • according to IEC 81346-2:2019 	<p>WG WGB</p>

further information / internet-Links

<p>Internet-Link</p> <ul style="list-style-type: none"> • to web page: selection aid TIA Selection Tool • to website: Industrial communication • to website: Industry Mall • to website: Information and Download Center • to website: Selection guide for cables and connectors • to website: Image database • to website: CAX-Download-Manager 	<p>http://www.siemens.com/tia-selection-tool http://www.siemens.com/simatic-net https://mall.industry.siemens.com http://www.siemens.com/industry/infocenter https://sie.ag/2QdlxcP http://automation.siemens.com/bilddb http://www.siemens.com/cax</p>
---	--

- to website: Industry Online Support

<https://support.industry.siemens.com>

last modified:

9/6/2022 