



## Cat5e 350 MHz Stranded-Core (UTP) PVC Bulk Ethernet Cable - Gray, 1000 ft. (304.8 m), TAA

MODEL NUMBER: N020-01K-GY

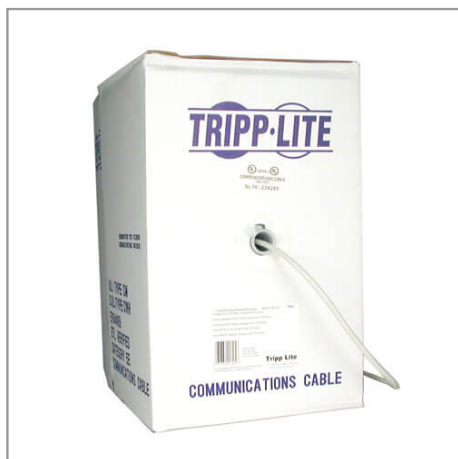

### Highlights

- Premium cabling for Category 5 and 5e applications — rated for 350 MHz/1Gbps communications
- 4pr Stranded PVC CMR Jacket

### System Requirements

- For making patch cables for Network Installations 1000 Base-T (1Gbps Ethernet), 10/100 Base-T (Ethernet), 100Mbps TPDDI, 155 Mbps ATM, ISDN, voice and Token Ring Type 3 applications.

### Package Includes

- 1000-ft. Cat5e Gray Bulk Patch Cable Stranded PVC 24AWG 350MHz

### Features

- Designed for patch (outside wall) cabling applications
- Cabling for category 5 (Cat5) and 5e (Cat5e) applications
- Length: 1,000 ft. Color: gray
- 24 AWG 4-pair stranded UTP cable with PVC CMR jacket
- Rated for 350MHz/ 1Gbps communication
- Meets most current industry standards including IEEE 802.3ab, IEEE 802.5, ANSI/EIA/TIA 568, ISO/IEC 11801 and ETL (category 5e draft 11)
- Available in other lengths
- Available in solid copper cable (N022-01K-GY) and in Cat6 (N222-01K and N224-01K)

## Specifications

| OVERVIEW             |              |
|----------------------|--------------|
| UPC Code             | 037332013057 |
| Technology           | Cat5/5e      |
| CONNECTIONS          |              |
| Side A - Connector 1 | BARE WIRE    |
| Side B - Connector 1 | BARE WIRE    |
| Crossover Wiring     | No           |
| Connector Type       | Bare Wire    |
| Angled Connector     | No           |



Powering Business Worldwide

TRIPP LITE  
SERIES

| PHYSICAL                        |                                                                  |
|---------------------------------|------------------------------------------------------------------|
| Cable Jacket Color              | Gray                                                             |
| Cable Jacket Material           | PVC                                                              |
| Cable Jacket Rating             | CMR                                                              |
| Cable Shielding                 | UTP                                                              |
| Cable Outer Diameter (OD)       | 5.4 mm                                                           |
| Number of Conductors            | 4 Pair                                                           |
| Conductor Material              | Stranded Copper                                                  |
| Conductor Gauge                 | 24 AWG                                                           |
| Cable Length (ft.)              | 1000                                                             |
| Cable Length (m)                | 304.88                                                           |
| Cable Length (in.)              | 12000                                                            |
| Cable Length (cm)               | 30480                                                            |
| Shipping Dimensions (hwd / in.) | 10.10 x 11.60 x 5.70                                             |
| Shipping Dimensions (hwd / cm)  | 25.65 x 29.46 x 14.48                                            |
| Shipping Weight (lbs.)          | 24.40                                                            |
| Shipping Weight (kg)            | 11.07                                                            |
| ENVIRONMENTAL                   |                                                                  |
| Operating Temperature Range     | -4° to 167°F (-20° to 75°C)                                      |
| Storage Temperature Range       | 32° to 140°F (0° to 60°C)                                        |
| COMMUNICATIONS                  |                                                                  |
| Bandwidth per TIA Standard      | 100 MHz                                                          |
| Maximum Bandwidth as Tested     | 350 MHz                                                          |
| Network Compatibility           | 1 Gbps (Gigabit)                                                 |
| IEEE Standards Supported        | 802.3ab                                                          |
| FEATURES & SPECIFICATIONS       |                                                                  |
| Antibacterial                   | No                                                               |
| IP68 Rated                      | No                                                               |
| Snagless Connector              | No                                                               |
| STANDARDS & COMPLIANCE          |                                                                  |
| Product Compliance              | RoHS; IEEE 802.3ab 1000Base-T; REACH; Trade Agreements Act (TAA) |
| WARRANTY & SUPPORT              |                                                                  |



Powering Business Worldwide

TRIPP LITE  
SERIES

|                                        |                           |
|----------------------------------------|---------------------------|
| Product Warranty Period<br>(Worldwide) | Lifetime limited warranty |
|----------------------------------------|---------------------------|

1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
<https://tripplite.eaton.com>

© 2025 Eaton. All Rights Reserved.  
Eaton is a registered trademark. All other trademarks  
are the property of their respective owners.