


Specification Sheet

Part Number: 115-06960

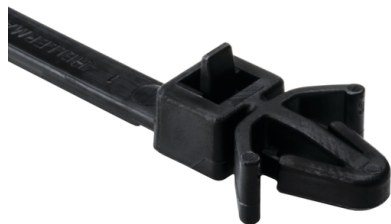

An all-in-one bundling and fixing solution reduces costs.

High-specification materials and superior design suit the fixing and bundling needs of complex applications.

Releasable to provide quick access to bundles.

1-Piece Cable Tie/Arrowhead Mount, 9.0"L, 2.0" Bundle Diameter, PA66, Black, 1000/pkg

Article Number 115-06960

Type RT50SFK

Color Black (BK)

Quantity Per bag

Product Description One-piece mounting ties offer a complete solution by bundling cables while at the same time providing a mounting solution. This tie features an extended pawl, allowing the user to release the tie for bundle maintenance. Push mount ties offer the ideal combination of high specification materials and superior design to suit the mounting and bundling needs of complex applications.

Short Description 1-Piece Cable Tie/Arrowhead Mount, 9.0"L, 2.0" Bundle Diameter, PA66, Black, 1000/pkg

Global Part Name RT50SFK-PA66-BK

Minimum Tensile Strength (Imperial) 50

Minimum Tensile Strength (Metric) 225

Length L (Imperial) 9.0

Length L (Metric) 225

Fixation Method Arrowhead

Identification Plate Position none

Releasable Closure Yes

Variant Inside Serrated

Width W (Imperial) 0.2

Width W (Metric) 5.0

Bundle Diameter Min (Imperial) 0.24

Bundle Diameter Min (Metric) 6.0

Bundle Diameter Max (Imperial) 1.97

Bundle Diameter Max (Metric) 50.0

Thickness T (Imperial) 0.055

Thickness T (Metric)	1.4
Height H (Imperial)	0.24
Height H (Metric)	6
Panel Thickness Min (Imperial)	0.03
Panel Thickness Max (Imperial)	0.31
Panel Thickness Min (Metric)	0.8
Panel Thickness Max (Metric)	3.0
Mounting Hole Diameter D (Imperial)	0.25 - 0.28
Mounting Hole Diameter D (Metric)	6.4 - 7.0 mm
Mounting Hole Diameter D Min (Imperial)	0.25
Mounting Hole Diameter D Max (Imperial)	0.28
Mounting Hole Diameter D Max (Metric)	7.0

Material Polyamide 6.6 (PA66)

Material Shortcut PA66

Flammability UL 94 V-2

UV Resistant (Yes/No)	No
Use Conditions	For Indoor and Outdoor Use
Operating Temperature	-40°F to +185°F (-40°C to +85°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Package Quantity (Imperial)	1000
Package Quantity (Metric)	1000
Customs Number	3926909988

© 2025 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)