



## Leaded Metal Film Resistors With Established Reliability



### FEATURES

- IECQ-CECC approved to EN 140101-806, version E
- Established reliability, failure rate level E7
- Advanced thin film technology
- Intrinsic sulfur resistance
- Single lot date code
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



**RoHS**  
COMPLIANT  
HALOGEN  
**FREE**

### LINKS TO ADDITIONAL RESOURCES



[3D Models](#)

MBA/SMA 0204 VG06, MBB/SMA 0207 VG06, and MBE/SMA 0414 VG06 leaded metal film resistors with established reliability are the perfect choice for all high-reliability applications typically found in military, aircraft and spacecraft electronics. These versions supplement the families of professional and precision leaded resistors MBA/SMA 0204, MBB/SMA 0207, and MBE/SMA 0414.

### APPLICATIONS

- Military
- Avionics
- Space

### TECHNICAL SPECIFICATIONS

| DESCRIPTION                                                               | MBA/SMA 0204 VG06                          | MBB/SMA 0207 VG06                        | MBE/SMA 0414 VG06             |
|---------------------------------------------------------------------------|--------------------------------------------|------------------------------------------|-------------------------------|
| DIN size                                                                  | 0204                                       | 0207                                     | 0414                          |
| Size code (EN/CECC style)                                                 | A                                          | B                                        | D                             |
| Resistance range                                                          | 1 $\Omega$ to 5.11 M $\Omega$ ; 0 $\Omega$ | 1 $\Omega$ to 10 M $\Omega$ ; 0 $\Omega$ | 1 $\Omega$ to 21.5 M $\Omega$ |
| Resistance tolerance                                                      | $\pm 1\%$ ; $\pm 0.1\%$                    |                                          |                               |
| Temperature coefficient                                                   | $\pm 50$ ppm/K; $\pm 15$ ppm/K             |                                          |                               |
| Rated dissipation, $P_{70}^{(1)}$                                         | 0.4 W                                      | 0.6 W                                    | 1 W <sup>(2)</sup>            |
| Operating voltage, $U_{max}$ , AC <sub>RMS</sub> or DC                    | 200 V                                      | 350 V <sup>(2)</sup>                     | 500 V                         |
| Permissible voltage against ambient (insulation):<br><br>1 min; $U_{ins}$ | 300 V                                      | 500 V                                    | 800 V <sup>(2)</sup>          |
| Assessed failure rate level                                               | E7 = $10^{-7}$ /h                          |                                          |                               |
| Quality factor, $\pi_Q$                                                   | 0.1                                        |                                          |                               |
| Failure rate, FIT <sub>observed</sub>                                     | $< 0.1 \times 10^{-9}$ /h                  |                                          |                               |

### Notes

- These resistors do not feature a limited lifetime when operated within the permissible limits. However, resistance value drift increasing over operating time may result in exceeding a limit acceptable to the specific application, thereby establishing a functional lifetime
- The failure rate level E7 ( $10^{-7}$ /h,  $\pi_Q = 0.1$ ), corresponding to MIL Level R, is superior to level E6 ( $10^{-6}$ /h,  $\pi_Q = 0.3$ ) or level E5 ( $10^{-5}$ /h,  $\pi_Q = 1$ ) and thus may be used as a replacement

<sup>(1)</sup> These specification details apply to the products  $\pm 50$  ppm/K;  $\pm 1\%$ . Please find more details for all product versions below

<sup>(2)</sup> These data provide a user advantage over the ratings and requirements of EN140101-806



| TECHNICAL SPECIFICATIONS FOR PRODUCTS $\pm 50$ ppm/K; $\pm 1$ %                   |                              |                            |                               |
|-----------------------------------------------------------------------------------|------------------------------|----------------------------|-------------------------------|
| DESCRIPTION                                                                       | MBA/SMA 0204 VG06            | MBB/SMA 0207 VG06          | MBE/SMA 0414 VG06             |
| Rated dissipation, $P_{70}$                                                       | 0.4 W                        | 0.6 W                      | 1 W <sup>(1)</sup>            |
| Permissible film temperature, $\vartheta_{F \max.}$                               | 155 °C                       |                            |                               |
| Operating temperature range                                                       | -55 °C to +155 °C            |                            |                               |
| Max. resistance change at $P_{70}$<br>for resistance, $ \Delta R/R $ max., after: | 1 $\Omega$ to 332 k $\Omega$ | 1 $\Omega$ to 1 M $\Omega$ | 1 $\Omega$ to 2.43 M $\Omega$ |
| 1000 h                                                                            | $\leq 0.5$ %                 | $\leq 0.5$ %               | $\leq 0.4$ % <sup>(1)</sup>   |
| 8000 h                                                                            | $\leq 1$ %                   | $\leq 1$ %                 | $\leq 0.8$ % <sup>(1)</sup>   |

**Note**

<sup>(1)</sup> These data provide a user advantage over the ratings and requirements of EN140101-806

| TECHNICAL SPECIFICATIONS FOR PRODUCTS $\pm 15$ ppm/K; $\pm 0.1$ %                 |                                |                                |                                |
|-----------------------------------------------------------------------------------|--------------------------------|--------------------------------|--------------------------------|
| DESCRIPTION                                                                       | MBA/SMA 0204 VG06              | MBB/SMA 0207 VG06              | MBE/SMA 0414 VG06              |
| Rated dissipation, $P_{70}$                                                       | 0.25 W                         | 0.4 W                          | 0.65 W <sup>(1)</sup>          |
| Permissible film temperature, $\vartheta_{F \max.}$                               | 125 °C                         |                                |                                |
| Operating temperature range                                                       | -55 °C to 125 °C               |                                |                                |
| Max. resistance change at $P_{70}$<br>for resistance, $ \Delta R/R $ max., after: | 100 $\Omega$ to 221 k $\Omega$ | 100 $\Omega$ to 499 k $\Omega$ | 100 $\Omega$ to 470 k $\Omega$ |
| 1000 h                                                                            | $\leq 0.25$ %                  | $\leq 0.15$ % <sup>(1)</sup>   | $\leq 0.25$ %                  |
| 8000 h                                                                            | $\leq 0.5$ %                   | $\leq 0.5$ %                   | $\leq 0.5$ %                   |

**Note**

<sup>(1)</sup> These data provide a user advantage over the ratings and requirements of EN140101-806

| TEMPERATURE COEFFICIENT AND RESISTANCE RANGE |                                           |                      |                                |          |
|----------------------------------------------|-------------------------------------------|----------------------|--------------------------------|----------|
| TYPE / SIZE                                  | TCR                                       | TOLERANCE            | RESISTANCE                     | E-SERIES |
| MBA/SMA 0204 VG06                            | $\pm 50$ ppm/K                            | $\pm 1$ %            | 1 $\Omega$ to 5.11 M $\Omega$  | E96      |
|                                              | $\pm 15$ ppm/K                            | $\pm 0.1$ %          | 100 $\Omega$ to 221 k $\Omega$ | E192     |
|                                              | Jumper <sup>(1)</sup> ; $I_{\max.} = 3$ A | $\leq 10$ m $\Omega$ | 0 $\Omega$                     | -        |
| MBB/SMA 0207 VG06                            | $\pm 50$ ppm/K                            | $\pm 1$ %            | 1 $\Omega$ to 10 M $\Omega$    | E96      |
|                                              | $\pm 15$ ppm/K                            | $\pm 0.1$ %          | 100 $\Omega$ to 499 k $\Omega$ | E192     |
|                                              | Jumper <sup>(1)</sup> ; $I_{\max.} = 5$ A | $\leq 10$ m $\Omega$ | 0 $\Omega$                     | -        |
| MBE/SMA 0414 VG06                            | $\pm 50$ ppm/K                            | $\pm 1$ %            | 1 $\Omega$ to 21.5 M $\Omega$  | E96      |
|                                              | $\pm 15$ ppm/K                            | $\pm 0.1$ %          | 100 $\Omega$ to 470 k $\Omega$ | E192     |

**Notes**

- Other TCR or tolerances, or combinations thereof, or resistance values from other E-series than given are not permitted in EN 140101-806 for version E products

<sup>(1)</sup> The temperature coefficient of resistance (TCR) is not specified for 0  $\Omega$  jumpers



## PACKAGING

| TYPE / SIZE       | CODE | QUANTITY | PACKAGING STYLE                                   | WIDTH | PITCH | PACKAGING DIMENSIONS   |  |  |
|-------------------|------|----------|---------------------------------------------------|-------|-------|------------------------|--|--|
| MBA/SMA 0204 VG06 | C1   | 1000     | Taped acc.<br>IEC 60286-1,<br>fan-folded in a box | 53 mm | 5 mm  | 184 mm x 75 mm x 42 mm |  |  |
|                   | CT   | 5000     |                                                   |       |       | 330 mm x 75 mm x 55 mm |  |  |
| MBB/SMA 0207 VG06 | C1   | 1000     |                                                   | 53 mm |       | 184 mm x 75 mm x 42 mm |  |  |
|                   | CT   | 5000     |                                                   |       |       | 324 mm x 77 mm x 83 mm |  |  |
| MBE/SMA 0414 VG06 | C1   | 1000     |                                                   | 63 mm |       | 377 mm x 85 mm x 47 mm |  |  |
|                   |      |          |                                                   |       |       |                        |  |  |

## Notes

- Width is the nominal spacing between tapes, with the nominal tape width on both sides being 6 mm, and pitch is the nominal standard spacing between components; tolerances apply according to IEC 60286-1
- The tape on one side is marked with a black print every 100<sup>th</sup> component position

## PART NUMBER AND PRODUCT DESCRIPTION

PART NUMBER: MBB0207CE3523BCT00

PART NUMBER: MBB0207CZ0000ZCT00

|   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| M | B | B | 0 | 2 | 0 | 7 | C | E | 3 | 5 | 2 | 3 | B | C | T | 0 | 0 |
| M | B | B | 0 | 2 | 0 | 7 | C | Z | 0 | 0 | 0 | 0 | Z | C | T | 0 | 0 |

| TYPE / SIZE                                  | VERSION                                                   | TCR                                            | RESISTANCE                                                                                                                                                                                                                                                           | TOLERANCE                              | PACKAGING |
|----------------------------------------------|-----------------------------------------------------------|------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|-----------|
| MBA/SMA 0204<br>MBB/SMA 0207<br>MBE/SMA 0414 | C = EN 140101-806,<br>version E,<br>failure rate level E7 | C = ± 50 ppm/K<br>E = ± 15 ppm/K<br>Z = jumper | 3 digit value<br>1 digit multiplier<br>MULTIPLIER<br>8 = *10 <sup>-2</sup><br>9 = *10 <sup>-1</sup><br>0 = *10 <sup>0</sup><br>1 = *10 <sup>1</sup><br>2 = *10 <sup>2</sup><br>3 = *10 <sup>3</sup><br>4 = *10 <sup>4</sup><br>5 = *10 <sup>5</sup><br>0000 = Jumper | F = ± 1 %<br>B = ± 0.1 %<br>Z = jumper | C1<br>CT  |

PRODUCT DESCRIPTION: MBB/SMA 0207-15 0.1 % VG06 CT 352K

PRODUCT DESCRIPTION: MBB/SMA 0207 VG06 CT 0R0

| MBB/SMA 0207                                 | -15                      | 0.1 %            | VG06                                                         | CT        | 352K                                           |
|----------------------------------------------|--------------------------|------------------|--------------------------------------------------------------|-----------|------------------------------------------------|
| MBB/SMA 0207                                 | -                        | -                | VG06                                                         | CT        | 0R0                                            |
| TYPE / SIZE                                  | TCR                      | TOLERANCE        | VERSION                                                      | PACKAGING | RESISTANCE                                     |
| MBA/SMA 0204<br>MBB/SMA 0207<br>MBE/SMA 0414 | ± 50 ppm/K<br>± 15 ppm/K | ± 1 %<br>± 0.1 % | VG06 = EN 140101-806,<br>version E,<br>failure rate level E7 | C1<br>CT  | 49R9 = 49.9 Ω<br>352K = 352 kΩ<br>0R0 = jumper |

## Notes

- The products can be ordered using either the PART NUMBER or the PRODUCT DESCRIPTION
- Products within a packaging unit are single lot date code

**EN 140101-806 ORDERING INFORMATION**

Example of the ordering information for a resistor: MBB/SMA 0207-15 0.1 % VG06 352K

**EN140101-806EZBP352KBE7**

Example of the ordering information for a zero ohm jumper: MBB/SMA 0207 VG06 0R0

**EN140101-806EZB-0R00-E7**

The elements used in the component number have the following meaning:

|                     |                                                                                                           |
|---------------------|-----------------------------------------------------------------------------------------------------------|
| <b>EN140101-806</b> | EN detail specification number                                                                            |
| <b>EZ</b>           | Assessment level for the zero-defect approach                                                             |
| <b>B</b>            | Style (size)                                                                                              |
| <b>P</b>            | Temperature coefficient, according to EN 60062<br>$R = \pm 50 \text{ ppm/K}$ ; $P = \pm 15 \text{ ppm/K}$ |
| <b>352K</b>         | Resistance, according to EN 60062, 4 characters                                                           |
| <b>B</b>            | Tolerance on rated resistance, according to EN 60062<br>$F = \pm 1 \%$ ; $B = \pm 0.1 \%$                 |
| <b>E7</b>           | Failure rate level according to EN 60115-1, annex ZR                                                      |

**Notes**

- The ordering information according to EN 140401-806:2007 shown above succeeds and replaces the ordering information according to its predecessor CECC 40101-806, for example:  

|      |                                |                                                                                                                           |
|------|--------------------------------|---------------------------------------------------------------------------------------------------------------------------|
|      | CECC 40101-806 S B E 352K B E7 |                                                                                                                           |
| with | S                              | Assessment level, where EZ is successor to and superior replacement for S                                                 |
|      | E                              | Temperature coefficient, according to the detail specification<br>$C = \pm 50 \text{ ppm/K}$ ; $E = \pm 15 \text{ ppm/K}$ |
- EN 140101-806 succeeds the prior specification CECC 40101-806 and a huge variety of historical specifications CECC 40101-0xx. Preceding specifications on resistors with established reliability (now "version E") have been CECC 40101-046 and CECC 40101-047



## DESCRIPTION

Production is strictly controlled and follows an extensive set of instructions established for reproducibility. A homogeneous film of metal alloy is deposited on a high grade ceramic body ( $\text{Al}_2\text{O}_3$ ) and conditioned to achieve the desired temperature coefficient. Plated steel termination caps are firmly pressed on the metallised rods. A special laser is used to achieve the target value by smoothly cutting a helical groove in the resistive layer without damaging the ceramics. Connecting wires of electrolytic copper plated with fused pure tin are welded to the termination caps. The resistor elements are covered by a light blue protective coating designed for electrical, mechanical and climatic protection. Five color code rings designate the resistance value and tolerance in accordance with **IEC 60062** <sup>(1)</sup>.

The result of the determined production is verified by an extensive testing procedure performed on 100 % of the individual resistors. For IECQ-CECC approved products, this includes pulse load screening for the elimination of products with a potential risk of early life failures according to EN 140101-806, 2.1.2.2 (feasible for  $R \geq 10 \Omega$ ). Only accepted products are stuck directly on the adhesive tapes in accordance with **IEC 60286-1** <sup>(1)</sup>. Products within a package unit are from the same production lot and carry the same date code.

## ASSEMBLY

The resistors are suitable for processing on lead forming and cropping equipment and automatic insertion machines. They are suitable for automatic wave or reflow soldering, including miniature wave selective soldering. Solderability is specified for 2 years after production or requalification, however, the permitted storage time is 20 years.

The resistors are completely lead (Pb)-free, the fused pure tin plating provides compatibility with lead (Pb)-free soldering processes. The immunity of the plating against tin whisker growth has been proven under extensive testing.

The encapsulation is resistant to all cleaning solvents commonly used in the electronics industry, including alcohols, esters and aqueous solutions. The suitability of conformal coatings, potting compounds, and their processes, if applied, shall be qualified by appropriate means to ensure the long-term stability of the whole system.

## MATERIALS

Vishay acknowledges the following systems for the regulation of hazardous substances.

- IEC 62474, Material Declaration for Products of and for the Electrotechnical Industry, with the list of declarable substances given therein <sup>(2)</sup>
- The Global Automotive Declarable Substance List (GADSL) <sup>(3)</sup>
- The REACH regulation (1907/2006/EC) and the related list of substances with very high concern (SVHC) <sup>(4)</sup> for its supply chain

The products do not contain any of the banned substances as per IEC 62474, GADSL, or the SVHC list, see [www.vishay.com/how/leadfree](http://www.vishay.com/how/leadfree).

Hence the products fully comply with the following directives:

- 2000/53/EC End-of-Life Vehicle Directive (ELV) and Annex II (ELV II)
- 2011/65/EU Restriction of the Use of Hazardous Substances Directive (RoHS) with amendment 2015/863/EU
- 2012/19/EU Waste Electrical and Electronic Equipment Directive (WEEE)

Vishay pursues the elimination of conflict minerals from its supply chain, see the Conflict Minerals Policy at [www.vishay.com/doc?49037](http://www.vishay.com/doc?49037).

## APPROVALS

The resistors are approved within the IECQ-CECC Quality Assessment System for Electronic Components to the detail specification **EN 140101-806** which refers to **EN 60115-1**, **EN 140100** and the variety of environmental test procedures of the **IEC 60068** <sup>(1)</sup> series.

Conformity is attested by the use of the **CECC** logo (E) as the Mark of Conformity on the package label.

Vishay Beyschlag has achieved “**Approval of Manufacturer**” in accordance with **IECQ 03-1**. The release certificate for “**Technology Approval Schedule**” in accordance with **CECC 240001** based on **IECQ 03-3-1** is granted for the Vishay Beyschlag manufacturing process.

The Vishay Beyschlag production facility is registered with the CAGE code D9539.

## RELATED PRODUCTS

A wider range of TCR, tolerance and resistance values, plus the option of values from a different E series is available with products approved to **EN 140101-806**, version A, without established reliability, nominal failure rate level E0 (Quality factor  $\pi_Q = 3$ ). See the datasheets:


- “Professional Leaded Metal Film Resistors”  
([www.vishay.com/doc?28766](http://www.vishay.com/doc?28766))
- “Precision Leaded Metal Film Resistors”  
([www.vishay.com/doc?28767](http://www.vishay.com/doc?28767))

## Notes


- <sup>(1)</sup> The quoted IEC standards are also released as EN standards with the same number and identical contents
- <sup>(2)</sup> The IEC 62474 list of declarable substances is maintained in a dedicated database, which is available at <http://std.iec.ch/iec62474>
- <sup>(3)</sup> The Global Automotive Declarable Substance List (GADSL) is maintained by the American Chemistry Council, and available at [www.gadsl.org](http://www.gadsl.org)
- <sup>(4)</sup> The SVHC list is maintained by the European Chemical Agency (ECHA) and available at <http://echa.europa.eu/candidate-list-table>




## FUNCTIONAL PERFORMANCE

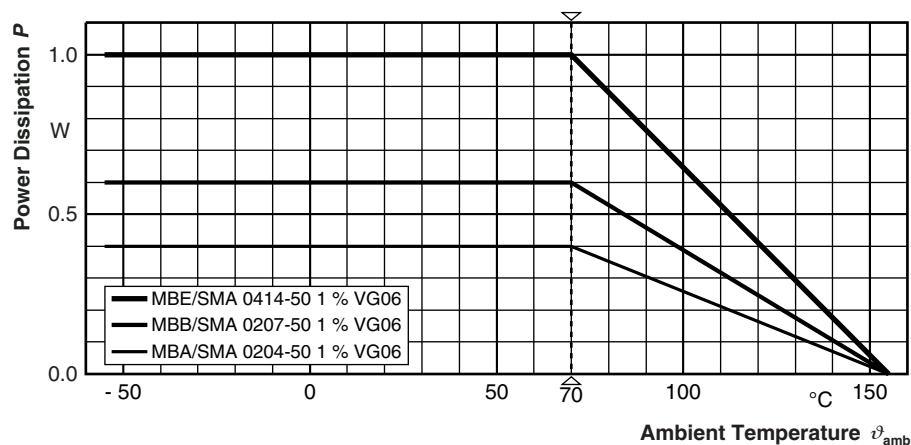

Derating for Products  $\pm 50$  ppm/K;  $\pm 1\%$

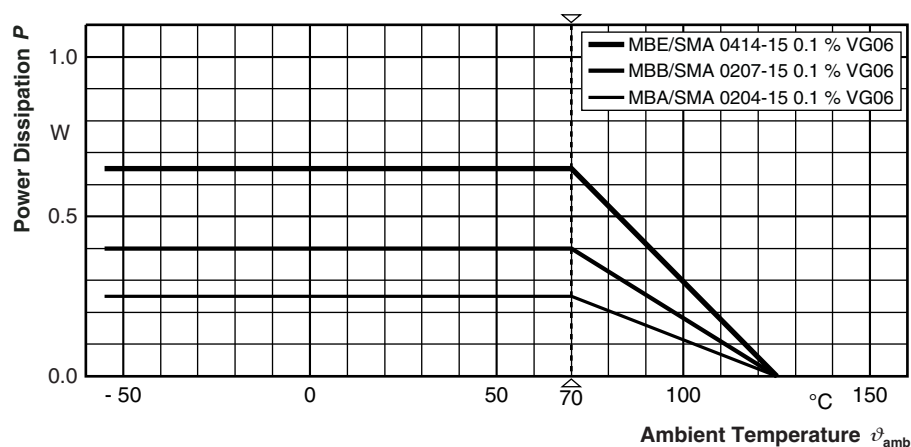


Derating for Products  $\pm 15$  ppm/K;  $\pm 0.1\%$

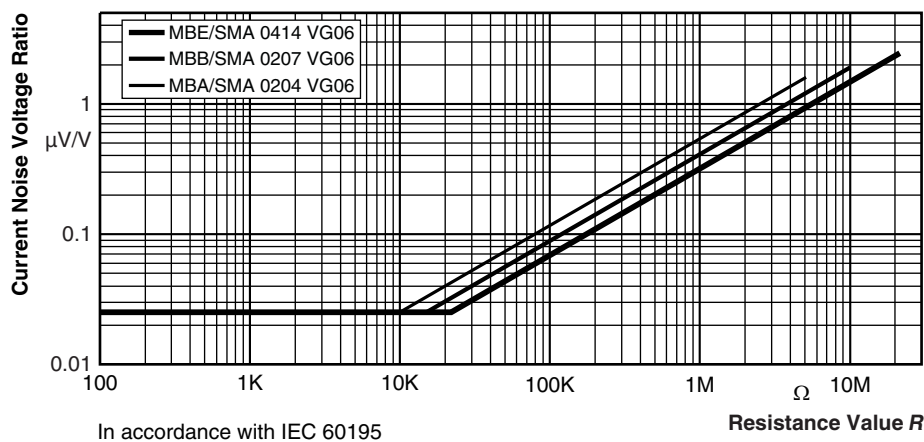

In accordance with IEC 60195

Current Noise Voltage Ratio

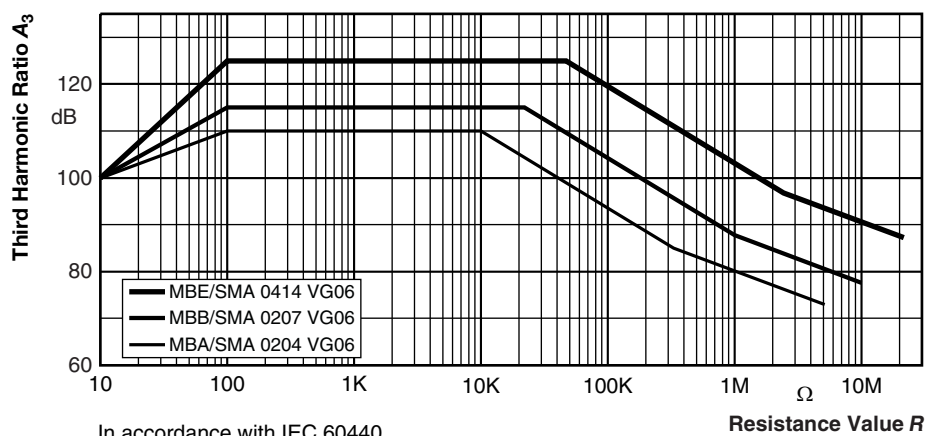
**Non-Linearity - Third Harmonic Ratio  $A_3$** 

Further information on the performance of these products is given in the following datasheets:

- “Professional Leadless Metal Film Resistors” ([www.vishay.com/doc?28766](http://www.vishay.com/doc?28766)) for products  $\pm 50$  ppm/K;  $\pm 1$  % and 0  $\Omega$  jumper
- “Precision Leadless Metal Film Resistors” ([www.vishay.com/doc?28767](http://www.vishay.com/doc?28767)) for products  $\pm 15$  ppm/K;  $\pm 0.1$  %

## TESTS AND REQUIREMENTS

All tests are carried out in accordance with the following specifications:

EN 60115-1, generic specification


EN 140100 (successor of EN 140400), sectional specification

EN 140101-806, detail specification

For further information on the tests and requirements of these products please refer to the specifications mentioned above, and to the following datasheets:

- “Professional Leadless Metal Film Resistors” ([www.vishay.com/doc?28766](http://www.vishay.com/doc?28766)) for products  $\pm 50$  ppm/K;  $\pm 1$  % and 0  $\Omega$  jumper
- “Precision Leadless Metal Film Resistors” ([www.vishay.com/doc?28767](http://www.vishay.com/doc?28767)) for products  $\pm 15$  ppm/K;  $\pm 0.1$  %

## DIMENSIONS

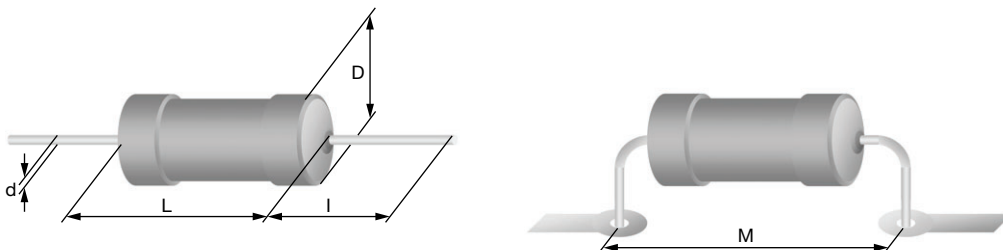

| DIMENSIONS AND MASS |                    |                    |                    |                    |                    |              |
|---------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------|
| TYPE                | $D_{max.}$<br>(mm) | $L_{max.}$<br>(mm) | $I_{min.}$<br>(mm) | $d_{nom.}$<br>(mm) | $M_{min.}$<br>(mm) | MASS<br>(mg) |
| MBA/SMA 0204 VG06   | 1.6                | 3.6                | 29                 | 0.5                | 5.0                | 125          |
| MBB/SMA 0207 VG06   | 2.5                | 6.3                | 28                 | 0.6                | 10                 | 220          |
| MBE/SMA 0414 VG06   | 4.0                | 11.9               | 31                 | 0.8                | 15                 | 700          |

### Notes

- Color code marking is applied according to IEC 60062 <sup>(1)</sup> in five bands. Each color band appears as a single solid line, voids are permissible if at least  $\frac{2}{3}$  of the band is visible from each radial angle of view. The last color band for tolerance is approximately 50 % wider than the other bands. Zero ohm jumpers are marked with one centered black color band. An interrupted violet band between the 1<sup>st</sup> and 2<sup>nd</sup> full band indicates the failure rate level E7. An interrupted orange band between the 4<sup>th</sup> and 5<sup>th</sup> full band indicates the temperature coefficient of 15 ppm/K

<sup>(1)</sup> The quoted IEC standards are also released as EN standards with the same number and identical contents

**HISTORICAL 12NC INFORMATION**

- The resistors had a 12-digit numeric code starting with 2312
- The subsequent 4 digits indicated the resistor type, specification and packaging; see the 12NC table
- The remaining 4 digits indicated the resistance value:
  - The first 3 digits indicate the resistance value
  - The last digit indicated the resistance decade in accordance with the resistance decade table

| RESISTANCE DECADE                | LAST DIGIT |
|----------------------------------|------------|
| 1 $\Omega$ to 9.99 $\Omega$      | 8          |
| 10 $\Omega$ to 99.9 $\Omega$     | 9          |
| 100 $\Omega$ to 999 $\Omega$     | 1          |
| 1 k $\Omega$ to 9.99 k $\Omega$  | 2          |
| 10 k $\Omega$ to 99.9 k $\Omega$ | 3          |
| 100 k $\Omega$ to 999 k $\Omega$ | 4          |
| 1 M $\Omega$ to 9.99 M $\Omega$  | 5          |
| 10 M $\Omega$ to 99.9 M $\Omega$ | 6          |

**Historical 12NC**

The 12NC of a MBB 0207 VG06 resistor, resistance 352K, TCR 15,  $\pm 0.1$  % tolerance, supplied taped and fan-folded in a box of 5000 units was: 2312 917 03524.

**HISTORICAL 12NC - Resistor type and packaging**

| DESCRIPTION   |                |             | 2312 ... ..                |                   |
|---------------|----------------|-------------|----------------------------|-------------------|
|               |                |             | TAPED, FAN-FOLDED IN A BOX |                   |
| TYPE          | TCR            | TOL.        | C1<br>1000 PIECES          | CT<br>5000 PIECES |
| MBA 0204 VG06 | $\pm 50$ ppm/K | $\pm 1$ %   | 900 0....                  | 905 0....         |
|               | $\pm 15$ ppm/K | $\pm 0.1$ % | 902 0....                  | 907 0....         |
|               | Jumper         |             | 902 90001                  | 907 90001         |
| MBB 0207 VG06 | $\pm 50$ ppm/K | $\pm 1$ %   | 910 0....                  | 915 0....         |
|               | $\pm 15$ ppm/K | $\pm 0.1$ % | 912 0....                  | 917 0....         |
|               | Jumper         |             | 912 90001                  | 917 90001         |
| MBE 0414 VG06 | $\pm 50$ ppm/K | $\pm 1$ %   | 920 0....                  | -                 |
|               | $\pm 15$ ppm/K | $\pm 0.1$ % | 922 0....                  |                   |

**Note**

- The 12NC coding had been established for the series of MBA 0204 VG06, MBB 0207 VG06 and MBE 0414 VG06 products. These products are succeeded and replaced by the new series of MBA/SMA 0204 VG06, MBB/SMA 0207 VG06 and MBE/SMA 0414 VG06 products, for which the 12NC coding is no longer applicable



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.