


4A-SF2 (LOOSE BRACKET)

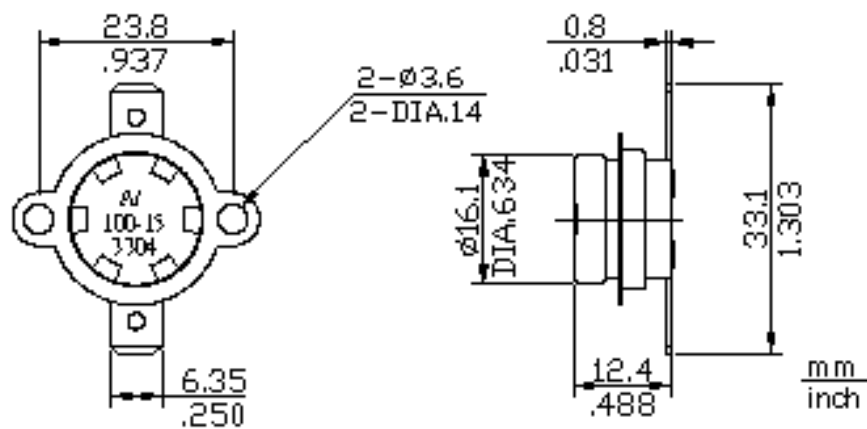

- *Electrical Rating: 16A/250V AC 15A/125V AC 10A/250V AC
- *Operation Temp: 40°C ~200(ENEC)
40°C ~205°C (UL/CUL)
- *Differential: 10K~65K
- *Calibration Method: 1°C/min. Air circulation furnace
- *Temp. Tolerance: $\pm 3K$ / $\pm 5K$
- *Heat Durability: 180°C *2Hr MAX.
- *Circuit Resistance: 50 m Ω MAX.
- *Insulation Resistance: 100M Ω min. at DC 500V
- *Dielectric Strength: AC1000V for One Minute or AC 1800V for One Second(Leak current: 0.5mA)
- *Operation life: 100,000 Cycles(15A 125V AC / 10A 250V AC)
10,000 Cycles(16A 250V AC)

SENASYS INC., 704 BARTLETT AVE., ALTOONA, WI 54720, U.S.A.
TEL: 715-831-6353 FAX: 419-818-0897
E-Mail : info@senasys.com