



Image for illustrative purpose only

## Summary

[Request a quote](#)

[Catalog](#)

Number of contacts Low Voltage	6
Wire Size/AWG	28 - 20
Gender	Standard
Socket / Receptacle	Socket / Receptacle - Fixed Panel Front Mounted
Locking system	Push-pull
Size	2P
Suggested matching part	<a href="#">CFB.M06.GLA.C72AZ</a>
Series	REDEL P - Push-Pull

[https://www.lemo.com/int\\_en/solutions/redel/redel-p-push-pull/cnb-m06-glla.html](https://www.lemo.com/int_en/solutions/redel/redel-p-push-pull/cnb-m06-glla.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

# Technical details

## Electrical Configuration

Contact Termination Low voltage	Solder
Insert configuration value	2P.M06 - 6 Low V.
Insulator	L: PEEK for solder contacts
Rated current	12 A
Test voltage (kV rms) Contact-contact	1.35
Contact Type	Solder
Air clearance	1.2 mm
Creepage distance	1.2 mm
Bucket Dia.	1.1 mm (0.043in)
Contact Dia.	1.3 mm (0.051in)
Number of contacts Low Voltage	6
Wire Size/AWG	28 - 20
Gender	Standard

## Form & Material

Shell style / Model id	CN - Fixed receptacle, nut fixing, watertight (IP 66)
Socket / Receptacle	Fixed Panel Front Mounted
Housing material	PSU (Polysulfone), gray
Locking system	Push-pull
Keying	B: 3 keys (alpha=0, gamma=60, Plug: male contacts, Receptacle: female contacts)
Weight	6.05 g

## Environment

Technical domain	Energy and Industrial, Medical, Test and Measurement, Transportation, Aerospace and UAV
Environmental sealing (IP rating)	IP66
Endurance	>5000 mating cycles
Temperature range	-50°C / +150°C
F ret (max)	250 N
F ret (min)	150 N
Steam sterilization	Fully sterilizable (Steam, Gamma, ETO) following our protocols and tests in line with ISO 11134 and IEC 60601-1 standards. For more details on sterilization methods and cycles, please contact us.

[https://www.lemo.com/int\\_en/solutions/redel/redel-p-push-pull/cnb-m06-glla.html](https://www.lemo.com/int_en/solutions/redel/redel-p-push-pull/cnb-m06-glla.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

## Cable fixation



Cable termination protection

Standard back nut (no additional protection)

Fixation type

Cable collet

## Drawings

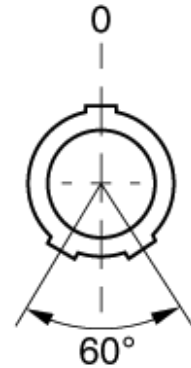

## Dimensions

	<b>L</b>	<b>N</b>
mm.	28.7	23.8
in.	1.13	0.94

[https://www.lemo.com/int\\_en/solutions/redel/redel-p-push-pull/cnb-m06-g11a.html](https://www.lemo.com/int_en/solutions/redel/redel-p-push-pull/cnb-m06-g11a.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.