



Image for illustrative purpose only

## Summary

[Request a quote](#)

[Catalog](#)

Nb of contacts Fluidic	1
Number of contacts Low Voltage	10
Wire Size/AWG	30 - 22
Gender	Standard
Socket / Receptacle	Socket / Receptacle - Fixed Panel Rear Mounted
Locking system	Push-pull
Size	2P
Suggested matching part	<a href="#">CAB.015.GLA.C72G</a>
Series	REDEL P - Push-Pull

[https://www.lemo.com/int\\_en/solutions/redel/redel-p-push-pull/ckb-015-gllg.html](https://www.lemo.com/int_en/solutions/redel/redel-p-push-pull/ckb-015-gllg.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

# Technical details

## Electrical Configuration

Contact Termination Low voltage	Solder
Nb of contacts Fluidic	1
Insert configuration value	2P.015 - 1 Fluidic, 10 Low V.
Insulator	L: PEEK for solder contacts
Rated current	5 A
Test voltage (kV rms) Contact-contact	1.15
Air clearance	0.9 mm
Creepage distance	0.9 mm
Contact Dia.	0.7
Number of contacts Low Voltage	10
Wire Size/AWG	30 - 22
Gender	Standard

## Form & Material

Shell style / Model id	CK - Fixed receptacle with two nuts (back panel mounting)
Socket / Receptacle	Fixed Panel Rear Mounted
Housing material	PSU (Polysulfone), gray
Locking system	Push-pull
Keying	B: 3 keys (alpha=0, gamma=60, Plug: male contacts, Receptacle: female contacts)
Weight	7.44 g

## Environment

Technical domain	Energy and Industrial, Medical, Test and Measurement, Transportation, Aerospace and UAV
Environmental sealing (IP rating)	IP50
Endurance	>5000 mating cycles
Temperature range	-50°C / +150°C

[https://www.lemo.com/int\\_en/solutions/redel/redel-p-push-pull/ckb-015-gllg.html](https://www.lemo.com/int_en/solutions/redel/redel-p-push-pull/ckb-015-gllg.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

## Cable fixation



Cable termination protection

Standard back nut (no additional protection)

Fixation type

Cable collet

## Drawings

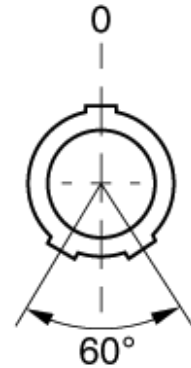

## Dimensions

	<b>N</b>	<b>a</b>
mm.	23.8	10.2
in.	0.94	0.4

[https://www.lemo.com/int\\_en/solutions/redel/redel-p-push-pull/ckb-015-gllg.html](https://www.lemo.com/int_en/solutions/redel/redel-p-push-pull/ckb-015-gllg.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.