




Quality Products. Service Excellence.

Flange Disconnect Operator Adaptor Kits



Features

- Used to adapt flange mounted operating mechanisms to all Hammond enclosures with universal cutouts.
- Kits include an adaptor plate and all of the required parts (with instructions) to interlock the main door with the operator mechanism.
- Blank plates are used to cover the flange cutouts in Hammond universal type disconnect enclosures.

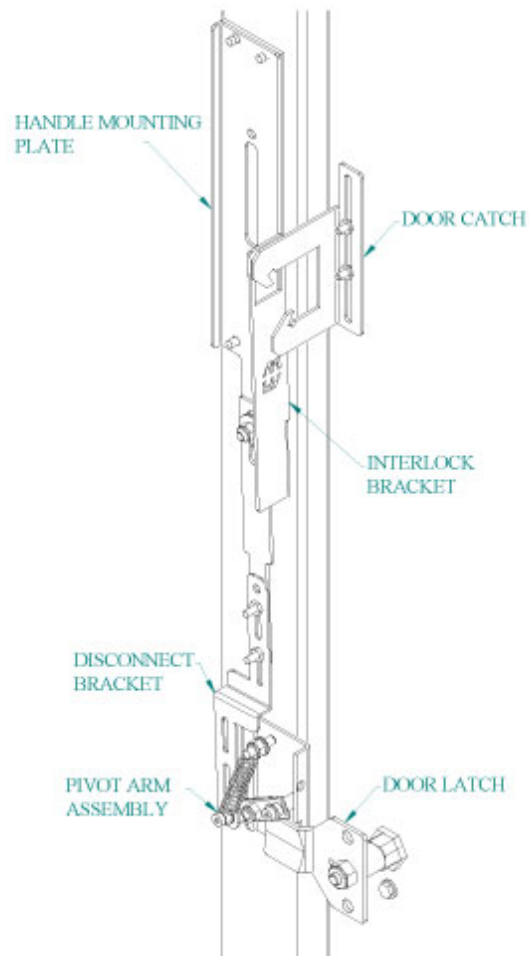

Part No.	Operator Make & Type	Manufacturer Part No.
AK1494FD	Allen Bradley	1494F and D
BPAK	Blank plate	

Part No.	Operator Make & Type	Manufacturer Part No.
AKU	ABB Controls - operating handle	
	Disconnect Switch	DSFHN-HS12
	Circuit Breaker	K7FHD-HS12

Flange Disconnect Operator Adaptor Kits - Hammond Mfg.

Part No.	Operator Make & Type	Manufacturer Part No.	
Allen Bradley - 1494V variable depth operating handle			
Disconnect Switch			
30 to 200		1494V H1	for 2UD, UHD, UHDM
400 to 600		1494V H2	for UHD
400		1494V H2	for UHDM
Circuit Breaker		1494V H11	
Cutler Hammer - operating handle			
Disconnect Switch		C361H1 or H3	
Circuit Breaker			
150 A		C371H1 or H3	
250 to 600 A		C371H5 or H7	for 2UD
250 to 1200 A		C371H5 or H7	for UHD, UHDM
Circuit Breaker		C371 Flex-Shaft™ handle mechanism	
General Electric - operating handle			
Disconnect Switch		STDA1or STDA2	
Circuit Breaker		STDA1or STDA2	
Circuit Breaker Spectra-Flex™ cable operators			
150 to 600 A		STDA1	
SK1200 A		STDA3	
Siemens I.T.E. Max-Flex™ - operating handle			
Disconnect Switch variable depth		FHOHS	
Circuit Breaker			
125 to 600 A		FHOH	
800 to 2000 A		FHOHN	
Square D - class 9422 operating mechanism			
Disconnect Switch variable depth		9422 type A1	
Circuit Breaker variable depth		9422 type A1	
Disconnect Switch with cable mechanism		9422 type A1	
Circuit Breaker with cable mechanism		9422 type A1	

Tags: **adapter, flange kit, multi-vendor, plate, Allen Bradley, ABB, Cutler Hammer, Siemens, Square D**, *Data subject to change without notice*
General Electric

© 2025. Hammond Manufacturing Ltd. All rights reserved.