




00X3007E040

110 Delta Drive
Pittsburgh, PA 15238
NAFTA Sales: (1)800-245-3984
HK Sales : (852)3102-9337
magnetics@spang.com
www.mag-inc.com

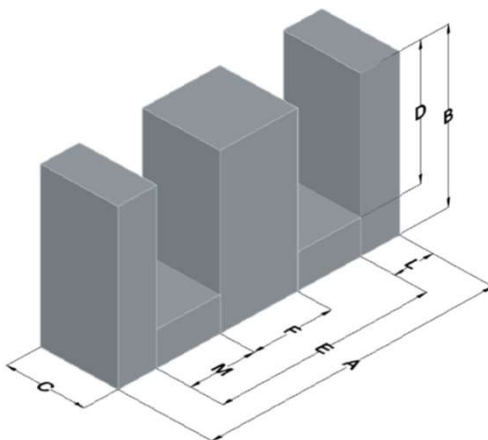

XFlux Permeability (μ)	A_L (nH/T ²)	Core Marking	
		Lot Number	Part Number
40	46 $\pm$ 8%	XXXXXX	X3007E040

	Dimensions		Tolerance ($\pm$)			Packaging
	(mm)	(in)	(mm)	(in)		
A	30.10	1.185	0.46	0.018		Box Qty= 840 Pcs
B	15.01	0.591	0.23	0.009		
C	7.06	0.278	0.15	0.006		
D	9.55	0.376	-	-	Min	Available Hardware
E	19.86	0.782	-	-	Min	PCB3007T1
F	6.96	0.274	0.20	0.008		
L	5.11	0.201	-	-	Nom	
M	6.32	0.249	-	-	Min	

Electrical Characteristics			Physical Characteristics					
Watt Loss @ 50kHz, 100mT max (mW/cm ³)	DC Bias min (oersteds)		Break Strength Min (kg)	Window Area W_a (mm ²)	Cross Section A_e (mm ²)	Path Length L_e (mm)	Volume V_e (mm ³)	Est. Weight (Ea. Piece) (g)
600	80%	50%	9.1	121	60.1	65.6	3,940	14
	105	200						

Notes:	Temperature Rating
	Curie Temp: 700 °C

Typical DC Bias Performance

