

GENERAL DESCRIPTION

The SGM4553 is a 2-bit, non-inverting, bidirectional voltage-level translator which features two independent configurable power-supply lines. The A and B ports track the V_{CCA} supply and V_{CCB} supply respectively. The supply voltage range is 1.65V to 5.5V for A ports and 2.3V to 5.5V for B ports. The device provides a bidirectional translation function among the different voltage nodes (including 1.8V, 2.5V, 3.3V and 5V).

The SGM4553 has an output-enabled (OE) function, which controls the inputs and outputs states. When OE goes low, all I/Os enter into the high-impedance state. It is beneficial for reducing quiescent current consumption. When V_{CCA} is powered, OE has an internal pull-down current source.

The SGM4553 is available in Green SOT-23-8 and XTDFN-1.4×1-8L packages. It operates over an ambient temperature range of -40°C to +85°C.

FEATURES

- **Power Supply Voltage Ranges ($V_{CCA} \leq V_{CCB}$)**
 - ♦ **A Ports: 1.65V to 5.5V**
 - ♦ **B Ports: 2.3V to 5.5V**
- **Direction-Control Signal is Not Required**
- **Data Rates**
 - ♦ **Push-Pull: 24Mbps**
 - ♦ **Open-Drain: 2Mbps**
- **Support V_{CCA} or V_{CCB} Isolation**
 - ♦ **When V_{CCA} or V_{CCB} is Low, Device Enters Power-Down Mode**
- **No Specific Power Sequences Required for V_{CCA} and V_{CCB}**
- **Support Power-Down Mode**
- **-40°C to +85°C Operating Temperature Range**
- **Available in Green XTDFN-1.4×1-8L and SOT-23-8 Packages**

APPLICATIONS

Universal Asynchronous Receiver/Transmitter
I²C/SMBus Interfaces
General Purpose I/O (GPIO)

TYPICAL APPLICATION

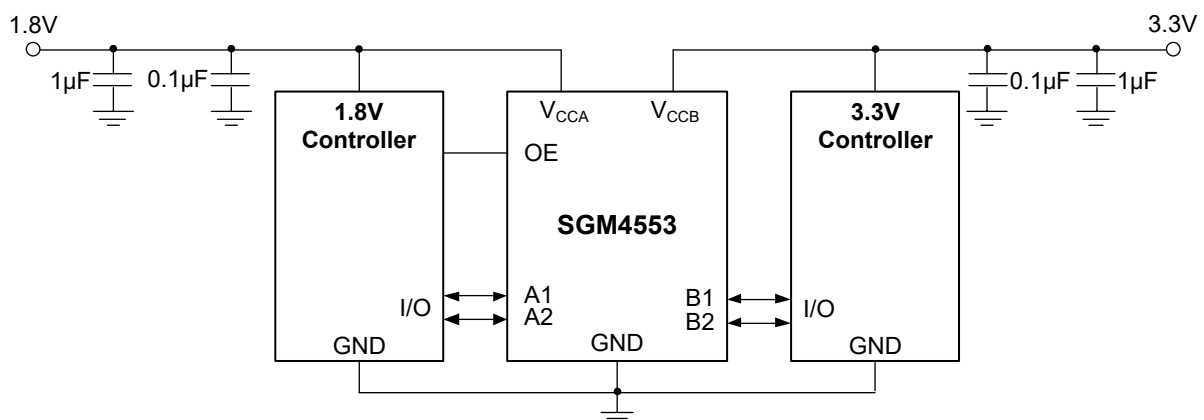


Figure 1. Typical Application Circuit


PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM4553	SOT-23-8	-40°C to +85°C	SGM4553YN8G/TR	SLDXX	Tape and Reel, 3000
	XTDFN-1.4×1-8L	-40°C to +85°C	SGM4553YXDO8G/TR	N2X	Tape and Reel, 5000


MARKING INFORMATION

NOTE: X = Date Code. XX = Date Code.

SOT-23-8



XTDFN-1.4×1-8L



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage Range

 V_{CCA} -0.3V to 6V V_{CCB} -0.3V to 6VInput Voltage Range, V_I ⁽¹⁾

A Ports, B Ports, OE -0.3V to 6V

Output Voltage Range for the High-Impedance or Power-Off State, V_O ⁽¹⁾

A Ports -0.3V to 6V

B Ports -0.3V to 6V

Output Voltage Range for the High or Low State, V_O ⁽¹⁾⁽²⁾A Ports -0.3V to $V_{CCA} + 0.3V$ B Ports -0.3V to $V_{CCB} + 0.3V$ Input Clamp Current, I_{IK} ($V_I < 0$) -50mAOutput Clamp Current, I_{OK} ($V_O < 0$) -50mAContinuous Output Current, I_O ±50mAContinuous Current through V_{CCA} , V_{CCB} , or GND ±100mAPackage Thermal Resistance @ $T_A = +25^\circ\text{C}$ SOT-23-8, θ_{JA} 240°C/WSOT-23-8, θ_{JB} 96.8°C/WSOT-23-8, θ_{JC} 152.4°C/WXTDFN-1.4×1-8L, θ_{JA} 248°C/WXTDFN-1.4×1-8L, θ_{JB} 89.6°C/WXTDFN-1.4×1-8L, θ_{JC} 133.4°C/W

Power Dissipation 0.5W (MAX)

Junction Temperature +150°C

Storage Temperature Range -65°C to +150°C

Lead Temperature (Soldering, 10s) +260°C

ESD Susceptibility

HBM ±4000V

CDM (XTDFN-1.4×1-8L) ±1000V

NOTES:

1. When the input and output current ratings are observed, the input and I/O negative voltage ratings may be exceeded.

2. V_{CCA} and V_{CCB} values are shown in the recommended operating conditions in Electrical Characteristics section.

RECOMMENDED OPERATING CONDITIONS

Operating Temperature Range -40°C to +85°C

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.



ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATIONS

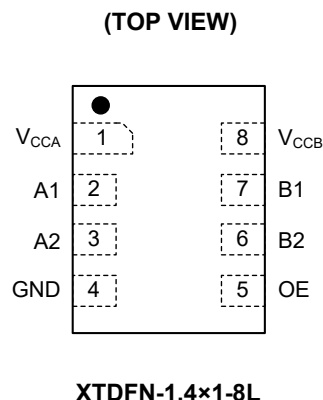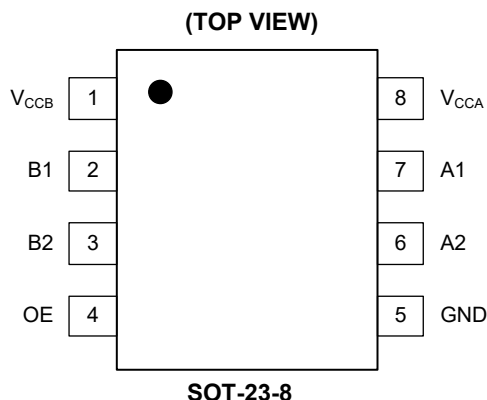

PIN DESCRIPTION

PIN		NAME	FUNCTION
SOT-23-8	XTDFN-1.4x1-8L		
1	8	V _{CCB}	Supply Voltage on B Ports. It can be operated from 2.3V to 5.5V.
2	7	B1	Channel 1 Input/Output B. It tracks the V _{CCB} supply.
3	6	B2	Channel 2 Input/Output B. It tracks the V _{CCB} supply.
4	5	OE	Output Enable Control Pin. Active high. When OE goes low, all outputs enter into the high-impedance state. It tracks the V _{CCA} supply.
5	4	GND	Ground.
6	3	A2	Channel 2 Input/Output A. It tracks the V _{CCA} supply.
7	2	A1	Channel 1 Input/Output A. It tracks the V _{CCA} supply.
8	1	V _{CCA}	Supply Voltage on A Ports. It can be operated from 1.65V to 5.5V, and V _{CCA} is always ≤ V _{CCB} .

ELECTRICAL CHARACTERISTICS

($V_{CCA} = 1.65\text{V}$ to 5.5V , $V_{CCB} = 2.3\text{V}$ to 5.5V , $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$, typical values are measured at $T_A = +25^\circ\text{C}$, unless otherwise noted.)

PARAMETER		SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Recommended Operating Conditions ^{(1) (2)}								
Supply Voltage ⁽³⁾		V _{CCA}			1.65		5.5	V
		V _{CCB}			2.3		5.5	
High-Level Input Voltage	A Port I/Os	V _{IH}	V _{CCA} = 1.65V to 1.95V, V _{CCB} = 2.3V to 5.5V		V _{CCI} - 0.2		V _{CCI}	V
			V _{CCA} = 2.3V to 5.5V, V _{CCB} = 2.3V to 5.5V		V _{CCI} - 0.4		V _{CCI}	
	B Port I/Os				V _{CCI} - 0.4		V _{CCI}	
	OE Input				V _{CCA} × 0.8		5.5	
Low-Level Input Voltage	A Port I/Os	V _{IL}			0		0.15	V
	B Port I/Os				0		0.15	
	OE Input				0		V _{CCA} × 0.25	
Input Transition Rise or Fall Rate		Δt/ΔV	A port I/Os push-pull driving				10	ns/V
			B port I/Os push-pull driving				10	
			Control input				10	
Electrical Characteristics								
A Ports High-Level Output Voltage		V _{OHA}	I _{OH} = -20μA, V _{IB} ≥ V _{CCB} - 0.4V		V _{CCA} × 0.7			V
A Ports Low-Level Output Voltage		V _{OLA}	I _{OL} = 1mA, V _{IB} ≤ 0.15V				0.4	
B Ports High-Level Output Voltage		V _{OHB}	I _{OH} = -20μA, V _{IA} ≥ V _{CCA} - 0.4V		V _{CCB} × 0.7			
B Ports Low-Level Output Voltage		V _{OLB}	I _{OL} = 1mA, V _{IA} ≤ 0.15V				0.4	
Input Leakage Current	OE	I _I	T _A = +25°C				±1	μA
			T _A = -40°C to +85°C				±1.5	
Power-Off Leakage Current	A Ports	I _{OFF}	V _{CCA} = 0V, V _{CCB} = 0V to 5.5V	T _A = +25°C			±0.5	μA
				T _A = -40°C to +85°C				
	B Ports		V _{CCA} = 0V to 5.5V, V _{CCB} = 0V	T _A = +25°C			±0.5	
				T _A = -40°C to +85°C				
3-State Output Leakage	A or B Ports	I _{OZ}	OE = 0V	T _A = +25°C			±0.6	μA
				T _A = -40°C to +85°C				

NOTES:

1. V_{CCI} is the supply voltage associated with the data input ports.
2. V_{CCO} is the supply voltage associated with the data output ports.
3. Ensure that $V_{CCA} \leq V_{CCB}$ and V_{CCA} must not exceed 5.5V.

ELECTRICAL CHARACTERISTICS (continued)

($V_{CCA} = 1.65V$ to $5.5V$, $V_{CCB} = 2.3V$ to $5.5V$, $T_A = -40^\circ C$ to $+85^\circ C$, typical values are measured at $T_A = +25^\circ C$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Quiescent Supply Current	I_{CCA}	$V_I = V_O = \text{OPEN}, I_O = 0A$	$V_{CCA} = 1.65V \text{ to } V_{CCB}, V_{CCB} = 2.3V \text{ to } 5.5V$		5.5	μA
			$V_{CCA} = 5.5V, V_{CCB} = 0V$		5.5	
			$V_{CCA} = 0V, V_{CCB} = 5.5V$		-1	
	I_{CCB}	$V_I = V_O = \text{OPEN}, I_O = 0A$	$V_{CCA} = 1.65V \text{ to } V_{CCB}, V_{CCB} = 2.3V \text{ to } 5.5V$		15	μA
			$V_{CCA} = 5.5V, V_{CCB} = 0V$		-1	
			$V_{CCA} = 0V, V_{CCB} = 5.5V$		6	
	$I_{CCA} + I_{CCB}$	$V_I = V_O = \text{OPEN}, I_O = 0A$	$V_{CCA} = 1.65V \text{ to } V_{CCB}, V_{CCB} = 2.3V \text{ to } 5.5V$		20	μA
	I_{CCZA}	$V_I = V_{CCI} \text{ or } 0V, I_O = 0A, OE = 0V$	$V_{CCA} = 1.65V \text{ to } V_{CCB}, V_{CCB} = 2.3V \text{ to } 5.5V$		5.5	μA
	I_{CCZB}	$V_I = V_{CCI} \text{ or } 0V, I_O = 0A, OE = 0V$	$V_{CCA} = 1.65V \text{ to } V_{CCB}, V_{CCB} = 2.3V \text{ to } 5.5V$		5.5	μA
OE Input Capacitance	C_I	$V_{CCA} = 3.3V, V_{CCB} = 3.3V$		4		pF
Input/Output Capacitance	A Ports	C_{IO}	$V_{CCA} = 3.3V, V_{CCB} = 3.3V$	5		pF
	B Ports			5		

TIMING REQUIREMENTS

(T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	V _{CCB} = 2.5V	V _{CCB} = 3.3V	V _{CCB} = 5V	UNITS
			TYP	TYP	TYP	
(V _{CCA} = 1.8V)						
Data Rate		Push-pull driving	21	22	24	Mbps
		Open-drain driving	2	2	2	
Pulse Duration (Data Inputs)	t _w	Push-pull driving	47	45	41	ns
		Open-drain driving	500	500	500	
(V _{CCA} = 2.5V)						
Data Rate		Push-pull driving	20	22	24	Mbps
		Open-drain driving	2	2	2	
Pulse Duration (Data Inputs)	t _w	Push-pull driving	50	45	41	ns
		Open-drain driving	500	500	500	
(V _{CCA} = 3.3V)						
Data Rate		Push-pull driving		23	24	Mbps
		Open-drain driving		2	2	
Pulse Duration (Data Inputs)	t _w	Push-pull driving		43	41	ns
		Open-drain driving		500	500	
(V _{CCA} = 5V)						
Data Rate		Push-pull driving			24	Mbps
		Open-drain driving			2	
Pulse Duration (Data Inputs)	t _w	Push-pull driving			41	ns
		Open-drain driving			500	

SWITCHING CHARACTERISTICS

($V_{CCA} = 1.8V$, $T_A = +25^\circ C$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		$V_{CCB} = 2.5V$	$V_{CCB} = 3.3V$	$V_{CCB} = 5V$	UNITS
				TYP	TYP	TYP	
Propagation Delay	t_{PHL}	From An to Bn	Push-pull driving	2.4	3.0	4.3	ns
			Open-drain driving	26.0	26.3	26.7	
	t_{PLH}	From An to Bn	Push-pull driving	4.0	3.6	3.5	
			Open-drain driving	175	145	110	
	t_{PHL}	From Bn to An	Push-pull driving	2.0	1.9	2.1	ns
			Open-drain driving	26.0	26.1	26.2	
	t_{PLH}	From Bn to An	Push-pull driving	1.7	1.5	1.4	
			Open-drain driving	133	69	51	
Enable Time	t_{EN} (t_{PZH} & t_{PZL})	From OE to An or Bn		24	20	18	ns
Disable Time	t_{DIS} (t_{PHZ} & t_{PLZ})	From OE to An or Bn		1200	1200	1200	ns
Rise Time	t_{RA}	A ports	Push-pull driving	6.6	5.8	5.4	ns
			Open-drain driving	89	31	10	
	t_{RB}	B ports	Push-pull driving	5.6	4.6	3.9	ns
			Open-drain driving	128	98	58	
Fall Time	t_{FA}	A ports	Push-pull driving	2.9	2.7	2.6	ns
			Open-drain driving	1.9	1.7	1.6	
	t_{FB}	B ports	Push-pull driving	4.6	5.9	8.0	ns
			Open-drain driving	2.2	2.3	2.9	
Channel-to-Channel Skew	t_{SKO}			0.5	0.5	0.5	ns
Data Rate		Push-pull driving		21	22	24	Mbps
		Open-drain driving		2	2	2	

SWITCHING CHARACTERISTICS (continued)

(V_{CCA} = 2.5V, T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		V _{CCB} = 2.5V	V _{CCB} = 3.3V	V _{CCB} = 5V	UNITS
				TYP	TYP	TYP	
Propagation Delay	t _{PHL}	From An to Bn	Push-pull driving	2.7	3.3	4.8	ns
			Open-drain driving	26.2	26.4	26.7	
	t _{PLH}		Push-pull driving	2.6	2.4	2.3	
			Open-drain driving	169	144	110	
	t _{PHL}	From Bn to An	Push-pull driving	2.4	2.3	2.4	ns
			Open-drain driving	26.3	26.4	26.5	
	t _{PLH}		Push-pull driving	2.0	1.9	1.8	
			Open-drain driving	165	118	55	
Enable Time	t _{EN} (t _{PZH} & t _{PZL})	From OE to An or Bn		23	19	16	ns
Disable Time	t _{DIS} (t _{PHZ} & t _{PLZ})	From OE to An or Bn		1200	1200	1200	ns
Rise Time	t _{RA}	A ports	Push-pull driving	3.2	2.8	2.6	ns
			Open-drain driving	120	70	10	
	t _{RB}	B ports	Push-pull driving	4.5	3.4	2.6	ns
			Open-drain driving	122	96	62	
Fall Time	t _{FA}	A ports	Push-pull driving	4.9	5.0	4.8	ns
			Open-drain driving	2.0	1.9	1.7	
	t _{FB}	B ports	Push-pull driving	4.8	6.1	8.3	ns
			Open-drain driving	1.9	2.1	2.7	
Channel-to-Channel Skew	t _{SKO}			0.5	0.5	0.5	ns
Data Rate		Push-pull driving		20	22	24	Mbps
		Open-drain driving		2	2	2	

SWITCHING CHARACTERISTICS (continued)

(V_{CCA} = 3.3V, T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		V _{CCB} = 3.3V	V _{CCB} = 5V	UNITS
				TYP	TYP	
Propagation Delay	t _{PHL}	From An to Bn	Push-pull driving	3.5	4.9	ns
			Open-drain driving	26.3	26.7	
	t _{PLH}		Push-pull driving	2.2	2.0	
			Open-drain driving	133	104	
	t _{PHL}	From Bn to An	Push-pull driving	3.0	3.2	ns
			Open-drain driving	26.6	26.8	
	t _{PLH}		Push-pull driving	1.8	1.7	
			Open-drain driving	132	83	
Enable Time	t _{EN} (t _{PZH} & t _{PZL})	From OE to An or Bn		18	15	ns
Disable Time	t _{DIS} (t _{PHZ} & t _{PLZ})	From OE to An or Bn		1200	1200	ns
Rise Time	t _{RA}	A ports	Push-pull driving	2.2	2.0	ns
			Open-drain driving	87	36	
	t _{RB}	B ports	Push-pull driving	2.9	2.3	ns
			Open-drain driving	87	56	
Fall Time	t _{FA}	A ports	Push-pull driving	6.2	5.8	ns
			Open-drain driving	2.3	2.0	
	t _{FB}	B ports	Push-pull driving	6.5	8.2	ns
			Open-drain driving	2.0	2.5	
Channel-to-Channel Skew	t _{SKO}			0.5	0.5	ns
Data Rate		Push-pull driving		23	24	Mbps
		Open-drain driving		2	2	

SWITCHING CHARACTERISTICS (continued)

(V_{CCA} = 5V, T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		V _{CCB} = 5V	UNITS
				TYP	
Propagation Delay	t _{PHL}	From An to Bn	Push-pull driving	5.4	ns
			Open-drain driving	26.7	
	t _{PLH}		Push-pull driving	1.9	
			Open-drain driving	120	
	t _{PHL}	From Bn to An	Push-pull driving	5.6	ns
			Open-drain driving	27.3	
	t _{PLH}		Push-pull driving	1.7	
			Open-drain driving	126	
Enable Time	t _{EN} (t _{PZH} & t _{PZL})	From OE to An or Bn		16	ns
Disable Time	t _{DIS} (t _{PHZ} & t _{PLZ})	From OE to An or Bn		1200	ns
Rise Time	t _{RA}	A ports	Push-pull driving	1.8	ns
			Open-drain driving	79	
	t _{RB}	B ports	Push-pull driving	2.2	ns
			Open-drain driving	73	
Fall Time	t _{FA}	A ports	Push-pull driving	8.7	ns
			Open-drain driving	2.7	
	t _{FB}	B ports	Push-pull driving	8.6	ns
			Open-drain driving	2.4	
Channel-to-Channel Skew	t _{SKO}			0.5	ns
Data Rate		Push-pull driving		24	Mbps
		Open-drain driving		2	

WAVEFORMS

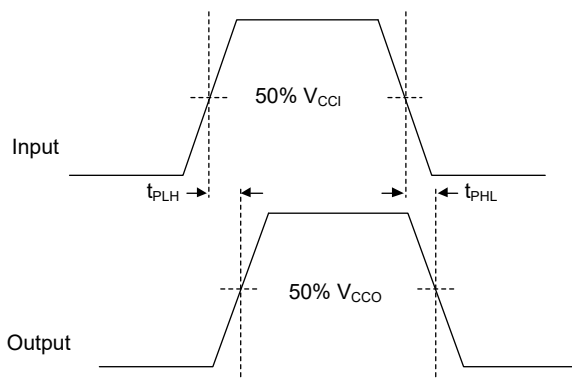


Figure 2. Propagation Delay

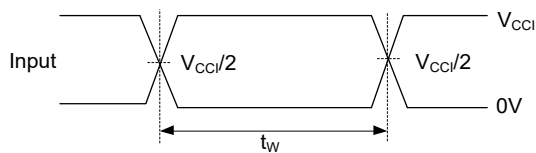


Figure 3. Pulse Duration


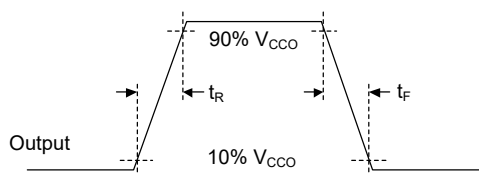


Figure 4. Rise Time and Fall Time of Data Output

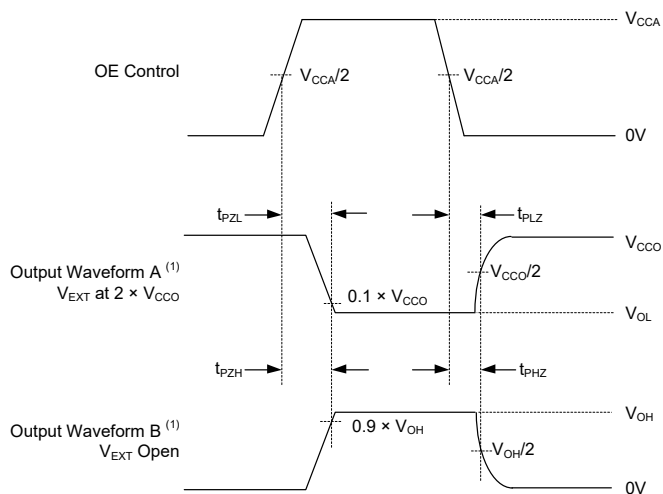


NOTE:

1. Waveform A indicates an output that is high except for OE is high. Waveform B indicates an output that is low except for OE is high.

Figure 5. Enable and Disable Times

TEST CIRCUIT

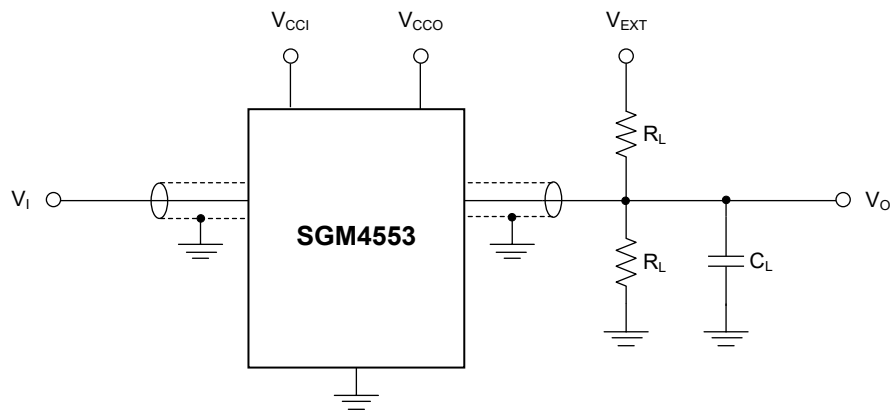

Definitions for test circuit:

R_L = Load resistance.

C_L = Load capacitance includes jig and probe capacitance.

V_{EXT} = External voltage for measuring switching times.

V_{CCI} = Supply voltage associated with the input.

V_{CCO} = Supply voltage associated with the output.

Figure 6. Test Circuit for Measuring Switching Times

APPLICATION INFORMATION

Applications

The SGM4553 is a bridge between two digital systems with different power supplies as it can transmit the signal transparently. For the application of the SGM4553, the output driver is open-drain or push-pull to drive the I²C or one-wire bus. In addition, if a device with push-pull driver is connected to the I/O pin of the SGM4553, it will operate as normal.

Architecture

The SGM4553 can switch the direction of the transmission for A port and B port automatically without any external control.

It is not necessary to add an external direction control for the application of the SGM4553. Also, each I/O pin can be an input or output of the voltage translator.

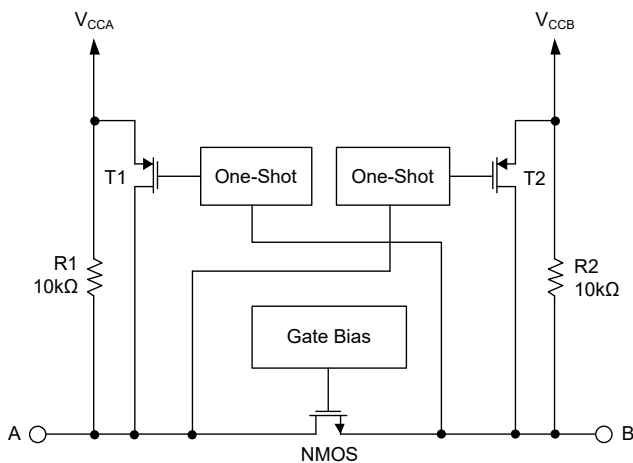


Figure 7. Architecture of an SGM4553 Cell

The explanation of two main parts of the internal circuit for the SGM4553 is shown as below:

- There is an NMOS between A port and B port to switch on or off the transmission.
- The one-shot accelerator can be used to accelerate the rising edges of the signal for A port and B port automatically.

Input Driver Requirements

The falling time of A port and B port and t_{PHL} depend on the output impedance of the connected device. The values of parameters which are t_{FA} , t_{FB} , t_{PHL} and data rates are specified when the resistance of external driver is less than 50Ω.

Power-Up

For the application of the SGM4553, the V_{CCA} should be less than V_{CCB} . However, it does not matter if the power supply voltage is ramping, and the sequence of power-up for both V_{CCA} and V_{CCB} is not defined.

Output Load Considerations

To decrease the extend of capacitive loading and ensure the proper triggering of one-shot, the trace in PCB should be as short as possible. Also, to ensure that the round-trip reflection delay is smaller than the time period of one-shot, the users should also decrease the length of trace, which means that the signal integrity is guaranteed because of the low impedance for the reflection. The period of on-state for the one-shot part is 30ns. In addition, for the one-shot circuit, it can support lumped capacitive load. In addition, the one-shot circuit has the time-out function, which aims to handle the extremely heavy capacitive load. For the function of one-shot part of the SGM4553, it can optimize the trade-off between the capability of load driving, maximum bit-rate and dynamic supply current. The length of PCB trace and output connectors will be considered as the capacitive load of the device, which may result in the retriggering of one-shot, contention of bus and the oscillations of the output.

Enable and Disable

The function of OE is used to disable SGM4553 by setting the transmitting I/O pins to high-impedance mode. The pull-down current source is integrated inside OE once it is powered by V_{CCA} . The definition of disable time (t_{DIS}) is the time period between OE goes low and when all of the I/O pins are in high-impedance mode. The enable time (t_{EN}) is defined as the time period between OE going to high position and one-shot part starting to operate.

Pull-Up or Pull-Down Resistors on I/O Lines

For the I/O pin of A and B side, there is a 10kΩ pull-up resistor to provide a high position for each I/O pin. However, if a smaller pull-up resistor is required, the users can add an external resistor which is parallel with the 10kΩ resistor. Also, the value of V_{OL} can be affected by the added external resistor. In addition, if the user wants to disable the device, the OE pin can be simply set to low position.



REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.



JUNE 2026 – REV.A.3 to REV.A.4	Page
Added Power Dissipation.....	2
APRIL 2026 – REV.A.2 to REV.A.3	Page
Updated ESD, Package Thermal Resistance.....	2
JUNE 2018 – REV.A.1 to REV.A.2	Page
Updated Marking Information section.....	2
MAY 2018 – REV.A to REV.A.1	Page
Added Package Thermal Resistance.....	2
Changes from Original to REV.A (JUNE 2014)	Page
Changed from product preview to production data.....	All

PACKAGE OUTLINE DIMENSIONS

SOT-23-8

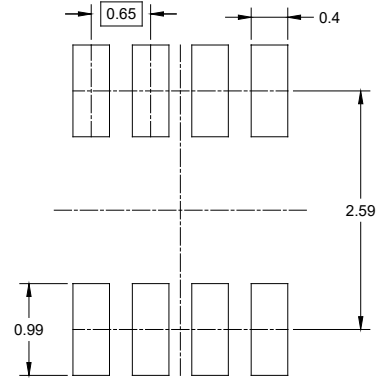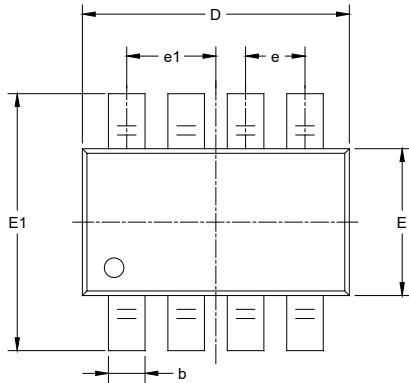

RECOMMENDED LAND PATTERN (Unit: mm)

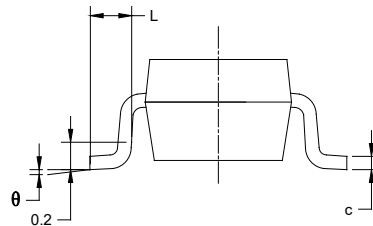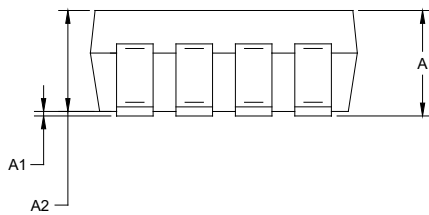


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.650 BSC		0.026 BSC	
e1	0.975 BSC		0.038 BSC	
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

NOTES:

1. Body dimensions do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

PACKAGE OUTLINE DIMENSIONS

XTDFN-1.4×1-8L

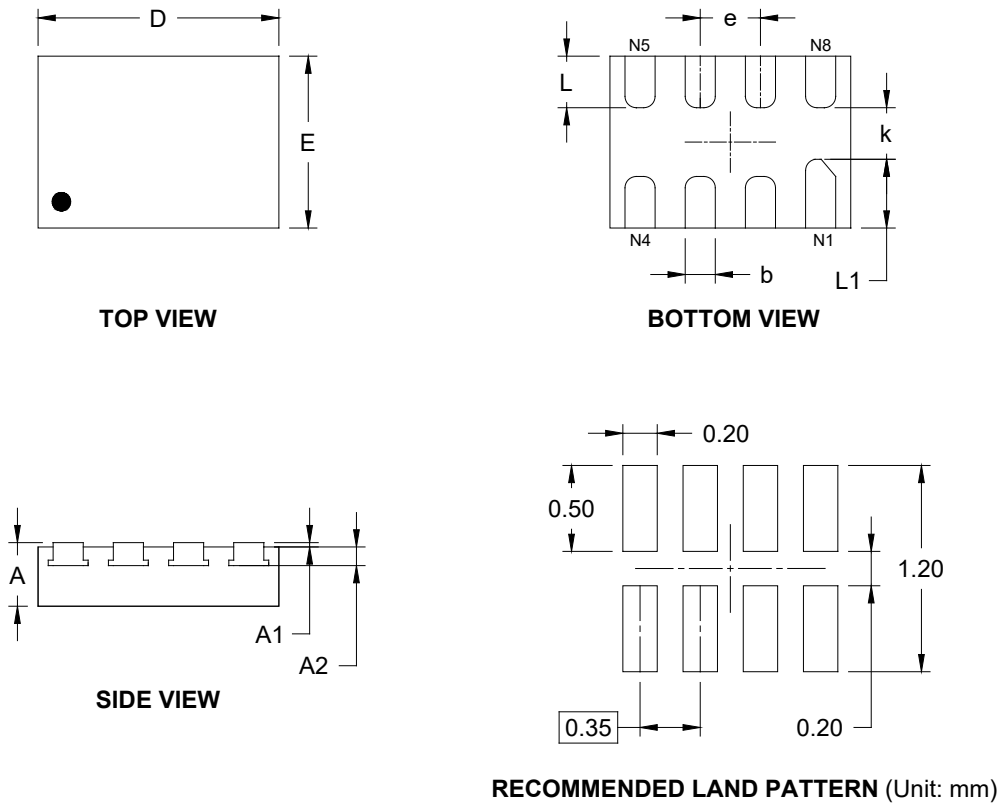


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.340	0.400	0.013	0.016
A1	0.000	0.050	0.000	0.002
A2	0.110 REF		0.004 REF	
D	1.350	1.450	0.053	0.057
E	0.950	1.050	0.037	0.041
k	0.200 MIN		0.008 MIN	
b	0.150	0.200	0.006	0.008
e	0.350 TYP		0.014 TYP	
L	0.250	0.350	0.010	0.014
L1	0.350	0.450	0.014	0.018


NOTE: This drawing is subject to change without notice.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

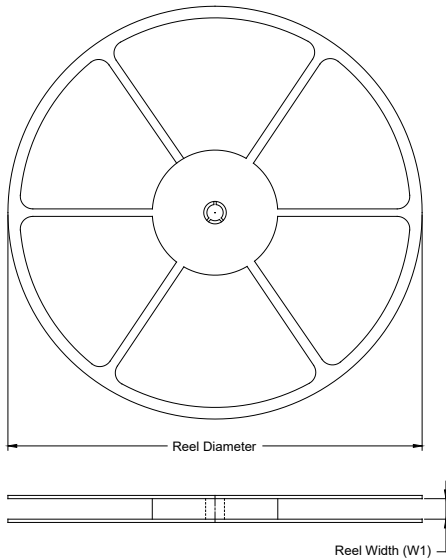

TAPE DIMENSIONS

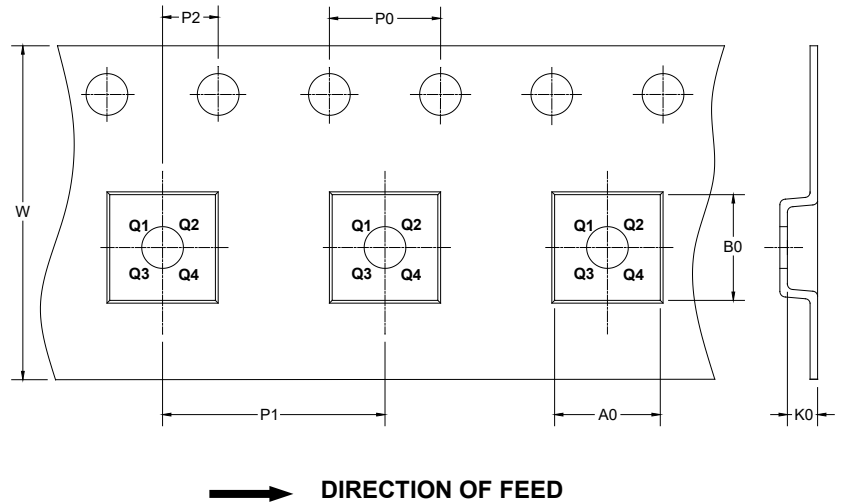

NOTE: The picture is only for reference. Please make the object as the standard.


KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOT-23-8	7"	9.5	3.17	3.23	1.37	4.0	4.0	2.0	8.0	Q3
XTDFN-1.4×1-8L	7"	9.5	1.15	1.60	0.50	4.0	4.0	2.0	8.0	Q1

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS

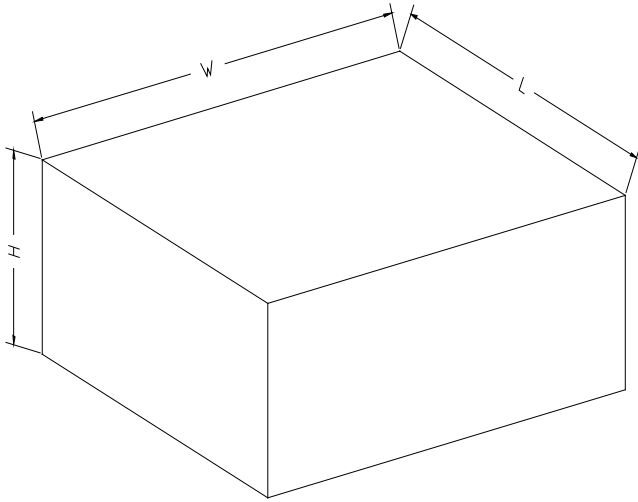

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002