


# USB 2.0 Panel Mount Cable, 5-Pin Motherboard IDC to USB-A (F/F), 1 ft. (0.31 m)

MODEL NUMBER: U024-001-5P-PM

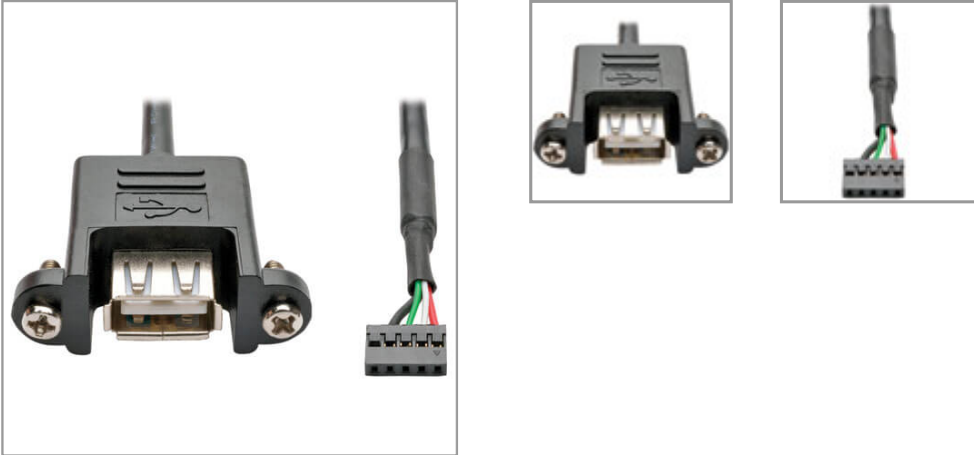

Connects your computer's motherboard to a panel-mounted USB-A port that can be installed in a computer, booth, kiosk or podium.

## Features

**Adds a Panel-Mounted USB-A Port** Allows convenient USB access from a trade show booth, retail kiosk or lecturer's podium  
**5-pin PCB header** terminates on computer's motherboard  
**Supports data transfer speeds up to 480 Mbps**  
**Backward compatible** with previous USB generations

**Premium Construction for Premium Performance** Corrosion-resistant gold-plated contacts for optimal signal transfer  
 Fully molded construction with strain relief for durability and long life  
 Flexible PVC jacket easy to install in tight spaces  
 Double shielding with aluminum braid, aluminum Mylar foil and twisted 28/24 AWG data/power lines  
 Mounting screws included

## Highlights

- Supports data transfer speeds up to 480 Mbps
- 5-pin PCB header connects to computer's motherboard
- USB-A port attaches with included screws
- Corrosion-resistant gold-plated contacts
- Backward compatible with previous USB generations

## System Requirements

- Computer with 5-pin motherboard connector

## Package Includes

- U024-001-5P-PM USB 2.0 Hi-Speed Panel Mount Cable, 1 ft.
- (2) Mounting screws

## Specifications

OVERVIEW	
UPC Code	037332191106
Technology	USB 2.0 (High Speed)
Cable Type	Passive
CONNECTIONS	
Side A - Connector 1	5 PIN IDC (FEMALE)
Side B - Connector 1	USB A (FEMALE)
PHYSICAL	
Cable Jacket Color	Black
Cable Length (ft.)	1



Powering Business Worldwide



Cable Length (m)	0.30
Shipping Dimensions (hwd / in.)	7.00 x 9.00 x 0.50
Shipping Dimensions (hwd / cm)	17.78 x 22.86 x 1.27
Shipping Weight (lbs.)	0.08
Shipping Weight (kg)	0.04
<b>ENVIRONMENTAL</b>	
Operating Temperature Range	14 to 122 F (-10 to 50 C)
Storage Temperature Range	5 to 140 F (-15 to 60 C)
Operating Humidity Range	0% to 90% RH, Non-Condensing
Storage Humidity Range	0% to 81% RH, Non-Condensing
<b>STANDARDS &amp; COMPLIANCE</b>	
Product Compliance	RoHS
<b>WARRANTY &amp; SUPPORT</b>	
Product Warranty Period (Worldwide)	Lifetime limited warranty

1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
<https://tripplite.eaton.com>

© 2024 Eaton. All Rights Reserved.  
Eaton is a registered trademark. All other trademarks  
are the property of their respective owners.