REVIS			
LTR	DESCRIPTION		APPROVED
A	NEW RELEASE	05/12/95	

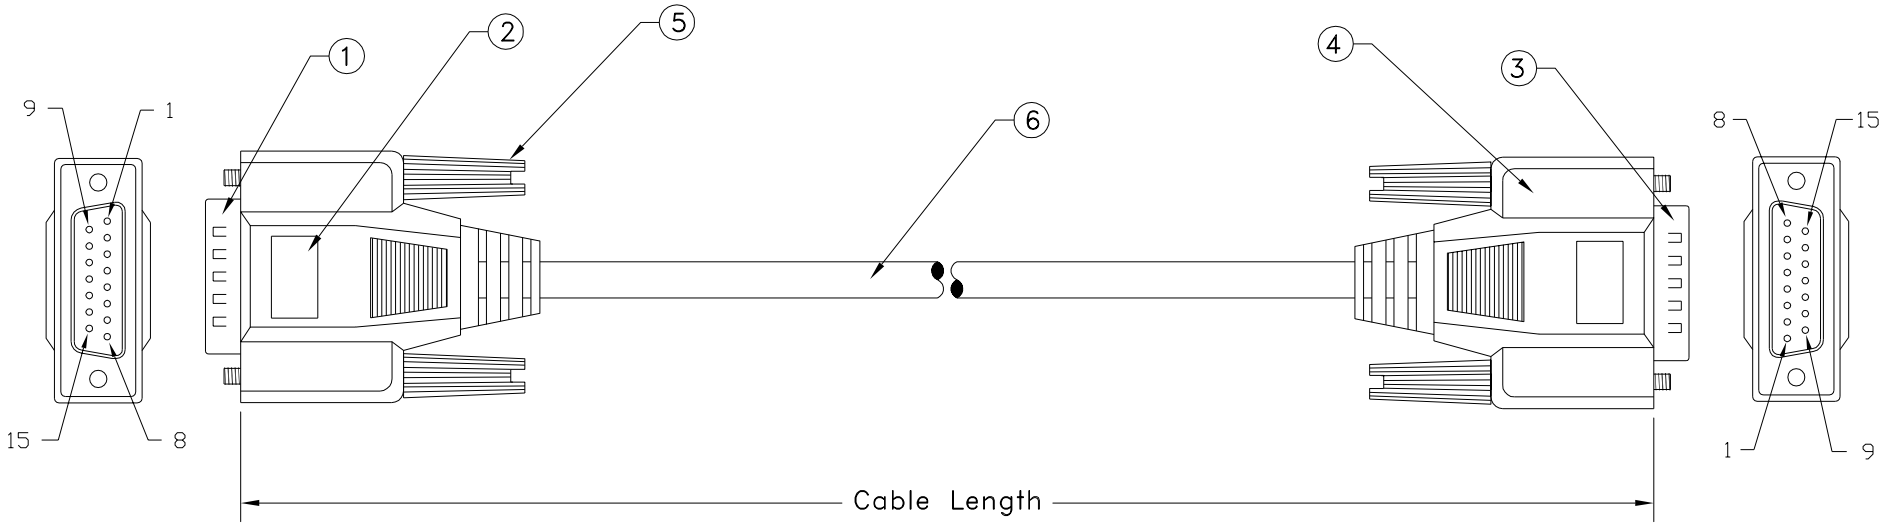

Pin Assignment

DB15 Male		DB15 Male
1	———	1
2	———	2
3	———	3
4	———	4
5	———	5
(	———	(
14	———	14
15	———	15
G	———	G

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
6.	28 AWG., 15 Conductors + Drain Wire, Single Shielded with AL–FOIL, Beige Outer PVC Jacket	XX	FT.
5.	4/40 Molded Thumbscrew, Color Beige	4	PCS.
4.	Beige Molded PVC Hood, Fully Shielded w/AL–FOIL	1	PCS.
3.	D–Sub 15 Pin Male w/Gold Plating Contacts	1	PCS.
2.	Beige Molded PVC Hood, Fully Shielded w/AL–FOIL	1	PCS.
1.	D–Sub 15 Pin Male W/Gold Plating Contacts	1	PCS.

CABLE ASSEMBLY PARTS LIST

UNLESS OTHERWISE SPECIFIED:
1. DIMENSION ARE IN INCHS
2. TOLERANCES:
   DECIMALES X.XX ±0.25

PROPRIETARY DOCUMENT
THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY

CUSTOMER

R.F.Q. NO.

DRAWN JFK DATE

CHECKED

CUSTOMER APPROVAL

PCCABLES.COM INC JFK

TITLE
DB15 M/M Molded Cable Assembly

DWG NO.	PART NO.	REV.
10D2	70004	A

RELEASE DATE: 05/12/95 SHEET: 1 OF 1