

HD36-24-19PN-059 ✓ ACTIVE

DEUTSCH | DEUTSCH HD30, DEUTSCH HD

TE Internal #: HD36-24-19PN-059

19 Position Housing, Housing for Male Terminals, Wire-to-Wire, Sealable, Wire & Cable, Power, Cable Mount (Free-Hanging), -55 – 125 °C [-67 – 257 °F]

[View on TE.com >](#)



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH HD30 Housings



Number of Positions: **19**

Connector & Housing Type: **Housing for Male Terminals**

Mating Pin Diameter: **1.6 mm, 2.4 mm [.063 in, .094 in]**

Connector System: **Wire-to-Wire**

Sealable: **Yes**

[All DEUTSCH HD30 Housings \(358\)](#)

Features

Industry Standards

IP Rating	IP67
-----------	------

Housing Features

Housing Material	Aluminum Alloy
------------------	----------------

Body Features

Cable Exit Angle	180°
------------------	------

Dimensions

Compatible Insulation Diameter Range	1.4 – 3.8 mm, 2.9 – 4.5 mm [.1 – .134 in][.134 – .17 in]
Product Width	49.3 mm[1.94 in]
Product Length	49.3 mm[1.94 in]
Connector Height	81 mm[3.19 in]

Packaging Features



Packaging Quantity	1
--------------------	---

Packaging Method	Package
------------------	---------

Mechanical Attachment

Strain Relief	With
---------------	------

Terminal Position Assurance	No
-----------------------------	----

Mating Alignment Type	Guide Slot
-----------------------	------------

Mating Alignment	With
------------------	------

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

Other

Serviceable	Yes
-------------	-----

Connector Position Assurance Capable	No
--------------------------------------	----

EU RoHS Compliance	Compliant
--------------------	-----------

EU ELV Compliance	Compliant
-------------------	-----------

Electrical Characteristics

Operating Voltage	250 VDC
-------------------	---------

Nominal Voltage Architecture	250 V
------------------------------	-------

Contact Features

Contact Size	Size 16, Size 12
--------------	------------------

Contact Type	Pin
--------------	-----

Mating Pin Diameter	1.6 mm, 2.4 mm [.063 in][.094 in]
---------------------	-----------------------------------

Contact Current Rating (Max)	25 A, 13 A
------------------------------	------------

Product Type Features

Mixed & Hybrid Connector	Yes
--------------------------	-----

Connector Shape	Circular
-----------------	----------

Connector & Housing Type	Housing for Male Terminals
--------------------------	----------------------------

Connector System	Wire-to-Wire
------------------	--------------

Sealable	Yes
----------	-----

Primary Locking Feature	Contact Retainer
-------------------------	------------------

Connector & Contact Terminates To	Wire & Cable
-----------------------------------	--------------

Configuration Features

Blank Cavity Position	0
-----------------------	---

Connector Modification	Cable Clamp
------------------------	-------------



Connector Seal Code	N Seal
Number of Positions	19

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	<p>Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in Component Part)</p> <p>Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.</p>
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1060-12-0166
PIN, SF, SIZE 12, 12-14, NI/SN



TE Part # CAT-J67-DSCC16
DEUTSCH Size 16 Crimp Contacts



TE Part # CAT-H3930-PC8382
Plug Protective Caps - DEUTSCH HD30



TE Part # 1060-12-0222
PIN, SF, SIZE 12, 10, NI/NI



TE Part # CAT-D48-SFT273
DEUTSCH Stamped and Formed Contacts



TE Part # 2300908-1
0460-003-16329, PIN, SOLID, 20-24AWG, AU




TE Part # CAT-H3930-CH8172
DEUTSCH HD30 Housings



TE Part # 0413-214-1205
SEALING PLUG, SIZE 12, KEYING, YEL



TE Part # 1060-12-0144
PIN, SF, SIZE 12, 12-14, AU/SN

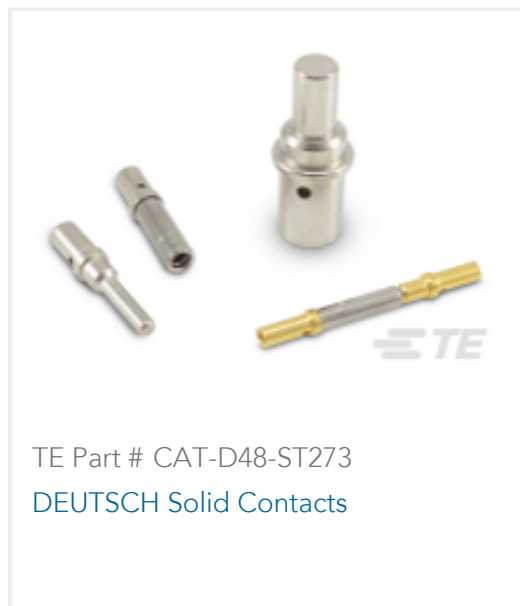

TE Part # CAT-D48-ST273
DEUTSCH Solid Contacts

Also in the Series | DEUTSCH HD



Automotive Headers(1)



Automotive Housings(359)



Connector Backshells(29)




Connector Strain Relief(5)



Insertion & Extraction Tools(10)



Other Automotive Connector Accessories(6)

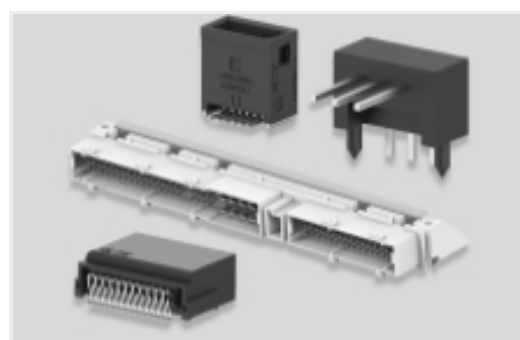

PCB Headers & Receptacles(1)




Wire-to-Board Headers & Receptacles (1)

Also in the Series | DEUTSCH HD30



Automotive Connector Caps & Covers (14)

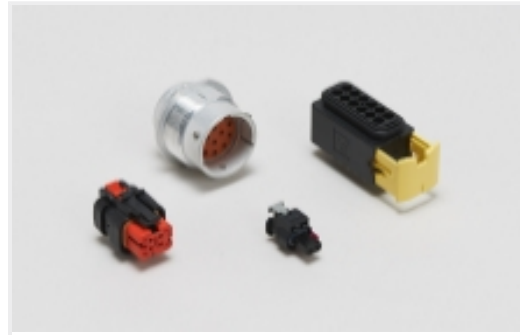

Automotive Housings(359)



Connector Seals & Cavity Plugs(11)



Connector Strain Relief(5)



Insertion & Extraction Tools(10)



Other Automotive Connector Accessories(6)

Customers Also Bought



TE Part #1-1414686-0
V23136A0004X058-EV-CBOX



TE Part #1-1393118-3
KUP-14D15-12=KU



TE Part #CAT-H396-CH8172
DEUTSCH HDP20 Housings



TE Part #CAT-H3930-CH8172
DEUTSCH HD30 Housings



TE Part #3-1534904-4
CONNECTOR HSG 94 POS.

Documents

[CAD Files](#)

[3D PDF](#)

[3D](#)

[Customer View Model](#)

[ENG_CVM_CVM_HD36-24-19PN-059_D1.2d_dxf.zip](#)

English



Customer View Model

[ENG_CVM_CVM_HD36-24-19PN-059_D1.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_HD36-24-19PN-059_D1.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[DEUTSCH HD30 & HDP20 CONNECTOR SERIES](#)

English

[CONNECTOR SELECTOR](#)

English

Product Specifications

[Application Specification](#)

English