


HUBBELL
Wiring Device-Kellems

**Straight Blade Devices, Male Plug, Insulgrip
Heavy Duty, Industrial/Commercial Grade,
Straight, 2-Pole 3- Wire Grounding, 15A
250V, 6-15P and White**

By Hubbell Wiring Device-Kellems
Catalog # [HBL5666C](#)

Straight Blade Devices, Male Plug, Insulgrip Heavy Duty,
Industrial/Commercial Grade, Straight, 2-Pole 3- Wire Grounding,
15A 250V, 6-15P, Black and White, Single Pack

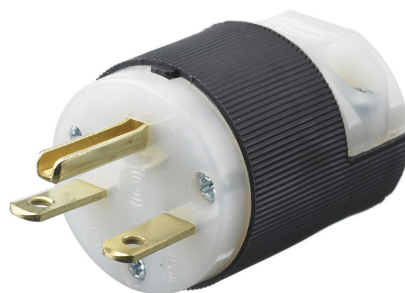

Features

- Ribbed nylon housing is impact and chemical resistant
- VARI-SIZE adjustable cord clamp
- Fast lead assembly screws
- Beveled housing prevents snagging

Performance

Electrical - Current Interrupting - Certified for current interrupting at full rated current, Electrical - Dielectric Voltage - Withstands 2,000V minimum, Environmental - Flammability - UL 94 HB or better, Environmental - IP Suitability - IP20, Environmental - Operating Temperatures - Maximum continuous 75°C minimum -40°C (w/o impact), Mechanical - Terminal Accommodation - #18-10 AWG. Standed copper wire only, Mechanical - Terminal Identification - Terminals identified in accordance with UL 498 and CSA

Specifications

Standards - RoHS Compliance	CM
Status	
Environmental Conditions	Ribbed Nylon Housing Is Impact and Chemical Resistant
EU RoHS Indicator	Contact Manufacturer
Nema Rating	6-15P
Industry Standard(s)	• CSA Certified to C22.2 No. 42 File 280 • NEMA® WD-6 Compliant • UL Listed to UL498 File E1706

Conductor

Number Of Wires	3-Wire
Wire Size	#18 AWG to #10 AWG
Number Of Poles	2-Pole

Current

Amperage Rating	15 A
Voltage Rating Description	250 V
Dielectric Strength	Withstands 2,000V minimum
Current Rating	15 A
Voltage Rating	250 V
Wattage	3750 W



A Hubbell brand

Current / Amperage Rating	15 A
---------------------------	------

Dimensions

Length	1.97 in
Weight	0.15 lb.
Height	1.53 in
Width	1.53 in
Dimensions	1.97 in x 1.53 in x 1.53 in

General

Color	Noir, blanc
Style	Standard
Series	Insulgrip®
Specifications	• Assembly Screws - Nickel plated steel • Blade Holder - Nylon • Blades - .060 in. (1.5) Brass • Housing/Cord Clamp - Nylon • Terminal Clamp - Nickel plated steel • Terminal Retainer - Clear Polycarbonate • Terminal Screws - #8-32 Brass , multiple drive
UPC	783585175607
Type	Plug
Item Type	Insulgrip Plug

Logistics

Pallet Quantity	6600
Carton Quantity	10

Operational

Operating Temperature	Maximum continuous 75°C and minimum -40°C without Impact
Horsepower - Maximum	1.5

Product Assets

- [Catalog \[English\]](#)
- [Catalog Page \[English\]](#)
- [Installation Manual \[French\]](#)