




TMCF03 Metallized Polyester Film Capacitor (MKT)

1. CAPACITANCE VALUE : $3.3 \text{ mfd}/400\text{V DC}$ $\pm 5\%$
2. TYPE : POLYESTER FILM (or) METALLIZED POLYESTER FILM
3. BREAK DOWN VOLTAGE : 600V DC (min)
4. PVC/XLP INSULATION CABLE, SHOULD WITHSTAND TEMPERATURE OF $+125^\circ\text{C}$
5. CONDUCTOR WIRE : MULTI STRAND
6. THE INSULATED CABLE SHOULD BE STRIPED AND NOT TO BE REMOVED
7. RESISTANCE VALUE : $3 \text{ WATT}/10 \text{ } \Omega$ $\pm 5\%$
8. LEAD FREE SOLDERING TO BE DONE
9. FORCE REQUIRED TO BREAK THE SOLDERING: 100N min
10. THE END OF THE STRIPPED WIRE TO BE TINNED



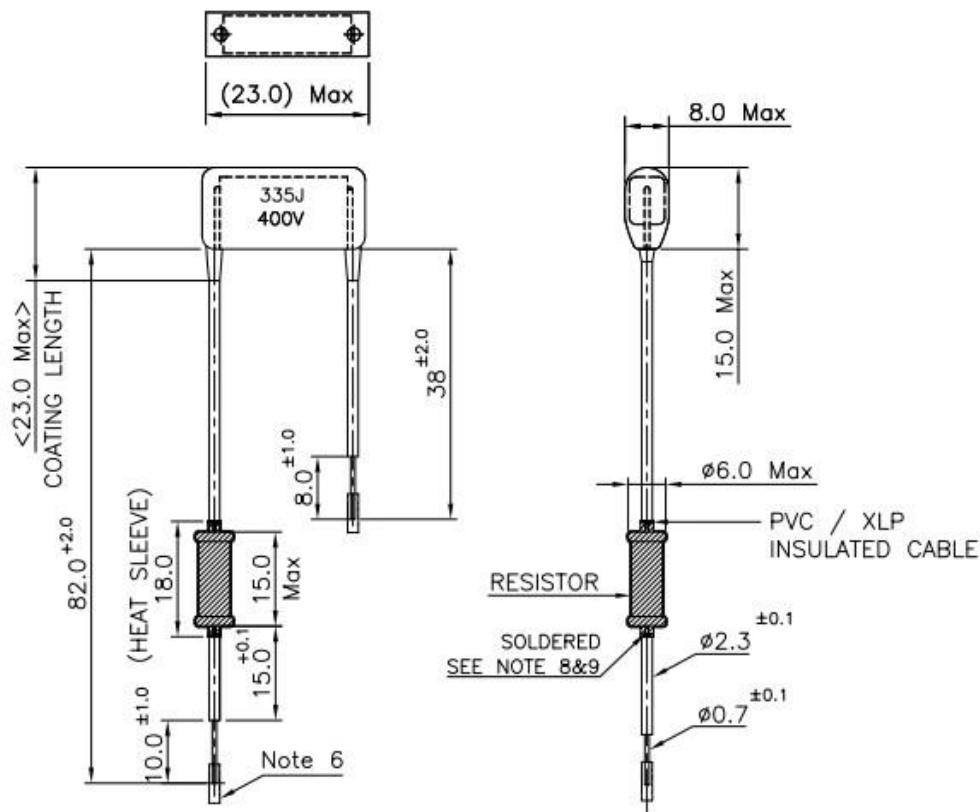

TMCF03 Metallized Polyester Film Capacitor (MKT)

