


121-A-111

Plug connector
Screw connection

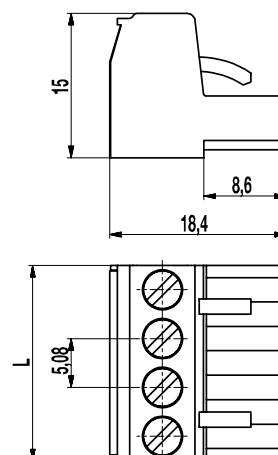

GENERAL INFORMATION


Pitch	5,08 mm
No. of poles	2 - 24
Usable with	all pin strips of series 121

TECHNICAL DATA

Clamping Range	solid / stranded / AWG		
	0,2 - 4 mm ² / 0,2 - 2,5 mm ² / 26 - 12 AWG		
Rated Cross Section	2,5 mm ²		
Wire Stripping Length	7 mm ± 0,5 mm		
Overvoltage Category	III	III	II
Pollution Severity Level	3	2	2
Rated Voltage	250 V	320 V	630 V
Rated Impulse Voltage	4 kV	4 kV	4 kV
Rated Insulation Voltage	250 V acc. to EN 60998-1		
Rated Current	12 A		
Torque	0,5 Nm		

APPROVALS

	Current [A]	Voltage [V]	Group	AWG	[Nm]
	15	300	B	26 - 12	0,51
	10	300	D	26 - 12	0,51
	15	300	B	26 - 12	0,51
	10	300	D, E	26 - 12	0,51
					



MATERIAL

Moulding	PA, grey, V-0
Comparative Tracking Index	CTI ≥ 600
Insulating Group	I
Temperature Range	-40°C up to 100°C
Terminal body	Nickel plated brass
Pressure clamp	Tin plated tin bronze
Screw	M3; zinc plated steel, blue passivated
Spring	Tin plated tin bronze

OPTIONS / ACCESSORIES

- Marking according to customer requirement
- Self-adhesive marking strip BST-5,08
- Pitch of 10,16 mm for larger clearance and creepage distances
- Coding elements 120-K
- Connectors equipped with coding elements on request
- Strain relief

CONFIGURATIONS

Poles	Item	Article number	Length (L)	Packaging	PU
2	121-A-111/02	10.808.102	10,16 mm	Box	200
3	121-A-111/03	10.808.103	15,24 mm	Box	200
4	121-A-111/04	10.808.104	20,32 mm	Box	100
5	121-A-111/05	10.808.105	25,40 mm	Box	100
6	121-A-111/06	10.808.106	30,48 mm	Box	100
7	121-A-111/07	10.808.107	35,56 mm	Box	50
8	121-A-111/08	10.808.108	40,64 mm	Box	50
9	121-A-111/09	10.808.109	45,72 mm	Box	50
10	121-A-111/10	10.808.110	50,80 mm	Box	50
11	121-A-111/11	10.808.111	55,88 mm	Box	50
12	121-A-111/12	10.808.112	60,96 mm	Box	50

further number of poles on request

