

## Han EE 46 Pos. Female Crimp Insert

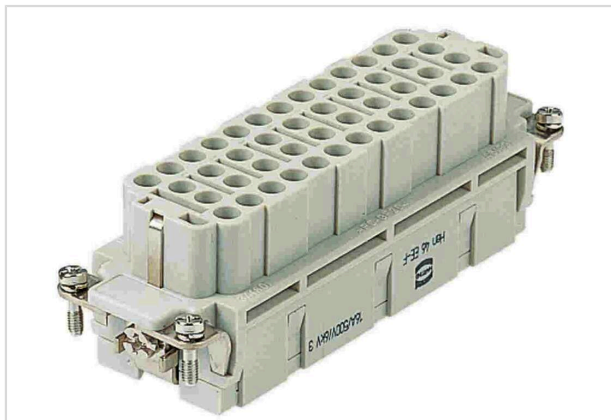


Image is for illustration purposes only. Please refer to product description.

|                    |   |
|--------------------|---|
| Part number        | 09 32 046 3101  |
| Specification      | Han EE 46 Pos. Female Crimp Insert  |
| HARTING eCatalogue | <a href="https://harting.com/09320463101">https://harting.com/09320463101</a> |

### Identification

|          |                     |
|----------|---------------------|
| Category | Inserts             |
| Series   | Han <sup>®</sup> EE |

### Version

|                    |   |
|--------------------|---|
| Termination method | Crimp termination                       |
| Gender             | Female                                  |
| Size               | 24 B                                    |
| Number of contacts | 46                                      |
| PE contact         | Yes                                     |
| Details            | Please order crimp contacts separately. |

### Technical characteristics

|                               |                            |
|-------------------------------|----------------------------|
| Conductor cross-section       | 0.14 ... 4 mm <sup>2</sup> |
| Conductor cross-section [AWG] | AWG 26 ... AWG 12          |
| Rated current                 | 16 A                       |
| Rated voltage                 | 500 V                      |
| Rated impulse voltage         | 6 kV                       |
| Pollution degree              | 3                          |
| Rated voltage acc. to UL      | 600 V                      |
| Rated voltage acc. to CSA     | 600 V                      |
| Insulation resistance         | >10 <sup>10</sup> Ω        |
| Limiting temperature          | -40 ... +125 °C            |



Pushing Performance  
Since 1945

## Technical characteristics

|               |      |
|---------------|------|
| Mating cycles | ≥500 |
|---------------|------|

## Material properties

|   |                              |
|---|------------------------------|
| Material (insert)                         | Polycarbonate (PC)           |
| Colour (insert)                           | RAL 7032 (pebble grey)       |
| Material flammability class acc. to UL 94 | V-0                          |
| RoHS                                      | compliant                    |
| ELV status                                | compliant                    |
| China RoHS                                | e                            |
| REACH Annex XVII substances               | Not contained                |
| REACH ANNEX XIV substances                | Not contained                |
| REACH SVHC substances                     | Not contained                |
| California Proposition 65 substances      | Yes                          |
| California Proposition 65 substances      | Lead<br>Nickel               |
| Fire protection on railway vehicles       | EN 45545-2 (2020-08)         |
| Requirement set with Hazard Levels        | R22 (HL 1-3)<br>R23 (HL 1-3) |

## Specifications and approvals

|                |   |
|----------------|---|
| Specifications | IEC 60664-1<br>IEC 61984  |
| UL / CSA       | UL 1977 ECBT2.E235076<br>UL 2237 PVVA2.E318390<br>CSA-C22.2 No. 182.3 PVVA8.E318390 |
| Approvals      | DNV GL  |

## Commercial data

|                                |   |
|--------------------------------|---|
| Packaging size                 | 1   |
| Net weight                     | 85 g  |
| Country of origin              | Romania   |
| European customs tariff number | 85366990  |
| GTIN                           | 5713140572164                                     |
| eCl@ss                         | 27440205 Contact insert for industrial connectors |