

2N2322 2N2326
 2N2323 2N2327
 2N2324 2N2328
 2N2325 2N2329

SILICON CONTROLLED RECTIFIER
1.6 AMPS, 25 THRU 400 VOLTS



TO-39 CASE

CentralTM
Semiconductor Corp.

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 2N2322 Series types are hermetically sealed Silicon Controlled Rectifiers designed for sensing circuit applications and control systems.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_C=25^\circ\text{C}$ unless otherwise noted)

		2N23								
	SYMBOL	22	23	24	25	26	27	28	29	UNITS
Peak Repetitive Forward Voltage	V_{DRM}	25	50	100	150	200	250	300	400	V
Peak Repetitive Reverse Voltage	V_{RRM}	25	50	100	150	200	250	300	400	V
Non-Repetitive Peak Reverse Voltage	V_{RSM}	40	75	150	225	300	350	400	500	V
RMS On-State Current	$I_T(RMS)$				1.6					A
Average On-State Current ($T_C=85^\circ\text{C}$)	$I_T(AV)$				1.0					A
Peak One Cycle Surge ($t=8.3\text{ms}$)	I_{TSM}				15					A
Peak Gate Power	P_{GM}				0.10					W
Average Gate Power	$P_{G(AV)}$				0.01					W
Peak Gate Current	I_{GM}				0.10					A
Peak Gate Voltage	V_{GM}				6.0					V
Junction Temperature	T_J				-65 to +125					$^\circ\text{C}$
Storage Temperature	T_{stg}				-65 to +150					$^\circ\text{C}$


ELECTRICAL CHARACTERISTICS: ($T_C=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I_{DRM}, I_{RRM}	Rated $V_{DRM}, V_{RRM}, R_{GK}=1.0\text{k}\Omega$		5.0	μA
I_{GT}	$V_D=6.0\text{V}, R_L=100\Omega$		200	μA
I_H	$V_D=6.0\text{V}, R_{GK}=1.0\text{k}\Omega$		2.0	mA
V_{GT}	$V_D=6.0\text{V}, R_L=100\Omega$		0.8	V
V_{TM}	$I_{TM}=1.0\text{A}, t_p=380\mu\text{s}$		1.5	V

R0 (11-December 2008)

SILICON CONTROLLED RECTIFIER
1.6 AMPS, 25 THRU 400 VOLTS

TO-39 CASE - MECHANICAL OUTLINE

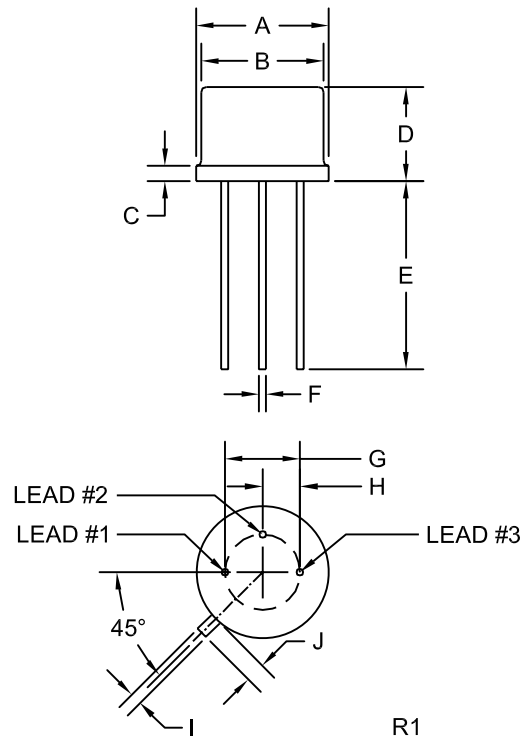

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.335	0.370	8.51	9.40
B (DIA)	0.315	0.335	8.00	8.51
C	-	0.040	-	1.02
D	0.240	0.260	6.10	6.60
E	0.500	-	12.70	-
F (DIA)	0.016	0.021	0.41	0.53
G (DIA)	0.200		5.08	
H	0.100		2.54	
I	0.028	0.034	0.71	0.86
J	0.029	0.045	0.74	1.14

TO-39 (REV: R1)

LEAD CODE:

- 1) CATHODE
- 2) GATE
- 3) ANODE (case)

MARKING: FULL PART NUMBER

R0 (11-December 2008)