SIEMENS

Data sheet 3VA5110-4ED36-0HC0



circuit breaker 3VA5 UL Frame 125 breaking capacity class S 25 kA @ 480 V 3-pole, line protection TM210, FTFM, In=100 A overload protection Ir=100 A permanently set short-circuit protection Ii=10 x In cable connection on two sides shunt trip left 24 V AC 50/60 Hz/24-30 V DC 2 auxiliary switches HQ

Model	
product brand name	SENTRON
product designation	Molded-case circuit breaker
design of the product	System protection
Net Weight	1.171 kg

Approvals / Certificates

General Product Approval

CCC CCC Confirmation UL UL VDE


General Product Approval	EMV	Marine / Shipping		
Miscellaneous	RCM	ABS	BUREAU VERITAS	DNV

Marine / Shipping	other			Environment
LRS RMRS	Confirmation	Miscellaneous	Miscellaneous	Environmental Confirmations

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA5110-4ED36-0HC0
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3VA5110-4ED36-0HC0
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA5110-4ED36-0HC0
CAx-Online-Generator
http://www.siemens.com/cax
Tender specifications
http://www.siemens.com/specifications

Subject to change without notice
© Copyright Siemens

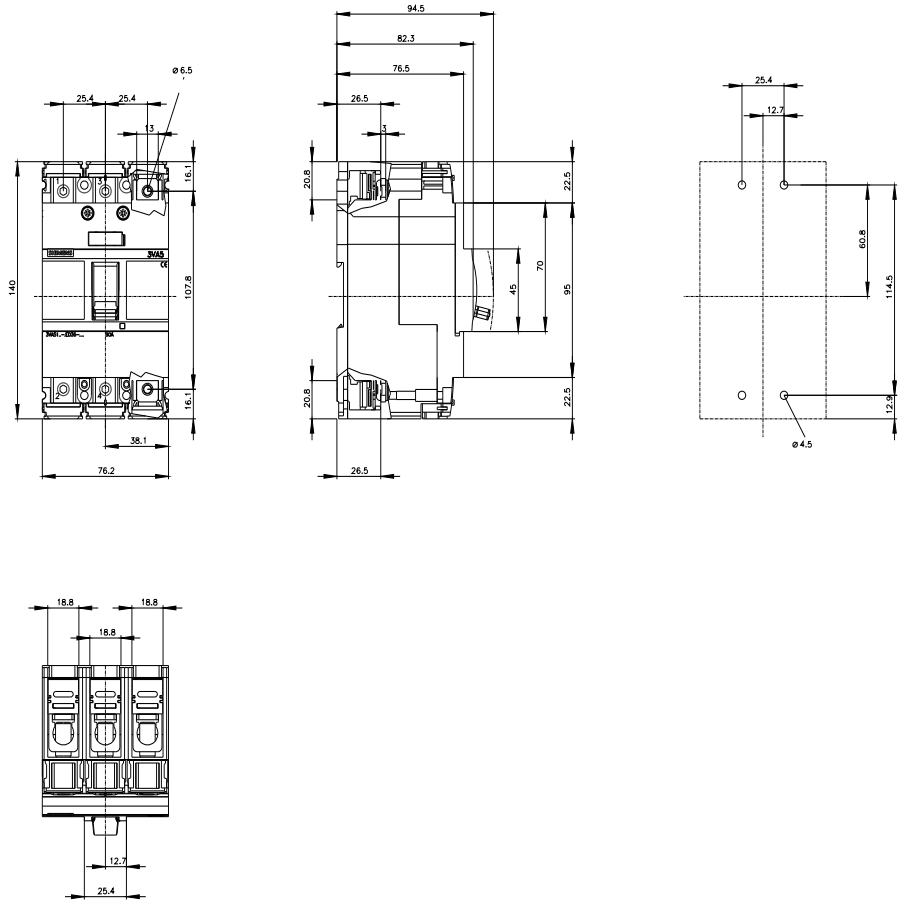

last modified: 3/11/2024

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens