

DT04-08PA-P026 ✓ ACTIVE




DEUTSCH | DEUTSCH DT

TE Internal #: DT04-08PA-P026

8 Position Housing, Housing for Female Terminals, Bus Bar-to-Wire, 9.09 mm [.358 in] Centerline, Sealable, Gray, Bus Bar / Wire & Cable, DEUTSCH DT

[View on TE.com >](#)

Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DT Receptacle Connectors

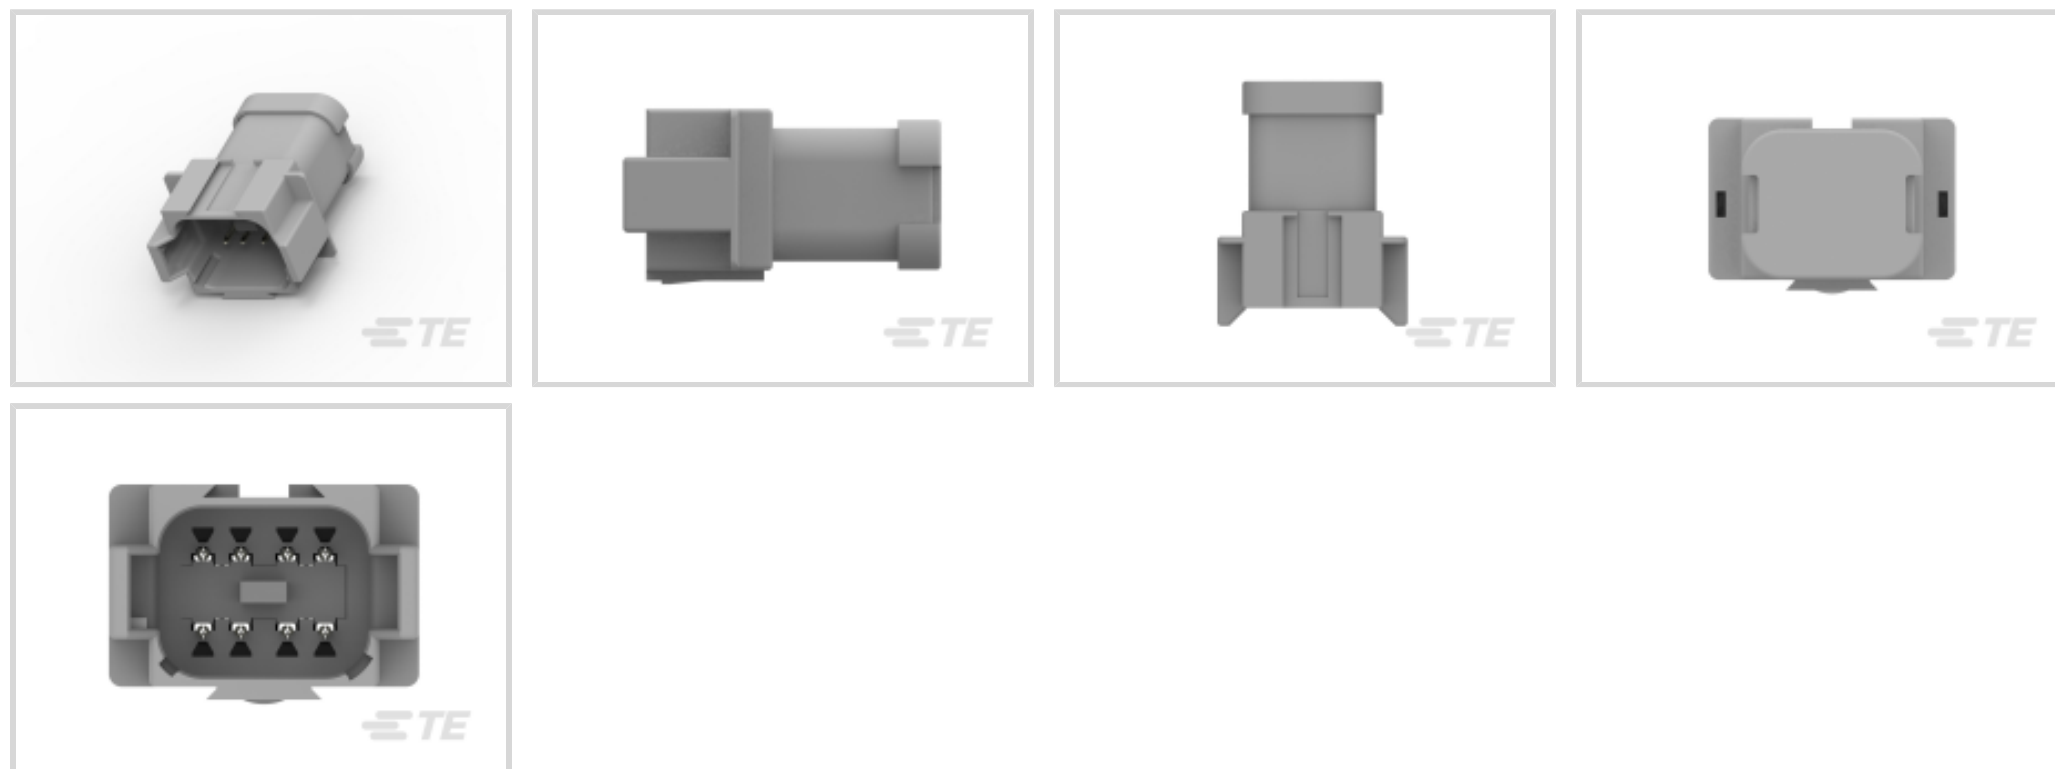

Number of Positions: 8

Connector & Housing Type: **Housing for Female Terminals**

Mating Pin Diameter: 1.57 mm [.062 in]

Connector System: **Bus Bar-to-Wire**

Centerline (Pitch): 9.09 mm [.358 in]

[All DEUTSCH DT Receptacle Connectors \(231\)](#)

Features

Industry Standards

IP Rating	IP6K9K, IP68
Compatible With Agency/Standards Products	SAE J2030
UL Flammability Rating	Not tested

Dimensions

Row-to-Row Spacing	4.45 mm[.175 in]
Product Width	36.45 mm[1.435 in]
Product Length	46.94 mm[1.848 in]
Connector Height	23.88 mm[.94 in]

Packaging Features

Packaging Quantity	300
Packaging Method	Box

Mechanical Attachment



Strain Relief	Add By Accessory
Terminal Position Assurance	Yes
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Bus Bar Mount

Other

Serviceable	Yes
Connector Position Assurance Capable	No
EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Electrical Characteristics

Operating Voltage	250 VDC
Nominal Voltage Architecture	250 V

Body Features

Cable Exit Angle	180°
Primary Product Color	Gray
Connector & Keying Code	A

Housing Features

Housing Material	PA GF
Centerline (Pitch)	9.09 mm [.358 in]

Contact Features

Contact Size	Size 16
Contact Type	Receptacle
Mating Pin Diameter	1.57 mm [.062 in]
Contact Current Rating (Max)	13 A

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Bus Bar-to-Wire
Sealable	Yes
Primary Locking Feature	Integrated in Housing



Connector & Contact Terminates To	Wire & Cable, Bus Bar
-----------------------------------	-----------------------

Configuration Features

Blank Cavity Position	0
Connector Modification	(2) 4 Pin Busses
Number of Positions	8
Number of Rows	2

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts

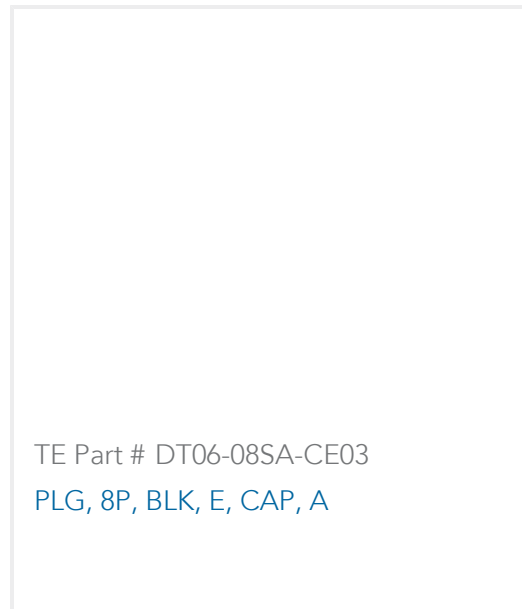

TE Part # DT06-08SA-CE03
PLG, 8P, BLK, E, CAP, A

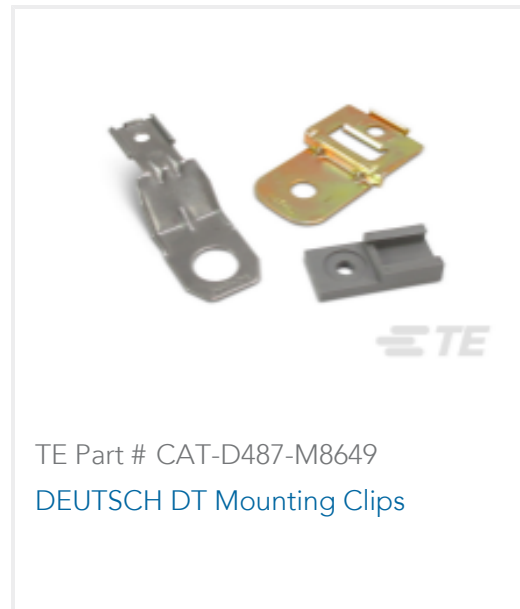


TE Part # CAT-D487-M8649
DEUTSCH DT Mounting Clips



TE Part # CAT-J41-DDPC
DEUTSCH DT Plug Connectors

Also in the Series | DEUTSCH DT

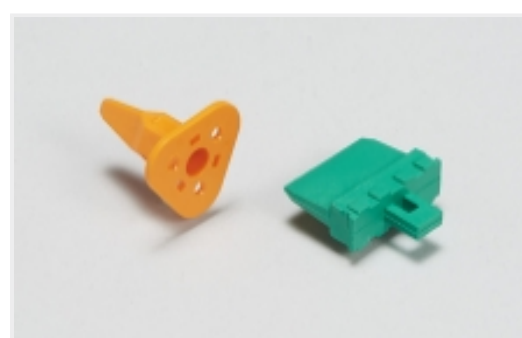

Automotive Connector Locks & Position Assurance(90)



Automotive Headers(107)



Automotive Housings(737)



Connector Caps & Covers(1)



Connector Strain Relief(31)




Insertion & Extraction Tools(3)



Other Automotive Connector Accessories(28)




Rectangular Backshells & Clamps(3)

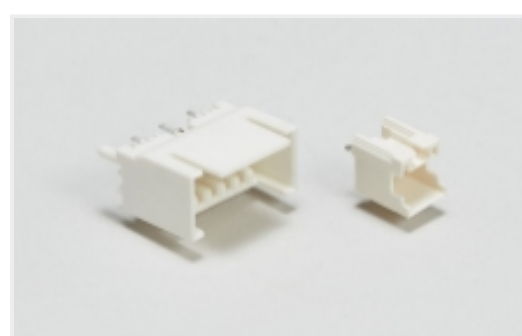

Wire-to-Board Headers & Receptacles
(106)

Customers Also Bought

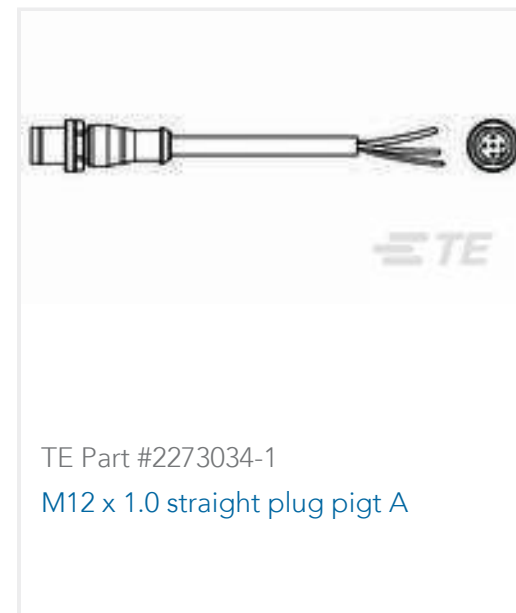

Documents

Product Drawings

[REC, 8P, GRY, BUSBAR 2X4, NICKEL, A](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_DT04-08PA-P026_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_DT04-08PA-P026_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_DT04-08PA-P026_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[TERMINALS AND CONNECTORS](#)

English

[ICT Terminals and Connectors Catalogue](#)

English

[CONNECTOR SELECTOR](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL Report](#)

English