

## Precision Surface Mount Resistors Wirewound Technology




### FEATURES

- According to EN 140402-801 (wirewound)
- Wide range of ohmic values (0.04  $\Omega$  to 13 k $\Omega$ )
- Low temperature coefficient ( $\pm 25$  ppm/ $^{\circ}\text{C}$  available)
- Good electrical insulation
- All welded construction and molded encapsulant
- High power ratings (up to 2.5 W)
- Stability class 0.5
- Pure matte tin termination
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)


**RoHS**  
COMPLIANT

Specially designed for surface mounting, the MSP series uses wirewound technology. The molded package ensures mechanical and climatic protection as well as high dielectric insulation. The MSP design is compatible with surface mounting equipment and can withstand wave and reflow soldering techniques.

### DIMENSIONS in millimeters

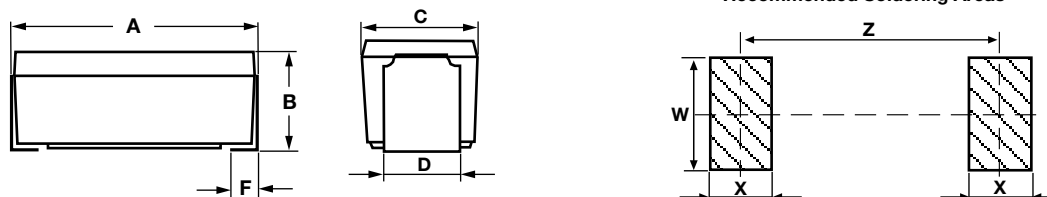

| SERIES | A    | B   | C   | D   | F   | W   | X   | Z    | WEIGHT in g |
|--------|------|-----|-----|-----|-----|-----|-----|------|-------------|
| MSP 1  | 6.8  | 3.9 | 3.8 | 2.5 | 1.4 | 2.7 | 2.9 | 6    | 0.2         |
| MSP 2  | 11.4 | 5   | 7   | 5   | 2.2 | 5.2 | 4.1 | 9.4  | 0.8         |
| MSP 3  | 14.6 | 6.6 | 7   | 5   | 2.3 | 5.2 | 4.1 | 12.7 | 1.5         |

#### Note

- General tolerance:  $\pm 0.2$  mm

### STANDARD ELECTRICAL SPECIFICATIONS

| MODEL   | RESISTANCE RANGE<br>$\Omega$ | RATED POWER<br>$P_{25^{\circ}\text{C}}$<br>W | LIMITING ELEMENT VOLTAGE<br>V | TOLERANCE<br>$\pm \%$ | TEMPERATURE COEFFICIENT<br>$\pm$ ppm/ $^{\circ}\text{C}$ |
|---------|------------------------------|----------------------------------------------|-------------------------------|-----------------------|----------------------------------------------------------|
| MSP 1 B | 0.04 to 2.2K                 | 1                                            | 50                            | 0.5, 1, 2, 5          | 25, 50, 100                                              |
| MSP 2 B | 0.04 to 4.7K                 | 2                                            | 120                           | 0.5, 1, 2, 5          | 25, 50, 100                                              |
| MSP 3 B | 0.04 to 13K                  | 2.5                                          | 200                           | 0.5, 1, 2, 5          | 25, 50, 100                                              |

**TECHNICAL SPECIFICATIONS**

| RESISTIVE TECHNOLOGY                                                     |                    | Wirewound                                                                                                                               |                           |                                |
|--------------------------------------------------------------------------|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------|---------------------------|--------------------------------|
| Vishay Sfernice Series                                                   |                    | MSP 1 B                                                                                                                                 | MSP 2 B                   | MSP 3 B                        |
| Metric Size                                                              |                    | 0704M                                                                                                                                   | 1107M                     | 1607M                          |
| Rated Dissipation at +25 °C, $P_{25}$                                    |                    | 1 W                                                                                                                                     | 2 W                       | 2.5 W                          |
| Ohmic Range in Relation to Tolerance (with Preferred Ohmic Value Series) | ± 5 % E24 Series   | 0.04 to 2.2K                                                                                                                            | 0.04 to 4.7K              | 0.04 to 13K                    |
|                                                                          | ± 2 % E48 Series   | 0.1 to 2.2K                                                                                                                             | 0.04 to 4.7K              | 0.05 to 13K                    |
|                                                                          | ± 1 % E96 Series   | 0.1 to 2.2K                                                                                                                             | 0.04 to 4.7K              | 0.05 to 13K                    |
|                                                                          | ± 0.5 % E96 Series | 1.4 to 2.2K                                                                                                                             | 0.4 to 4.7K               | 0.3 to 13K                     |
| Limiting Element Voltage, $U_{max}$ . AC/DC                              |                    | 50 V                                                                                                                                    | 120 V                     | 200 V                          |
| Series                                                                   |                    | MSP 1 B                                                                                                                                 | MSP 2 B                   | MSP 3 B                        |
| Critical Resistance                                                      |                    | -                                                                                                                                       | -                         | -                              |
| Temperature Coefficient                                                  |                    | CECC 40402-801<br>-55 °C / +200 °C<br>< 1 $\Omega$ ± 100 ppm/°C<br>1 $\Omega$ to < 10 $\Omega$ ± 50 ppm/°C<br>≥ 10 $\Omega$ ± 25 ppm/°C |                           |                                |
| Failure Rate                                                             |                    | E6<br>10 <sup>-6</sup> /h                                                                                                               | E6<br>10 <sup>-6</sup> /h | E0 or A<br>10 <sup>-4</sup> /h |

**MECHANICAL SPECIFICATIONS**



| RESISTIVE TECHNOLOGY | Wirewound                   |
|----------------------|-----------------------------|
| Encapsulant          | Thermoset                   |
| Resistive Element    | CuNi or NiCr                |
| Ceramic Substrate    | Alumina or Steatite         |
| Termination          | Electrolytic pure matte tin |

**ENVIRONMENTAL SPECIFICATIONS**

| RESISTIVE TECHNOLOGY             | Wirewound        |
|----------------------------------|------------------|
| Temperature Range                | -55 °C to 275 °C |
| Climatic Category (LCT/UCT/days) | 55/200/56        |



| <b>PERFORMANCE</b>           |                                                                                                 |                                                                 |
|------------------------------|-------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|
| <b>TESTS</b>                 | <b>CONDITIONS</b><br><b>Wirewound</b>                                                           | <b>REQUIREMENTS</b><br><b>Wirewound</b><br><b>EN 140402-801</b> |
| Short Time Overload          | IEC 60115-1<br>$5 P_r$ or $U = 2 U_{max}/5$ s                                                   | $\pm (0.25 \% + 0.05 \Omega)$                                   |
| Load Life                    | IEC 60115-1<br>90'/30' cycles<br>1000 h $P_r$ + 25 °C<br>8000 h $P_r$                           | $\pm (0.5 \% + 0.05 \Omega)$<br>$\pm (3 \% + 0.05 \Omega)$      |
| Dielectric w/s Voltage       | IEC 60115-1<br>$U_{RMS} = 500$ V/60 s                                                           | No flashover or breakdown<br>Leakage current < 10 $\mu$ A       |
| Rapid Change of Temperature  | IEC 60115-1<br>IEC 60068-2-14 Test Na<br>5 cycles (30' at LCT/30' at UCT)<br>-55 °C / +200 °C   | $\pm (0.25 \% + 0.05 \Omega)$                                   |
| Climatic Sequence            | IEC 60115-1<br>-55 °C / +200 °C                                                                 | $\pm (0.5 \% + 0.05 \Omega)$                                    |
| Humidity (Steady State)      | IEC 60115-1<br>IEC 60068-2-3 Test Ca<br>95 % HR/40 °C<br>56 days                                | $\pm (0.5 \% + 0.05 \Omega)$                                    |
| Substrate Bending Test       | IEC 60115-1<br>IEC 60068-2-21 Test $U_{e3}$<br>2 mm/10 times                                    | $\pm (0.25 \% + 0.05 \Omega)$                                   |
| Shock                        | IEC 60115-1<br>IEC 60068-2-27 Test Ea<br>50 g's/half sine/3 times by direction (i.e. 18 shocks) | $\pm (0.25 \% + 0.05 \Omega)$                                   |
| Vibration                    | IEC 60115-1<br>IEC 60068-2-6 Test Fc<br>10 Hz/2000 Hz                                           | $\pm (0.25 \% + 0.05 \Omega)$                                   |
| Resistance to Soldering Heat | IEC 60115-1<br>IEC 60068-2-58 Solder Bath<br>260 °C/10 s                                        | $\pm (0.5 \% + 0.05 \Omega)$                                    |

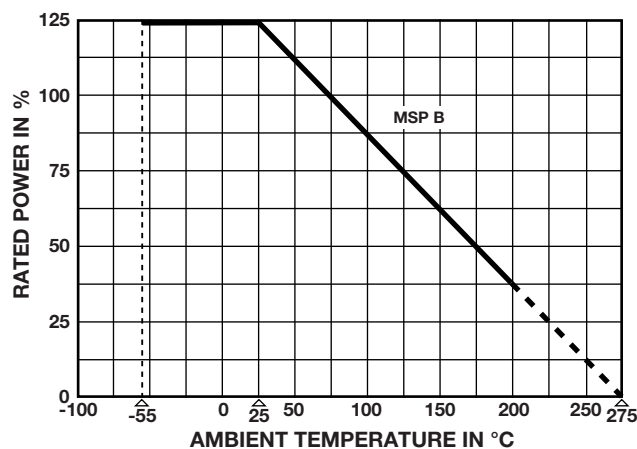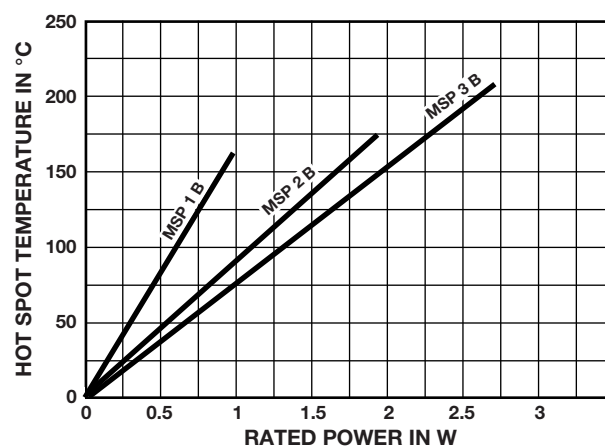**POWER RATING****TEMPERATURE RISE****SURFACE MOUNTING OF MSP B**

Soldering cycle: 2 min at 215 °C or 10 s at 260 °C or with an iron 40 W: 3 s at 350 °C.

Soldering is possible by wave, reflow and vapor phase.

**NON INDUCTIVE WINDING FOR MSP B**

Non-inductive (Ayrton Perry) winding available.

Please consult Vishay Sfernice.

## PACKAGING

In bulk (plastic bag of 100 units or multiples)


In tube: MSP1 70 units per tube

MSP2 50 units per tube

MSP3 40 units per tube

In reel of 500 units for MSP1 and MSP2

## DIMENSIONS in millimeters - Informative Data

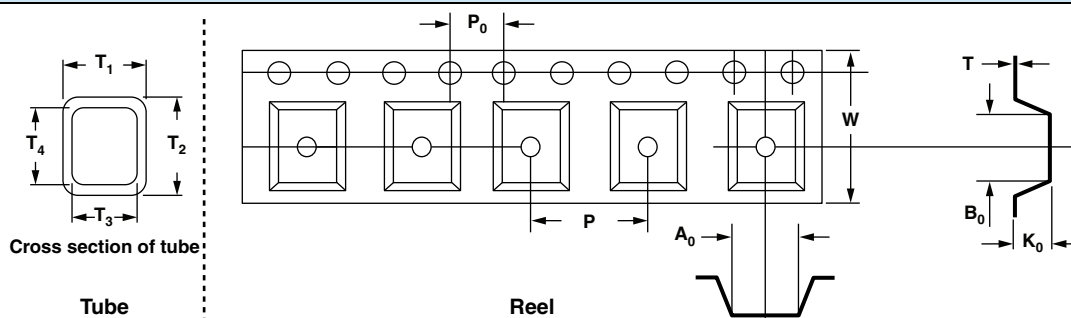

|              | TUBE PACKAGING |     |     |     |        | REEL PACKAGING |       |      |    |    |       |    |
|--------------|----------------|-----|-----|-----|--------|----------------|-------|------|----|----|-------|----|
|              | T1             | T2  | T3  | T4  | LENGTH | A0             | B0    | K0   | P0 | W  | T     | P  |
| <b>MSP 1</b> | 6.6            | 6.8 | 4.6 | 4.8 | 530    | 3.9            | 7.35  | 4.25 | 4  | 12 | 0.254 | 8  |
| <b>MSP 2</b> | 9.2            | 8.7 | 8   | 7.5 | 615    | 7.43           | 11.91 | 5.36 | 4  | 24 | 0.368 | 12 |
| <b>MSP 3</b> |                |     |     |     |        | n/a            |       |      |    |    |       |    |

## MARKING

Vishay Sfernice trademark, ohmic value (in  $\Omega$ ), tolerance (in %), series and style, technology, manufacturing date.

## ORDERING INFORMATION

| MSP    | 1     | B            |                       | 48U7        | ± 1 %     | TC                                | BA100     | e3             |
|--------|-------|--------------|-----------------------|-------------|-----------|-----------------------------------|-----------|----------------|
| SERIES | STYLE | TECHNOLOGY   | NON INDUCTIVE WINDING | OHMIC VALUE | TOLERANCE | Applicable only in "C" technology | PACKAGING | LEAD (Pb)-FREE |
|        |       | B: wirewound | Optional              |             |           |                                   |           |                |

## SAP PART NUMBERING GUIDELINES

|                 |                                                   |                                        |                                                                                                                                                                                                                                                         |   |   |                                                        |   |                                                                                                                                                |   |   |                  |   |                  |   |   |   |
|-----------------|---------------------------------------------------|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---|--------------------------------------------------------|---|------------------------------------------------------------------------------------------------------------------------------------------------|---|---|------------------|---|------------------|---|---|---|
| M               | S                                                 | P                                      |                                                                                                                                                                                                                                                         | 1 | B | 4                                                      | 8 | R                                                                                                                                              | 7 | 0 | F                | T | 2                | 0 | E | 3 |
| GLOBAL<br>MODEL | OPTION                                            | SIZE                                   | OHMIC VALUE                                                                                                                                                                                                                                             |   |   | TOL.                                                   |   | PACKAGING                                                                                                                                      |   |   | SPECIAL          |   | RoHS             |   |   |   |
| MSP             | Blank<br>or<br>N<br>(non<br>inductive<br>winding) | 1B<br>2B<br>3B<br><br>B =<br>wirewound | The first four digits are<br>significant figures and the<br>last digit specifies the<br>number of zeros to follow.<br>R designates decimal point.<br>48R70 = 48.7 Ω<br>48701 = 48 700 Ω<br>10002 = 100 000 Ω<br>R0100 = 0.01 Ω<br>R4700 = 0.47 Ω<br>... |   |   | B = 0.1 %<br>F = 1 %<br>G = 2 %<br>J = 5 %<br>K = 10 % |   | S14 = bag<br>(100 pieces)<br>R10 = reel<br>(500 pieces)<br>T25 = tube<br>(70 pieces)<br>T17 = tube<br>(40 pieces)<br>T20 = tube<br>(50 pieces) |   |   | As<br>applicable |   | E3 =<br>pure tin |   |   |   |



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.