

## PP-V14-CC-IDC-RJ45-8P-P-M-STR-SHLD

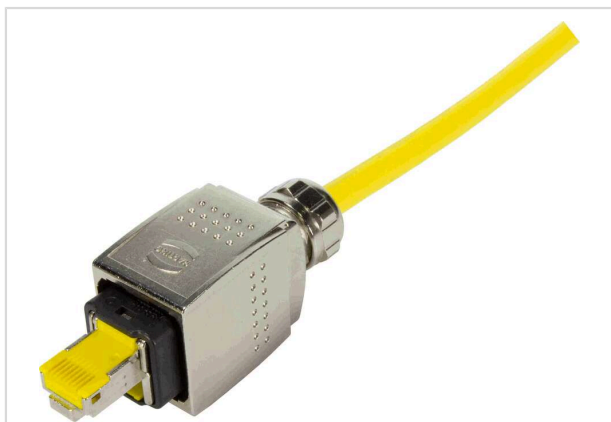


Image is for illustration purposes only. Please refer to product description.

Part number	09 35 220 0401
Specification	PP-V14-CC-IDC-RJ45-8P-P-M-STR-SHLD
HARTING eCatalogue	<a href="https://b2b.harting.com/09352200401">https://b2b.harting.com/09352200401</a>

### Identification

Category	Connectors
Series	Han <sup>®</sup> PushPull (V14)
Element	Connector
Specification	AIDA compliant PROFINET Multi Feature RJ45 Straight
Features	Suitable for all PoE versions

### Version

Termination method	IDC termination
Shielding	Fully shielded, 360° shielding contact
Number of contacts	8
Coding	RJ45

### Technical characteristics

Conductor cross-section	0.12 ... 0.32 mm <sup>2</sup> Stranded 0.12 ... 0.32 mm <sup>2</sup> Solid
Conductor cross-section [AWG]	AWG 26/7 ... AWG 22/7 Stranded AWG 24/1 ... AWG 22/1 Solid
Wire outer diameter	0.8 ... 1.6 mm
Transmission characteristics	Cat. 6 <sub>A</sub> Class E <sub>A</sub> up to 500 MHz



Pushing Performance  
 Since 1945

## Technical characteristics

Data rate	10 Mbit/s
	100 Mbit/s
	1 Gbit/s
	2.5 Gbit/s
	5 Gbit/s
	10 Gbit/s
Limiting temperature	-40 ... +85 °C
Mating cycles	≥750
Degree of protection acc. to IEC 60529	IP65
	IP67
Cable diameter	6.5 ... 9.5 mm
Vibration resistance	10-500 Hz, 0.35 mm / 50 m/s <sup>2</sup> , 2h/axis
	5.72 m/s <sup>2</sup> acc. to IEC 61373 Category 1 Class B
Shock resistance	50 g / 30 ms, 3 shocks / axis and direction acc. to IEC 61373 Category 1 Class B

## Material properties

Surface (contacts)	Au over Ni Mating side
	Sn over Ni Termination side
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Nickel plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Not contained

## Specifications and approvals

Specifications	IEC 60603-7 Mating face
	ISO/IEC 11801
	EN 50173-1
	IEC 61076-3-117 Variant 14
UL / CSA	UL 1977 ECBT2.E102079
	CSA-C22.2 No. 182.3 ECBT8.E102079
Approvals	DNV GL



**Pushing Performance**  
Since 1945

## Specifications and approvals

PROFINET	Yes
----------	-----

---

## Commercial data

Packaging size	1
Net weight	89 g
Country of origin	Latvia
European customs tariff number	85366990
GTIN	5713140224278
ETIM	EC002636
eCl@ss	27440114 Rectangular connector (for field assembly)