

**Mallory Sonalert Products, Inc.**

Part #:

**JR28-R-4MCM115****Sales Outline Drawing**

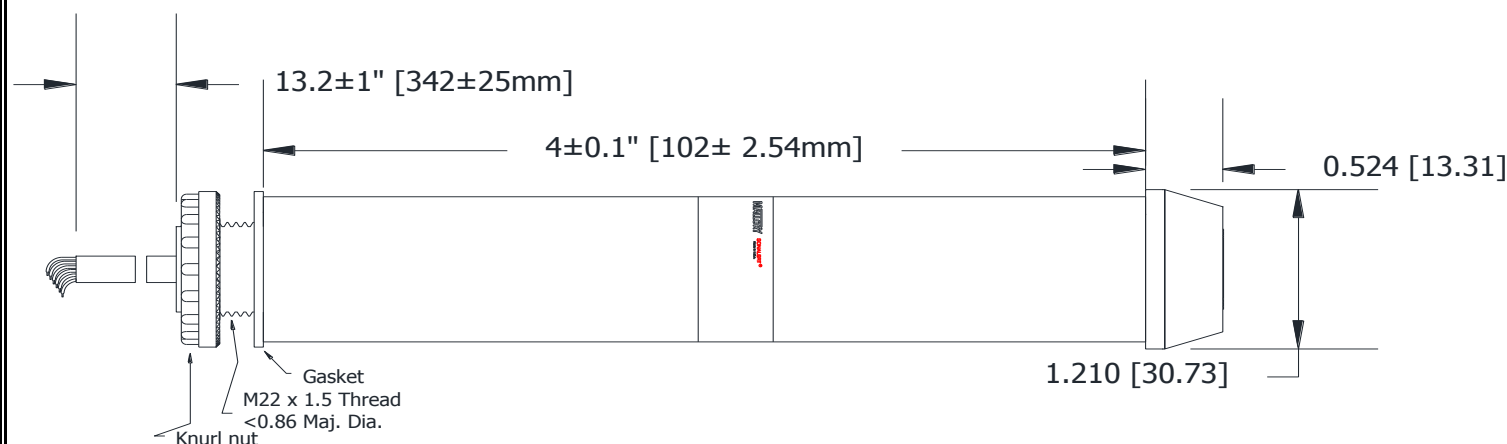
Revision:

**A****Specifications:**

|                        |                                                                             |
|------------------------|-----------------------------------------------------------------------------|
| Sound Level Category   | Medium                                                                      |
| Mode of Operation      | Chime Sound @ 3 Seconds for 15 Seconds, then 0.1s beep @ 1 PPS until reset. |
| Voltage Rating         | 20 to 28 VAC/DC                                                             |
| Frequency              | 3900 ± 500 Hz                                                               |
| Loudness @ 1M          | 70 to 75 dB(A) Typ.                                                         |
| Sound Current Draw     | 40mA MAX                                                                    |
| LED Color              | RED                                                                         |
| LED Current Draw       | 60mA MAX                                                                    |
| Total Max Current Draw | 100mA MAX                                                                   |
| Housing Material       | 6/6 Nylon, Color: Black                                                     |
| Top Cap Material       | 6/6 Nylon, Color: Opaque White                                              |
| Storage Temperature    | -40° to +70° C                                                              |
| Operating Temperature  | -30° to +60° C                                                              |
| Mounting               | Recommended hole size is 22.5 mm.                                           |
| Knurled Nut            | The max recommended torque is 10 in-lbs.                                    |
| Cable                  | Gray, UL Style 21894, 300V, 105°C, 24AWG, Pb-Free Tinned Leads              |
| Weight (Typical)       | 105 grams                                                                   |
| NEMA 12                | Approved with use of included gasket.                                       |
| Options                | Please contact factory.                                                     |

**Dimensions:**

Inches (mm)

**cUL Recognized****ROHS Compliant****Connections:**

SOUND BLACK wire and ORANGE wire to Power  
TOP BROWN wire and RED wire to Power