

# MOSFET – Power, Single, N-Channel with ESD Protection, SOT-723 20 V, 890 mA

## NTK3134N

### Features

- N-Channel Switch with Low  $R_{DS(on)}$
- 44% Smaller Footprint and 38% Thinner than SC89
- Low Threshold Levels Allowing 1.5 V  $R_{DS(on)}$  Rating
- Operated at Low Logic Level Gate Drive
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

### Applications

- Load/Power Switching
- Interface Switching
- Logic Level Shift
- Battery Management for Ultra Small Portable Electronics

### MAXIMUM RATINGS ( $T_J = 25^\circ\text{C}$ unless otherwise stated)



| Parameter                                                         |                        |                          | Symbol         | Value      | Unit             |
|-------------------------------------------------------------------|------------------------|--------------------------|----------------|------------|------------------|
| Drain-to-Source Voltage                                           |                        |                          | $V_{DS}$       | 20         | V                |
| Gate-to-Source Voltage                                            |                        |                          | $V_{GS}$       | $\pm 8$    | V                |
| Continuous Drain Current (Note 1)                                 | Steady State           | $T_A = 25^\circ\text{C}$ | $I_D$          | 890        | mA               |
|                                                                   |                        | $T_A = 85^\circ\text{C}$ |                | 640        |                  |
|                                                                   | $t \leq 5 \text{ s}$   | $T_A = 25^\circ\text{C}$ |                | 990        |                  |
| Power Dissipation (Note 1)                                        | Steady State           | $T_A = 25^\circ\text{C}$ | $P_D$          | 450        | mW               |
|                                                                   | $t \leq 5 \text{ s}$   | $T_A = 25^\circ\text{C}$ |                | 550        |                  |
| Continuous Drain Current (Note 2)                                 | Steady State           | $T_A = 25^\circ\text{C}$ | $I_D$          | 750        | mA               |
|                                                                   |                        | $T_A = 85^\circ\text{C}$ |                | 540        |                  |
| Power Dissipation (Note 2)                                        |                        | $T_A = 25^\circ\text{C}$ | $P_D$          | 310        | mW               |
| Pulsed Drain Current                                              | $t_p = 10 \mu\text{s}$ |                          | $I_{DM}$       | 1.8        | A                |
| Operating Junction and Storage Temperature                        |                        |                          | $T_J, T_{STG}$ | -55 to 150 | $^\circ\text{C}$ |
| Lead Temperature for Soldering Purposes (1/8" from case for 10 s) |                        |                          | $T_L$          | 260        | $^\circ\text{C}$ |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Surface mounted on FR4 board using 1 in sq pad size (Cu area = 1.127 in sq [1 oz] including traces)
2. Surface mounted on FR4 board using the minimum recommended pad size


| $V_{(BR)DSS}$ | $R_{DS(on)}$ TYP      | $I_D$ Max |
|---------------|-----------------------|-----------|
| 20 V          | 0.20 $\Omega$ @ 4.5 V | 890 mA    |
|               | 0.26 $\Omega$ @ 2.5 V | 790 mA    |
|               | 0.43 $\Omega$ @ 1.8 V | 700 mA    |
|               | 0.56 $\Omega$ @ 1.5 V | 200 mA    |

### SOT-723 (3-LEAD)

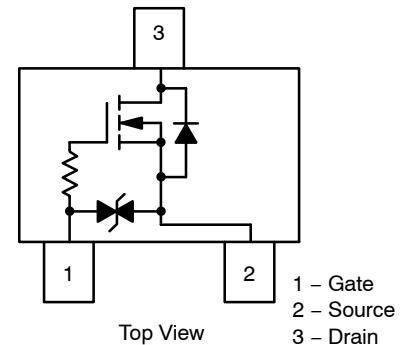

SOT-723  
CASE 631AA  
STYLE 5

### MARKING DIAGRAM



KF = Specific Device Code  
M = Date Code

### ORDERING INFORMATION

| Device      | Package            | Shipping <sup>†</sup> |
|-------------|--------------------|-----------------------|
| NTK3134NT1G | SOT-723<br>Pb-Free | 4000 / Tape & Reel    |
| NTK3134NT1H |                    | 4000 / Tape & Reel    |
| NTK3134NT5G |                    | 8000 / Tape & Reel    |
| NTK3134NT3G |                    | 40000 / Tape & Reel   |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

# THERMAL RESISTANCE RATINGS

| Parameter                                               | Symbol          | Max | Unit |
|---------------------------------------------------------|-----------------|-----|------|
| Junction-to-Ambient – Steady State (Note 3)             | $R_{\theta JA}$ | 280 | °C/W |
| Junction-to-Ambient – $t = 5$ s (Note 3)                | $R_{\theta JA}$ | 228 |      |
| Junction-to-Ambient – Steady State Minimum Pad (Note 4) | $R_{\theta JA}$ | 400 |      |

3. Surface mounted on FR4 board using 1 in sq pad size (Cu area = 1.127 in sq [1 oz] including traces)  
4. Surface mounted on FR4 board using the minimum recommended pad size

# MOSFET ELECTRICAL CHARACTERISTICS ( $T_J = 25^\circ\text{C}$ unless otherwise specified)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-----------|--------|----------------|-----|-----|-----|------|
|-----------|--------|----------------|-----|-----|-----|------|

## OFF CHARACTERISTICS

|                                                           |                   |                                                                  |                           |    |           |               |
|-----------------------------------------------------------|-------------------|------------------------------------------------------------------|---------------------------|----|-----------|---------------|
| Drain-to-Source Breakdown Voltage                         | $V_{(BR)DSS}$     | $V_{GS} = 0\text{ V}, I_D = 250\text{ }\mu\text{A}$              | 20                        |    |           | V             |
| Drain-to-Source Breakdown Voltage Temperature Coefficient | $V_{(BR)DSS}/T_J$ | $I_D = 250\text{ }\mu\text{A}$ , Reference to $25^\circ\text{C}$ |                           | 18 |           | mV/°C         |
| Zero Gate Voltage Drain Current                           | $I_{DSS}$         | $V_{GS} = 0\text{ V}, V_{DS} = 16\text{ V}$                      | $T_J = 25^\circ\text{C}$  |    | 1.0       | $\mu\text{A}$ |
|                                                           |                   |                                                                  | $T_J = 125^\circ\text{C}$ |    | 2.0       |               |
| Gate-to-Source Leakage Current                            | $I_{GSS}$         | $V_{DS} = 0\text{ V}, V_{GS} = \pm 4.5\text{ V}$                 |                           |    | $\pm 0.5$ | $\mu\text{A}$ |

## ON CHARACTERISTICS (Note 5)

|                                            |                  |                                                 |      |      |      |          |
|--------------------------------------------|------------------|-------------------------------------------------|------|------|------|----------|
| Gate Threshold Voltage                     | $V_{GS(TH)}$     | $V_{GS} = V_{DS}, I_D = 250\text{ }\mu\text{A}$ | 0.45 |      | 1.2  | V        |
| Negative Threshold Temperature Coefficient | $V_{GS(TH)}/T_J$ |                                                 |      | 2.4  |      | mV/°C    |
| Drain-to-Source On Resistance              | $R_{DS(on)}$     | $V_{GS} = 4.5\text{ V}, I_D = 890\text{ mA}$    |      | 0.20 | 0.35 | $\Omega$ |
|                                            |                  | $V_{GS} = 2.5\text{ V}, I_D = 780\text{ mA}$    |      | 0.26 | 0.45 |          |
|                                            |                  | $V_{GS} = 1.8\text{ V}, I_D = 700\text{ mA}$    |      | 0.43 | 0.65 |          |
|                                            |                  | $V_{GS} = 1.5\text{ V}, I_D = 200\text{ mA}$    |      | 0.56 | 1.2  |          |
| Forward Transconductance                   | $g_{FS}$         | $V_{DS} = 10\text{ V}, I_D = 800\text{ mA}$     |      | 1.6  |      | S        |

## CHARGES, CAPACITANCES AND GATE RESISTANCE

|                              |           |                                                               |  |     |     |    |
|------------------------------|-----------|---------------------------------------------------------------|--|-----|-----|----|
| Input Capacitance            | $C_{ISS}$ | $V_{GS} = 0\text{ V}, f = 1\text{ MHz}, V_{DS} = 16\text{ V}$ |  | 79  | 120 | pF |
| Output Capacitance           | $C_{OSS}$ |                                                               |  | 13  | 20  |    |
| Reverse Transfer Capacitance | $C_{RSS}$ |                                                               |  | 9.0 | 15  |    |

## SWITCHING CHARACTERISTICS, $V_{GS} = 4.5\text{ V}$ (Note 6)

|                    |              |                                                                                            |  |      |  |    |
|--------------------|--------------|--------------------------------------------------------------------------------------------|--|------|--|----|
| Turn On Delay Time | $t_{d(ON)}$  | $V_{GS} = 4.5\text{ V}, V_{DS} = 10\text{ V}, I_D = 500\text{ mA}, R_G = 10\text{ }\Omega$ |  | 6.7  |  | ns |
| Rise Time          | $t_r$        |                                                                                            |  | 4.8  |  |    |
| TurnOff Delay Time | $t_{d(OFF)}$ |                                                                                            |  | 17.3 |  |    |
| Fall Time          | $t_f$        |                                                                                            |  | 7.4  |  |    |

## DRAIN SOURCE DIODE CHARACTERISTICS

|                         |          |                                                                                                             |                            |  |      |     |    |
|-------------------------|----------|-------------------------------------------------------------------------------------------------------------|----------------------------|--|------|-----|----|
| Forward Diode Voltage   | $V_{SD}$ | $V_{GS} = 0\text{ V}, I_S = 350\text{ mA}$                                                                  | $T_J = 25^{\circ}\text{C}$ |  | 0.75 | 1.2 | V  |
| Reverse Recovery Time   | $t_{RR}$ | $V_{GS} = 0\text{ V}, dI_{SD}/dt = 100\text{ A}/\mu\text{s},$<br>$I_S = 1.0\text{ A}, V_{DD} = 20\text{ V}$ |                            |  | 8.1  |     | ns |
| Charge Time             | $t_a$    |                                                                                                             |                            |  | 6.4  |     |    |
| Discharge Time          | $t_b$    |                                                                                                             |                            |  | 1.7  |     |    |
| Reverse Recovery Charge | $Q_{RR}$ |                                                                                                             |                            |  | 3.0  |     | nC |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

5. Pulse Test: pulse width = 300  $\mu\text{s}$ , duty cycle = 2%  
6. Switching characteristics are independent of operating junction temperatures

TYPICAL CHARACTERISTICS

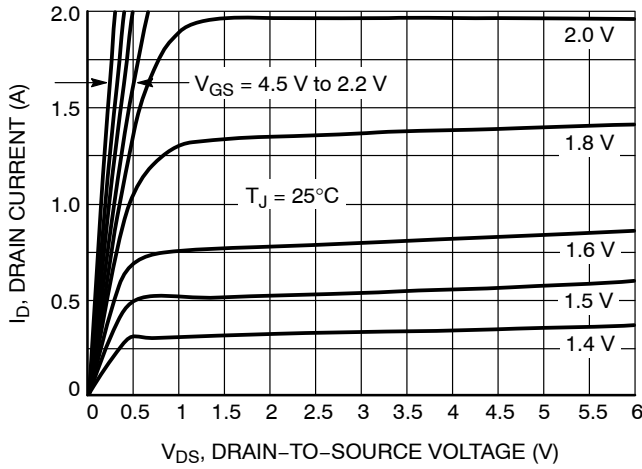


Figure 1. On-Region Characteristics

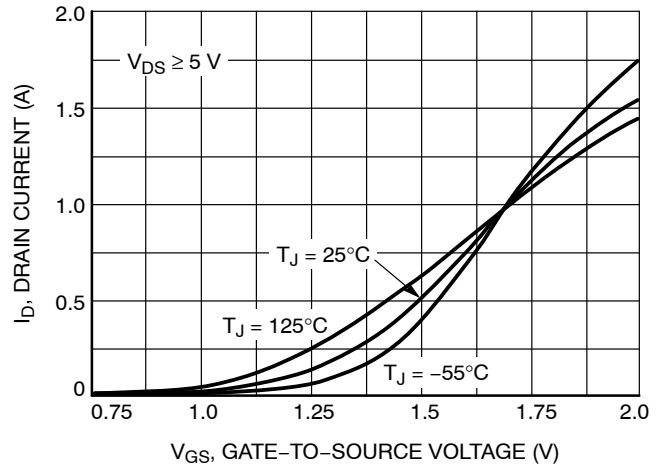


Figure 2. Transfer Characteristics

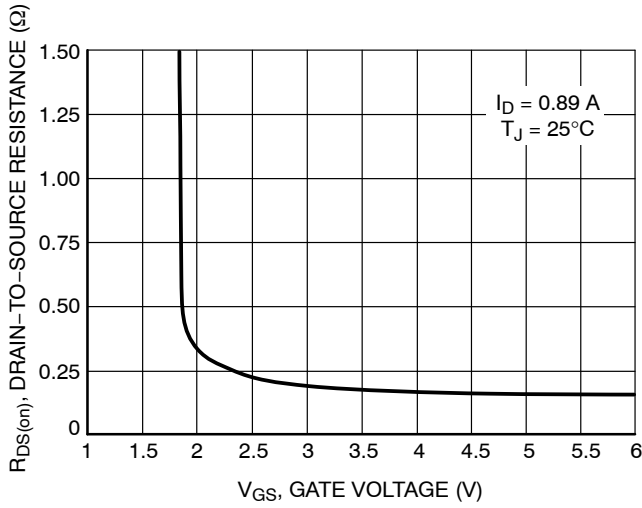


Figure 3. On-Resistance vs. Gate-to-Source Voltage

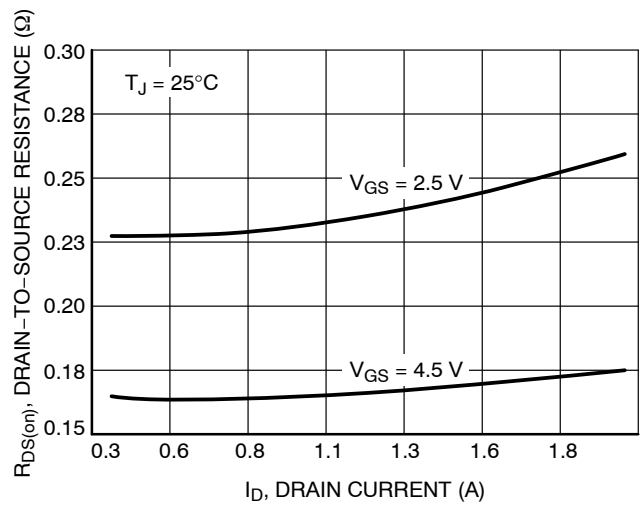


Figure 4. On-Resistance vs. Drain Current and Gate Voltage

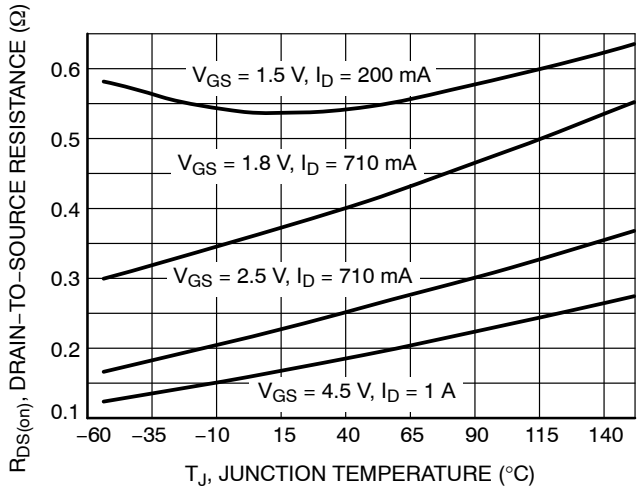


Figure 5. On-Resistance Variation with Temperature

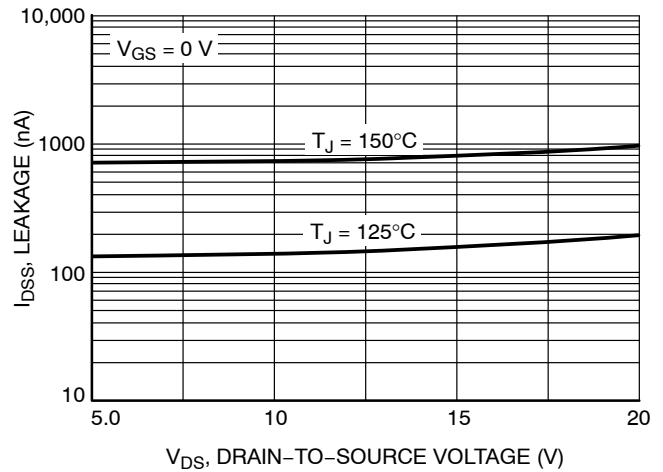


Figure 6. Drain-to-Source Leakage Current vs. Voltage

TYPICAL CHARACTERISTICS

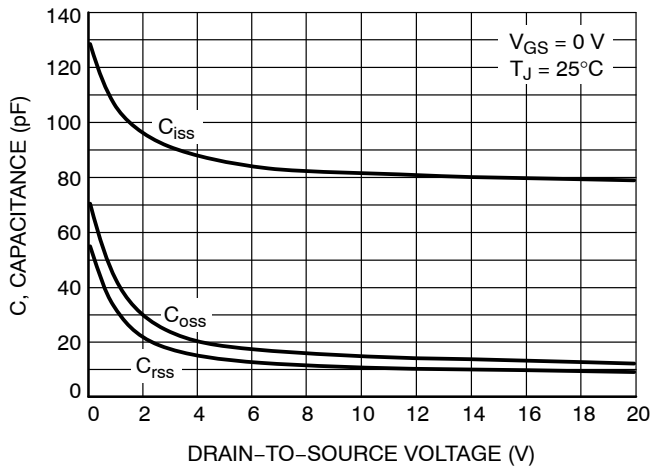


Figure 7. Capacitance Variation

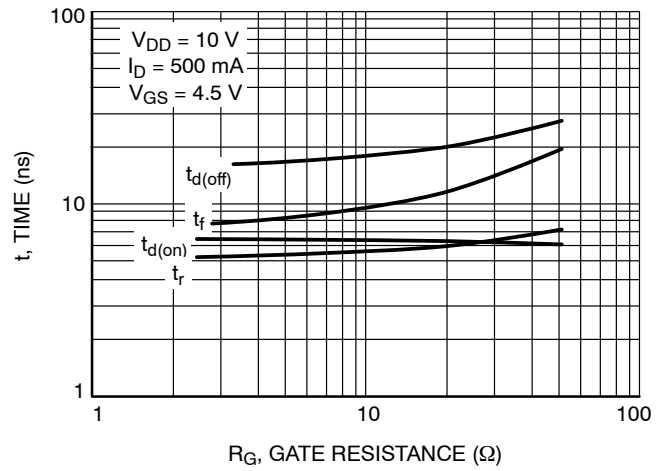


Figure 8. Resistive Switching Time Variation vs. Gate Resistance

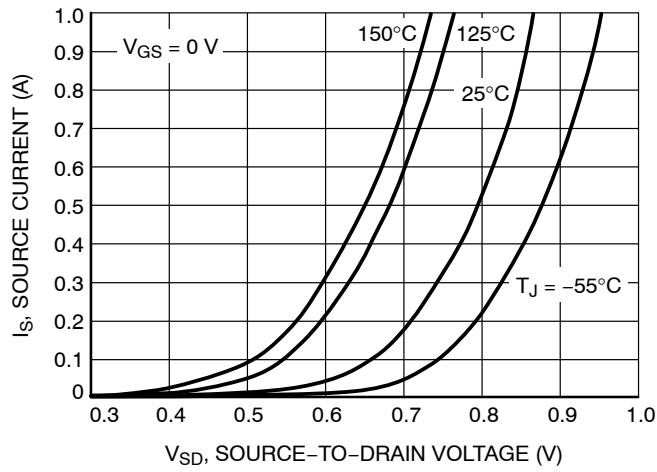


Figure 9. Diode Forward Voltage vs. Current



**SOT-723 1.20x0.80x0.50, 0.40P**  
**CASE 631AA**  
**ISSUE E**

DATE 24 JAN 2024

NOTES:


1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.



TOP VIEW



SIDE VIEW




BOTTOM VIEW

| DIM | MILLIMETERS |      |      |
|-----|-------------|------|------|
|     | MIN.        | NOM. | MAX. |
| A   | 0.45        | 0.50 | 0.55 |
| b   | 0.15        | 0.21 | 0.27 |
| b1  | 0.25        | 0.31 | 0.37 |
| c   | 0.07        | 0.12 | 0.17 |
| D   | 1.15        | 1.20 | 1.25 |
| E   | 0.75        | 0.80 | 0.85 |
| e   | 0.40 BSC    |      |      |
| H   | 1.15        | 1.20 | 1.25 |
| L   | 0.29 REF    |      |      |
| L2  | 0.15        | 0.20 | 0.25 |



RECOMMENDED MOUNTING  
FOOTPRINT

**GENERIC  
MARKING DIAGRAM\***



XX = Specific Device Code  
M = Date Code

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

|                                                       |                                                  |                                                    |                                                      |                                                  |
|-------------------------------------------------------|--------------------------------------------------|----------------------------------------------------|------------------------------------------------------|--------------------------------------------------|
| STYLE 1:<br>PIN 1. BASE<br>2. EMITTER<br>3. COLLECTOR | STYLE 2:<br>PIN 1. ANODE<br>2. N/C<br>3. CATHODE | STYLE 3:<br>PIN 1. ANODE<br>2. ANODE<br>3. CATHODE | STYLE 4:<br>PIN 1. CATHODE<br>2. CATHODE<br>3. ANODE | STYLE 5:<br>PIN 1. GATE<br>2. SOURCE<br>3. DRAIN |
|-------------------------------------------------------|--------------------------------------------------|----------------------------------------------------|------------------------------------------------------|--------------------------------------------------|

|                         |                                      |                                                                                                                                                                                  |
|-------------------------|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98AON12989D</b>                   | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>SOT-723 1.20x0.80x0.50, 0.40P</b> | <b>PAGE 1 OF 1</b>                                                                                                                                                               |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)