

GaAs SPDT Terminated Switch DC - 2.5 GHz

SW-338
V6

Features

- Very Low Power Consumption
- High Isolation: 30 dB up to 2 GHz
- Very High Intercept Point: 46 dBm IP₃
- Nanosecond Switching Speed
- Temperature Range: -40°C to +85°C
- Low Cost SOIC-8 Plastic Package
- Tape and Reel Packaging Available

Description

M/A-COM's SW-338 is a GaAs MMIC SPDT terminated switch in a low cost SOIC 8-lead surface mount plastic package. The SW-338 is ideally suited for use where very low power consumption is required.

Typical applications include transmit/receive switching, switch matrices, and filter banks in systems such as radio and cellular equipment, PCM, GPS, fiber optic modules, and other battery powered radio equipment.


The SW-338 is fabricated with a monolithic GaAs MMIC using a mature 1-micron process. The process features full chip passivation for increased performance and reliability.

Ordering Information

Part Number	Package
SW-338	Bulk Packaging
SW-338TR	1000 piece reel
SW-338SMB	Sample Test Board

Note: Reference Application Note M513 for reel size information.

Functional Schematic

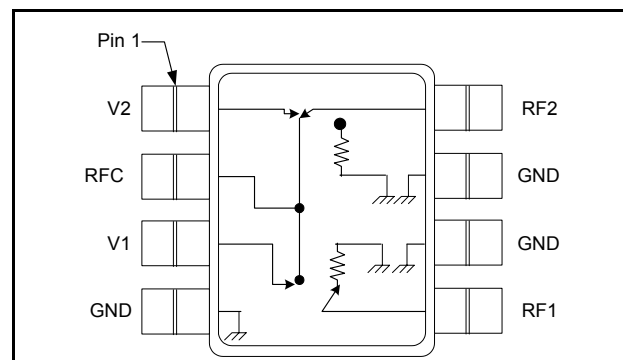

Pin Configuration

Pin No.	Function	Pin No.	Function
1	V2	5	RF Port 1
2	RF Common	6	Ground
3	V1	7	Ground
4	Ground	8	RF Port 2

Absolute Maximum Ratings ^{1,2}

Parameter	Absolute Maximum
Input Power 0.05 GHz 0.5 - 2.0 GHz	+27 dBm +34 dBm
Control Voltage	-8.5 V ≤ V _c ≤ +5 V
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM does not recommend sustained operation near these survivability limits.

GaAs SPDT Terminated Switch DC - 2.5 GHz

SW-338
V6

Electrical Specifications: $T_A = 25^\circ\text{C}$, $V_c = 0\text{ V} / -2.9\text{ V}$, $Z_0 = 50\ \Omega$

Parameter	Test Conditions	Units	Min.	Typ. ³	Max.
Insertion Loss	DC - 0.5 GHz	dB	—	0.55	—
	0.5 - 1.0 GHz	dB	—	0.60	0.7
	1.0 - 2.0 GHz	dB	—	0.65	—
Isolation	DC - 0.5 GHz	dB	—	50	—
	0.5 - 1.0 GHz	dB	36	43	—
	1.0 - 2.0 GHz	dB	—	35	—
VSWR On/Off	DC - 2.0 GHz	Ratio	—	1.1:1	—
Trise, Tfall	10% to 90% RF, 90% to 10 % RF	nS	—	10	—
Ton, Toff	50% Control to 90% RF, 50% Control to 10% RF	nS	—	20	—
Transients	In-Band	mV	—	25	—
1 dB Compression Point	Input Power	dBm	—	25	—
	0.05 GHz 0.5 - 2.0 GHz	dBm	—	30	—
2nd Order Intercept	Measured Relative to Input Power (for two-tone input power up to +5 dBm)	dBm	—	60	—
	0.05 GHz 0.5 - 2.0 GHz	dBm	—	65	—
3rd Order Intercept	Measured Relative to Input Power (for two-tone input power up to +5 dBm)	dBm	—	40	—
	0.05 GHz 0.5 - 2.0 GHz	dBm	—	46	—
Control Current	$ V_c = 2.9\text{ V}$	μA	—	15	35

3. Typical values represent performance at middle of frequency range noted.

Truth Table⁴

Control Inputs		Condition of Switch RF Common to Each RF Port	
V1	V2	RFC-RF1	RFC-RF2
1	0	ON	OFF
0	1	OFF	ON


4. 0 = 0 V $\pm$ 0.2 V, 1 = -2.9 V to -5.0 V

GaAs SPDT Terminated Switch DC - 2.5 GHz

SW-338


V6

SO-8

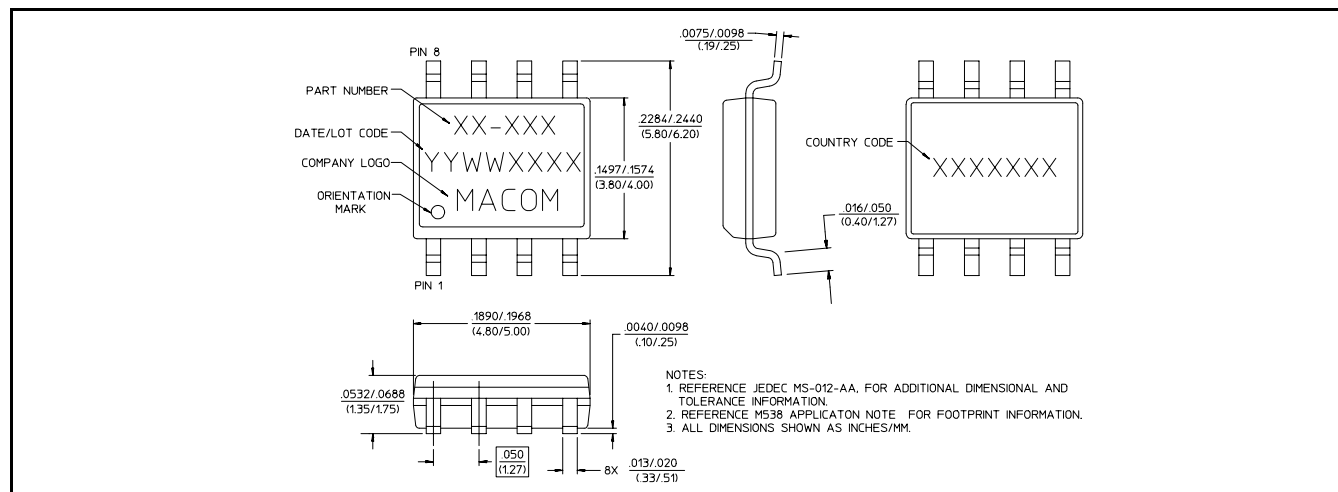


Typical Performance Curves

Insertion Loss

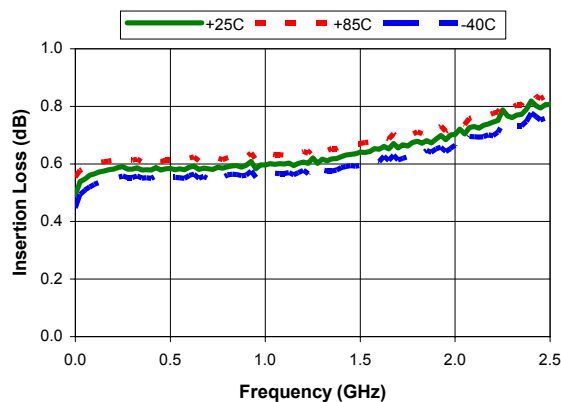

Isolation

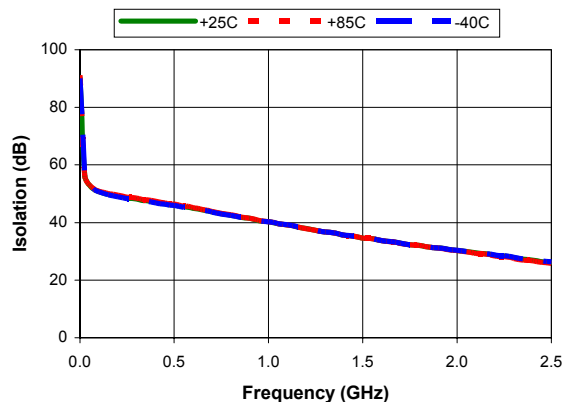

VSWR vs. Frequency

