




AA12038 CF SERIES

External Dimensions

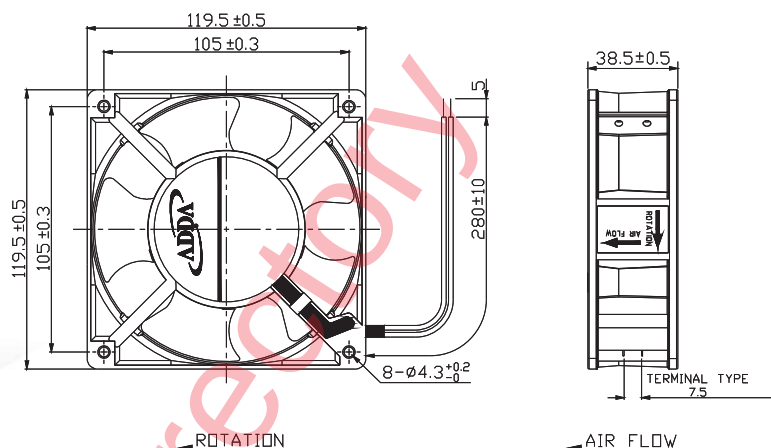

Frame: Aluminum Alloy
Impeller: Plastic (UL: 94V-0)
Motor Structure: Shaded Pole Induction Motor.
Rotational direction: CCW looking at rotor.
Lead wire: UL1430 AWG22
Wire Type: -AT Terminal / -AW Wires
OPERATING TEMP*: -10°C ~ 70°C
*: -10°C ~ 60°C for fans with sleeve/ball combination bearings.

Specifications (Nominal)


Bearing type: ◎=Ball※=Sleeve○=1B1S●=Hypro bearing													
Frame size (mm)	Model No.	Bearing System Type	Volt. (VAC)	Freq. (Hz)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM)	(CFM)	Maximum Pressure (InAq)	(mmAq)	*Noise Level (dB/A)	Weight (g)
120x120x38	AA1281DB-AT(CF)	◎※●	115	50/60	0.08/0.08	7.00/6.60	2300/1700	1.980/1.520	70.0/53.5	0.130/0.060	3.302/1.524	39.2/30.5	550
	AA1282DB-AT(CF)	◎※●	230		0.04/0.04	8.10/7.70							
	AA1281LB-AT(CF)	◎※●	115	50/60	0.12/0.11	9.00/8.70	2400/2200	2.150/2.020	76.0/71.5	0.180/0.100	4.572/2.540	40.1/37.9	
	AA1282LB-AT(CF)	◎※●	230		0.06/0.05	9.80/9.40							
	AA1281MB-AT(CF)	◎※●	115	50/60	0.18/0.15	13.80/12.40	2600/2800	2.310/2.460	81.5/87.0	0.240/0.210	6.196/5.334	41.0/42.0	
	AA1282MB-AT(CF)	◎※●	230		0.08/0.07	13.80/12.50							
	AA1281HB-AT(CF)	◎※●	115	50/60	0.24/0.19	17.00/14.00	2600/2900	2.410/2.750	85.0/97.0	0.310/0.350	7.900/8.870	42.2/44.5	
	AA1282HB-AT(CF)	◎※●	230		0.11/0.09	17.10/14.80							

Bearing type: ◎=Ball ※=Sleeve ○=1B1S ●=Hypro bearing


Specifications subject to change without notice.

The specification for bearing type is for reference only, for more bearing types information, please contact with your ADDA sales representative, thanks!!
(網頁上呈現產品軸承資訊均以2Ball為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝!!)

50Hz

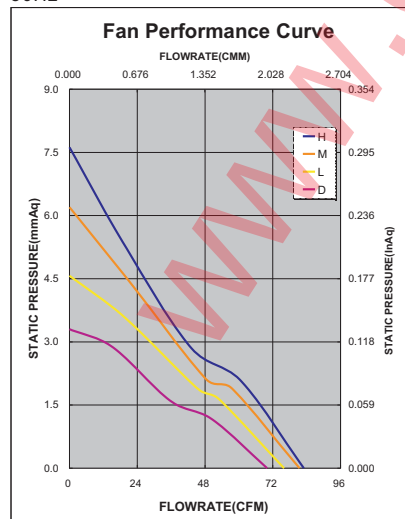

60Hz

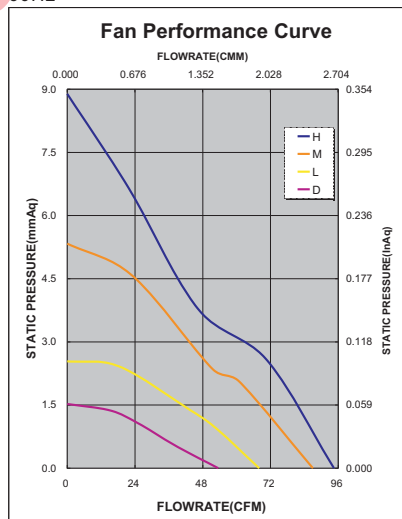

*Safety approvals

✓	✓		✓	✓

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ADDA:](#)

[AA1282MB-AT-LF](#) [AA1281DB-AT-LF](#) [AA1282DB-AT-LF](#)