



circular conduc. terminal TA2.8 1 x 250...750kcmil; 2 x 250kcmil for 1 cable 250 - 750 kcmil or 2 cables 250 kcmil 4 units accessory for: 3VA53/54; 3VA63/64 up to 400 A

Model	
product brand name	SETRON
product designation	circular conductor terminal
accessories	Wire connector
General technical data	
designation / of the terminal	TA2.8
type of electrical connection / with control wire tap	No
Connections according IEC	
stripped length	38,1 mm
Connections according UL	
permissible temperature / of connectable conductor / according to UL 486A-486B	90 °C
stripped length	1.5 in
connectable conductor cross-section	
• for copper cable / stranded / minimum	250 kcmil
• for copper cable / stranded / maximum	750 kcmil
• for aluminum cable / stranded / minimum	250 kcmil
• for aluminum cable / stranded / maximum	750 kcmil
tightening torque / when using copper cables	
• stranded	250-750 kcmil: 410.0 lb-in 250 kcmil: 410.0 lb-in
Certificates	
General Product Approval	EMV
	Marine / Shipping



[Miscellaneous](#)



other		Environment	
Miscellaneous	Confirmation	Miscellaneous	Environmental Con- firmations
			Environmental Con- firmations

Further information	
Information on the packaging	
https://support.industry.siemens.com/cs/ww/en/view/109813875	
Information- and Downloadcenter (Catalogs, Brochures,...)	
http://www.siemens.com/lowvoltage/catalogs	
Industry Mall (Online ordering system)	

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9374-0JJ24>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9374-0JJ24>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9374-0JJ24

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

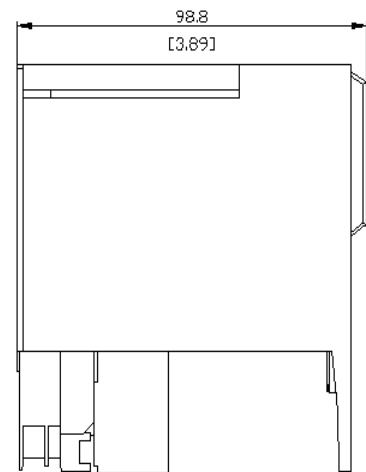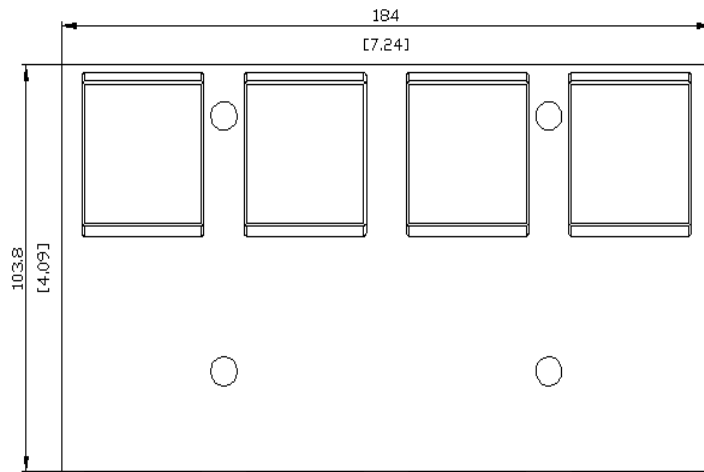

last modified:

11/27/2024 

