

Plug-In

Power Splitter/Combiner

2 Way-0° 50Ω 1 to 400 MHz

TSC-2-1+
TSC-2-1




Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.

Pin Connections

SUM PORT	1
PORT 1	2
PORT 2	4
GROUND	3
CASE GROUND	3

Outline Drawing

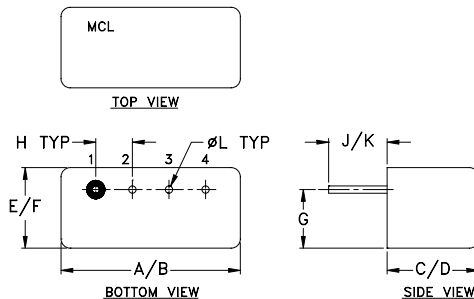

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.480	.500	.240	.255	.210	.230
12.19	12.70	6.10	6.48	5.33	5.84
G	H	J	K	L	wt
.16	.100	.14	.20	.020	grams
4.06	2.54	3.56	5.08	0.51	1.9

Features

- wideband 1 to 400 MHz
- hermetic, metal case
- good isolation, 30 dB typ.

Applications

- VHF/UHF
- receivers/transmitters
- military, hi-rel applications

CASE STYLE: B02

PRICE: \$20.20 ea. QTY. (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.




Splitter Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 3.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L		M		U	
	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
1-400	30	25	30	25	30	20	0.25	0.5	0.4	0.75	0.8	1.0	2.0	3.0	4.0	0.15	0.2	0.6

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2					
1.00	3.20	3.19	0.01	37.25	0.03	1.10	1.17
5.00	3.17	3.16	0.01	41.78	0.05	1.10	1.13
8.00	3.18	3.18	0.00	41.83	0.02	1.11	1.12
10.00	3.18	3.17	0.01	41.78	0.06	1.11	1.12
20.00	3.18	3.18	0.00	40.78	0.09	1.11	1.12
60.00	3.22	3.21	0.01	35.98	0.37	1.12	1.11
90.00	3.26	3.24	0.02	33.33	0.53	1.12	1.11
150.00	3.32	3.27	0.05	29.81	0.84	1.13	1.10
180.00	3.35	3.27	0.08	28.52	1.01	1.13	1.10
210.00	3.36	3.26	0.10	27.42	1.16	1.13	1.09
240.00	3.42	3.28	0.14	26.60	1.26	1.13	1.12
300.00	3.48	3.29	0.20	25.13	1.45	1.13	1.10
340.00	3.59	3.32	0.27	24.53	1.59	1.13	1.10
380.00	3.63	3.31	0.31	23.88	1.63	1.13	1.12
400.00	3.64	3.28	0.36	23.60	1.53	1.12	1.12

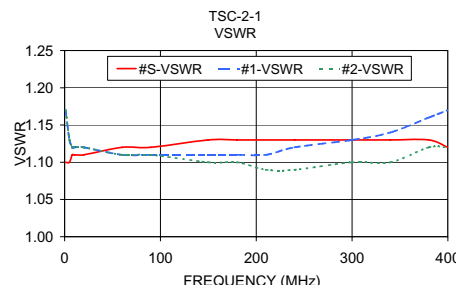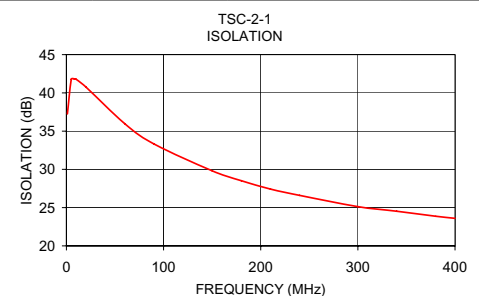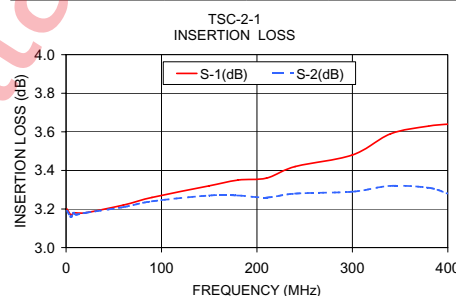

electrical schematic



Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

ALL NEW
minicircuits.com

REV. A
M98898
TSC-2-1
HY/TD/CP
070202