COOPER Bussmann

TCP™ Series

TCP1.25A, Telecom Circuit Protector

Description


- The first and most reliable surface mount telecom circuit protector designed to protect against power cross faults and comply with all surge requirements.
- Allows compliance with telecom regulatory standards including Bellcore GR 1089, UL 1950/60950, and FCC part 68. Application circuit testing is recommended.
- Eliminates the need for a current limiting resistor.
- Protects against overcurrent conditions found in telecom Subscriber Line Interface Cards (SLICs), xDSL Modem Applications, Set-Top Boxes, and Consumer Premises Equipment (CPE).
- NEW! TCP1.25A tested and confirmed compatible with STMicroelectronics Trisil™ Transient Surge Arrestor (list of part numbers below)

STMicroelectronics Trisil™ P/N's	
SMP100LC-XXX	SMP100MC-XXX


RoHS 2002/95/EC



Dimensions mm/(inches)

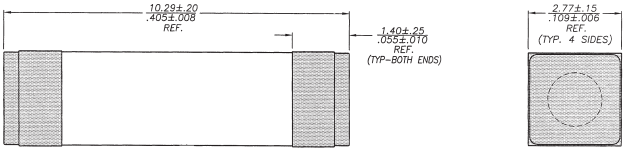

Land Pattern



ELECTRICAL CHARACTERISTICS	
% of Amp Rating	**Opening Time**
100%	4 Hours Minimum
250%	1 Second Minimum
250%	4-10 Seconds Typical
250%*	120 Seconds Maximum
300%	10 Seconds Maximum

* If the device does not open at 250% within 120 seconds, increase current to 300% of amp rating. Device must open in 10 seconds max.

Environmental Data

- Life Test: MIL-STD-202, Method 108A, Test Condition D
- Load Humidity: MIL-STD-202, Method 103B
- Moisture Resistance: MIL-STD-202, Method 106E
- Thermal Shock: MIL-STD-202, Method 107D, air-to-air
- Case Resistance: EIA/IS-722
- Resistance to Dissolution of Metallization: ANSI J-STD-002, Test D
- Mechanical Shock: MIL-STD-202, Method 213B, Test Condition A
- High Frequency Vibration: MIL-STD-202, Method 204D, Test Condition D
- Resistance to Solvents: MIL-STD-202, Method 215A

Agency Information

- UL Recognition Card: JDYX2/E19180
- CSA Component Certification Record and Class No.: 053787C000, 1422 30

Ordering

- Specify packaging, product and option code (i.e., TR2/TCP1.25-R)

Soldering Method

- Wave Immersion: 260°C, 10 sec max.
- Infrared: 260°C, 30 sec max.

LIGHTNING SURGE SPECIFICATIONS						
Surge Specification	**Surge**	**Repetitions**	**Waveform (µSec.)**	**Current (A)**	**Voltage (V)**	**Performance Requirement**
FCC 47 Part 68	Longitudinal Type A	2	10x160	100 per fuse	1500	Fuse cannot open
FCC 47 Part 68	Metallic Type B	2	10x560	100	800	Fuse cannot open
Bellcore GR-1089-CORE	First Level Lightning	50	10x1000	100	1000	Fuse cannot open
Bellcore GR-1089-CORE	First Level Lightning	50	2x10	500	2500	Fuse cannot open
Surge out		1	10x160	160	N/A	Fuse cannot open
Surge out		1	10x560	115	N/A	Fuse cannot open


ELECTRICAL AND POWER CROSS SPECIFICATIONS												
Product Code	**Voltage Rating AC**	**Interrupting Rating***		**DC Cold Resistance** (ohms)**			**Typical Melting I^2t†**	**Maximum Total Clearing**	**Typical Voltage Drop‡**	**Alpha Code Marking**	
		250VAC	**600VAC**	**min.**	**typ.**	**max.**				**1st Code**	**2nd Code**
TCP1.25A	250 V	50 A	60 A	0.070	0.090	0.110	22.2 A^2s	100 A^2s	150mV	J	R***

* AC Interrupting Rating (Measured at designated voltage, 100% power factor)
** DC Cold Resistance (Measured at 10% of rated current)
*** On RoHS Compliant Version (-R option)
† Typical Melting I^2t (Measured with a battery bank at 60V DC, 10x-rated current, time constant of calibrated circuit less than 50 microseconds)
‡ Typical Voltage Drop (Measured at rated current after temperature stabilizes)


Special Investigation

The TCP1.25A is designed to provide overcurrent protection for telecom SLIC, xDSL modem, and set-top box applications regardless of the overvoltage device selected. To provide an easier specification experience, Cooper Bussmann and STMicroelectronics have joined together to provide a special test report confirming the coordination between the TCP1.25A and SMP100MC-270 devices.

TEST CIRCUITS

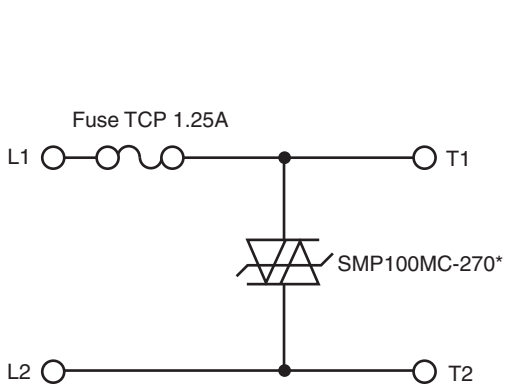

Test Circuit 1

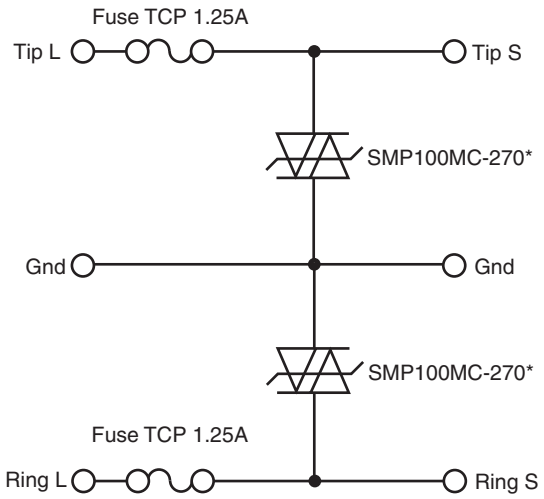

Test Circuit 2

*** Note:** or other STMicroelectronics Trisil™ part number listed in table on page 1

TEST PROGRAM

Test	Standard	Results
Lightning Surge Tests		
10/1000µs + and –1kV 100A (25 pulses of each polarity)	Bellcore GR-1089	Passed
2/10µs + and –2.5 and 5kV 500A (10 pulses of each polarity)	Bellcore GR-1089	Passed
10/560µs + and –800V 100A (1 pulse of each polarity)	FCC Part 68	Passed
10/160µs + and –1.5kV 200A (1 pulse of each polarity)	FCC Part 68	Passed
10/700µs + and –1.5kV 37.5A (5 pulses of each polarity)	K20	Passed
Electrical and Power Cross Tests		
600V 3A 1.1s (first level)	Bellcore GR-1089	Passed
277V 25A (second level)	Bellcore GR-1089	Passed
600V 60A 5s(second level)	Bellcore GR-1089	Passed
600V 40A 1.5s	UL 60950	Passed
600V 2.2A 30min	UL 60950	Passed
600V 1A 0.2s (A criteria)	K20	Passed
230V 1.44A/0.77A/0.38A 15min (A criteria)	K20	Passed
230V 23A 15min (A criteria)	K20	Passed

For additional information on STMicroelectronic's Trisil™ Product line, please see www.st.com/protection

COOPER Bussmann

TCP™ Series

TCP500MA & TCP2A, Telecom Circuit Protector

Description

- Designed to protect Consumer Premises Equipment from harmful overcurrents.
- Allows compliance with telecom regulatory standards including UL 1950/60950, and FCC part 68. Application circuit testing is recommended.
- Eliminates the need for a current limiting resistor.

ELECTRICAL CHARACTERISTICS	
% of Amp Rating	**Opening Time**
100%	4 Hours Minimum
250%	1 Second Minimum
250%	4-10 Seconds Typical
250%*	120 Seconds Maximum
300%	10 Seconds Maximum

* If the device does not open at 250% within 120 seconds, increase current to 300% of amp rating. Device must open in 10 seconds max.

Agency Information

- UL Recognition Card: JDYX2/E19180
- CSA Component Certification Record and Class No.: 053787C000, 1422 30


Environmental Data

- Life Test: MIL-STD-202, Method 108A, Test Condition D
- Load Humidity: MIL-STD-202, Method 103B
- Moisture Resistance: MIL-STD-202, Method 106E
- Thermal Shock: MIL-STD-202, Method 107D, air-to-air
- Case Resistance: EIA/IS-722
- Resistance to Dissolution of Metallization: ANSI J-STD-002, Test D
- Mechanical Shock: MIL-STD-202, Method 213B, Test Condition A
- High Frequency Vibration: MIL-STD-202, Method 204D, Test Condition D
- Resistance to Solvents: MIL-STD-202, Method 215A


RoHS 2002/95/EC



Dimensions mm/(inches)

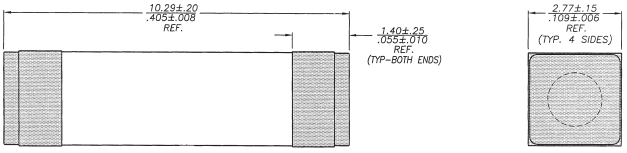

Land Pattern



Ordering

- Specify packaging, product and option code (i.e., TR2/TCP500-R)

Soldering Method

- Wave Immersion: 260°C, 10 sec max.
- Infrared: 260°C, 30 sec max.

LIGHTNING SURGE SPECIFICATIONS						
Surge Specification	**Surge**	**Repetitions**	**Waveform (µSec.)**	**Current (A)**	**Voltage (V)**	**Performance Requirement**
TCP 500mA tested						
FCC 47 Part 68	Longitudinal Type B	2	5x320	37.5	N/A	Fuse cannot open
FCC 47 Part 68	Metallic Type A	2	10x560	100	800	Fuse must open safely
Surge out		25	10x160	65	N/A	Fuse cannot open
TCP2A tested						
FCC 47 Part 68	Longitudinal Type A	2	10x160	100 per fuse	1500	Fuse cannot open
FCC 47 Part 68	Metallic Type B	2	10x560	100	800	Fuse cannot open
Bellcore GR-1089-CORE	First Level Lightning	50	10x1000	100	1000	Fuse cannot open
Bellcore GR-1089-CORE	First Level Lightning	50	2x10	500	2500	Fuse cannot open
Surge out		1	10x160	160	N/A	Fuse cannot open
Surge out		1	10x560	115	N/A	Fuse cannot open

ELECTRICAL AND POWER CROSS SPECIFICATIONS											
Product Code	**Voltage Rating AC**	**Interrupting Rating* 250VAC**	**600VAC**	**DC Cold Resistance** min.**	**typ.**	**max.**	**Typical Melting I²t†**	**Maximum Total Clearing**	**Typical Voltage Drop‡**	**Alpha Code Marking 1st Code**	**2nd Code**
TCP500mA	250 V	50 A	40 A	0.420	0.530	0.640	1.3 A²s	100 A²s	471mV	F	R***
TCP2A	250 V	50 A	60 A	0.050	0.075	0.100	30 A²s	100 A²s	205mV	N	

* AC Interrupting Rating (Measured at designated voltage, 100% power factor)


** DC Cold Resistance (Measured at 10% of rated current)

*** On RoHS Compliant Version (-R option)

† Typical Melting I²t (Measured with a battery bank at 60V DC, 10x-rated current, time constant of calibrated circuit less than 50 microseconds)

‡ Typical Voltage Drop (Measured at rated current after temperature stabilizes)

TIME CURRENT CURVE

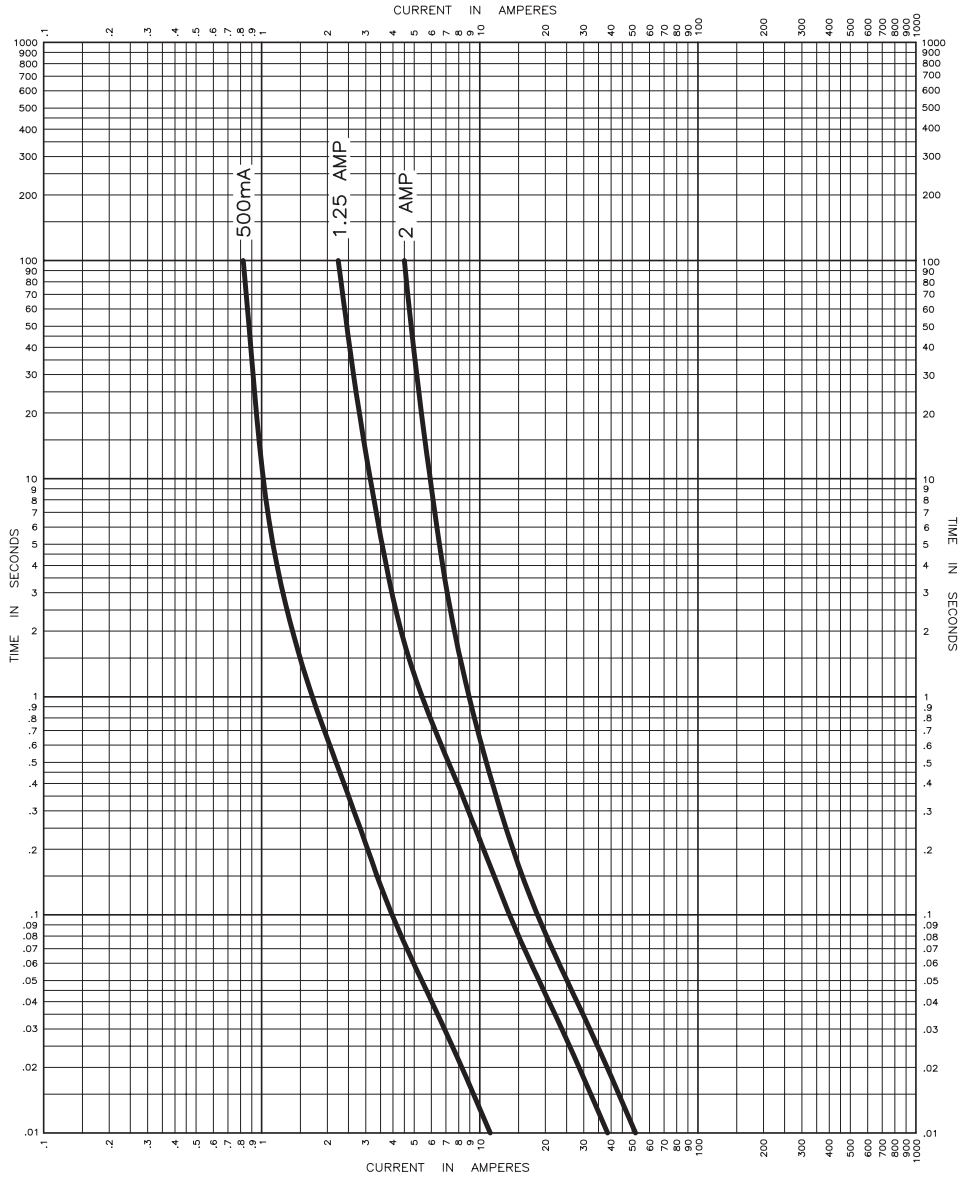

PACKAGING CODE	
Packaging Code	**Description**
TR2	2500 pieces of fuses on 24mm tape-and-reel on 13 inch (330mm) reel per EIA Standard 481, 8mm pitch

OPTION CODE	
Option Code	**Description**
-R	RoHS Compliant Version (Sn plating w/ Ni barrier)

Visit us on the web at:
www.cooperbussmann.com

Datasheet: OC-2609 1/07

© Cooper Electronic Technologies 2007

North America

Cooper Electronic Technologies
1225 Broken Sound Parkway NW
Suite F
Boca Raton, FL 33487-3533
Tel: 1-561-998-4100
Fax: 1-561-241-6640
Toll Free: 1-888-414-2645

Cooper Bussmann
P.O. Box 14460
St. Louis, MO 63178-4460
Tel: 1-636-394-2877
Fax: 1-800-544-2570

Europe

Cooper Electronic Technologies
Cooper (UK) Limited
Burton-on-the-Wolds
Leicestershire • LE12 5TH UK
Tel: +44 (0) 1509 882 737
Fax: +44 (0) 1509 882 786

Cooper Electronic Technologies
Avda. Santa Eulalia, 290
08223
Terrassa, (Barcelona), Spain
Tel: +34 937 362 812
+34 937 362 813
Fax: +34 937 362 719

Asia Pacific

Cooper Electronic Technologies
1 Jalan Kilang Timor
#06-01 Pacific Tech Centre
Singapore 159303
Tel: +65 278 6151
Fax: +65 270 4160